What the compiled E91 histogram contains — and how one bandit turn is sampled

(a) The histogram is a discrete joint transcript distribution

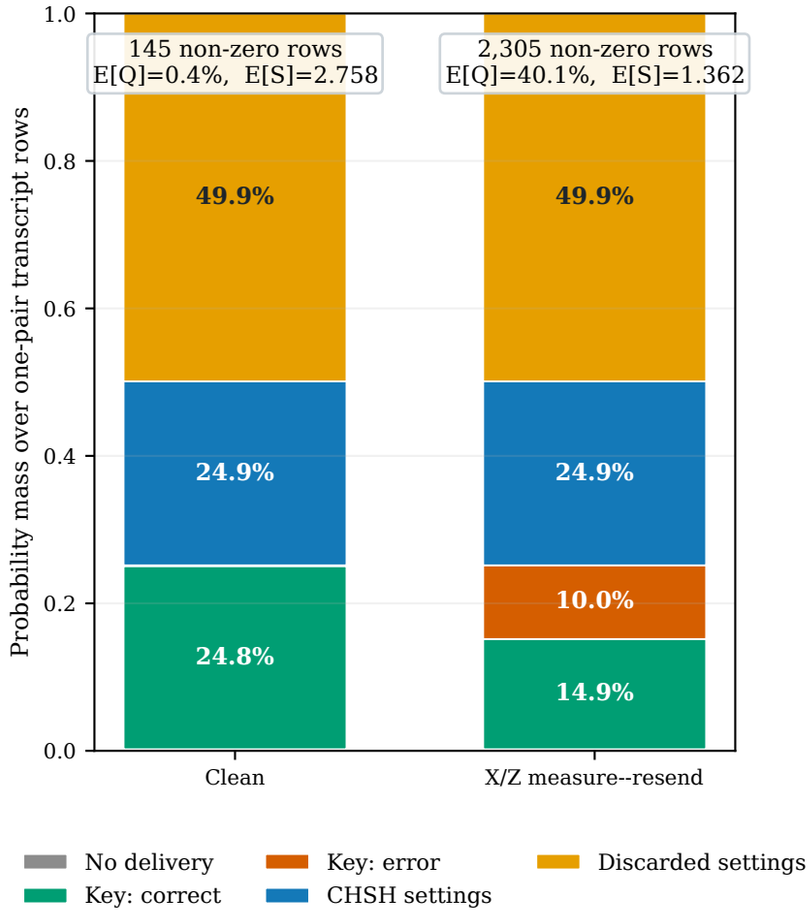

(b) One deterministic 1,200-record turn from each histogram

Clean

no attack

```
ALICE / PUBLIC RECORD
delivered  1196 / 1200
key        304 (1 errors)
QBER       0.33% / 11%
CHSH       2.875 / 2
decision   accepted

EVE / RETAINED RECORD
fields
  target,basis,bit
records    0
Pguess     0.500
exposed    false
```

X/Z probe

edge information probe

```
ALICE / PUBLIC RECORD
delivered  1197 / 1200
key        281 (107 errors)
QBER       38.08% / 11%
CHSH       1.353 / 2
decision   qber abort

EVE / RETAINED RECORD
fields
  target,basis,bit
records    1197
Pguess     0.600
exposed    false
```

Current Eve payoff = 1 - Alice's public Bell-qualified service utility - declared action cost; instrument records estimate information exposure separately.
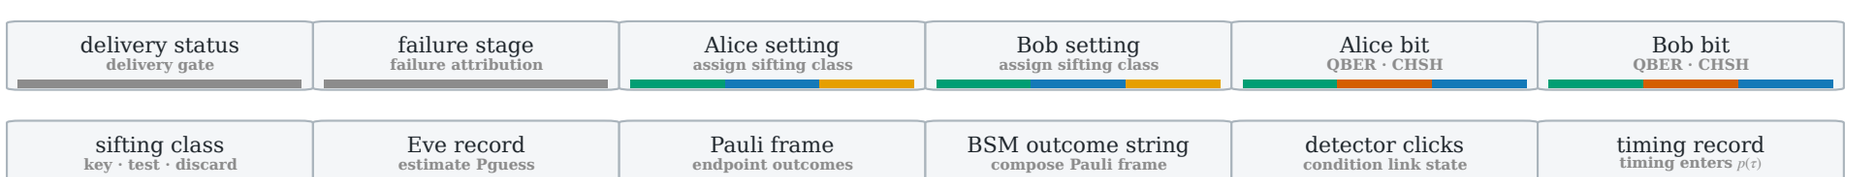
(c) Each compact row τ has probability $p(\tau)$ and explicit fields: