System Requirements Specification Index

For

Donation Management System

Version 4.0

Contents

	1.	BUSINESS-REQUIREMENT:	3					
2.1	-	NGO Constraints:	4					
2.2	2 Donor Constraints							
2.3	}	Donations Constraints						
2.4	ļ	Donation Request Constraints 5						
2.	5 Common Constraints							
3.2	<u>-</u>	Donor Entity:	6					
3.3	}	Donation Entity:	6					
3.4	ļ.	Donation Request Entity:	6					
	4.	REST ENDPOINTS	7					
4.1	-	NgoController	7					
4.2 DonorController								
	5.	TEMPLATE CODE STRUCTURE	10					
FR	ONT	END-ANGULAR SPA	13					
1	Pr	roblem Statement	13					
2	Pr	oposed Donation Management Wireframe	14					
	2.1	Welcome page	14					
	2.2	Ngo Homepage	14					
	2.3	Donor Homepage	14					
	2.4	Donation Homepage	15					
3	В	usiness-Requirement:	15					
4	Co	onstraints	17					
	6.	EXECUTION STEPS TO FOLLOW (BACKEND)	18					
7	F۱	vecution Stens to Follow for Frontend	19					

Donation Management APPLICATIONSystem Requirements Specification

You need to consume APIs exposed by Backend application in Angular to make application work as FULLSTACK

1.B	USINESS-	REQUI	IREMENT:
-----	-----------------	-------	-----------------

1.1 PROBLEM STATEMENT:

Donation Management Application is .Net Core 3.1 RESTful Web API with Ms SQL Server, where NGOs can raise the funds by inviting the donors online and sending the notification about the events and donations.

1.2 FOLLOWING IS THE REQUIREMENT SPECIFICATION:

	Donation Management System Application
Modules	
1	NGO
2	Donor
3	Donation
4	Donation Request
NGO Module	
Functionalities	
1	Register a NGO
2	Update the existing NGO details
3	Get the NGO by Id
4	Fetch all registered NGOs
5	Delete an existing NGO
Donor Module	
Functionalities	
1	Register a Donor
2	Update the existing Donor
3	Get a Donor by Id
4	Fetch all registered Donors
5	Delete an existing Donor
6	Fetch all the Donors registered with a NGO

Donation Module Functionalities	
1	Create a Donation
2 Update the existing Donation details	
3	Get the Donation by Id
4	Fetch all Donations
5	Delete an existing Donation
6	Fetch all Donations done by a Donor
7	Fetch all Donations done for a NGO
Donation Request	
Module	
Functionalities	
1	Create a Donation Request
2	Get the Donation Notification by the NGO
3	Get all the Donation request sent to a Donor

2. Assumptions, Dependencies, Risks / Constraints

2.1 NGO Constraints:

- While deleting an NGO, if ngold does not exist then the operation should throw a custom exception.
- While fetching the NGO details by id, if ngold does not exist then the operation should throw a custom exception.

2.2 Donor Constraints

- While deleting the Donor, if donorld does not exist then the operation should throw a custom exception.
- While fetching the Donor details by id, if donorld does not exist then operation should throw a custom exception.
- While fetching all the Donor details by NGO id, if ngold does not exist then the operation should throw a custom exception.

2.3 Donations Constraints

- While deleting the Donation, if donationId does not exist then the operation should throw a custom exception.
- While fetching the Donation details by id, if donationId does not exist then operation should throw a custom exception.
- While fetching all the Donations done by a donor id, if donorld does not exist then the operation should throw a custom exception.
- While fetching all the Donation details by NGO id, if ngold does not exist then operation should throw custom exception.

2.4 Donation Request Constraints

- While fetching the all the Donation request done by NGO, if ngold does not exist then operation should throw custom exception.
- While fetching all the Donation requests sent to a donor, if donorld does not exist then the operation should throw a custom exception.

2.5 Common Constraints

- For all rest endpoints receiving @RequestBody, validation check must be done and must throw custom exception if data is invalid
- All the business validations must be implemented in model classes only.
- All the database operations must be implemented on entity object only
- Do not change, add, remove any existing methods in service layer
- In Repository interfaces, custom methods can be added as per requirements.
- All RestEndpoint methods and Exception Handlers must return data wrapped in ResponseEntity

3. Business Validations

3.1 NGO Entity:

- NGO name(string) is not null, min 3 and max 100 characters.
- NGO username(string) is not null, min 3 and max 50 characters.
- NGO password(string) is not null, min 3 and max 50 characters.
- NGO address(string) is not null, min 3 and max 100 characters.
- NGO phone number(string) is not null and have min 10 and max 10 digits
- NGO started In(datetime) is not null, have 'yyyy-mm-dd' format and should be past date
- NGO documents(string) are not null, min 3 and max 100 characters.

3.2 Donor Entity:

- Donor name(string) is not null, min 3 and max 100 characters.
- Donor username(string) is not null, min 3 and max 50 characters.
- Donor password(string) is not null, min 3 and max 50 characters.
- Donor email(string) is not null, min 3 and max 100 characters and should be in email format
- Donor phone number(string) is not null and have min 10 and max 10 digits
- Donor address(string) is not null, min 3 and max 100 characters.

3.3 Donation Entity:

- Donation type(string) is not null, min 3 and max 100 characters.
- Donation amount(decimal) is not null
- Donation date(datetime) is not null, has 'yyyy-mm-dd' format and should be a future date.

3.4 Donation Request Entity:

- Donation Request amount(decimal) is not null
- Donation Request status(string) is not null, min 3 and max 100 characters
- Donation request end date(datetime) is not null, have 'yyyy-mm-dd' format and should be future date

4. REST ENDPOINTS

Rest End-points to be exposed in the controller along with method details for the same to be created

4.1 NgoController

URL I	Exposed	Purpose	
/ngos/register-ngo		Register a NGO	
Http Method POST			
Parameters	NgoDetails		
	ngoDetails,string		
	password		
Return	HTTP Response		
	StatusCode		
/ngos/update-ngo		Update the NGO	
Http Method	PUT	opulie me neo	
Parameter 1	RegisterNgoViewMod		
	el model		
Return	HTTP Response		
	StatusCode		
/ngos/get/{NgoId}		Fetches the details of NGO by Id	
Http Method GET Parameter 1 Long(Ngold) Return <ngodetails></ngodetails>		l eteries the details of 1400 by 14	
Recuiii	11802001137		
/ngos/delete-ngo/{Ngo	ld}	Delete the Ngo detail	
Http Method	DELETE		
Parameter 1	Long (Ngold)		
Return	HTTP Response		
	StatusCode		
/ngos/all		Fotch all registered NGOs	
/ngos/all Http Method GET		Fetch all registered NGOs	
Http Method Parameter 1	- GE1		
Return	<pre>- <ienumerable<ngode< pre=""></ienumerable<ngode<></pre>		
Neturn	tails>>		
	tulisee		
/ngos/create-donation-	request	Create a Donation request	
Http Method	POST	·	

Parameter 1	DonationRequest donationRequest	
Return	HTTP Response StatusCode	
/ngos/donation-req	uest-by-ngo/{NgoId}	Get all the donation request by the NGO
Http Method	GET	
Parameter 1	Long(Ngold)	
Return	<ienumerable<donationre< p=""></ienumerable<donationre<>	
	quest>>	
/ngos/ donation-requ	est-by-donor/{donarId}	Get all the donation requests for a donor
Http Method GET Parameter 1 Long(donarld)		·
Return	<pre><ienumerable<donationre quest="">></ienumerable<donationre></pre>	

4.2 DonorController

	URL Exposed	Purpose	
/donors/register-do	nors	Register a Donor	
Http Method POST			
Parameters	Donor donor, string password		
Return	HTTP Response StatusCode		
/donors/update-dor	nor	Update the existing donor	
Http Method	PUT		
Parameter 1	RegisterDonorViewM odel model		
Return HTTP Response StatusCode			
/donors/get/{Donar	ld}	Fetches the donor details by	
Http Method GET Parameter 1 Long(Donarld) Return <donor></donor>		id	
/donors/all		Fetch the details of all the	
Http Method	GET	registered donors	
Parameter 1	-		

/donors/delete-donor/{DonarId} Delete the existing Donor Http Method DELETE Parameter 1 Long (DonarId) Return HTTP Response StatusCode /donors/get-by-ngo/{ngoId} Fetch all the don registered with the NGO Http Method GET Parameter 1 Long (ngoId) Return List <donardto> /donation/create-donation Create a Donation Http Method POST Parameter 1 Donation donation Return HTTP Response StatusCode /donation/update-donation Update the existing Donation details Http Method PUT Parameter 1 RegisterDonationView Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation Http Method DELETE</donardto>	Return	List <donardto></donardto>	
Http Method DELETE Parameter 1 Long (Donarld) Return HTTP Response StatusCode	/donors/delete-dono	 r/{Donarld}	Delete the existing Donor
Parameter 1			Delete the existing bollon
Return HTTP Response StatusCode Adonors/get-by-ngo/{ngold} Fetch all the don registered with the NGO			
StatusCode		<u> </u>	
/donors/get-by-ngo/{ngold} Fetch all the don registered with the NGO Parameter 1 Long (ngold) Return List <donardto> /donation/create-donation Create a Donation Http Method POST Parameter 1 Donation donation Return HTTP Response StatusCode /donation/update-donation Update the existing Donation details Http Method PUT Parameter 1 RegisterDonationView Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation</donardto>	Recuiii	•	
Http Method GET Parameter 1 Long (ngold) Return List <donardto> </donardto>			
Parameter 1 Long (ngold) Return List <donardto> </donardto>	donors/get-by-ngo/{	ngold}	Fetch all the donors
Return List <donardto> Create a Donation </donardto>	Http Method	GET	registered with the NGO
/donation/create-donation Http Method POST Parameter 1 Donation donation Return HTTP Response StatusCode /donation/update-donation Http Method PUT Parameter 1 RegisterDonationView Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation Delete an existing Donation Delete an existing Donation	Parameter 1	Long (ngold)	
Http Method POST Parameter 1 Donation donation Return HTTP Response StatusCode /donation/update-donation Update the existing Donation details Http Method PUT Parameter 1 RegisterDonationView Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation	Return	List <donardto></donardto>	
Http Method POST Parameter 1 Donation donation Return HTTP Response StatusCode /donation/update-donation Update the existing Donation details Http Method PUT Parameter 1 RegisterDonationView Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation			
Parameter 1 Donation donation Return HTTP Response StatusCode /donation/update-donation Update the existing Donation details Http Method PUT Parameter 1 Register Donation View Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation Delete Delete	·		Create a Donation
Return HTTP Response StatusCode /donation/update-donation Http Method PUT Parameter 1 RegisterDonationView Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation Delete an existing Donation			
/donation/update-donation Http Method PUT Parameter 1 RegisterDonationView Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation Update the existing Donation details Update the existing Donation Delete an existing Donation	Parameter 1	Donation donation	
/donation/update-donation Http Method PUT Parameter 1 RegisterDonationView	Return	•	
Http Method PUT Parameter 1 RegisterDonationView Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation		StatusCode	
Http Method PUT Parameter 1 RegisterDonationView Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation			
Parameter 1 RegisterDonationView Model model Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation			
Model model Return HTTP Response StatusCode Delete an existing Donation	•		details
Return HTTP Response StatusCode /donation/delete-donation/{DonationId} Delete an existing Donation	Parameter 1	_	
StatusCode Delete an existing Donation	D.I		
/donation/delete-donation/{DonationId} Delete an existing Donation	Return	·	
		Statuscode	
	/donation/delete-dor	 nation/{DonationId}	Delete an existing Donation
Parameter 1 Long (donationId)	Parameter 1	Long (donationId)	
Return HTTP Response	Return		
StatusCode			
/donation/get/{DonationId} Get the donation details by	donation/get/{Donat	tionId}	Get the donation details by id
Http Method GET	Http Method GET Parameter 1 Long (donationId) Return <donation></donation>		
Parameter 1 Long (donationId)			
Return <donation></donation>			
/denotion/oll	/denetion/ell	Fatala all the a territor	
/donation/allFetch all the existHttp MethodGETdonations		GET	
Parameter 1 - donations	•	GET	donations
		- dEnumentale de la constitu	
Return < Enumerable <donati< td=""><td>Keturn</td><td></td><td></td></donati<>	Keturn		
on>>		011>>	

/donation/get-by-donor	Fetch all the donations for a		
Http Method GET			particular donor
Parameter 1 Long(donarld)			
Return < Enumerable <don:< td=""><td></td><td></td></don:<>			
	on>>		
/donation/get-by-ngo/{i	ngold}		Fetch all the donations raised
Http Method GET			by a particular NGO
Parameter 1	Long(ngold)		
Return	<ienumerable<donati< td=""><td></td><td></td></ienumerable<donati<>		
	on>>		
		•	

5. TEMPLATE CODE STRUCTURE

5.1 Package: DonationManagement

Resources

Names	Resource	Remarks	Status
Package Structure			
controller	Ngo Controller Donor Controller	Controller class to expose all rest-endpoints for auction related activities.	Partially implemented
Startup.cs	Startup CS file	Contain all Services settings and SQL server Configuration.	Already Implemented
Properties	launchSettings.json file	All URL Setting for API	Already Implemented
	appsettings.json	Contain connection string for database	Already Implemented

5.2 Package: DonationManagement.BusinessLayer

Resources

Names	Resource	Remarks	Status
Package Structure			
Interface	INgoServices interface IDonorServices interface IDonationServices interface IDonationRequestService s interface	Inside all these interface files contains all business validation logic functions.	Already Implemented
Service	Ngo Services CS file Donor Services CS file Donation Services CS file DonationRequest Services CS file	Using this all class we are calling the Repository method and use it in the program and on the controller.	Partially Implemented
Repository	INgoRepository Ngo Repository IDonorRepository DonorRepository IDonationRepository Donation Repository IDonationRequestReposit ory DonationRequestReposit ory CS file and interface.	All these interfaces and class files contain all CRUD operation code for the database. Need to provide implementation for service related functionalities	Partially Implemented
ViewModels	RegisterNgoViewModel, RegisterDonorViewModel , RegisterDonationViewMo del, RegisterDonationRequest ViewModel,	Contain all view Domain entities for show and bind data. All the business validations must be implemented.	Partially Implemented

5.3 Package: DonationManagement.DataLayer

Resources

Names	Resource	Remarks	Status
Package Structure			
DataLayer	NgoDbContext cs file	All database Connection and collection setting class	Already Implemented

5.4 Package: DonationManagement.Entities

Resources

Names	Resource	Remarks	Status
Package Structure			
Entities	NgoDetails,Donor,Donation , DonationRequest CS file	All Entities/Domain attribute are used for pass the data in controller Annotate this class with proper annotation to declare it as an entity class with Id as primary key. Generate the Id using the IDENTITY strategy	Partially Implemented

5.5 Package: DonationManagement.Tests

Resources

The DonationManagement.Tests project contains all test case classes and functions for code evaluation. Don't edit or change anything inside this project.

FRONTEND-ANGULAR SPA

1 Problem Statement


Donation management is SPA (Single Page Application) for registering different NGO under some Donation campaign along with Donor information. It performs all CRUD operations for all 3 modules. The core modules of Donation management app are:

- 1. Welcome Page
- 2. Ngo homepage
- 3. Donor homepage
- 4. Donation homepage


2 Proposed Donation Management Wireframe

UI needs improvisation and modification as per given use case and to make test cases passed.


2.1 Welcome page



2.2 Ngo Homepage

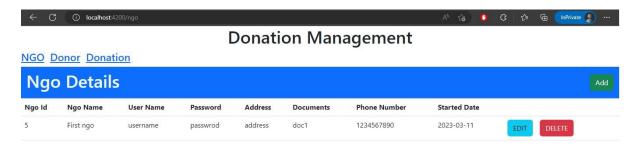

2.3 Donor Homepage

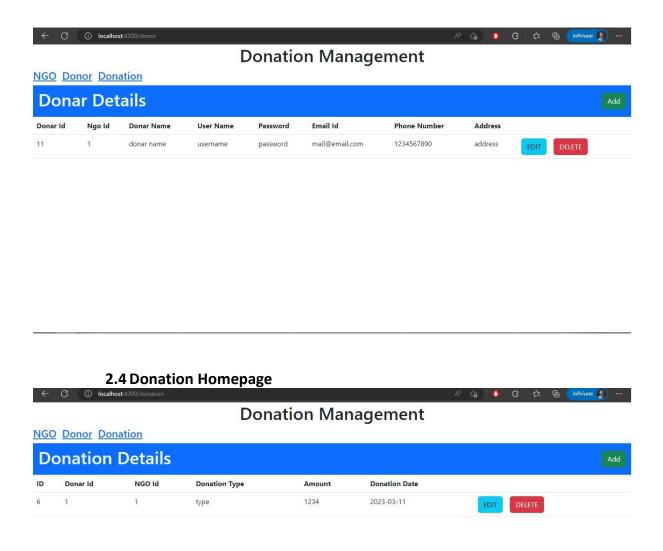

3 Business-Requirement:

As an application developer, develop the Donation management App (Single Page App) with below guidelines:

User Story #	User Story Name	User Story
US_01	Welcome Page	As a user I should be able to visit the welcome page as default page. Acceptance criteria: 1. User can click any links shown at homepage.
US_02	Ngo Homepage	As a user I should be able to see Ngo page and perform all CRUD

		operations:	
		Acceptance criteria: 1. As a user I should be able to furnish following details at the time of creating an ngo.	
		1.1 Ngo Name	
		1.2 User Name 1.3 Password	
		1.4 Address	
		1.5 Documents	
		1.6 Phone Number	
		1.7 Started In	
		2. Save button should be disabled until all fields are validated.	
		 All details fields must be mandatory. If any constraint is not satisfied, a validation message must be shown. 	
US_03	Donor Homepage	As a user I should be able to see donor page and perform all CRUD operations:	
		Acceptance criteria: 1. As a user I should be able to furnish following details at the time of creating an donor.	
		1.2 Ngo Id	
		1.3 Donor Name	
		1.4 User Name	
		1.5 Password	
		1.6 Email ID	
		1.7 Phone Number 1.8 Address	
		 Save button should be disabled until all fields are validated. All details fields must be mandatory. If any constraint is not satisfied, a validation message must be shown. 	
US_04	Donation Homepage	As a user I should be able to see donation page and perform all CRUD operations:	
		Acceptance criteria: 1. As a user I should be able to furnish	

			following details at the time of creating an donation.
		1.9	Donor Id
		1.10	Ngo ID
		1.11	Donation Type
		1.12	Amount
		1.13	Donation Date
	Save button should be disabled until all fields are validated. 1. All details fields must be mandatory. If any constraint is not		
	satis	Tied, a valid	dation message must be shown

4 Constraints

- 1. On the page load, input focus must come to the first name input field.
- 2. You should be able to press the "TAB" key and "SHIFT + TAB" to navigate from top field to bottom field and vice-versa.

6. Execution Steps to Follow (BACKEND)

- 1. All actions like build, compile, running application, running test cases will be through Command Terminal.
- 2. To open the command terminal the test takers need to go to the Application menu (Three horizontal lines at left top) Terminal \rightarrow New Terminal.
- 3. On command prompt, cd into your project folder (cd <Your-Project-folder>).
- 4. To connect SQL server from terminal: (DonationManagement/sqlcmd -S localhost -U sa -P pass@word1)
 - To create database from terminal -

```
1> Create Database DonationManagement_Db 2> Go
```

- 5. Steps to Apply Migration(Code first approach):
 - Press Ctrl+C to get back to command prompt
 - Run following command to apply migration-(DonationManagement/dotnet-ef database update)
- To check whether migrations are applied from terminal:
 (DonationManagement/sqlcmd -S localhost -U sa -P

```
pass@word1)

1> Use DonationManagement_Db

2> Go

1> Select * From_EFMigrationsHistory

2> Go
```

7. To build your project use command:

(DonationManagement/dotnet build)

- 8. To launch your application, Run the following command to run the application: (DonationManagement/dotnet run)
- 9. This editor Auto Saves the code.
- 10. To test any Restful application, the last option on the left panel of IDE, you can find ThunderClient, which is the lightweight equivalent of POSTMAN.

11. To test web-based applications on a browser, use the internal browser in the workspace. Click on the second last option on the left panel of IDE, you can find Browser Preview, where you can launch the application.

Note: The application will not run in the local browser

- 12. To run the test cases in CMD, Run the following command to test the application: (DonationManagement.Tests/dotnet test --logger"console;verbosity=detailed") (You can run this command multiple times to identify the test case status,and refactor code to make maximum test cases passed before final submission)
- 13. If you want to exit(logout) and continue the coding later anytime (using Save & Exit option on Assessment Landing Page) then you need to use CTRL+Shift+B command compulsorily on code IDE. This will push or save the updated contents in the internal git/repository. Else the code will not be available in the next login.
- 14. These are time bound assessments the timer would stop if you logout and while logging in back using the same credentials the timer would resume from the same time it was stopped from the previous logout.
- 15. You need to use CTRL+Shift+B command compulsorily on code IDE, before final submission as well. This will push or save the updated contents in the internal git/repository, and will be used to evaluate the code quality.

7. Execution Steps to Follow for Frontend

- 1. All actions like build, compile, running application, running test cases will be through Command Terminal.
- To open the command terminal the test takers, need to go to
 Application menu (Three horizontal lines at left top) -> Terminal ->New Terminal.
- 3. This is a web-based application, to run the application on a browser, use the internal browser in the environment.

- 4. You can follow series of command to setup Angular environment once you are in your project-name folder:
 - a. npm install -> Will install all dependencies -> takes 10 to 15 min
 - b. npm run start -> To compile and deploy the project in browser. You can press <Ctrl> key while clicking on localhost:4200 to open project in browser -> takes 2 to 3 min
 - c. npm run test -> to run all test cases. It is mandatory to run this command before submission
 of workspace -> takes 5 to 6 min
- 5. You need to use CTRL+Shift+B command compulsorily on code IDE, before final submission as well. This will push or save the updated contents in the internal git/repository, and will be used to evaluate the code quality.