
System Requirements Specification Index

For

Blood Donors Application

Version 1.0

IIHT Pvt. Ltd.
fullstack@iiht.com

Contents

1. Business-Requirement:	3
1.1 Problem Statement:	3
1.1.1 Blood Donors Application	3
2. Template Code Structure	4
2.1 Donor Controller	4
2.2 Resources Available	4
3. Suggested Wireframes:	5
4. Business Validations	9
5. Considerations	9
6. Execution Steps to Follow	9

1 BUSINESS-REQUIREMENT:

1.1 PROBLEM STATEMENT:

The Blood Donor Application is a critical tool designed to streamline the process of managing and accessing donor information efficiently.

Your task is to develop a comprehensive application that enables users to add new donors, retrieve and sort a list of donors by various fields in both ascending and descending order, and modify or delete donor entries. Additionally, the application should offer robust search functionality to locate donors based on State, City, or Blood Group, enhancing its usability in real-world scenarios.

1.1.1 Blood Donor Application:

The Blood Donor Application allows you to:

1. Access the home page.
2. Should be able to add a new donor.
3. It should have basic fields like first name, last name, email, mobile number, gender, state, city and blood group.
4. Should be able to get the list of donors along with options to sort in ascending and descending order in each field.
5. Should be able to edit and delete any donor.
6. Should be able to search for any donor by State, City or Blood Group.

2. TEMPLATE CODE STRUCTURE:

2.1 DONOR CONTROLLER


Method Exposed	Purpose
<code>listDonor()</code>	Should return page "list-donors" with required data.
<code>showFormForAdd()</code>	Should return page "add-donor-form" for adding a donor.
<code>saveDonor()</code>	Should save a donor and return "donor/list" with required data.
<code>showFormForUpdate()</code>	Should show donor details in page "update-donor-form" to edit an donor.
<code>deleteDonor()</code>	Should delete a donor and return "donor/list" with required data.
<code>searchDonors()</code>	Should search a donor and return "list-donors" with required data.

2.2 RESOURCES AVAILABLE:

Description	View Pages Name	Remarks
Common UI		
Home Page	list-donors	Contains a homepage which shows a list of all donors along with options to add, edit , delete and search a donor.
All donors	list-donors	
Add a donor	add-donor-form	
Update a donor	update-donor-form	
Search a donor	list-donors	

3 SUGGESTED WIREFRAMES:


1. Homepage – Visitor Landing Page

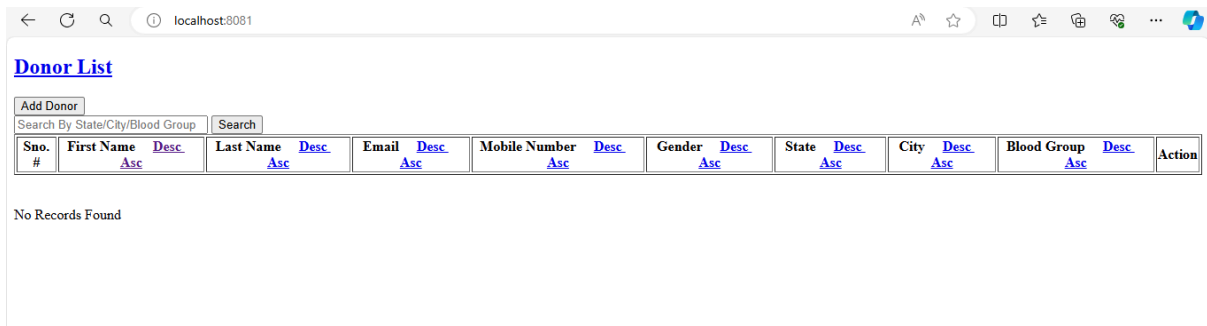

A screenshot of a web browser showing a page titled "Donor List". The browser's address bar shows "localhost:8081". The page has a header with "Add Donor" and a search bar labeled "Search By State/City/Blood Group" with a "Search" button. Below the header is a table with columns: Sno. #, First Name, Last Name, Email, Mobile Number, Gender, State, City, Blood Group, and Action. Each column has a link labeled "Asc" or "Desc". The table is currently empty, and a message "No Records Found" is displayed below it.

Sno. #	First Name	Last Name	Email	Mobile Number	Gender	State	City	Blood Group	Action
--------	------------	-----------	-------	---------------	--------	-------	------	-------------	--------

2. Create a Donor

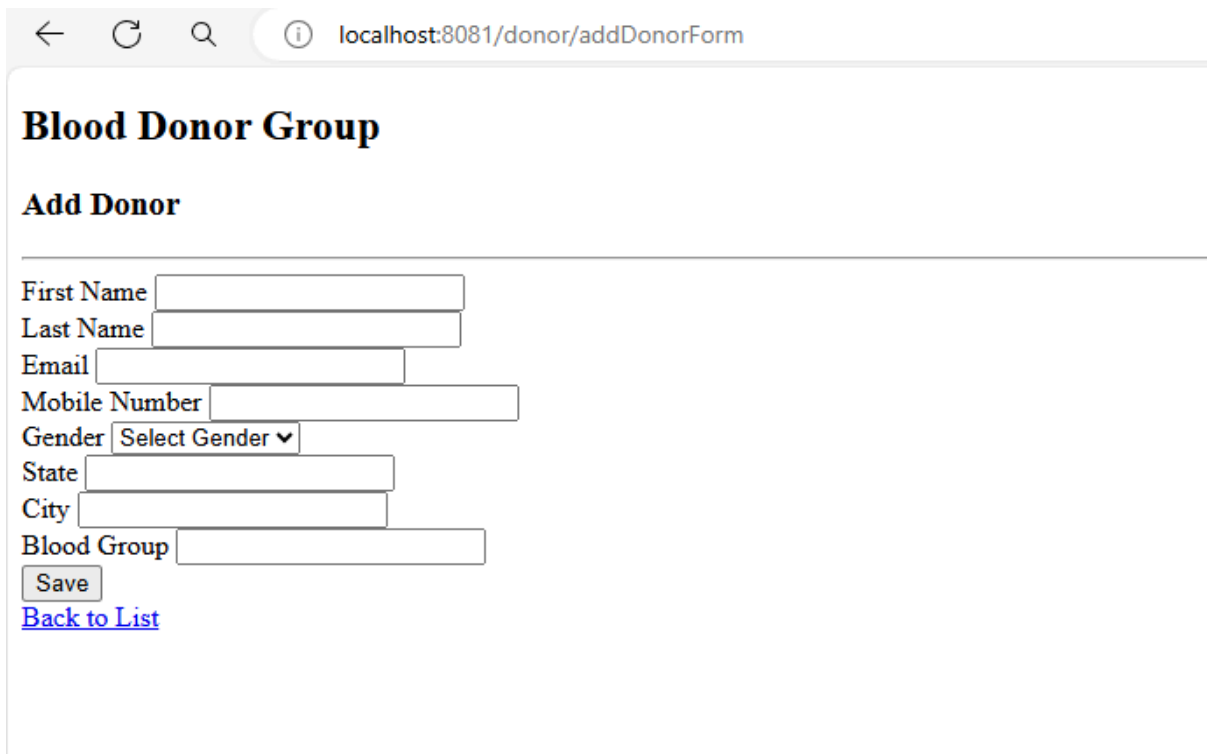

A screenshot of a web browser showing a page titled "Blood Donor Group" with a sub-header "Add Donor". The browser's address bar shows "localhost:8081/donor/addDonorForm". The form contains input fields for "First Name", "Last Name", "Email", "Mobile Number", "Gender" (a dropdown menu with "Select Gender" as the selected option), "State", "City", and "Blood Group". Below the form is a "Save" button and a link labeled "Back to List".

First Name

Last Name

Email

Mobile Number

Gender

State

City

Blood Group

[Back to List](#)

←↻🔍📄localhost:8081/donor/addDonorForm

Blood Donor Group

Add Donor

First Name

John

Last Name

Doe

Email

johnd@gmail.com

Mobile Number

9556231478

Gender

Male

State

Bangalore

City

Whitefield

Blood Group

A-

Save

[Back to List](#)

3. Donor List

←↻🔍📄localhost:8081/donor/list

Donor List

Add Donor

Search By State/City/Blood Group

Search

Sno. #	First Name <div>AscDesc</div>	Last Name <div>AscDesc</div>	Email <div>AscDesc</div>	Mobile Number <div>AscDesc</div>	Gender <div>AscDesc</div>	State <div>AscDesc</div>	City <div>AscDesc</div>	Blood Group <div>AscDesc</div>	Action
1	John	Doe	johnd@gmail.com	9556231478	male	Bangalore	Whitefield	A-	Update Delete
2	Emily	Joe	emily90@gmail.com	8753621458	female	Delhi	Ladakh	AB+	Update Delete

1

4. Update a Donor

localhost:8081/donor/updateDonorForm?donorId=1

Blood Donor Group

Update Donor

First Name

Last Name

Email

Mobile Number

Gender

State

City

Blood Group

[Back to List](#)

localhost:8081/donor/list

Donor List

Search By State/City/Blood Group

Sno. #	First Name Asc Desc	Last Name Asc Desc	Email Asc Desc	Mobile Number Asc Desc	Gender Asc Desc	State Asc Desc	City Asc Desc	Blood Group Asc Desc	Action
1	John	Doe	johnd@gmail.com	9556231478	male	Bangalore	Whitefield	O+	Update Delete
2	Emily	Joe	emily90@gmail.com	8753621458	female	Delhi	Ladakh	AB+	Update Delete

1

5. Delete a Donor

localhost:8081/donor/list

Donor List

Add Donor

Search By State/City/Blood Group Search

localhost:8081 says
Are you sure you want to delete this donor?
OK Cancel

Sno. #	First Name Desc Asc	Last Name Desc Asc	Email Desc Asc	Mobile Number Desc Asc	Gender Desc Asc	State Desc Asc	City Desc Asc	Blood Group Desc Asc	Action
1	John	Doe	johnd@gmail.com	9556231478	male	Bangalore	Whitefield	O+	Update Delete
2	Emily	Joe	emily90@gmail.com	8753621458	female	Delhi	Ladakh	AB+	Update Delete

1

localhost:8081/donor/list

Donor List

Add Donor

Search By State/City/Blood Group Search

Sno. #	First Name Desc Asc	Last Name Desc Asc	Email Desc Asc	Mobile Number Desc Asc	Gender Desc Asc	State Desc Asc	City Desc Asc	Blood Group Desc Asc	Action
1	John	Doe	johnd@gmail.com	9556231478	male	Bangalore	Whitefield	O+	Update Delete

1

6. Search a Donor

localhost:8081/search?theSearchName=B%2B

Donor List

Add Donor

B+ Search

Sno. #	First Name Desc Asc	Last Name Desc Asc	Email Desc Asc	Mobile Number Desc Asc	Gender Desc Asc	State Desc Asc	City Desc Asc	Blood Group Desc Asc	Action
1	Mary	Rose	mary@gmail.com	8756875423	female	Tamil Nadu	Chennai	B+	Update Delete

1

4 BUSINESS VALIDATIONS

1. Id must be of type id.
 2. First name value is not blank, min 2 and max 40 characters.
 3. Last name value is not blank, min 2 and max 40 characters.
 4. Email value is not blank and of type email.
 5. Mobile number is not null and must be of length 10.
 6. Gender should not be blank
 7. State should not be blank.
 8. City should not be blank.
 9. Blood groups should not be blank and min 1 and max 3 characters.
-

5 CONSIDERATIONS

The Code template already contains skeleton methods for service and controller layer. Please write your logic in it.

6 EXECUTION STEPS TO FOLLOW

1. All actions like build, compile, running application, running test cases will be through Command Terminal.
 2. To open the command terminal the test takers, need to go to Application menu
(Three horizontal lines at left top) → Terminal → New Terminal
 3. To build your project use command:
mvn clean package -Dmaven.test.skip
 4. To launch your application:
java -jar <your application war file name>
 5. This editor Auto Saves the code
 6. If you want to exit(logout) and continue the coding later anytime (using Save & Exit option on Assessment Landing Page) then you need to use **CTRL+Shift+B**-command compulsorily on code IDE. This will push or save the updated contents in the internal git/repository. Else the code will not be available in the next login.
 7. These are time bound assessments the timer would stop if you logout and while logging in back using the same credentials the timer would resume from the same time it was stopped from the previous logout.
-

8. To test any Restful application, the last option on the left panel of IDE, you can find ThunderClient, which is the lightweight equivalent of POSTMAN.
9. This is a web-based application, to run the application on a browser, use the internal browser in the workspace. Click on the second last option on the left panel of IDE, you can find Browser Preview, where you can launch the application.

Note: The application will not run in the local browser

10. Default credentials for MySQL:
 - a. Username: **root**
 - b. Password: **pass@word1**
11. To login to mysql instance: Open new terminal and use following command:
 - a. **sudo systemctl enable mysql**
 - b. **sudo systemctl start mysql**

NOTE: After typing the second sql command (sudo systemctl start mysql), you may encounter a warning message like :

System has not been booted with systemd as init system (PID 1). Can't operate. Failed to connect to bus: Host is down

>> Please note that this warning is expected and can be disregarded. Proceed to the next step.

- c. **mysql -u root -p**

The last command will ask for password which is '**pass@word1**'

12. Mandatory: Before final submission run the following command:
mvn test
13. You need to use **CTRL+Shift+B** - command compulsorily on code IDE, before final submission as well. This will push or save the updated contents in the internal git/repository, and will be used to evaluate the code quality.