

ECOMMERCE APPLICATION

IIHT

Time To Complete: 2 hr

CONTENTS

1	Problem Statement	3
2	Proposed E Commerce Application Wireframe	4
2.1	Welcome Page	4
2.2	ScreenShots	5
3	Business-Requirement	9
4	Validations	14
5	Constraints	14
6	Mandatory Assessment Guidelines	14

1 PROBLEM STATEMENT

"E Commerce Application " is a Single Page Application (SPA) that empowers users to list all products with details like name, description and price. It allows users to edit and delete any product along with giving the option to search any product also.

2 PROPOSED E COMMERCE APPLICATION WIREFRAME

UI needs improvisation and modification as per given use case and to make test cases passed.

2.1 WELCOME PAGE

localhost:8081/

Welcome to your Product Catalog

Product Form

Add a Product

Name: Description: Price:


Products List

Filter by Name:

- **Name:** Mousee
Description: Description for Mouse
Price: 19.99
- **Name:** Keyboard
Description: Description for Keyboard
Price: 29.99
- **Name:** Carpet
Description: Description for Carpet
Price: 39.99

2.2 SCREEN SHOTS:

Add Product

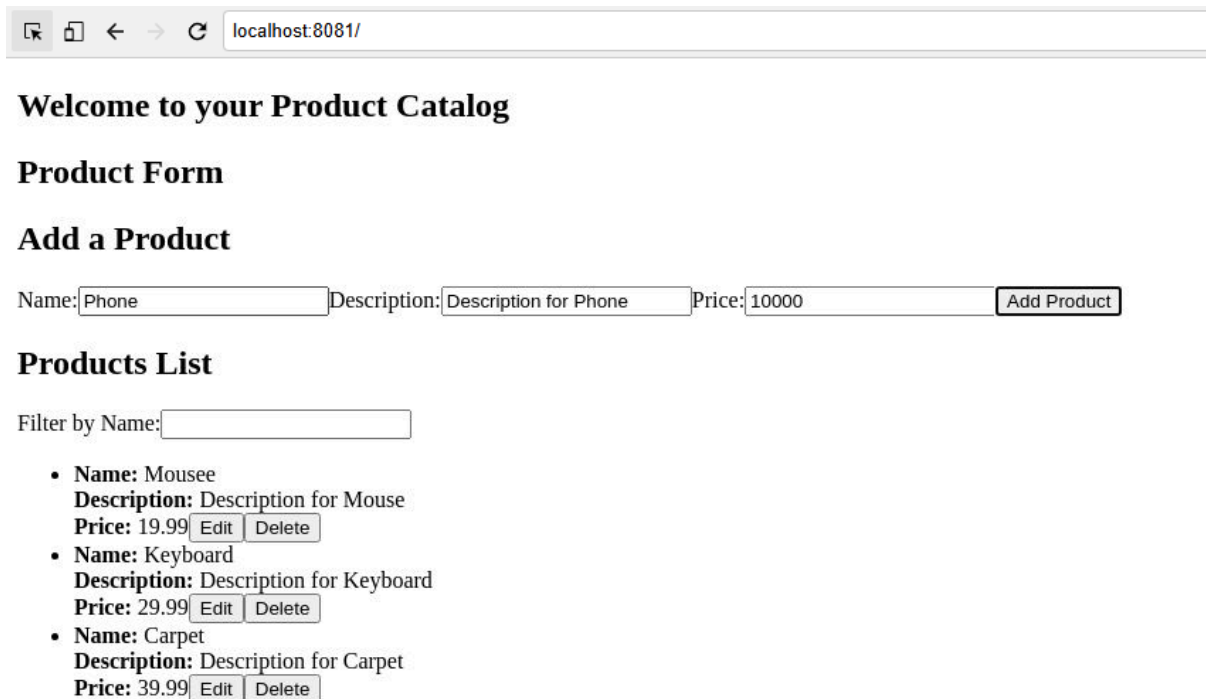

A screenshot of a web browser at localhost:8081/ showing the 'Product Catalog' application. The page has a header 'Welcome to your Product Catalog' and a section 'Product Form' with a sub-section 'Add a Product'. Below this is a form with three input fields: 'Name' (containing 'Phone'), 'Description' (containing 'Description for Phone'), and 'Price' (containing '10000'). To the right of the 'Price' field is an 'Add Product' button. Below the form is a 'Products List' section with a 'Filter by Name' input field. The list contains three items: 'Mousee' (Price: 19.99), 'Keyboard' (Price: 29.99), and 'Carpet' (Price: 39.99). Each item has 'Edit' and 'Delete' buttons next to its price.

localhost:8081/

Welcome to your Product Catalog

Product Form

Add a Product


Name: Description: Price:

Products List

Filter by Name:

- **Name:** Mousee
Description: Description for Mouse
Price: 19.99
- **Name:** Keyboard
Description: Description for Keyboard
Price: 29.99
- **Name:** Carpet
Description: Description for Carpet
Price: 39.99

Added Product

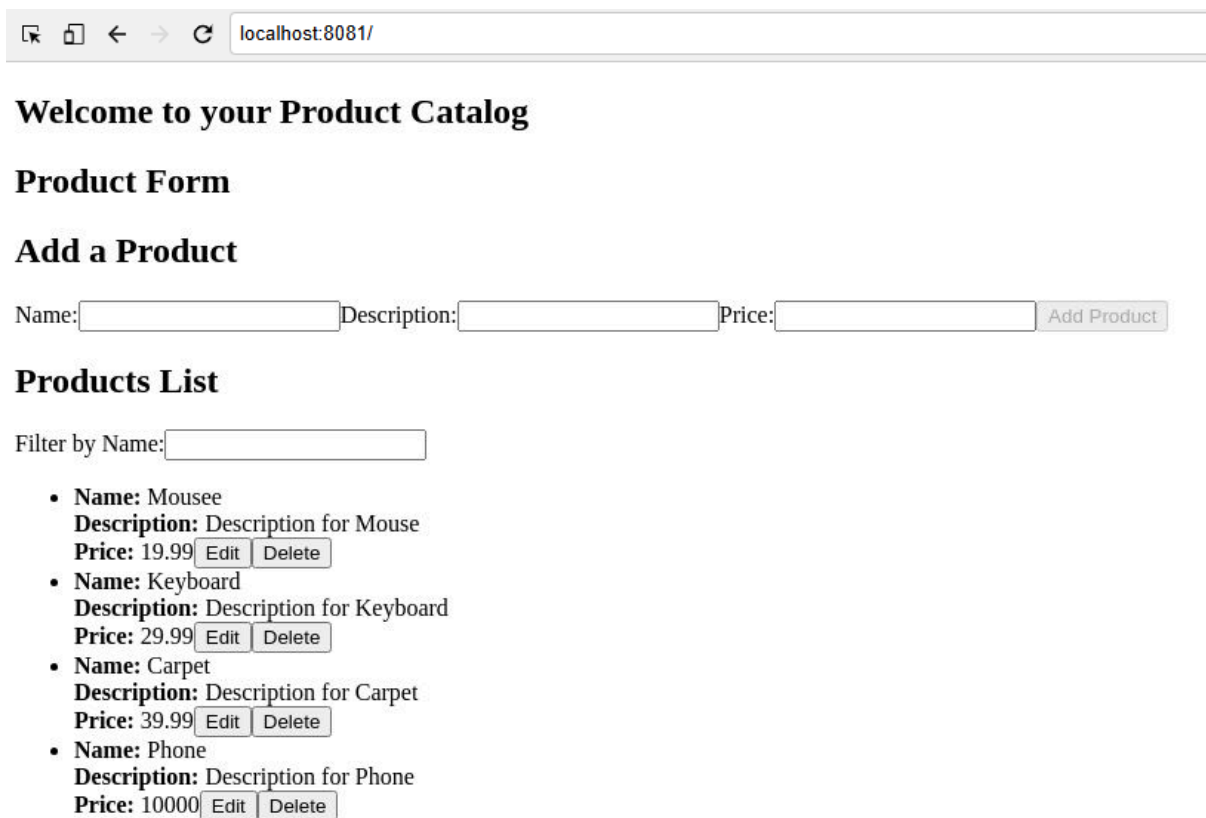

A screenshot of the same web browser at localhost:8081/ showing the 'Product Catalog' application. The page structure is identical to the previous screenshot, but the 'Add Product' button is now disabled (grayed out). The 'Products List' section now includes a fourth item, 'Phone' (Price: 10000), which has 'Edit' and 'Delete' buttons next to its price.

localhost:8081/

Welcome to your Product Catalog

Product Form

Add a Product


Name: Description: Price:

Products List

Filter by Name:

- **Name:** Mousee
Description: Description for Mouse
Price: 19.99
- **Name:** Keyboard
Description: Description for Keyboard
Price: 29.99
- **Name:** Carpet
Description: Description for Carpet
Price: 39.99
- **Name:** Phone
Description: Description for Phone
Price: 10000

Edit Product

     localhost:8081/

Welcome to your Product Catalog

Product Form

Edit Product




Name: Description: Price:

Products List

Filter by Name:

- **Name:** Mousee
Description: Description for Mouse
Price: 19.99
- **Name:** Keyboard
Description: Description for Keyboard
Price: 29.99
- **Name:** Carpet
Description: Description for Carpet
Price: 39.99
- **Name:** Phone
Description: Description for Phone
Price: 10000

Update Product

     localhost:8081/

Welcome to your Product Catalog

Product Form

Edit Product






Name: Description: Price:

Products List

Filter by Name:

- **Name:** Mousee
Description: Description for Mouse
Price: 19.99
- **Name:** Keyboard
Description: Description for Keyboard
Price: 29.99
- **Name:** Carpet
Description: Description for Carpet
Price: 39.99
- **Name:** Phone
Description: Description for Phone
Price: 10000

Updated Product

     localhost:8081/

Welcome to your Product Catalog

Product Form

Add a Product

Name: Description: Price:

Products List

Filter by Name:

- **Name:** DELL Mouse
Description: Description for Mouse
Price: 29.99
- **Name:** Keyboard
Description: Description for Keyboard
Price: 29.99
- **Name:** Carpet
Description: Description for Carpet
Price: 39.99
- **Name:** Phone
Description: Description for Phone
Price: 10000

Delete Product

     localhost:8081/

Welcome to your Product Catalog

Product Form

Add a Product

Name: Description: Price:

Products List

Filter by Name:

- **Name:** DELL Mouse
Description: Description for Mouse
Price: 29.99
- **Name:** Keyboard
Description: Description for Keyboard
Price: 29.99
- **Name:** Phone
Description: Description for Phone
Price: 10000

Filter Product

 localhost:8081/

Welcome to your Product Catalog

Product Form

Add a Product

Name: Description: Price:

Products List

Filter by Name:

- **Name:** Keyboard
Description: Description for Keyboard
Price: 29.99

 localhost:8081/

Welcome to your Product Catalog

Product Form

Add a Product

Name: Description: Price:

Products List

Filter by Name:

- No products found

3 BUSINESS-REQUIREMENT:

As an application developer, develop the E Commerce Application (Single Page App) with below guidelines:

User Story #	User Story Name	User Story
US_01	Welcome Page	<p>As a user I should be able to visit the welcome page as default page.</p> <p>Acceptance Criteria:</p> <p>AppComponent:</p> <ol style="list-style-type: none">1. Should display the heading "Welcome to your Product Catalog" inside an <code><h2></code> tag.2. Should display the heading "Product Form" inside an <code><h2></code> tag.3. Should render the ProductForm component for product creation and editing.4. Should display the heading "Products List" inside an <code><h2></code> tag.5. Should render the ProductList component to display available products. <p>State & Functionality Overview:</p> <p>State Variables:</p> <ol style="list-style-type: none">1. products:<ul style="list-style-type: none">• Type: array• Purpose: Holds the list of all products.• Initial Value: <code>[]</code> (empty array)2. editProduct:<ul style="list-style-type: none">• Type: object or <code>null</code>• Purpose: Stores the product currently being edited.• Initial Value: <code>null</code> <p>Fetching Products:</p> <ol style="list-style-type: none">1. Use the <code>useEffect</code> hook to fetch products from the backend once when the component mounts.2. Make a GET request to: <code>http://localhost:4000/products</code>3. On success, update the <code>products</code> state with the response data.4. On failure, log the error to the console with a meaningful message. <p>Add Product Functionality:</p> <ol style="list-style-type: none">1. Accepts a product object as an argument.

		<ol style="list-style-type: none"> Makes a POST request to: <code>http://localhost:4000/products</code> On success, append the new product (from the response) to the <code>products</code>. Handle any errors by logging them. <p>Delete Product Functionality:</p> <ol style="list-style-type: none"> Accepts a <code>productId</code> object as an argument. Makes a DELETE request to: <code>http://localhost:4000/products/{id}</code> On success, remove the corresponding product from the <code>products</code> array. Log errors appropriately. <p>Update Product Functionality:</p> <ol style="list-style-type: none"> Accepts a product object with updated data as an argument. Makes a PUT request to: <code>http://localhost:4000/products/{id}</code> On success, update the corresponding product in the <code>products</code> list. Also reset the <code>editProduct</code> state back to <code>null</code> after updating. Errors should be logged to the console. <p>ProductForm Component:</p> <p>This component is used for both adding new products and editing existing ones. It displays a form with input fields for product details and triggers the appropriate handler (<code>addProduct</code> or <code>updateProduct</code>) on form submission.</p> <p>Props:</p> <ol style="list-style-type: none"> <code>addProduct(product)</code> – Function to create a new product. <code>editProduct</code> – The product object being edited, or <code>null</code>. <code>updateProduct(product)</code> – Function to update an existing product. <p>State Management:</p> <ol style="list-style-type: none"> Maintains a local state object <code>product</code> with the following properties: <ul style="list-style-type: none"> <code>name</code> (string) <code>description</code> (string) <code>price</code> (number) On component mount or whenever <code>editProduct</code> changes:
--	--	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

		<ul style="list-style-type: none"> • If <code>editProduct</code> exists, populate the form fields with its values. • If not, reset the form to empty fields. <p>3. Use the <code>useEffect</code> hook to handle this logic.</p> <p>Form Behavior:</p> <ol style="list-style-type: none"> 1. Form Fields: <ul style="list-style-type: none"> • <code>name</code> – required • <code>description</code> • <code>price</code> – required, numeric input 2. Form Mode: <ul style="list-style-type: none"> • Determine if it's an add or edit operation using the presence of <code>editProduct</code>. • Show appropriate heading in <code><h2></code> and button text respectively as: <ul style="list-style-type: none"> → If editing: "Edit Product" and "Update Product" → If adding: "Add a Product" and "Add Product" 3. Submission Logic: <ul style="list-style-type: none"> • On form submission: <ul style="list-style-type: none"> → Prevent default behavior. → If editing, call <code>updateProduct(product)</code>. → If adding, call <code>addProduct(product)</code>. • After submission, reset the form fields to empty. 4. Validation: <ul style="list-style-type: none"> • Disable the submit button if required fields (<code>name</code> or <code>price</code>) are empty. <p>HTML Structure:</p> <ol style="list-style-type: none"> 1. Displays a heading using an <code><h2></code> tag: <ul style="list-style-type: none"> • "Edit Product" if editing. • "Add a Product" if adding. 2. Renders a <code><form></code> with the following labeled input fields: <ul style="list-style-type: none"> • Name (<code><input type="text"></code>) – required. • Description (<code><input type="text"></code>) – optional. • Price (<code><input type="number"></code>) – required. 3. The form contains three input fields, each with a label. Here's how they should be structured: <ul style="list-style-type: none"> • Name Field: <ul style="list-style-type: none"> → Use a label with the text "Name:".
--	--	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

		<p>→ This label should be linked to the input using the <code>htmlFor</code> attribute.</p> <p>→ The corresponding input should have the <code>id</code> set to <code>"name"</code>.</p> <ul style="list-style-type: none"> • Description Field: <p>→ Use a label with the text "Description:".</p> <p>→ Link the label to its input with <code>htmlFor="description"</code>.</p> <p>→ The input should have <code>id="description"</code>.</p> • Price Field: <p>→ Use a label with the text "Price:".</p> <p>→ Link it using <code>htmlFor="price"</code> and match the input <code>id</code> accordingly.</p> <p>4. Each input uses the <code>value</code> from state and updates state on <code>onChange</code>.</p> <p>5. A <code><button type="submit"></code> is shown:</p> <ul style="list-style-type: none"> • Text: "Update Product" when editing. • Text: "Add Product" when adding. • The button is disabled if required fields (<code>name</code>, <code>price</code>) are empty. <p>** Kindly refer to the screenshots for any clarifications. **</p> <p>ProductList Component:</p> <p>This component is responsible for displaying a list of products. It allows users to filter products by name, edit a selected product, or delete a product. It also handles dynamic filtering and rendering of the product list.</p> <p>Props:</p> <ol style="list-style-type: none"> 1. <code>products</code> – An array of product objects to be displayed. 2. <code>deleteProduct(productId)</code> – Function to delete a product by its ID. 3. <code>setEditProduct(product)</code> – Function to set a selected product for editing (used in the form). <p>State Management:</p> <ol style="list-style-type: none"> 1. Maintains local state <code>filters</code> as an object with: <ul style="list-style-type: none"> • <code>name</code> (string) – used to filter the displayed products by name.
--	--	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

		<p>2. The list of products is filtered on each render based on the current value of <code>filters.name</code>:</p> <ul style="list-style-type: none"> • Matching is case-insensitive. • Only products whose <code>name</code> includes the entered filter text are displayed. <p>Filter Behavior:</p> <ol style="list-style-type: none"> 1. A single input field should be provided to filter products by name. 2. As the user types in the input, the filter state updates in real time and the product list is re-rendered accordingly. <p>HTML Structure:</p> <ol style="list-style-type: none"> 1. Filter Section: <ul style="list-style-type: none"> • Includes a label with the text "Filter by Name:". • This label is associated with the input using <code>htmlFor="name"</code>. • The input element has <code>id="name"</code> and type "text". • The input's value is bound to <code>filters.name</code>. • On <code>onChange</code>, the filter state is updated accordingly. 2. Product List Section: <ul style="list-style-type: none"> • Uses an unordered list (<code></code>) to display the filtered products. • For each product, the following is rendered inside a list item (<code></code>): <ul style="list-style-type: none"> ➔ Name: shown using a bold label "Name:" ➔ Description: shown using a bold label "Description:" ➔ Price: shown using a bold label "Price:" ➔ Two buttons: <ul style="list-style-type: none"> ➤ Edit button: triggers <code>setEditProduct(product)</code> when clicked. ➤ Delete button: triggers <code>deleteProduct(product.id)</code> when clicked. 3. If no products match the filter criteria: <ul style="list-style-type: none"> • Display a list item with the message: "No products found". <p>** Kindly refer to the screenshots for any clarifications. **</p>
--	--	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

4 VALIDATIONS

- All required fields must be fulfilled with valid data.
- Price field should accept only numeric values.
- In the starting “Add Product” button should be disabled.
- Only after validating fields, “Add Product” button should be enabled.

5 CONSTRAINTS

- You should be able to press the “TAB” key and “SHIFT + TAB” to navigate from top field to bottom field and vice-versa.
- On clicking the “Add Product” button, the particular product should be added.

6 MANDATORY ASSESSMENT GUIDELINES

1. All actions like build, compile, running application, running test cases will be through Command Terminal.
2. To open the command terminal the test takers, need to go to Application menu (Three horizontal lines at left top) -> Terminal ->New Terminal.
3. This editor Auto Saves the code.
4. These are time bound assessments the timer would stop if you logout and while logging in back using the same credentials the timer would resume from the same time it was stopped from the previous logout.
5. To test any Restful application, the last option on the left panel of IDE, you can find ThunderClient, which is the lightweight equivalent of POSTMAN.
6. This is a web-based application, to run the application on a browser, use the internal browser in the workspace. Click on the second last option on the left panel of IDE, you can find Browser Preview, where you can launch the application.

Note: The application will not run in the local browser

7. You can follow series of command to setup React environment once you are in your project-name folder:
- a. `npm install` -> Will install all dependencies -> takes 10 to 15 min
 - b. `npm run start` -> To compile and deploy the project in browser. You can press <Ctrl> key while clicking on localhost:8080/8081 to open project in browser -> takes 2 to 3 min
 - c. `npm run json-start` -> To start the json server. As all data is stored in our db.json file.
 - d. `npm run jest` -> to run all test cases and see the summary.
 - e. `npm run test` -> to run all test cases. **It is mandatory to run this command before submission of workspace** -> takes 5 to 6 min
8. You may also run “`npm run jest`” while developing the solution to re-factor the code to pass the test-cases.
9. Once you are done with development and ready with submission, you may navigate to the previous tab and submit the workspace. It is mandatory to click on **“Submit Assessment”** after you are done with code.