



Introducción a BootStrap, FontAwesome

Universidad de Sevilla

Departamento de Lenguajes y Sistemas
Informáticos

Carlos Arévalo, Daniel Ayala, José Calderón,
Margarita Cruz, Inma Hernández, David Ruiz

UNIVERSIDAD DE SEVILLA

Objetivos



Contenidos

Introducción

Librerías

BootStrap

FontAwesome



Frameworks CSS: BootStrap, FontAwesome

Facilitan el manejo de estilos

Son RWD

Se basan en la especificación de clases para generar estilos

Librerías integradas en Silence o accesibles remotamente



Contenidos

Introducción

Librerías


BootStrap

FontAwesome



Enlace a librerías

Incluídas en Silence



```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap 5 Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>
```

```
<!DOCTYPE html>
<html>
<head>
  <title>Font Awesome Icons</title>
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <script src="https://kit.fontawesome.com/a076d05399.js" crossorigin="anonymous"></script>
```

Repositorios remotos

```
<html lan="es">
<head>
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <link rel="stylesheet" type="text/css" href="css/bootstrap.min.css">
  <link rel="stylesheet" type="text/css" href="css/font-awesome.min.css">
</head>
```

Contenidos

Introducción

Librerías

BootStrap

FontAwesome



BootStrap

Containers

```
<div class="container">
  <h1>My First Bootstrap Page</h1>
  <p>This part is inside a .container class.</p>
  <p>The .container class provides a responsive fixed width container.</p>
  <p>Resize the browser window to see that the container width will change at different breakpoints.</p>
</div>
```

My First Bootstrap Page

This part is inside a .container class.

The .container class provides a responsive fixed width container.

Resize the browser window to see that the container width will change at different breakpoints.

Container-fluid


```
<div class="container-fluid">
  <h1>My First Bootstrap Page</h1>
  <p>This part is inside a .container-fluid class.</p>
  <p>The .container-fluid class provides a full width container, spanning the entire width of the viewport.</p>
</div>
```

My First Bootstrap Page

This part is inside a .container-fluid class.

The .container-fluid class provides a full width container, spanning the entire width of the viewport.

BootStrap. Grid 12c

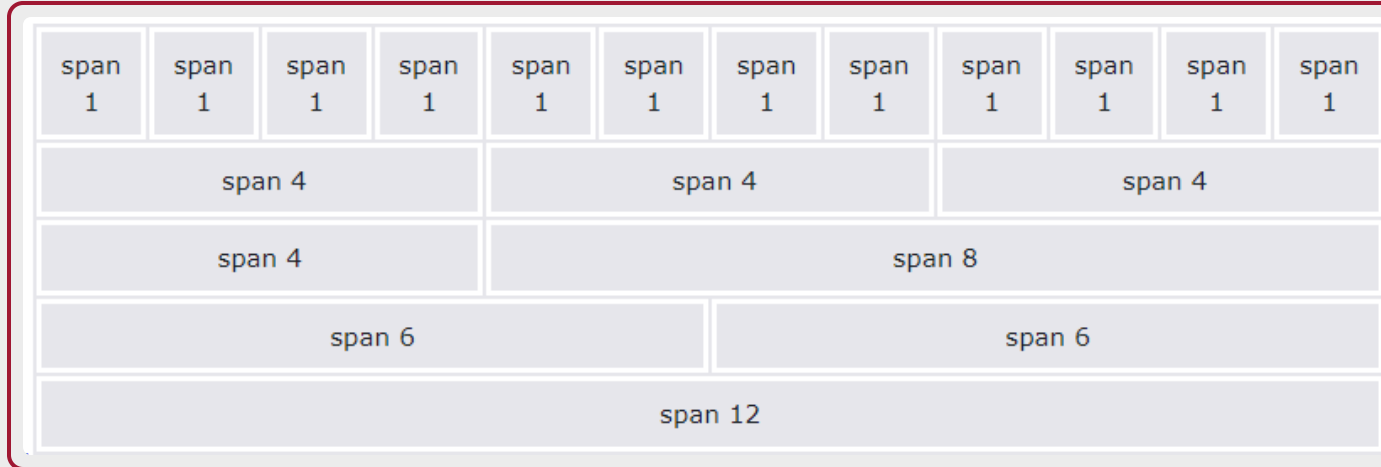

Grid Classes

The Bootstrap 5 grid system has six classes:

- `.col-` (extra small devices - screen width less than 576px)
- `.col-sm-` (small devices - screen width equal to or greater than 576px)
- `.col-md-` (medium devices - screen width equal to or greater than 768px)
- `.col-lg-` (large devices - screen width equal to or greater than 992px)
- `.col-xl-` (xlarge devices - screen width equal to or greater than 1200px)
- `.col-xxl-` (xxlarge devices - screen width equal to or greater than 1400px)

BootStrap. Responsive

Result Size: 657 x 404 [Get your own website](#)

Responsive Columns

Resize the browser window to see the effect.

The columns will automatically stack on top of each other when the screen is less than 576px wide.

.col

.col

.col

.col

```
<div class="container-fluid mt-3">
  <h1>Responsive Columns</h1>
  <p>Resize the browser window to see the effect.</p>
  <p>The columns will automatically stack on top of each other when
the screen is less than 576px wide.</p>
  <div class="row">
    <div class="col-sm-3 p-3 bg-primary text-white">.col</div>
    <div class="col-sm-3 p-3 bg-dark text-white">.col</div>
    <div class="col-sm-3 p-3 bg-primary text-white">.col</div>
    <div class="col-sm-3 p-3 bg-dark text-white">.col</div>
  </div>
</div>
```

Responsive Columns

Resize the browser window to see the effect.

The columns will automatically stack on top of each other when the screen is less than 576px wide.

.col

.col

.col

.col

Bootstrap. Colors

```
<div class="container mt-3">
  <h2>Background Color with Contrasting Text Color</h2>
  <p class="text-bg-primary">This text is important.</p>
  <p class="text-bg-success">This text indicates success.</p>
  <p class="text-bg-info">This text represents some information.</p>
  <p class="text-bg-warning">This text represents a warning.</p>
  <p class="text-bg-danger">This text represents danger.</p>
  <p class="text-bg-secondary">Secondary background color.</p>
  <p class="text-bg-dark">Dark grey background color.</p>
  <p class="text-bg-light">Light grey background color.</p>
</div>
```

Background Color with Contrasting Text Color

This text is important.

This text indicates success.

This text represents some information.

This text represents a warning.

This text represents danger.

Secondary background color.

Dark grey background color.

Light grey background color.

Bootstrap. Images

```
<div class="container mt-3">  
  <p>The .img-fluid class makes the image scale nicely to the parent  
  element (resize the browser window to see the effect):</p>  
    
</div>
```

The .img-fluid class makes the image scale nicely to the parent element (resize the browser window to see the effect):



Bootstrap. Botones

Button Styles

Bootstrap 5 provides different styles of buttons:

Basic

Primary

Secondary

Success

Info

Warning

Danger

Dark

Light


[Link](#)

Example

```
<button type="button" class="btn">Basic</button>
<button type="button" class="btn btn-primary">Primary</button>
<button type="button" class="btn btn-secondary">Secondary</button>
<button type="button" class="btn btn-success">Success</button>
<button type="button" class="btn btn-info">Info</button>
<button type="button" class="btn btn-warning">Warning</button>
<button type="button" class="btn btn-danger">Danger</button>
<button type="button" class="btn btn-dark">Dark</button>
<button type="button" class="btn btn-light">Light</button>
<button type="button" class="btn btn-link">Link</button>
```

BootStrap. Cards

```
<div class="container mt-3">
  <h2>Card Image</h2>
  <p>Image at the top (card-img-top):</p>
  <div class="card">
    
    <div class="card-body">
      <h4 class="card-title">John Doe</h4>
      <p class="card-text">Some example text some example text. John Doe is an architect and engineer</p>
      <a href="#" class="btn btn-primary">See Profile</a>
    </div>
  </div>
</div>
```

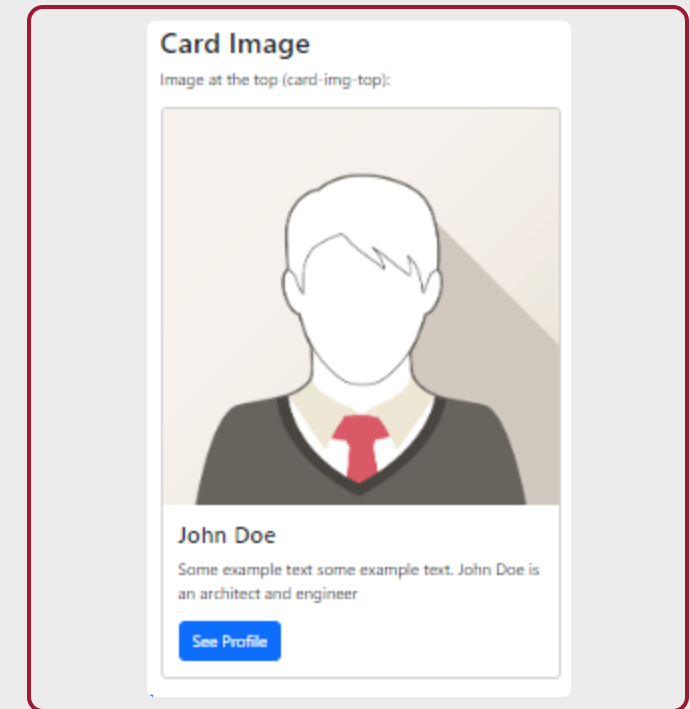

Bootstrap. Barras de navegación

Link 1 Link 2 Link 3

```
<nav class="navbar navbar-expand-sm bg-light">
  <div class="container-fluid">
    <ul class="navbar-nav">
      <li class="nav-item">
        <a class="nav-link" href="#">Link 1</a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="#">Link 2</a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="#">Link 3</a>
      </li>
    </ul>
  </div>
</nav>
```


Bootstrap. Forms

```
<div class="container mt-3">
  <h2>Stacked form</h2>
  <form action="/action_page.php">
    <div class="mb-3 mt-3">
      <label for="email">Email:</label>
      <input type="email" class="form-control" id="email" placeholder="Enter email" name="email">
    </div>
    <div class="mb-3">
      <label for="pwd">Password:</label>
      <input type="password" class="form-control" id="pwd" placeholder="Enter password" name="pswd">
    </div>
    <div class="form-check mb-3">
      <label class="form-check-label">
        <input class="form-check-input" type="checkbox" name="remember"> Remember me
      </label>
    </div>
    <button type="submit" class="btn btn-primary">Submit</button>
  </form>
</div>
```

Stacked form

Email:

Password:

☐ Remember me

Contenidos

Introducción

Librerías


BootStrap

FontAwesome



FontAwesome. Incrustación de iconos

```
<ul class="fa-ul">
  <li><span class="fa-li"><i class="fas fa-check-square"></i></span>List Item</li>
  <li><span class="fa-li"><i class="fas fa-spinner fa-pulse"></i></span>List Item</li>
  <li><span class="fa-li"><i class="fas fa-square"></i></span>List Item</li>
</ul>
```





Gracias

Universidad de Sevilla

**Departamento de Lenguajes y Sistemas
Informáticos**

CSS is OK

UNIVERSIDAD DE SEVILLA