



Introducción a BootStrap, FontAwesome

Universidad de Sevilla

Departamento de Lenguajes y Sistemas
Informáticos

Carlos Arévalo, Daniel Ayala, José Calderón,
Margarita Cruz, Inma Hernández, David Ruiz

UNIVERSIDAD DE SEVILLA

Objetivos



Contenidos

Introducción

Librerías

BootStrap

FontAwesome



Frameworks CSS: BootStrap, FontAwesome

Facilitan el manejo de estilos

Son RWD

Se basan en la especificación de clases para generar estilos

Librerías integradas en Silence o accesibles remotamente



Contenidos

Introducción

Librerías


BootStrap

FontAwesome



Enlace a librerías

Incluídas en Silence



```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Bootstrap 5 Example</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.2/dist/js/bootstrap.bundle.min.js"></script>
</head>
<body>
```

Repositorios remotos

```
<!DOCTYPE html>
<html>
<head>
  <title>Font Awesome Icons</title>
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <script src="https://kit.fontawesome.com/a076d05399.js" crossorigin="anonymous"></script>
```

```
<html lan="es">
<head>
  <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
  <link rel="stylesheet" type="text/css" href="css/bootstrap.min.css">
  <link rel="stylesheet" type="text/css" href="css/font-awesome.min.css">
</head>
```

Contenidos

Introducción

Librerías

BootStrap

FontAwesome



BootStrap

Containers

```
<div class="container">
  <h1>My First Bootstrap Page</h1>
  <p>This part is inside a .container class.</p>
  <p>The .container class provides a responsive fixed width container.</p>
  <p>Resize the browser window to see that the container width will change at different breakpoints.</p>
</div>
```

My First Bootstrap Page

This part is inside a .container class.

The .container class provides a responsive fixed width container.

Resize the browser window to see that the container width will change at different breakpoints.

Container-fluid


```
<div class="container-fluid">
  <h1>My First Bootstrap Page</h1>
  <p>This part is inside a .container-fluid class.</p>
  <p>The .container-fluid class provides a full width container, spanning the entire width of the viewport.</p>
</div>
```

My First Bootstrap Page

This part is inside a .container-fluid class.

The .container-fluid class provides a full width container, spanning the entire width of the viewport.

BootStrap. Grid 12c

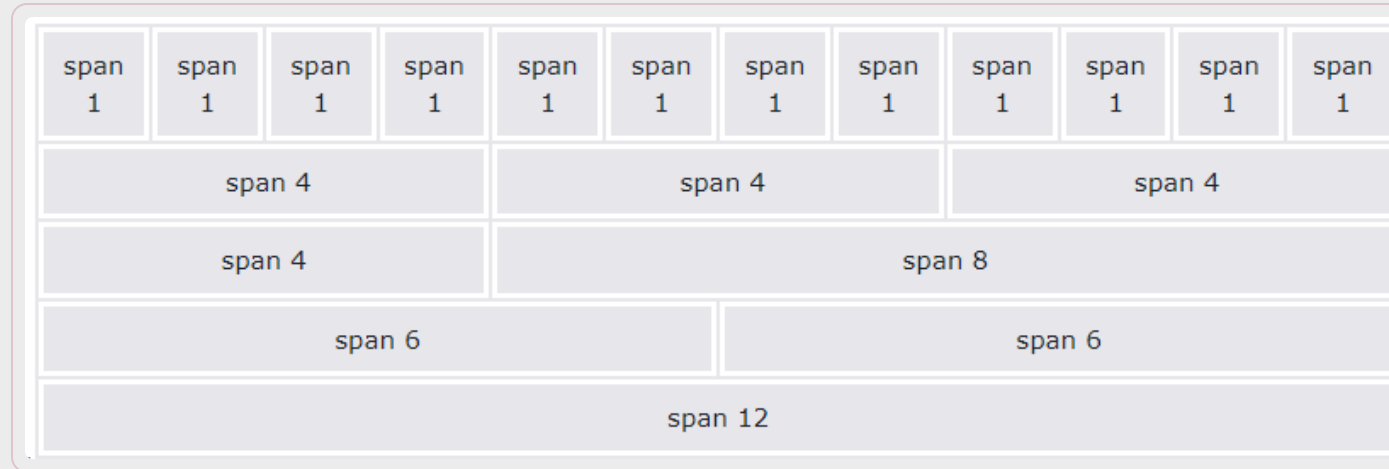

Grid Classes

The Bootstrap 5 grid system has six classes:

- `.col-` (extra small devices - screen width less than 576px)
- `.col-sm-` (small devices - screen width equal to or greater than 576px)
- `.col-md-` (medium devices - screen width equal to or greater than 768px)
- `.col-lg-` (large devices - screen width equal to or greater than 992px)
- `.col-xl-` (xlarge devices - screen width equal to or greater than 1200px)
- `.col-xxl-` (xxlarge devices - screen width equal to or greater than 1400px)

BootStrap. Responsive

Result Size: 657 x 404

[Get your own website](#)

Responsive Columns

Resize the browser window to see the effect.

The columns will automatically stack on top of each other when the screen is less than 576px wide.




```
<div class="container-fluid mt-3">
  <h1>Responsive Columns</h1>
  <p>Resize the browser window to see the effect.</p>
  <p>The columns will automatically stack on top of each other when
the screen is less than 576px wide.</p>
  <div class="row">
    <div class="col-sm-3 p-3 bg-primary text-white">.col</div>
    <div class="col-sm-3 p-3 bg-dark text-white">.col</div>
    <div class="col-sm-3 p-3 bg-primary text-white">.col</div>
    <div class="col-sm-3 p-3 bg-dark text-white">.col</div>
  </div>
</div>
```

Responsive Columns

Resize the browser window to see the effect.

The columns will automatically stack on top of each other when the screen is less than 576px wide.

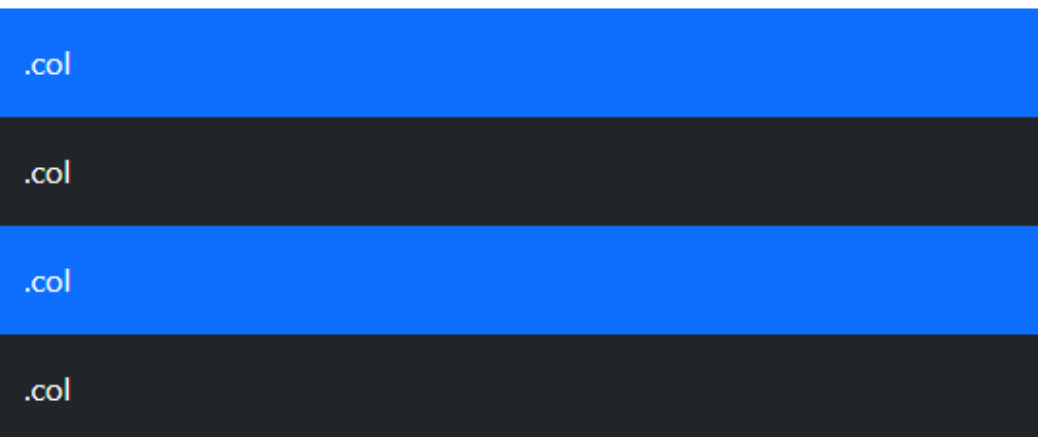

Bootstrap. Colors

```
<div class="container mt-3">
  <h2>Background Color with Contrasting Text Color</h2>
  <p class="text-bg-primary">This text is important.</p>
  <p class="text-bg-success">This text indicates success.</p>
  <p class="text-bg-info">This text represents some information.</p>
  <p class="text-bg-warning">This text represents a warning.</p>
  <p class="text-bg-danger">This text represents danger.</p>
  <p class="text-bg-secondary">Secondary background color.</p>
  <p class="text-bg-dark">Dark grey background color.</p>
  <p class="text-bg-light">Light grey background color.</p>
</div>
```

Background Color with Contrasting Text Color

This text is important.

This text indicates success.

This text represents some information.

This text represents a warning.

This text represents danger.

Secondary background color.

Dark grey background color.

Light grey background color.

Bootstrap. Images

```
<div class="container mt-3">  
  <p>The .img-fluid class makes the image scale nicely to the parent  
  element (resize the browser window to see the effect):</p>  
    
</div>
```

The .img-fluid class makes the image scale nicely to the parent element (resize the browser window to see the effect):



Bootstrap. Botones

Button Styles

Bootstrap 5 provides different styles of buttons:

Basic

Primary

Secondary

Success

Info

Warning

Danger

Dark

Light


[Link](#)

Example

```
<button type="button" class="btn">Basic</button>
<button type="button" class="btn btn-primary">Primary</button>
<button type="button" class="btn btn-secondary">Secondary</button>
<button type="button" class="btn btn-success">Success</button>
<button type="button" class="btn btn-info">Info</button>
<button type="button" class="btn btn-warning">Warning</button>
<button type="button" class="btn btn-danger">Danger</button>
<button type="button" class="btn btn-dark">Dark</button>
<button type="button" class="btn btn-light">Light</button>
<button type="button" class="btn btn-link">Link</button>
```

BootStrap. Cards

```
<div class="container mt-3">
  <h2>Card Image</h2>
  <p>Image at the top (card-img-top):</p>
  <div class="card">
    
    <div class="card-body">
      <h4 class="card-title">John Doe</h4>
      <p class="card-text">Some example text some example text. John Doe is an architect and engineer</p>
      <a href="#" class="btn btn-primary">See Profile</a>
    </div>
  </div>
</div>
```

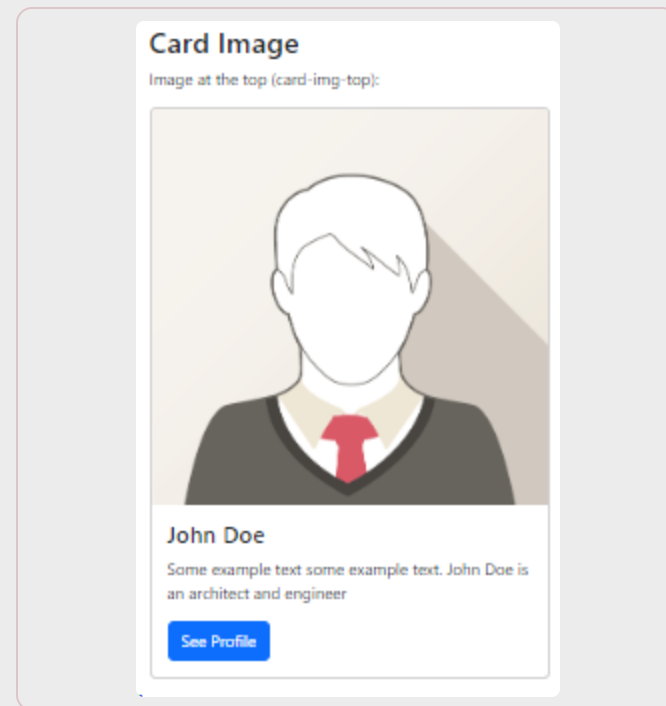

Bootstrap. Barras de navegación

Link 1 Link 2 Link 3

```
<nav class="navbar navbar-expand-sm bg-light">
  <div class="container-fluid">
    <ul class="navbar-nav">
      <li class="nav-item">
        <a class="nav-link" href="#">Link 1</a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="#">Link 2</a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="#">Link 3</a>
      </li>
    </ul>
  </div>
</nav>
```


Bootstrap. Forms

```
<div class="container mt-3">
  <h2>Stacked form</h2>
  <form action="/action_page.php">
    <div class="mb-3 mt-3">
      <label for="email">Email:</label>
      <input type="email" class="form-control" id="email" placeholder="Enter email" name="email">
    </div>
    <div class="mb-3">
      <label for="pwd">Password:</label>
      <input type="password" class="form-control" id="pwd" placeholder="Enter password" name="pswd">
    </div>
    <div class="form-check mb-3">
      <label class="form-check-label">
        <input class="form-check-input" type="checkbox" name="remember"> Remember me
      </label>
    </div>
    <button type="submit" class="btn btn-primary">Submit</button>
  </form>
</div>
```

Stacked form

Email:

Password:

☐ Remember me

Contenidos

Introducción

Librerías


BootStrap

FontAwesome



FontAwesome. Incrustación de iconos

```
<ul class="fa-ul">
  <li><span class="fa-li"><i class="fas fa-check-square"></i></span>List Item</li>
  <li><span class="fa-li"><i class="fas fa-spinner fa-pulse"></i></span>List Item</li>
  <li><span class="fa-li"><i class="fas fa-square"></i></span>List Item</li>
</ul>
```





Gracias

Universidad de Sevilla

**Departamento de Lenguajes y Sistemas
Informáticos**

CSS is OK

UNIVERSIDAD DE SEVILLA