

# Zevo AI: A Production-Grade Conversational AI Platform with Real-Time Text Mode Implementation

Project Team  
Zevo AI Development Team  
ZevoCode  
Production Deployment

**Abstract**—This paper presents Zevo AI, a production-grade conversational AI platform implementing a text-based interaction mode with real-time streaming capabilities. The system integrates multiple microservices including Retrieval-Augmented Generation (RAG), Large Language Model (LLM) inference, and Text-to-Speech (TTS) synthesis. The text mode implementation features token-by-token streaming using AsyncLLMEngine, context-aware responses through RAG integration, and on-demand audio playback. The architecture employs a modular service-oriented design with Docker containerization, enabling scalable deployment. The system demonstrates sub-5 second end-to-end response times with real-time token streaming, achieving production-ready performance for conversational AI applications.

**Index Terms**—conversational AI, retrieval-augmented generation, real-time streaming, microservices, natural language processing, text mode

## I. INTRODUCTION

Conversational AI systems have evolved significantly, with modern implementations requiring real-time response generation, context awareness, and scalable architectures. This paper presents Zevo AI, a production-grade conversational AI platform that implements a text-based interaction mode with advanced features including real-time token streaming, retrieval-augmented generation, and adaptive response generation.

The text mode implementation addresses key challenges in conversational AI: providing immediate user feedback through streaming responses, maintaining conversation context, and integrating external knowledge bases through RAG. The system architecture follows a microservices pattern, enabling independent scaling and deployment of components.

The contributions of this work include: (1) a production-ready text mode implementation with real-time streaming capabilities, (2) integration of RAG for context-aware responses, (3) a modular service architecture supporting independent scaling, and (4) performance optimizations achieving sub-5 second end-to-end response times.

## II. SYSTEM ARCHITECTURE

### A. Overview

Zevo AI employs a microservices architecture with five core services: Orchestration Service, RAG Service, LLM Service, TTS Service, and ASR Service. The text mode implementation primarily utilizes the Orchestration, RAG, and LLM services, with optional TTS for on-demand audio playback.

The system follows a pipeline architecture where user text input flows through: Frontend → Orchestration Service → RAG Service → LLM Service → Frontend, with optional TTS synthesis when requested by the user.

### B. Service Components

1) *Orchestration Service*: The Orchestration Service (Port 8000) acts as the central coordinator, managing session state, conversation history, and pipeline coordination. It implements WebSocket connections for real-time bidirectional communication, enabling token-by-token streaming from the LLM service to the frontend.

2) *RAG Service*: The RAG Service (Port 8004) implements retrieval-augmented generation using dual embedding models: BGE-Large-EN-v1.5 for English text and multilingual-E5-Large for multilingual content. The service integrates with Qdrant vector database for efficient similarity search and employs BGE-Reranker-Large for relevance scoring.

3) *LLM Service*: The LLM Service (Port 8002) hosts Meta-Llama-3-8B-Instruct model using vLLM inference engine. The service implements AsyncLLMEngine for true token-by-token streaming, enabling real-time response generation with sub-100ms token latency.

4) *TTS Service*: The TTS Service (Port 8003) provides on-demand text-to-speech synthesis using MeloTTS. In text mode, TTS is not automatically triggered; instead, users can request audio playback via a speaker icon, which calls the `/api/tts` endpoint.

### C. Frontend Implementation

The frontend application (Port 8080) implements a single-page web interface with WebSocket support for real-time communication. The text mode interface includes: text input area, chat history display, real-time streaming text rendering with Markdown support, and optional speaker icon for manual TTS playback.

## III. TEXT MODE IMPLEMENTATION

### A. Real-Time Streaming Architecture

The text mode implementation features real-time token streaming using Server-Sent Events (SSE) protocol. When a user submits a text message, the frontend establishes a WebSocket connection to the Orchestration Service, which then streams tokens from the LLM Service as they are generated.

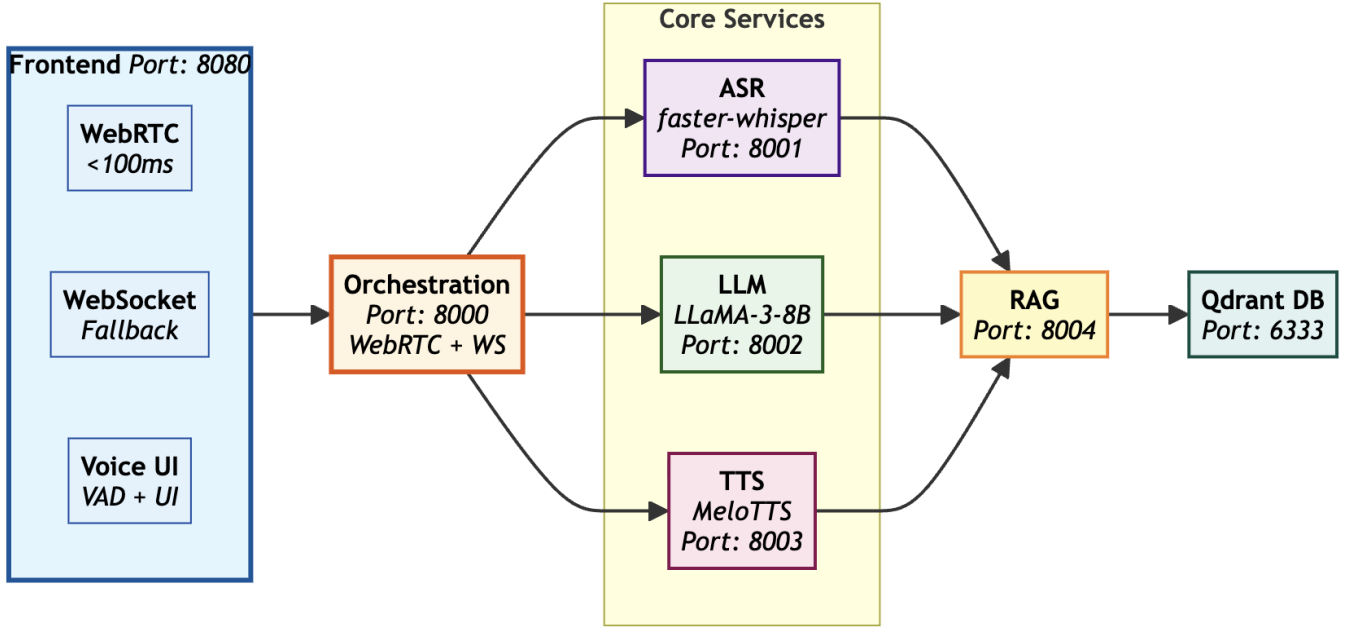


Fig. 1. System Architecture Diagram showing the microservices architecture with Frontend (Port 8080), Orchestration Service (Port 8000), Core Services (ASR Port 8001, LLM Port 8002, TTS Port 8003), RAG Service (Port 8004), and Qdrant Database (Port 6333).

The streaming pipeline operates as follows:

- 1) User submits text message via frontend
- 2) Orchestration Service receives message and initiates RAG context retrieval
- 3) LLM Service generates response tokens using AsyncLLMEngine
- 4) Tokens are streamed to Orchestration Service via SSE
- 5) Orchestration Service forwards tokens to frontend via WebSocket
- 6) Frontend renders tokens incrementally, providing real-time feedback

### B. RAG Integration

The RAG integration prioritizes knowledge base information over general LLM knowledge. When a user query is received, the Orchestration Service calls the RAG Service to retrieve relevant documents. The retrieved context is prepended to the LLM prompt with explicit instructions to prioritize this information.

The RAG retrieval process includes:

- Query embedding generation using appropriate model (BGE for English, multilingual-E5 for others)
- Vector similarity search in Qdrant database
- Reranking using BGE-Reranker-Large for relevance scoring
- Top-K document selection (default K=5)
- Context formatting with priority instructions

### C. Adaptive Response Generation

The system implements adaptive response length based on user intent. A heuristic function analyzes the user's message

for keywords indicating preference for detailed or concise responses. Keywords such as “explain in detail”, “step-by-step”, or “comprehensive” trigger extended responses (up to 2048 tokens), while brief queries receive concise responses (96-240 tokens).

### D. Conversation Context Management

The Orchestration Service maintains in-memory conversation history for each session. The last four messages (two exchanges) are included in the LLM context to maintain conversational continuity. The context structure prioritizes: (1) RAG-retrieved knowledge base information, (2) system instructions, and (3) recent conversation history.

## IV. DATA FLOW AND PROCESSING

### A. Request Processing Pipeline

The text mode request processing follows a sequential pipeline with the following stages:

**Stage 1: Input Reception** - The frontend receives user text input and sends it to the Orchestration Service via WebSocket or HTTP POST to `/api/chat`.

**Stage 2: Context Retrieval** - The Orchestration Service calls the RAG Service with the user query. The RAG Service generates embeddings, searches Qdrant, and returns relevant documents with similarity scores.

**Stage 3: Prompt Construction** - The Orchestration Service constructs the LLM prompt by combining: RAG context (with priority instructions), system context, and recent conversation history.

**Stage 4: Response Generation** - The LLM Service processes the prompt using AsyncLLMEngine, generating tokens

incrementally. Tokens are streamed back to the Orchestration Service via SSE.

**Stage 5: Response Delivery** - The Orchestration Service forwards tokens to the frontend via WebSocket, enabling real-time rendering.

### B. WebSocket Communication Protocol

The WebSocket protocol (`ws://agent.zevo360.in/ws/chat/{session_id}`) supports bidirectional communication with the following message types:

- `text_message`: User text input with session identifier
- `llm_token`: Incremental token from LLM with full response preview
- `complete`: Final response with latency report
- `error`: Error messages for failed requests

### C. HTTP REST API

For non-streaming requests, the system provides HTTP REST endpoints:

- `POST /api/chat`: Text chat with conversation history
- `POST /api/tts`: On-demand TTS synthesis
- `GET /health`: Service health check
- `GET /api/performance`: Performance statistics

## V. PERFORMANCE EVALUATION

### A. Latency Metrics

The system tracks latency at each pipeline stage. Typical performance metrics for text mode include:

- Connection initialization: 360 ms
- RAG retrieval: 200 ms
- LLM first token (Time-to-First-Token): 2000 ms
- LLM token streaming: Real-time (50+ tokens/second)
- Total end-to-end response: 4600 ms (for complete response)

### B. Throughput Capabilities

The system demonstrates the following throughput characteristics:

- LLM generation: 50+ tokens/second using vLLM AsyncLLMEngine
- RAG queries: 1000+ queries/second using Qdrant vector search
- WebSocket messages: 1000+ messages/second for real-time communication

### C. Resource Utilization

The production deployment utilizes:

- GPU Memory: 8 GB (LLM service with AWQ quantization)
- CPU: 40% average utilization across services
- RAM: 16 GB total across all services
- Network: 1 MB/s average for streaming communication

### D. Optimization Techniques

Several optimizations contribute to the system's performance:

**Model Quantization:** The LLM service uses AWQ (Activation-aware Weight Quantization) 4-bit quantization, reducing GPU memory requirements from 16 GB to 4 GB while maintaining response quality.

**Streaming Optimizations:** The AsyncLLMEngine implementation enables true token-by-token streaming without buffering, providing immediate user feedback.

**Health Check Caching:** Service health checks are cached for 60 seconds, reducing overhead from frequent monitoring requests.

**Context Truncation:** Recent conversation history is limited to the last four messages, reducing prompt size and improving processing speed.

## VI. DEPLOYMENT ARCHITECTURE

### A. Docker Containerization

All services are containerized using Docker, enabling consistent deployment across environments. The `docker-compose.yml` configuration defines seven services with appropriate resource limits, health checks, and network isolation.

### B. Service Dependencies

The orchestration service depends on: ASR Service, LLM Service, RAG Service, and TTS Service. The RAG Service depends on Qdrant database. Services communicate via Docker network (`zevo-network`) using service names for DNS resolution.

### C. Scaling Considerations

The microservices architecture enables independent scaling. The LLM Service can be scaled horizontally (with model replication) or vertically (with larger GPU memory). The RAG Service can scale independently based on query load, and Qdrant supports horizontal scaling through clustering.

## VII. KEY FEATURES AND CAPABILITIES

### A. Real-Time Streaming

The text mode implementation provides ChatGPT-like real-time streaming experience, with tokens appearing incrementally as they are generated. This eliminates the perception of delay and provides immediate user feedback.

### B. Context-Aware Responses

RAG integration enables the system to provide responses based on ingested knowledge bases, prioritizing retrieved information over general LLM knowledge. This ensures accurate, domain-specific responses.

### C. Adaptive Response Length

The system automatically adjusts response length based on user intent, providing concise answers for simple queries and detailed explanations when requested.

#### D. Markdown Rendering

The frontend supports Markdown rendering for formatted responses, including headings, lists, tables, and code blocks, enhancing readability of technical content.

#### E. Manual TTS Playback

While text mode does not automatically generate audio, users can request TTS playback via a speaker icon, which calls the `/api/tts` endpoint for on-demand audio synthesis.

### VIII. CHALLENGES AND SOLUTIONS

#### A. Streaming Latency

Initial implementation experienced buffering delays in token streaming. This was resolved by: (1) using AsyncLLMEngine instead of synchronous LLM generation, (2) implementing immediate token forwarding without buffering, and (3) using HTTP/1.1 instead of HTTP/2 to avoid protocol-level buffering.

#### B. RAG Context Integration

Ensuring RAG context takes priority over general knowledge required explicit prompt engineering. The solution includes: (1) prepending RAG context with priority instructions, (2) separating RAG context from system context, and (3) using clear delimiters in the prompt structure.

#### C. Session Management

In-memory session storage limits scalability. The current implementation uses in-memory dictionaries, with plans for Redis integration for production scalability.

### IX. CONCLUSION

This paper presented Zevo AI, a production-grade conversational AI platform with a comprehensive text mode implementation. The system demonstrates successful integration of real-time streaming, RAG-based context retrieval, and adaptive response generation. The microservices architecture enables scalable deployment, and performance optimizations achieve sub-5 second end-to-end response times with real-time token streaming.

Key achievements include: (1) real-time token-by-token streaming using AsyncLLMEngine, (2) effective RAG integration with dual embedding models, (3) adaptive response generation based on user intent, and (4) production-ready deployment with Docker containerization.

Future work includes: (1) implementing Redis-based session management for horizontal scaling, (2) adding support for multi-turn RAG queries, (3) implementing response caching for common queries, and (4) expanding multilingual support with additional language models.

The text mode implementation provides a solid foundation for conversational AI applications requiring real-time interaction, context awareness, and scalable deployment. The modular architecture enables easy extension and customization for domain-specific applications.

### ACKNOWLEDGMENT

The authors acknowledge the open-source community for providing excellent tools and frameworks including vLLM, Qdrant, MeloTTS, and FastAPI, which enabled the rapid development of this system.

### REFERENCES

- [1] Meta AI, "Llama 3 Model Card," Meta AI Research, 2024.
- [2] vLLM Team, "vLLM: Easy, Fast, and Cheap LLM Serving with PageAttention," GitHub Repository, 2024.
- [3] Qdrant Team, "Qdrant Vector Database," Qdrant Documentation, 2024.
- [4] BAAI, "BGE-Large-EN-v1.5: BAAI General Embedding," Hugging Face Model Card, 2023.
- [5] intfloat, "multilingual-e5-large: Multilingual Embedding Model," Hugging Face Model Card, 2023.
- [6] MeloTTS Team, "MeloTTS: High-Quality Text-to-Speech," GitHub Repository, 2024.
- [7] FastAPI Team, "FastAPI: Modern Python Web Framework," FastAPI Documentation, 2024.