

Indian Institute of Technology, Madras - Centre for Continuing Education

Notations :

- 1.Options shown in **green** color and with ✓ icon are correct.
- 2.Options shown in **red** color and with ✗ icon are incorrect.

Question Paper Name :

IIT M FOUNDATION DIPLOMA ENDTERM
QPD2 07 Aug 2022 IBA

Subject Name :

2022 Aug: IIT M FOUNDATION DIPLOMA
ENDTERM QPD2

Creation Date :

2022-08-03 15:48:14

Duration :

180

Total Marks :

1121

Display Marks:

Yes

Share Answer Key With Delivery Engine :

Yes

Actual Answer Key :

Yes

Calculator :

Scientific

Magnifying Glass Required? :

No

Ruler Required? :

No

Eraser Required? :

No

Scratch Pad Required? :

No

Rough Sketch/Notepad Required? :

No

Protractor Required? :

No

Show Watermark on Console? :

Yes

Highlighter :

No

Auto Save on Console?

Yes

Change Font Color :

No

Change Background Color :	No
Change Theme :	No
Help Button :	No
Show Reports :	No
Show Progress Bar :	No

Group I

Group Number :	1
Group Id :	6406538823
Group Maximum Duration :	0
Group Minimum Duration :	90
Show Attended Group? :	No
Edit Attended Group? :	No
Break time :	0
Group Marks :	1121
Is this Group for Examiner? :	No
Examiner permission :	Cant View
Show Progress Bar? :	No
Revisit allowed for group Instructions? :	Yes
Maximum Instruction Time :	0
Minimum Instruction Time :	0
Group Time In :	Minutes
Navigate To Group Summary From Last Question? :	No
Disable Submit Button During Assessment? :	No

Sem1 Eng1

Section Id :	64065322263
---------------------	-------------

Section Number :	1
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	27
Number of Questions to be attempted :	27
Section Marks :	100
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065351249
Question Shuffling Allowed :	No

Question Number : 1 Question Id : 640653354540 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "FOUNDATION LEVEL: SEMESTER 1: ENGLISH 1"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531175845. ✓ Yes

6406531175846. ✗ No

Sub-Section Number :	2
Sub-Section Id :	64065351250
Question Shuffling Allowed :	No

**Question Id : 640653354541 Question Type : COMPREHENSION Sub Question Shuffling
Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A
Think Time : N.A Minimum Instruction Time : 0**

Question Numbers : (2 to 11)

Question Label : Comprehension

Read the following passage and answer the given subquestions that follow:

It was in the times of Wajid Ali Shah. Lucknow was drowned in sensuality. The big and small, the rich and the poor – all were sunk in it. Some were engrossed in dance and music; some just revelled in the drowsiness induced by opium. Love of pleasure dominated every aspect of life. In administration, in literature, in social life, in arts and crafts, in business and industry, in cuisine and custom – sensuality ruled everywhere. The state officials were absorbed in fun and pleasure, poets in descriptions of love and separation, artisans in *zari* and *chikan* work, businessmen in dealings in surma, perfumes and cosmetics. All were drowned in sensual pleasures. No one knew what was happening around the world. Quail fights were on. Rings were being readied for partridge fights. Somewhere the game of *chausar* was being played, with its attendant shouts on the winning throw. Elsewhere a pitched chessboard battle was on. From the king to the pauper – all were engrossed in these pleasures. So much so, that if beggars received money in alms, they preferred to spend it on opium or its extract rather than bread. ‘Playing games like chess or cards or ganjifa sharpens the mind, improves mental faculties and helps in solving complex problems.’ Such arguments were being forcefully advanced. (People subscribing to this thesis can be found even today.) So if Mirza Sajjad Ali and Mir Roshan Ali spent most of their time sharpening their wits, how could any thoughtful person take exception. Both of them were hereditary Jagirdars, free from the worries of a livelihood; they enjoyed their good food without having to work at all. What else could they do? ~

Chess Players - Premchand

Sub questions

**Question Number : 2 Question Id : 640653354542 Question Type : MCQ Is Question
Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction
Time : 0**

Correct Marks : 2

Question Label : Multiple Choice Question

What can be identified during the reign of Wajid Ali Shah?

Options :

6406531175847. ✓ Lucknow was in decadence.

6406531175848. ✗ Lucknow was in mismanagement.

6406531175849. ✗ Lucknow was facing the threat of invasion.

6406531175850. ✗ People were dissatisfied under the rule of Wajid Ali Shah.

Question Number : 3 Question Id : 640653354543 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

An appropriate substitute for the word *sensuality* would be _____.

Options :

6406531175851. ✓ Erotic

6406531175852. ✗ Sensible

6406531175853. ✗ Sentimental

6406531175854. ✗ Celebratory

Question Number : 4 Question Id : 640653354544 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The bird referred here is _____.

Options :

6406531175855. ✗ Quail

6406531175856. ✗ Partridge

6406531175857. ✗ Peacock

6406531175858. ✓ Both Quail and Partridge

Question Number : 5 Question Id : 640653354545 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

'People subscribing to this thesis can be found even today.' What is the thesis referred to here?

Options :

6406531175859. ❌ Bird fights are good.

6406531175860. ✓ Playing chess or cards sharpens one's mind.

6406531175861. ❌ Leisure enhances one's creativity.

6406531175862. ❌ None of these.

Question Number : 6 Question Id : 640653354546 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose an appropriate substitute for the word *revel*.

Options :

6406531175863. ✓ Celebrate

6406531175864. ❌ Criticise

6406531175865. ❌ Oppose

6406531175866. ❌ Play

Question Number : 7 Question Id : 640653354547 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

'Love of music dominated every aspect of Lucknow's life.' This statement is _____ as per the

text.

Options :

6406531175867. ✘ TRUE

6406531175868. ✓ FALSE

Question Number : 8 Question Id : 640653354548 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Beggars in Lucknow spent their money on opium rather than on food. This statement is _____ as per the text.

Options :

6406531175869. ✓ TRUE

6406531175870. ✘ FALSE

Question Number : 9 Question Id : 640653354549 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What were Mirza Sajjad Ali and Mir Roshan Ali doing in Lucknow?

Options :

6406531175871. ✘ They were warriors.

6406531175872. ✘ They were businessmen.

6406531175873. ✓ They were playing chess.

Question Number : 10 Question Id : 640653354550 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose an appropriate substitute for the word *engross*.

Options :

6406531175874. ✓ Engage

6406531175875. ✗ Compile

6406531175876. ✗ Both Engage and Compile

6406531175877. ✗ None of these

Question Number : 11 Question Id : 640653354551 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The poets in Lucknow were _____.

Options :

6406531175878. ✗ Writing pleasure songs

6406531175879. ✓ Writing poems of love and separation

6406531175880. ✗ Writing about the King

6406531175881. ✗ Writing about the God

Question Id : 640653354552 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (12 to 21)

Question Label : Comprehension

Listen to the audio sample and answer the given subquestions.



885_640653_0_1984128_hs1001fdane1s1q11mq.mp3

Sub questions

Question Number : 12 Question Id : 640653354553 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statements is TRUE?

Options :

6406531175882. ✓ Neptune has 14 moons.

6406531175883. ✓ At least one of Neptune's moons requires 29 years to travel around it once.

6406531175884. ✗ Triton is Neptune's 7th largest moon.

6406531175885. ✗ Neptune only has one moon – Triton – the others are asteroids.

Question Number : 13 Question Id : 640653354554 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Triton is the biggest moon among all of Neptune's moons. True or false?

Options :

6406531175886. ✓ TRUE

6406531175887. ✗ FALSE

Question Number : 14 Question Id : 640653354555 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

"Also, Triton is one of only four objects in the solar system that we know _____ geologically active." Fill the blank, and justify your answer

Options :

6406531175888. ✓ Is, because the subject of the sentence is the singular "Triton"

6406531175889. ❌ Are, because the subject of the sentences is “four objects” – which is in the plural

6406531175890. ❌ Is, because we do not know if the other three objects are geologically active yet

6406531175891. ❌ Are, because we know there are four objects that are geologically active

Question Number : 15 Question Id : 640653354556 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The surface area of Triton is bigger than that of _____.

Options :

6406531175892. ❌ Australia

6406531175893. ❌ Russia

6406531175894. ✓ Australia and Russia together

6406531175895. ❌ Russia and North America

Question Number : 16 Question Id : 640653354557 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

How does Triton orbit Neptune?

Options :

6406531175896. ❌ In the same direction of Neptune's rotation

6406531175897. ✓ Against the direction of Neptune's rotation

6406531175898. ❌ In the double system, outside Neptune's orbit

6406531175899. ❌ Against the rotation of the other moons of Neptune

Question Number : 17 Question Id : 640653354558 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following words is not similar to the word "catapult"?

Options :

6406531175900. ✘ Sling

6406531175901. ✘ Shoot

6406531175902. ✘ Propel

6406531175903. ✓ Screech

Question Number : 18 Question Id : 640653354559 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following words can be synonyms of the word "ground"?

Options :

6406531175904. ✓ Crushed

6406531175905. ✘ Practical

6406531175906. ✘ None of these

Question Number : 19 Question Id : 640653354560 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following is true about Triton's history before Neptune?

Options :

6406531175907. ✓ That it may have been a dwarf planet

6406531175908. ✘ That it was an asteroid

6406531175909. ✓ That it was previously part of a double system

6406531175910. ✗ That it was part of another galaxy

Question Number : 20 Question Id : 640653354561 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which among the following, according to experts, could be the future possibilities for Triton?

Options :

6406531175911. ✓ Triton may eventually crash into Neptune.

6406531175912. ✓ Triton may be ground by Neptune's gravity into a huge ring system.

6406531175913. ✗ Triton will escape the orbits of Neptune, and go into space.

6406531175914. ✗ Triton will move back into the double system, and leave Neptune's orbit.

Question Number : 21 Question Id : 640653354562 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following sentences is grammatically correct?

Options :

6406531175915. ✓ Triton was probably a dwarf planet that was forced into submission by Neptune, when the solar system was younger and more chaotic.

6406531175916. ✗ Triton was probably a dwarf planet forced into submission by Neptune, when the solar system was much younger and much chaotic.

6406531175917. ✗ Triton was probably a dwarf planet forced into submission by Neptune, when the solar system was much young and more chaotic.

Sub-Section Number : 3

Sub-Section Id : 64065351251

Question Shuffling Allowed : No

Question Id : 640653354563 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (22 to 26)

Question Label : Comprehension

Listen to the audio and answer the given subquestions



885_640653_0_1984128_hs1001fdane1s1q21mq.mp3

Sub questions

Question Number : 22 Question Id : 640653354564 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

How many syllables are there in the word **destiny**?

Options :

6406531175918. ✘ 2

6406531175919. ✓ 3

6406531175920. ✘ 4

6406531175921. ✘ 5

Question Number : 23 Question Id : 640653354565 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

How many syllables are there in the word **successful**?

Options :

6406531175922. ✘ 2

6406531175923. ✓ 3

6406531175924. ✘ 4

6406531175925. ✘ 5

Question Number : 24 Question Id : 640653354566 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

How many syllables are there in the word **environment**?

Options :

6406531175926. ✘ 2

6406531175927. ✘ 3

6406531175928. ✓ 4

6406531175929. ✘ 5

Question Number : 25 Question Id : 640653354567 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose the appropriate pause for the following sentence as you hear in the audio.

If you think you cannot make a difference I would say you very well can make a difference, if you so desire

Options :

6406531175930. ✓ If you think you cannot make a difference/ I would say you very well can make a difference/ if you so desire//

6406531175931. ✘ If you/ think you cannot make a difference I would/ say you very well/ can make a difference if you so desire//

6406531175932. ✶ If you think you cannot make a difference/ I would/ say you very well can make a difference if you so desire//

Question Number : 26 Question Id : 640653354568 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose the appropriate pause for the following sentence as you hear in the audio.

It's your job to remove those myths and to get things done

Options :

6406531175933. ✶ It's your job to remove/ those myths and to get things done//

6406531175934. ✶ It's/ your job to remove/ those myths and to get/ things done//

6406531175935. ✓ It's/ your job/ to remove those myths/ and to get things done//

Question Id : 640653354569 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (27 to 31)

Question Label : Comprehension

Read the following telephone conversation and answer the given subquestions:

A: Hello! Brizbee Customer Services. (i) _____

B: Thank you! I want to speak in connection with the replacement of an item that I had ordered a few days ago. The order number is IM349520.

A: I'm afraid I can't hear you (ii) _____

B: Order number IM349520.

A: It is still not audible. (iii) _____

B: Alright. I'm (iv) _____ for now. I will call you back later.

Sub questions

Question Number : 27 Question Id : 640653354570 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which among the following is an appropriate response for the blank (i)?

Options :

6406531175936. ✘ What's up?

6406531175937. ✘ Who are you?

6406531175938. ✓ How may I help you?

Question Number : 28 Question Id : 640653354571 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which among the following is an appropriate response for the blank (ii)?

Options :

6406531175939. ✘ See you soon.

6406531175940. ✓ Hello! Your voice is breaking.

6406531175941. ✘ Goodbye! I will talk to you later.

Question Number : 29 Question Id : 640653354572 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which among the following is an appropriate response for the blank (iii)?

Options :

6406531175942. ✓ Hello! Are you there?

6406531175943. ✘ What can I do for you today?

6406531175944. ✎ It was a great conversation. Let us connect regularly.

Question Number : 30 Question Id : 640653354573 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which among the following is an appropriate response for the blank (iv)?

Options :

6406531175945. ✎ Hanging in

6406531175946. ✎ Hanging on

6406531175947. ✓ Hanging up

Question Number : 31 Question Id : 640653354574 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which expression in telephonic conversation means to end a phone conversation by cutting the connection?

Options :

6406531175948. ✎ Hang in

6406531175949. ✓ Hang up

6406531175950. ✎ Hang on

Sub-Section Number : 4

Sub-Section Id : 64065351252

Question Shuffling Allowed : No

Question Id : 640653354575 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (32 to 36)

Question Label : Comprehension

Match Column A with suitable options in Column B. (Hint: Word collocation)

Column A	Column B
1. Added	i.Fight
2. Sound	ii.Area
3. Tacit	iii.Advice
4. Endless	iv. Agreement
5. Built-up	v.Advantage

Sub questions**Question Number : 32 Question Id : 640653354576 Question Type : MCQ Is Question****Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction****Time : 0****Correct Marks : 2**

Question Label : Multiple Choice Question

Added

Options :

6406531175951. ✘ i

6406531175952. ✘ ii

6406531175953. ✘ iii

6406531175954. ✘ iv

6406531175955. ✓ v

Question Number : 33 Question Id : 640653354577 Question Type : MCQ Is Question**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction****Time : 0****Correct Marks : 2**

Question Label : Multiple Choice Question

Sound

Options :

6406531175956. ✘ i

6406531175957. ✘ ii

6406531175958. ✓ iii

6406531175959. ✘ iv

6406531175960. ✘ v

Question Number : 34 Question Id : 640653354578 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Tacit

Options :

6406531175961. ✘ i

6406531175962. ✘ ii

6406531175963. ✘ iii

6406531175964. ✓ iv

6406531175965. ✘ v

Question Number : 35 Question Id : 640653354579 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Endless

Options :

6406531175966. ✓ i

6406531175967. ✘ ii

6406531175968. ✘ iii

6406531175969. ✘ iv

6406531175970. ✘ v

Question Number : 36 Question Id : 640653354580 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Built-up

Options :

6406531175971. ✘ i

6406531175972. ✓ ii

6406531175973. ✘ iii

6406531175974. ✘ iv

6406531175975. ✘ v

Question Id : 640653354601 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (37 to 41)

Question Label : Comprehension

Fill in the blanks with the right options.

1) ___, the house had appeared enormous. 2) ___, beside the new grey buildings towering above it like unfriendly giants, it seemed a miserable shack. The old Naga tree 3) _____ its dry branches towards eternity, covering the roof with sickly yellow leaves. A funereal crow 4) _____ croaking on a wire. It flew away as I approached. 5) _____ shadows stared.

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 37 Question Id : 640653354602 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose the appropriate option for blank (1).

Options :

6406531176042. ✘ Now

6406531176043. ✓ Once

6406531176044. ✘ Stretched

6406531176045. ✘ Perched

6406531176046. ✘ Furtive

Question Number : 38 Question Id : 640653354603 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose the appropriate option for blank (2).

Options :

6406531176047. ✓ Now

6406531176048. ✘ Once

6406531176049. ✘ Stretched

6406531176050. ✘ Perched

6406531176051. ✘ Furtive

Question Number : 39 Question Id : 640653354604 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose the appropriate option for blank (3).

Options :

6406531176052. ✘ Now

6406531176053. ✘ Once

6406531176054. ✓ Stretched

6406531176055. ✘ Perched

6406531176056. ✘ Furtive

Question Number : 40 Question Id : 640653354605 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose the appropriate option for blank (4).

Options :

6406531176057. ✘ Now

6406531176058. ✘ Once

6406531176059. ✘ Stretched

6406531176060. ✓ Perched

6406531176061. ✘ Furtive

Question Number : 41 Question Id : 640653354606 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose the appropriate option for blank (5).

Options :

6406531176062. ✘ Now

6406531176063. ✘ Once

6406531176064. ✘ Stretched

6406531176065. ❌ Perched

6406531176066. ✓ Furtive

Sub-Section Number : 5

Sub-Section Id : 64065351253

Question Shuffling Allowed : Yes

Question Number : 42 Question Id : 640653354581 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The word 'erode' is _____.

Options :

6406531175976. ❌ Trisyllabic

6406531175977. ❌ Polysyllabic

6406531175978. ✓ Disyllabic

Question Number : 43 Question Id : 640653354582 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The word 'revenue' has ___ syllables.

Options :

6406531175979. ❌ 1

6406531175980. ❌ 2

6406531175981. ✓ 3

Question Number : 44 Question Id : 640653354583 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

'The company projects the estimate spending at 75,000\$ for this year.'

Choose the appropriate stress for the usage of the word 'project' in the sentence.

Options :

6406531175982. ❌ PROject

6406531175983. ✓ proJECT

Question Number : 45 Question Id : 640653354584 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following has an aspirated stop?

Options :

6406531175984. ❌ Stem

6406531175985. ❌ Test

6406531175986. ❌ Imply

6406531175987. ✓ Both Test and imply

Question Number : 46 Question Id : 640653354585 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Birds _____ in the sky.

Options :

6406531175988. ✘ Flies

6406531175989. ✓ Fly

Question Number : 47 Question Id : 640653354586 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Payasam is one of the most favourite delicacy of Tamil Nadu. Spot the error in this sentence.

Options :

6406531175990. ✘ Is

6406531175991. ✓ Delicacy

Question Number : 48 Question Id : 640653354587 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Apple _____ a new set of gadgets.

Options :

6406531175992. ✓ Has launched

6406531175993. ✘ Have launched

Question Number : 49 Question Id : 640653354588 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Context: Teacher to students in the classroom.

"You should attend the three-hour lecture tomorrow".

Options :

6406531175994. ✓ Command

6406531175995. ✗ Request

Question Number : 50 Question Id : 640653354589 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

"I can't believe Raksha told the management about Rashi's plans of eventually quitting the company – I didn't think she was someone who would _____."

Options :

6406531175996. ✗ Sneak on someone

6406531175997. ✓ Sell someone out

6406531175998. ✗ Cheat on someone

6406531175999. ✗ Hurl abuses on someone

Question Number : 51 Question Id : 640653354591 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Consider the following sentences:

(1) I sleep.

(2) I work out every day.

(3) I love mangoes.

Which of the above sentences has an explicit object?

Options :

6406531176004. ✘ All three

6406531176005. ✘ (1) only

6406531176006. ✘ (1) and (2)

6406531176007. ✓ (3) only

Question Number : 52 Question Id : 640653354592 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

In the sentence '*Shyam goes to college*', the tense and agreement is in the word _____.

Options :

6406531176008. ✘ College

6406531176009. ✘ Shyam

6406531176010. ✓ Goes

6406531176011. ✘ To college

Question Number : 53 Question Id : 640653354593 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

'*They cook dinner together*' is a grammatically correct sentence where there is subject-verb agreement.

Options :

6406531176012. ✓ TRUE

6406531176013. ✘ FALSE

Question Number : 54 Question Id : 640653354594 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

In the words '*mountaineer*', '*disassemble*', and '*souvenir*', the stressed syllable is the ____.

Options :

6406531176014. ✘ First

6406531176015. ✘ Second

6406531176016. ✓ Third

6406531176017. ✘ In different places in each word

Question Number : 55 Question Id : 640653354595 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The word '*affiliate*' is stressed on _____. .

Options :

6406531176018. ✘ 'Liate'

6406531176019. ✘ 'Af'

6406531176020. ✘ 'Fil'

6406531176021. ✓ 'Fi'

Question Number : 56 Question Id : 640653354596 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Identity the stressed syllable in the following word:

Procedure

Options :

6406531176022. ✘ First syllable

6406531176023. ✓ Second syllable

6406531176024. ✘ Third syllable

6406531176025. ✘ No stress

Question Number : 57 Question Id : 640653354597 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Choose from the options the word with correctly marked stress:

Biological

Options :

6406531176026. ✘ B'i'ological

6406531176027. ✘ 'Biological

6406531176028. ✘ Biologi'cal

6406531176029. ✓ Bio'logical

Question Number : 58 Question Id : 640653354598 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Jane is _____ than Anne.

Options :

6406531176030. ✘ Tall

6406531176031. ✓ Taller

6406531176032. ✘ More taller

6406531176033. ✘ the tallest

Question Number : 59 Question Id : 640653354599 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The reporters asked insightful questions during the interview. The word insightful qualifies _____.

Options :

6406531176034. ✘ Interview

6406531176035. ✘ Reporters

6406531176036. ✓ Questions

6406531176037. ✘ None of these

Question Number : 60 Question Id : 640653354600 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Identify the subject in the following sentence.

"The bicycle had been left in the rain."

Options :

6406531176038. ✓ The bicycle

6406531176039. ✘ Rain

6406531176040. ✘ Left in the rain

6406531176041. ✘ Had been left in the rain

Sub-Section Number : 6

Sub-Section Id : 64065351254

Question Shuffling Allowed : Yes

Question Number : 61 Question Id : 640653354590 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

What does "apple of one's eye" mean?

Options :

6406531176000. ✓ A cherished and favoured person

6406531176001. ✓ A thing or person which someone loves above all others

6406531176002. ✖ A memory of something that makes one nostalgic

6406531176003. ✖ A feeling of helplessness

Sem1 Stats1

Section Id :	64065322264
Section Number :	2
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	13
Number of Questions to be attempted :	13
Section Marks :	40
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065351255
Question Shuffling Allowed :	No

Question Number : 62 Question Id : 640653354607 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "FOUNDATION LEVEL: SEMESTER 1/DIRECT ENTRY DIPLOMA : STATISTICS FOR DATA SCIENCE 1"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531176067. ✓ Yes

6406531176068. ✗ No

Sub-Section Number : 2

Sub-Section Id : 64065351256

Question Shuffling Allowed : Yes

Question Number : 63 Question Id : 640653354608 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

An urn contains 10 white balls and 3 black balls. Four balls are drawn from the urn without replacement. Let a random variable X be defined as the number of white balls drawn, what are the possible values X can take?

Options :

6406531176069. ✓ 1, 2, 3, 4

6406531176070. ✗ 1, 2, ..., 10

6406531176071. ✗ 0, 1, 2, 3, 4

6406531176072. ✗ 0, 1, 2, ..., 10

Question Number : 64 Question Id : 640653354624 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

A fair coin is tossed three times. If X denote the number of heads followed immediately by a tail, then what is the expected value of X ?

Options :

6406531176100. ❌ $\frac{7}{8}$

6406531176101. ❌ $\frac{3}{8}$

6406531176102. ❌ $\frac{4}{8}$

6406531176103. ✓ $\frac{5}{8}$

Sub-Section Number : 3

Sub-Section Id : 64065351257

Question Shuffling Allowed : Yes

Question Number : 65 Question Id : 640653354613 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

A student of B.Sc. Online Degree ran out of time while taking a quiz-exam and plans to guess on last 5 questions. Each question has 4 possible choices, one of which is correct. If the random variable X represents the number of questions answered correctly, among the last 5 questions, then find the $\text{Var}(X)$. (Enter the answer correct to two decimal places)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.91 to 0.97

Sub-Section Number : 4

Sub-Section Id : 64065351258

Question Shuffling Allowed : Yes

Question Number : 66 **Question Id :** 640653354614 **Question Type :** MSQ **Is Question**

Mandatory : No **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following options is/are incorrect for a variable having ratio scale of measurement?

Options :

6406531176080. ✓ Difference between the values of a variable can not be evaluated.

6406531176081. ✗ Order of the data is meaningful.

6406531176082. ✗ Multiplication and division of values of a variable is possible.

6406531176083. ✓ There is no absolute zero for a variable.

Sub-Section Number : 5

Sub-Section Id : 64065351259

Question Shuffling Allowed : Yes

Question Number : 67 **Question Id :** 640653354615 **Question Type :** MCQ **Is Question**

Mandatory : No **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 3

Question Label : Multiple Choice Question

If a random variable X is exponentially distributed with parameter λ and $P(X \leq 1) = P(X > 1)$, then what is the value of $Var(X)$?

Options :6406531176084. ✘ $\ln 2$ 6406531176085. ✘ $(\ln 2)^2$ 6406531176086. ✘ $\frac{1}{\ln 2}$ 6406531176087. ✓ $\frac{1}{(\ln 2)^2}$ **Question Number : 68 Question Id : 640653354623 Question Type : MCQ Is Question****Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0****Correct Marks : 3**

Question Label : Multiple Choice Question

What is the Interquartile range (IQR) of the dataset 42, 51, 62, 47, 38, 50, 54, 43?

Options :

6406531176096. ✘ 4.5

6406531176097. ✘ 42.5

6406531176098. ✘ 52.5

6406531176099. ✓ 10

Question Number : 69 Question Id : 640653354625 Question Type : MCQ Is Question**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0****Correct Marks : 3**

Question Label : Multiple Choice Question

An analyst did a survey to know about annual incomes of recent graduates of two different universities and the results are given in Table Q.1.

Age group (in years)	University A	University B
Less than \$20,000	40	20
\$20,000 to 40,000	54	36
More than \$40,000	76	24

Table Q.1

If a randomly selected graduate earns more than \$40, 000, then what is the probability that he/she is from University B?

Options :

6406531176104. ✓ $\frac{24}{100}$

6406531176105. ✗ $\frac{24}{80}$

6406531176106. ✗ $\frac{24}{250}$

6406531176107. ✗ $\frac{76}{170}$

Sub-Section Number : 6

Sub-Section Id : 64065351260

Question Shuffling Allowed : Yes

Question Number : 70 Question Id : 640653354612 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Six men and five women apply for a position of administrative in a company and two of the applicants are selected for the interview. If the random variables X and Y denote the number of male and number of female in the interview pool respectively, then calculate the value of $E(X + Y)$.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 71 **Question Id :** 640653354622 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

Six letter words (with or without meaning) are made using the letters of the word 'SACHIN'. If all the formed words are now arranged in ascending order, then find the serial number at which the word 'SACHIN' will appear.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

601

Sub-Section Number : 7

Sub-Section Id : 64065351261

Question Shuffling Allowed : No

Question Id : 640653354609 **Question Type :** COMPREHENSION **Sub Question Shuffling**

Allowed : No **Group Comprehension Questions :** No **Calculator :** None **Response Time :** N.A

Think Time : N.A **Minimum Instruction Time :** 0

Question Numbers : (72 to 73)

Question Label : Comprehension

Probability mass function of a random variable X is given as

$$P(X = x) = \begin{cases} kx & x = 1, 2, 3, 4 \\ 0 & \text{otherwise} \end{cases}$$

Based on the given information, answer the subquestions.

Sub questions

Question Number : 72 Question Id : 640653354610 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Find the value of k .

(Enter the answer correct to one decimal place)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0.1

Question Number : 73 Question Id : 640653354611 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

What is the value
of $P(X \leq 3 | X > 3)$?

Options :

6406531176074. ✓ 0

6406531176075. ✘ 1

6406531176076. ✘ $\frac{7}{10}$ 6406531176077. ✘ $\frac{6}{10}$ **Question Id : 640653354616 Question Type : COMPREHENSION Sub Question Shuffling****Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A****Think Time : N.A Minimum Instruction Time : 0****Question Numbers : (74 to 75)**

Question Label : Comprehension

To participate in a game of prediction of runs scored by a team in a cricket match, one needs to pay an entry fee of 10 rupee. If the net gain is uniformly distributed between [-10,10] rupee. Then based on the given information answer the subquestions.

Sub questions**Question Number : 74 Question Id : 640653354617 Question Type : MCQ Is Question****Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0****Correct Marks : 3**

Question Label : Multiple Choice Question

What is the probability that the absolute value of net gain for a person participating in the game will be less than 2 rupees?

Options :6406531176088. ✓ $\frac{1}{5}$

6406531176089. ✘ $\frac{3}{5}$

6406531176090. ✘ $\frac{2}{5}$

6406531176091. ✘ $\frac{4}{5}$

Question Number : 75 Question Id : 640653354618 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is the probability that a person participating in this game will have a net gain of 0 rupee?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0

Question Id : 640653354619 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (76 to 77)

Question Label : Comprehension

The ratio of boys to girls at IIT Madras is 1.5 : 1. If a group of 6 students is randomly selected, then based on the given information, answer the subquestions.

Sub questions

Question Number : 76 Question Id : 640653354620 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is the probability that there will be at least one girl in the selected group of 6 students?
(Enter the answer correct to two decimal places)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.91 to 0.99

Question Number : 77 Question Id : 640653354621 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

What is the probability that there will be exactly 3 girls in the group given that there is at least one girl in the selected group of 6 students? (Enter the answer correct to two decimal places)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.25 to 0.33

Sem2 Eng2

Section Id :	64065322265
Section Number :	3
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	35
Number of Questions to be attempted :	35
Section Marks :	100
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065351262
Question Shuffling Allowed :	No

Question Number : 78 Question Id : 640653354626 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "FOUNDATION LEVEL: SEMESTER 2: ENGLISH 2"

**ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.**

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531176108. ✓ Yes

6406531176109. ✗ No

Sub-Section Number :

2

Sub-Section Id :

64065351263

Question Shuffling Allowed :

No

Question Id : 640653354627 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (79 to 88)

Question Label : Comprehension

Read the following passage and answer the given subquestions

On weekends, there is hardly any elbow room on Shangumugham Beach in Kerala's capital, Thiruvananthapuram. The smell of roasted corn hangs in the air, vendors mill around the walkway that leads to the beach, families lounge around a 35m-long sculpture of a reclining naked woman — 'Jalakanyaka' by Kanaayi Kunhiraman — that seems to strain against Kerala's conservative ethos yet has come to be one of the most recognised landmarks in the city. It is a familiar beach scene.

The only problem is — there isn't much beach left.

"Every year, I feel the sea is drawing closer," says Indu, a 44-year-old Thiruvananthapuram resident who has been coming to Shangumugham since her childhood. "The beach is so much smaller than it used to be. We would come here to get away from the congestion in the city, and now look how congested the beach has become."

She points to a row of fishing boats lined up along a part of the shore usually reserved for people. The boats were moved after vast tracts of the Shangumugham shoreline were eroded following Cyclone Ockhi, which hit the Kerala coast in December 2017. A nearby road, which runs parallel to the beach, bears testimony to Ockhi's fury — rope and traffic cones cordon off the traffic from long sections of the road that were washed away by the waves.

Even now, the waves are visibly rough — but they do not deter visitors. Beach-goers play a game of racing back to the shore before the water reaches their ankles, laughing aloud when the wave beats them to it. Others try to venture into the water, holding hands with their friends but lose balance when the wave pulls back into the sea. The whistles of coastguards pierce the air,

instructing the crowds to move away from the water. Families with toddlers are turned away from the water.

—Rihan Najib, *The Hindu Business Line*

Sub questions

Question Number : 79 Question Id : 640653354628 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following options best summarise the given article excerpt?

Options :

6406531176110. ❌ The article is about a beach in Kerala.

6406531176111. ✓ The article is about a beach in Thiruvananthapuram, which is diminishing.

6406531176112. ❌ The article is about the history of the people who lived along the coastline of Kerala's beaches.

6406531176113. ❌ The article is about a cyclone that hit Thiruvananthapuram in 2017.

Question Number : 80 Question Id : 640653354629 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following sentences uses the phrase “*cordon off*” incorrectly?

Options :

6406531176114. ❌ The crime scene was cordoned off.

6406531176115. ❌ The police cordon off the street to prevent the mob from entering.

6406531176116. ✓ I cordoned off Valerie for being too rude.

6406531176117. ❌ Due to the ongoing construction, the children's playground has been cordoned off.

Question Number : 81 Question Id : 640653354630 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following statements is true according to the passage?

Options :

6406531176118. ✘ The sculpture named Jalakanyaka goes against the conservative ethos of the state of Kerala.

6406531176119. ✘ The sculpture of the reclining woman is a famous landmark.

6406531176120. ✘ The sculpture of the reclining woman was made by Kanaayi Kunhiraman.

6406531176121. ✓ All of these

Question Number : 82 Question Id : 640653354631 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

"A nearby road, which runs parallel to the beach, bears testimony to Ockhi's fury — rope and traffic cones cordon off the traffic from long sections of the road that were washed away by the waves." What does this sentence mean?

Options :

6406531176122. ✘ Cyclone Ockhi has completely destroyed the road running parallel to the beach.

6406531176123. ✘ The road running parallel to the beach is closed and no vehicles are allowed.

6406531176124. ✓ Long parts of the road that were washed away by Ockhi are restricted to vehicles and traffic.

6406531176125. ✘ The impact of Ockhi has forced the authorities to close off a road near the beach.

Question Number : 83 Question Id : 640653354632 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Because of the rough waves, many beach-goers have stopped visiting the Shangumugham Beach.
True or False?

Options :

6406531176126. ✘ TRUE

6406531176127. ✓ FALSE

Question Number : 84 Question Id : 640653354633 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statements pertaining to the impact of Cyclone Ockhi on the beach is true?

Options :

6406531176128. ✓ The fishing boats on the shoreline were moved.

6406531176129. ✘ People were banned from using the boats.

6406531176130. ✓ Heavy erosion occurred on the shoreline.

6406531176131. ✘ People were no longer allowed to get into the water.

Question Number : 85 Question Id : 640653354634 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

"We would come here to get away from the congestion in the city, and now look how congested the beach has become." Who is the speaker, and what are they talking about?

Options :

6406531176132. ✓ A resident of Thiruvananthapuram; about the sea coming closer and the crowd on the beach.

6406531176133. ✗ A resident of Thiruvananthapuram; about the impact of the cyclone and the crowd on the beach.

6406531176134. ✗ A coastguard; about the crowd on the beach.

6406531176135. ✗ A resident of Thiruvananthapuram, about adventurous youngsters.

Question Number : 86 Question Id : 640653354635 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

"There is hardly any elbow room..." What does this mean?

Options :

6406531176136. ✓ There is almost no room

6406531176137. ✗ There is some room

6406531176138. ✗ There are a few rooms

6406531176139. ✗ There is not much scope

Question Number : 87 Question Id : 640653354636 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What does the author talk about in the last paragraph? Choose the most appropriate option.

Options :

6406531176140. ✗ About the restrictions placed on visitors to the beach.

6406531176141. ✓ About the tension between adventurous visitors and the dangerous waves.

6406531176142. ✗ About the coastguards and their frustrations.

6406531176143. ✗ About toddlers who are not allowed into the water.

Question Number : 88 Question Id : 640653354637 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following words is the opposite of "reclining"?

Options :

6406531176144. ✘ Resting

6406531176145. ✘ Lounging

6406531176146. ✓ Standing

6406531176147. ✘ Leaning

Question Id : 640653354638 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (89 to 98)

Question Label : Comprehension

Listen to the audio sample and answer the given subquestions:



885_640653_0_1984128_hs1002fdfne1s1a1.mp3

Sub questions

Question Number : 89 Question Id : 640653354639 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the topic of the audio?

Options :

6406531176148. ✘ Uneducated young men in India

6406531176149. ✓ Higher Education in India

6406531176150. ✗ Primary Education in India

6406531176151. ✗ The Demography of India

Question Number : 90 Question Id : 640653354640 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the meaning of "*demography*"?

Options :

6406531176152. ✗ The study of democracy

6406531176153. ✓ The composition of human population

6406531176154. ✗ The study of oration

6406531176155. ✗ The art of demagoguery

Question Number : 91 Question Id : 640653354641 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

"Half the Indian population is pretty much under 25." What is the phrase "*pretty much*" used to convey?

Options :

6406531176156. ✗ To convey uncertainty

6406531176157. ✗ To convey surety

6406531176158. ✓ To convey approximation

6406531176159. ✗ To convey probability

Question Number : 92 Question Id : 640653354642 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

"The gap between the average age of the Indian person and of the Indian cabinet – I think we hold the world record for that." What does Tharoor mean by this?

Options :

6406531176160. ✓ That the people in power in the country are much older than the average citizen of the country.

6406531176161. ✗ That the people ruling the country are incompetent.

6406531176162. ✗ That the people ruling the country are all older than 65.

6406531176163. ✗ That the average citizen's age is less than 20, while the average age of those in the Indian cabinet is 45.

Question Number : 93 Question Id : 640653354643 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

"We are an amazingly young country." Why is this such an amazing and important fact for Tharoor?

Options :

6406531176164. ✗ Because the average age of China is inching towards 50, while India's average age is still at 25.

6406531176165. ✗ Because young college graduates in India do not generally take part in society.

6406531176166. ✓ Because India consists of a primarily young population, while other countries such as US, China and Japan are ageing rapidly.

6406531176167. ✗ Because all young people in India are college-educated.

Question Number : 94 Question Id : 640653354644 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

"By 2020, we'll have 160 million people between 20-24 years old in India." Which organisation has worked out this calculation?

Options :

6406531176168. ✓ The International Labour Organisation

6406531176169. ✗ The Food and Agricultural Organisation

6406531176170. ✗ The United Nations Organisation

6406531176171. ✗ The International Court of Law

Question Number : 95 Question Id : 640653354645 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the meaning of the phrase "work out" as it is used in this audio?

Options :

6406531176172. ✗ Exercise

6406531176173. ✗ Plan or devise something

6406531176174. ✓ Solve something by calculation

6406531176175. ✗ Have a good, desired result

Question Number : 96 Question Id : 640653354646 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the meaning of the word "poised"?

Options :

6406531176176. ✗ Be unprepared

6406531176177. ✗ Be ferocious

6406531176178. ✓ Be ready and prepared

6406531176179. ✘ Pose and act

Question Number : 97 Question Id : 640653354647 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statements is true, from what you can understand from the audio?

Options :

6406531176180. ✘ India has not progressed in the education realm since Independence.

6406531176181. ✓ India has expanded educational access, and has also strived for equity in education.

6406531176182. ✓ The quality or excellence of Indian higher educational institutions is lacking.

6406531176183. ✓ Because India is a young country, education of its young people becomes crucial to its development.

Question Number : 98 Question Id : 640653354648 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the meaning of the phrase "*in a nutshell*"?

Options :

6406531176184. ✘ In spite of

6406531176185. ✘ In a single word

6406531176186. ✓ In the fewest possible words

6406531176187. ✘ In recognition of the lack of time

Question Id : 640653354649 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (99 to 108)

Question Label : Comprehension

Listen to the audio and answer the given subquestions:



885_640653_0_1984128_hs1002fdfne1s1a2.mp3

Sub questions

Question Number : 99 Question Id : 640653354650 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The word *sharpening* is stressed on the _____. .

Options :

6406531176188. ✓ First syllable

6406531176189. ✗ Second syllable

6406531176190. ✗ Third syllable

6406531176191. ✗ No syllables receive stress

Question Number : 100 Question Id : 640653354651 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The word *achieve* is stressed on the _____. .

Options :

6406531176192. ✗ First syllable

6406531176193. ✓ Second syllable

6406531176194. ✗ Third syllable

6406531176195. ✗ Fourth syllable

Question Number : 101 Question Id : 640653354652 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The word *interesting* is stressed on the _____.

Options :

6406531176196. ✓ First syllable

6406531176197. ✗ Second syllable

6406531176198. ✗ Third syllable

6406531176199. ✗ Fourth syllable

Question Number : 102 Question Id : 640653354653 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Identify the number of syllables in the word *something*.

Options :

6406531176200. ✗ 1

6406531176201. ✓ 2

6406531176202. ✗ 3

6406531176203. ✗ 4

Question Number : 103 Question Id : 640653354654 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Identify the number of syllables in the word *consecutively*.

Options :

6406531176204. ✘ 2

6406531176205. ✘ 3

6406531176206. ✓ 5

6406531176207. ✘ 6

Question Number : 104 Question Id : 640653354655 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Identify the number of syllables in the word *aspirational*.

Options :

6406531176208. ✓ 5

6406531176209. ✘ 1

6406531176210. ✘ 2

6406531176211. ✘ 3

Question Number : 105 Question Id : 640653354656 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The vowel in the word *says* is _____.

Options :

6406531176212. ✘ Short

6406531176213. ✓ Long

Question Number : 106 Question Id : 640653354657 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The vowel in the second syllable of the word *scientists* is _____

Options :

6406531176214. ✓ Short

6406531176215. ✗ Long

Question Number : 107 Question Id : 640653354658 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose the appropriate pauses for the following passage as you hear in the audio:

It's worked dramatically I am already inspired to be addressing this really august intellectual gathering of people from Harvard a place that my mother thought I will never reach

Options :

6406531176216. ✗ //It's worked/ dramatically I am already inspired/ to be addressing this really august intellectual/ gathering of people/ from Harvard a place that my mother thought I will never/ reach//

6406531176217. ✗ //It's worked dramatically I am/ already inspired to be addressing this really august intellectual/ gathering of people from Harvard a/ place that my mother thought I/ will never reach//

6406531176218. ✓ //It's worked dramatically I am already inspired/ to be addressing/ this really august intellectual gathering of people from Harvard/ a place that my/ mother thought I will never reach//

6406531176219. ✗ //It's worked dramatically/ I am already inspired/ to be addressing this really august intellectual gathering/ of people from Harvard a place/ that my mother thought I will never reach//

Question Number : 108 Question Id : 640653354659 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose the appropriate pauses for the following sentence as you hear in the audio:

But I am just an actor and I am going to just give you my dream shamelessly because that's the thing that I can do best

Options :

6406531176220. ❌ //But I am just// an actor and I am going to/ just give you/ my dream shamelessly because/ that's/ the thing that I/ can do best//

6406531176221. ✓ //But I am just an actor/ and I am going to just give you my dream shamelessly/ because/ that's the thing that I can do best//

6406531176222. ❌ //But/ I am just an actor and I/ am going to just give/ you my dream shamelessly because that's// the thing that I can do best//

6406531176223. ❌ //But I am just an actor and I am/ going to just give you/ my dream shamelessly because/ that's the thing that I can do best//

Sub-Section Number : 3

Sub-Section Id : 64065351264

Question Shuffling Allowed : No

Question Id : 640653354660 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (109 to 113)

Question Label : Comprehension

Read the following exchange between an employer and a candidate (potential employee) and answer the given subquestions:

Anisha: Min, it's so nice to meet you in this setting. Thank you for taking the time to interview for the role of instructional designer at Bridgespan Education. I'm curious to hear more about your interest in the learning design industry. Why are you in this industry?

Min: Nice to meet you too! I'm so excited to be here today and thankful to you for having given me this opportunity. So, I've been a curriculum developer in various educational and corporate settings for the past 10 years. I'm very passionate about creating data-driven and aesthetically appealing learning solutions in different formats — be it instructor-led, e-learning, and blended learning. I applied for this role because I watched a news piece on how your CEO Mr. Raul brought in an indoor mapping tool that made hybrid work possible for employees working from anywhere — I thought that was quite amazing, and I'd be thrilled to meet him sometime.

Anisha: We can definitely have you meet him if things work out! It's great that you've been following our company for some time now. I'd like to follow up with another question — why this role and this company, in particular?

Min: Well, there are three reasons I applied for this role in particular — I'd love to dive into them if you'd like to know more about that!

Anisha: *nods enthusiastically*

Min: The first is that your company is known to put a strong emphasis on innovations and research, and I'd love to be a part of a company that wants to constantly develop their products. Secondly, I'm also huge on teamwork and collaboration, and given that the role and your company's values emphasise teamwork, it sounded like the perfect fit for me. Thirdly, the position matches my prior experience, but is also challenging enough that I know I'll have the space to pick up new skills and grow.

Anisha: That's great, thanks so much!

Sub questions

Question Number : 109 Question Id : 640653354661 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Why does Anisha use the phrase "*I'm curious to hear more about...*"

Options :

6406531176224. ✘ She uses it to intimidate Min.
6406531176225. ✓ She uses it to start off the conversation on an easy note.
6406531176226. ✘ She wants Min to introduce herself.
6406531176227. ✘ She wants to know if Min is lying on her CV.

Question Number : 110 Question Id : 640653354662 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the meaning of the phrase "*I'm huge on...*"?

Options :

6406531176228. ✘ I'm talented at
6406531176229. ✘ I'm against
6406531176230. ✓ I prioritise and value
6406531176231. ✘ I dislike

Question Number : 111 Question Id : 640653354663 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What does Min do as soon as she starts speaking?

Options :

6406531176232. ✘ She directly answers Alisha's question on her reason for being in the e-learning industry.
6406531176233. ✘ She falters as she tries to introduce herself.
6406531176234. ✘ She expresses disinterest at the role.
6406531176235. ✓ She expresses her enthusiasm for the interview and the company.

Question Number : 112 Question Id : 640653354664 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following things about Bridgespan Education were a factor in her applying to the role?

Options :

6406531176236. ✓ Their focus on innovation and research.

6406531176237. ✓ Their work culture, which values teamwork.

6406531176238. ✗ Their status as a Fortune 500 company.

6406531176239. ✗ Their reputation as the best learning solutions start-up.

Question Number : 113 Question Id : 640653354665 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What does Min mean when she says "*I'd love to dive right into them...*"?

Options :

6406531176240. ✗ She would like to talk about her CV.

6406531176241. ✓ She enthusiastically signals that she wants to go into more detail.

6406531176242. ✗ She wants to avoid talking about her reasons behind applying.

6406531176243. ✗ She wants to give a broad reason behind her application.

Sub-Section Number : 4

Sub-Section Id : 64065351265

Question Shuffling Allowed : Yes

Question Number : 114 Question Id : 640653354666 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Our motorcycle broke down; we came last. This sentence is an example of _____.

Options :

6406531176244. ✓ Compound sentence

6406531176245. ✗ Simple sentence

6406531176246. ✗ Complicated sentence

6406531176247. ✗ Complex sentence

Question Number : 115 Question Id : 640653354667 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Identify the independent clause in the following sentence:

Robert ran away because John yelled at him.

Options :

6406531176248. ✓ Robert ran away

6406531176249. ✗ Because John yelled at him.

6406531176250. ✗ Robert ran away because John yelled at him.

6406531176251. ✗ No independent clause

Question Number : 116 Question Id : 640653354668 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Identify the adjectival clause in the following sentence.

People whose cats shed need to vacuum often.

Options :

6406531176252. ✘ Whose cats shed need to vacuum often

6406531176253. ✓ Whose cats shed

Question Number : 117 Question Id : 640653354669 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Identify the number of suffixes in the following sentence.

It was a warm summer month: the flowers were blooming, the birds were singing, and the days seemed endless.

Options :

6406531176254. ✘ 1

6406531176255. ✘ 3

6406531176256. ✘ 5

6406531176257. ✓ 7

Question Number : 118 Question Id : 640653354670 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Context :At a job fair, an interviewer to an interviewee.

A question about her hobbies.

Options :

6406531176258. ✓ Do you mind sharing with us what your hobbies are?

6406531176259. ✘ If you could tell us what your hobbies are, we can understand what sort of an energy revolves around you as a person by calculating the weightage of what you consider as

worthy of your free time, and thereby see if you are a worthy candidate or not.

6406531176260. ✩ Tell me what your hobbies are. We don't have much time, so make it quick.

6406531176261. ✩ Do you think you can let us into the sacred space of your personal life and share with us what engages you in your free time? With this, we mean your hobbies, if you don't mind.

Question Number : 119 Question Id : 640653354671 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Context :At a job fair, an interviewer to an interviewee.

About her professional qualifications.

Options :

6406531176262. ✩ I don't see any work experience here in your resume. Get out.

6406531176263. ✩ We were wondering if you could elaborate on the lack of work experience in your case, and were strikingly bothered. Could you please let us know if we should continue this interview?

6406531176264. ✓ It shows here that you do not have previous work experience in this field. Is this your first job? Would you mind elaborating?

6406531176265. ✩ None of these.

Question Number : 120 Question Id : 640653354672 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Imagine that you are in a formal meeting with a client. In such a context, you are asking her whether she would like to review a file. From the options below, which would be the most appropriate way to ask this question?

Options :

6406531176266. ✘ Will you like to take a look at the file?
6406531176267. ✘ You will like to take a look at the file?
6406531176268. ✓ Would you like to have a look at this file?
6406531176269. ✘ Do you want this file?

Question Number : 121 Question Id : 640653354673 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

"Asoka was a great emperor." The interrogative form of this sentence is _____

Options :

6406531176270. ✘ Will Asoka be a great emperor?
6406531176271. ✘ Did Asoka become a great emperor?
6406531176272. ✘ Why is Asoka a great emperor?
6406531176273. ✓ Was Asoka a great emperor?

Question Number : 122 Question Id : 640653354674 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Convert the following sentence to active voice.

The cup was broken by Sandip.

Options :

6406531176274. ✘ The cup were broken by Sandip.
6406531176275. ✘ Sandip is breaking the cups.
6406531176276. ✓ Sandip broke the cup.
6406531176277. ✘ Sandip will break the cup.

Question Number : 123 Question Id : 640653354675 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

He rejected their proposals despite of their wonderful marketing. This sentence is grammatically correct.

Options :

6406531176278. ✘ TRUE

6406531176279. ✓ FALSE

Question Number : 124 Question Id : 640653354676 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Fill in the blank with verbs that are in the present continuous tense.

"Raya ____ the dragon."

Options :

6406531176280. ✓ Is slaying

6406531176281. ✘ Slayed

6406531176282. ✘ Will slay

6406531176283. ✘ Will be slaying

Question Number : 125 Question Id : 640653354677 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Identify the verb tense and aspect of the sentence:

"Raveena's friends will be working tomorrow."

Options :

6406531176284. ✘ Simple present

6406531176285. ✘ Simple future

6406531176286. ✓ Future continuous

6406531176287. ✘ Future perfect

Question Number : 126 Question Id : 640653354678 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Identify the adverb in the following sentence.

The lazy dog ran into a lovely wolf.

Options :

6406531176288. ✘ Lazy

6406531176289. ✘ Lovely

6406531176290. ✘ A lovely wolf

6406531176291. ✓ This sentence does not have an adverb

Question Number : 127 Question Id : 640653354679 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

"Before the storm, the city council failed to inform residents of the disaster. _____, the death toll was enormous."

Options :

6406531176292. ✓ Therefore

6406531176293. ✗ At the same time

6406531176294. ✗ Nevertheless

6406531176295. ✗ Because

Question Number : 128 Question Id : 640653354680 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Many smokers believe that e-cigarettes can help them quit smoking. ____, scientific researches shows that e-cigarettes are more addictive and lethal than traditional cigarettes.

Options :

6406531176296. ✗ In addition

6406531176297. ✓ However

6406531176298. ✗ As a consequence

6406531176299. ✗ but

Question Number : 129 Question Id : 640653354681 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

In the following sentence, fill in the blank with the most appropriate modal verb.

The junior employee told her boss: "I think we _____ confirm the hotel rooms now".

Options :

6406531176300. ✗ Would

6406531176301. ✗ Are

6406531176302. ✗ Will

6406531176303. ✓ Could

Question Number : 130 Question Id : 640653354682 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

In the following sentence, fill in the blank with the most appropriate modal verb.

"They told me that if they had the power, they _____ have opposed the majority."

Options :

6406531176304. ❌ Can

6406531176305. ❌ Will

6406531176306. ❌ Could

6406531176307. ✓ Would

Question Number : 131 Question Id : 640653354683 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Identify the modal auxiliary in the following sentence.

Rohit must play in the series decider.

Options :

6406531176308. ❌ Play

6406531176309. ❌ In

6406531176310. ❌ Series

6406531176311. ✓ Must

Question Number : 132 Question Id : 640653354684 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

"The tea was ___ hot while served." The appropriate degree adverb here is ____.

Options :

6406531176312. Very

6406531176313. Too

6406531176314. Both Very and Too

6406531176315. None of these

Question Number : 133 Question Id : 640653354685 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Identify the adjective(s) in the following sentence.

Siva had quite a bad day yesterday.

Options :

6406531176316. Day

6406531176317. Bad

6406531176318. Yesterday

6406531176319. Quite

Question Number : 134 Question Id : 640653354686 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

He won the battle against the pesticide company in court. The meaning of this sentence is ____.

Options :

6406531176320. ✘ He fought a war against the pesticide company

6406531176321. ✓ He won the case against the pesticide company

6406531176322. ✘ He fought a war at court

6406531176323. ✘ He defeated the pesticide company in a war

Question Number : 135 Question Id : 640653354687 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

These people are so slow, _____?

Options :

6406531176324. ✘ Don't they

6406531176325. ✘ Didn't they

6406531176326. ✘ Isn't they

6406531176327. ✓ Aren't they

Question Number : 136 Question Id : 640653354688 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

"Our boss sent the document to the client by email." In this sentence, identify the indirect object.

Options :

6406531176328. ✘ Sent

6406531176329. ✘ Our boss

6406531176330. ✘ The document

6406531176331. ✓ The client

Question Number : 137 Question Id : 640653354689 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

For the direct question "*When does the registration begin?*", identify a possible embedded question from the options given below.

Options :

6406531176332. ❌ I'd like to know when does the registration begin.

6406531176333. ✓ I'd like to know when the registration begins.

6406531176334. ❌ I was wondering if the registration will begin.

6406531176335. ❌ I wanted to know when does the registration begin.

Question Number : 138 Question Id : 640653354690 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

_____ they outrun you, they will be selected.

Options :

6406531176336. ✓ If

6406531176337. ❌ Whether

6406531176338. ❌ Either *if* or *whether* can be used

Question Number : 139 Question Id : 640653354691 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

"*The engineer constructed this house.*" This sentence is in _____.

Options :

6406531176339. ✓ Active voice

6406531176340. ✘ Passive voice

Question Number : 140 Question Id : 640653354692 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

'The town where my uncle lives uses only solar energy.' The relative clause here modifies the subject.

Options :

6406531176341. ✓ TRUE

6406531176342. ✘ FALSE

Question Number : 141 Question Id : 640653354693 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Pick the odd one out.

Presumably, biologically, honestly, apparently

Options :

6406531176343. ✘ Presumably

6406531176344. ✓ Biologically

6406531176345. ✘ Honestly

6406531176346. ✘ Apparently

Question Number : 142 Question Id : 640653354694 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Thomas drives a car. The negative of this sentence will be - "Thomas _____ drive a car."

Options :

6406531176347. ✓ Does not

6406531176348. ✗ Do not

6406531176349. ✗ Not

6406531176350. ✗ Is not

Question Number : 143 Question Id : 640653354695 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

I've never met _____ as bright as her.

Options :

6406531176351. ✓ Anybody

6406531176352. ✗ Anything

6406531176353. ✗ Someone

6406531176354. ✗ Something

Sem2 Maths2

Section Id : 64065322266

Section Number : 4

Section type : Online

Mandatory or Optional : Mandatory

Number of Questions : 15

Number of Questions to be attempted : 15

Section Marks : 50

Display Number Panel : Yes

Group All Questions : No

Enable Mark as Answered Mark for Review and

Yes

Clear Response :

Maximum Instruction Time :

0

Sub-Section Number :

1

Sub-Section Id :

64065351266

Question Shuffling Allowed :

No

Question Number : 144 Question Id : 640653354696 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "FOUNDATION LEVEL: SEMESTER 2/DIRECT ENTRY DIPLOMA : MATHEMATICS FOR DATA SCIENCE 2"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531176355. ✓ Yes

6406531176356. ✗ No

Sub-Section Number :

2

Sub-Section Id :

64065351267

Question Shuffling Allowed :

No

Question Id : 640653354697 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (145 to 146)

Question Label : Comprehension

Consider a matrix $A = \begin{bmatrix} a & b \\ b & a \end{bmatrix}$ and a function

$f : \mathbb{R}^2 \rightarrow \mathbb{R}$ such that $f(a, b) = \det(A)$.

Answer the given subquestions:

Sub questions

Question Number : 145 **Question Id :** 640653354698 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 1

Question Label : Short Answer Question

Find the number of critical points of the function $f(a, b)$.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1

Question Number : 146 **Question Id :** 640653354699 **Question Type :** MSQ **Is Question**

Mandatory : No **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 1

Question Label : Multiple Select Question

Which of the following options is/are true?

Options :

A is not a symmetric matrix for all

6406531176358. ✘ $a, b \in \mathbb{R}$.

6406531176359. ✓ A^2 is a symmetric matrix for all $a, b \in \mathbb{R}$.

6406531176360. ✓

If (β, γ) is a critical point of $f(a, b)$, then the matrix

$A = \begin{pmatrix} \beta & \gamma \\ \gamma & \beta \end{pmatrix}$ satisfies that $A^2 = A$.

If (β, γ) is a critical point of $f(a, b)$, then the matrix

$A = \begin{pmatrix} \beta & \gamma \\ \gamma & \beta \end{pmatrix}$ satisfies that $\text{rank}(A) = 1$.

6406531176361. *

Sub-Section Number : 3

Sub-Section Id : 64065351268

Question Shuffling Allowed : No

Question Id : 640653354700 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (147 to 149)

Question Label : Comprehension

Consider the matrix $A = \begin{bmatrix} x & -2 & 0 \\ y & 3 & 2 \\ z & 1 & 3 \end{bmatrix}$. Answer the given subquestions:

Sub questions

Question Number : 147 Question Id : 640653354701 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Let $T : \mathbb{R}^3 \rightarrow \mathbb{R}$ be a linear transformation such that $T(x, y, z) = \det(A)$. Then which of following options is/are true?

Options :

6406531176362. * T is injective.

6406531176363. ✓ T is surjective.

6406531176364. ✎ T is an isomorphism.

6406531176365. ✎ T is neither injective nor surjective.

Question Number : 148 Question Id : 640653354702 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Let W be a subspace of \mathbb{R}^3 (with inner product as the dot product) such that $W = \{(x, y, z) \mid \det(A) = 0\}$. If β is an orthonormal basis of W , then find the cardinality of the set β .

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 149 Question Id : 640653354703 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Let $T : \mathbb{R}^3 \rightarrow \mathbb{R}$ be a linear transformation such that $T(x, y, z) = \det(A)$. Let B be the matrix representation of T with respect to some ordered bases for the domain and the codomain. Let $m \times n$ be the order of the matrix B and r be the nullity of B . Then find the value of $m + n + r$.

Then find the value of $m + n + r$.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

6

Sub-Section Number : 4

Sub-Section Id : 64065351269

Question Shuffling Allowed : No

Question Id : 640653354704 **Question Type :** COMPREHENSION **Sub Question Shuffling Allowed :** No **Group Comprehension Questions :** No **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Question Numbers : (150 to 152)

Question Label : Comprehension

Let $T: \mathbb{R}^3 \rightarrow \mathbb{R}^3$ be the linear transformation defined by
 $T(x, y, z) = (x + 3z, x - y + 2z, x + 2y + 5z).$

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 150 **Question Id :** 640653354705 **Question Type :** SA **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Short Answer Question

Find the nullity of T .

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

Question Number : 151 Question Id : 640653354706 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Find the rank of T .

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 152 Question Id : 640653354707 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Choose the correct option(s).

Options :

{(-6, -2, 2)} is a basis

6406531176370. ✓ for the kernel of T .

{(-3, 0, 1), (0, 1, -1)} is a

6406531176371. ✗ basis for the kernel of T .

There exists an isomorphism

6406531176372. ✓ from the range of T to \mathbb{R}^2 .

There exists an isomorphism

6406531176373. ✗ from the range of T to \mathbb{R} .

Sub-Section Number :	5
Sub-Section Id :	64065351270
Question Shuffling Allowed :	Yes

Question Number : 153 Question Id : 640653354708 Question Type : MSQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

An inner product on a vector space V is a function $\langle \cdot, \cdot \rangle : V \times V \rightarrow \mathbb{R}$ satisfying the following conditions:

Condition 1: $\langle v, v \rangle > 0$ for all $v \in V \setminus \{0\}$; $\langle v, v \rangle = 0$ if and only if $v = 0$.

Condition 2: $\langle v_1 + v_2, v_3 \rangle = \langle v_1, v_3 \rangle + \langle v_2, v_3 \rangle$.

Condition 3: $\langle v_1, v_2 \rangle = \langle v_2, v_1 \rangle$.

Condition 4: $\langle cv_1, v_2 \rangle = c\langle v_1, v_2 \rangle$

Let $V = \mathbb{R}^2$ and consider the function defined as:

$$\begin{aligned}\langle \cdot, \cdot \rangle : V \times V &\rightarrow \mathbb{R} \\ \langle (x_1, x_2), (y_1, y_2) \rangle &= x_1 y_1 - 2x_2 y_2.\end{aligned}$$

Which of the following are satisfied by the above function?

Options :

6406531176374. ❌ Condition 1 is satisfied.

6406531176375. ✓ Condition 2 is satisfied.

6406531176376. ✓ Condition 3 is satisfied.

6406531176377. ✓ Condition 4 is satisfied.

Question Number : 154 Question Id : 640653354715 Question Type : MSQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following options is/are true?

$$f(x, y) = \frac{x^3y}{x^6 + y^2}$$

Options :

6406531176383. ❌ $\lim_{(x,y) \rightarrow (0,0)} f(x, y) = 0$

6406531176384. ❌ $\lim_{(x,y) \rightarrow (0,0)} f(x, y) = \frac{1}{2}$

6406531176385. ❌ $\lim_{(x,y) \rightarrow (0,0)} f(x, y) = 1$

6406531176386. ✓ $\lim_{(x,y) \rightarrow (0,0)} f(x, y)$ does not exist.

6406531176387. ✓ $f(x, y)$ is not continuous at $(0, 0)$

6406531176388. ❌ $f(x, y)$ is continuous at $(0, 0)$.

Question Number : 155 Question Id : 640653354727 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Let $A = \begin{pmatrix} 1 & 2 & -1 \\ 2 & 1 & 1 \\ -1 & 1 & -2 \end{pmatrix}$ and $B = \begin{pmatrix} -1 & 3 & 2 \\ 0 & 2 & 2 \\ -1 & 1 & 0 \end{pmatrix}$. Choose the correct option(s).

Options :

6406531176410. ❌ A is not equivalent to B .

6406531176411. ✓ A is equivalent to B .

6406531176412. ❌ A is similar to B .

6406531176413. ✓ A is not similar to B.

Sub-Section Number : 6

Sub-Section Id : 64065351271

Question Shuffling Allowed : Yes

Question Number : 156 Question Id : 640653354709 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

If a , b and c are three positive numbers which satisfy the following two properties:

- The sum of a , b and c is 12.
- The sum of the squares of a , b , c is minimum among the sum of squares of any such positive numbers which sum up to 12.

Find the value of $a - 2b + c$.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

-6

Sub-Section Number : 7

Sub-Section Id : 64065351272

Question Shuffling Allowed : No

Question Id : 640653354710 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (157 to 160)

Question Label : Comprehension

Consider the function $f(x, y) = 2x^3 + 6xy^2 - 3y^3 - 150x$.

Answer the given subquestions:

Sub questions

Question Number : 157 Question Id : 640653354711 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Find the number of local maxima using the Hessian test.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1

Question Number : 158 Question Id : 640653354712 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Find the number of local minima using the Hessian test.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1

Question Number : 159 Question Id : 640653354713 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Find the number of saddle points using the Hessian test.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 160 Question Id : 640653354714 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Find the number of points at which the Hessian test is indeterminate.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0

Question Id : 640653354728 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (161 to 163)

Question Label : Comprehension

The price of a product ($f(x, y)$) depends on the price (x) of the raw materials and the price (y) of transportation of the product to the market according to

$$f : \mathbb{R}^2 \rightarrow \mathbb{R}$$

$$f(x, y) = \begin{cases} x^3 - xy^2 & \text{if } x \neq y \\ x + y & \text{otherwise} \end{cases}$$

Answer the given subquestions:

Sub questions

Question Number : 161 Question Id : 640653354729 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What will be the ratio of the price of the raw materials and the price of the transportation ($x : y$) when $y > x$, if the rate of change of the price of the product with respect to the price of the raw materials is 0? (In this context x and y both are always positive).

Options :

6406531176414. ✘ 1 : 1

6406531176415. ✘ 1 : 3

6406531176416. ✓ 1 : $\sqrt{3}$

The ratio cannot be determined using the given information.

6406531176417. ✘

Question Number : 162 Question Id : 640653354730 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following statements are true?

Options :

6406531176418. ✘ $f(x, y)$ is a linear function in its domain.

6406531176419. ✓ $f(cx, cy) = c^3 f(x, y)$ for any real number c , if $x \neq y$.

6406531176420. ✓ $f(x, y)$ is continuous at $(0, 0)$.

If the price of raw material and transportation of the product approaches 6406531176421. ✓ 3 and 2 respectively, then the price of the product approaches 15.

If the price of raw material and transportation of the product approaches 6406531176422. ✘ 3 and 2 respectively, then the price of the product approaches 5.

Question Number : 163 Question Id : 640653354731 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

If the rate of change of the price of the product along the direction of the vector $(1, 1)$ is $\frac{1}{\sqrt{2}}[ka^2 + lab + mb^2]$, when the price of raw material is a and the price of transportation of the product to the market is b (where $a \neq b$), then find the value of $k - l + m$.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

4

Sub-Section Number : 8

Sub-Section Id : 64065351273

Question Shuffling Allowed : Yes

Question Number : 164 **Question Id :** 640653354716 **Question Type :** MCQ **Is Question**

Mandatory : No **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following is true for the function:

$$f(x, y) = \frac{x^3 - y^3}{x - y}$$

Options :

6406531176389. ❌ $\lim_{(x,y) \rightarrow (1,-1)} f(x, y) = 0$

6406531176390. ✓ $\lim_{(x,y) \rightarrow (1,-1)} f(x, y) = 1$

6406531176391. ❌ $\lim_{(x,y) \rightarrow (1,-1)} f(x, y) = 2$

6406531176392. ❌ $\lim_{(x,y) \rightarrow (1,-1)} f(x, y)$ does not exist.

Question Number : 165 **Question Id :** 640653354717 **Question Type :** MCQ **Is Question**

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the function $f(x, y) = x^3 + y^3$. Which of the following affine subspaces represent the tangent line at the point $(1, 1)$ in the direction of the vector $(1, 1)$?

Options :

$$\{(x, y, z) \in \mathbb{R}^3 \mid \frac{x-1}{\frac{1}{\sqrt{2}}} = \frac{y-1}{\frac{1}{\sqrt{2}}}\}$$

6406531176393. ❌

$$\{(x, y, z) \in \mathbb{R}^3 \mid \frac{x-1}{\frac{1}{\sqrt{2}}} = \frac{y-1}{\frac{1}{\sqrt{2}}} = \frac{z-2}{\frac{1}{\sqrt{2}}}\}$$

6406531176394. ❌

$$\{(x, y, z) \in \mathbb{R}^3 \mid \frac{x-1}{\frac{1}{\sqrt{2}}} = \frac{y-1}{\frac{1}{\sqrt{2}}} = \frac{z-2}{\frac{6}{\sqrt{2}}}\}$$

6406531176395. ✓

$$\{(x, y, z) \in \mathbb{R}^3 \mid \frac{x}{\frac{1}{\sqrt{2}}} = \frac{y}{\frac{1}{\sqrt{2}}} = \frac{z}{\frac{6}{\sqrt{2}}}\}$$

6406531176396. ❌

Question Number : 166 Question Id : 640653354723 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following option is/are true?

Options :

If L and L' are two affine subspaces of \mathbb{R}^3 , then $L \cap L'$ is an affine

6406531176401. ✓ subspace of \mathbb{R}^3 .

Let $Ax = b$ be a system of linear equations with infinitely many solutions and let P be an invertible matrix such that product PA is well defined.

6406531176402. ❌ Then the system of linear equations $PAx = b$ has infinitely many solutions.

Let A and B be two matrices such that reduced echelon form of A and B are the same. Then $\text{rank}(A) > \text{rank}(B)$.
6406531176403. *

Let $Ax = 0$ be a system of linear equations such that reduced echelon form of the coefficient matrix A is the identity matrix.
6406531176404. * Then the system $Ax = 0$ has infinitely many solutions.

Sub-Section Number : 9

Sub-Section Id : 64065351274

Question Shuffling Allowed : No

Question Id : 640653354718 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (167 to 170)

Question Label : Comprehension

Consider $V = \mathbb{R}^3$ with inner product as the dot product and $W = \{(x, y, z) \mid x = y, z = 0\}$ is a subspace of V .

Let $P_W: V \rightarrow W$ be a projection on W .

Answer the given subquestions:

Sub questions

Question Number : 167 Question Id : 640653354719 Question Type : SA Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Find the dimension of the image space P_W .

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1

Question Number : 168 Question Id : 640653354720 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Find the dimension of the null space of P_W .

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 169 Question Id : 640653354721 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

If $v \in W$ is such that $\|v\| = 3$,

then find $\|P_W(v)\|$.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

3

Question Number : 170 Question Id : 640653354722 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Let A be the matrix representation of P_W with respect to some orthonormal bases β and γ for V and W , respectively. Then find the dimension of the null space A^2 .

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Sub-Section Number : 10

Sub-Section Id : 64065351275

Question Shuffling Allowed : No

Question Id : 640653354724 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (171 to 172)

Question Label : Comprehension

Let $A = \begin{pmatrix} 2 & 0 & 2 \\ -2 & 1 & 2 \\ 1 & 4 & -1 \end{pmatrix}$. Let B be the matrix whose rows are obtained by normalizing the rows of A .

Answer the given subquestions about matrix B .

Sub questions

Question Number : 171 Question Id : 640653354725 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Choose the correct options about the matrix B .

Options :

A and B have the same reduced row

6406531176405. ✓ echelon form.

6406531176406. ✗ $BB^T x = 0$ has infinitely many solutions.

6406531176407. ✓ B is an orthogonal matrix.

6406531176408. ✗ The columns of B are not orthonormal.

Question Number : 172 Question Id : 640653354726 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is $z_2 + 2z_3$, where $z = (z_1, z_2, z_3)^T$ is
the solution of $Bz = (2, -2, 1)^T$ obtained
using the Cramer's rule?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0

Section Id :	64065322267
Section Number :	5
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	12
Number of Questions to be attempted :	12
Section Marks :	40
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065351276
Question Shuffling Allowed :	No

Question Number : 173 Question Id : 640653354732 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "FOUNDATION LEVEL: SEMESTER 2/DIRECT ENTRY DIPLOMA : STATISTICS FOR DATA SCIENCE 2"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531176424. ✓ Yes

6406531176425. ✗ No

Question Number : 174 Question Id : 640653354733 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

Discrete random variables:

Distribution	PMF ($f_X(k)$)	CDF ($F_X(x)$)	$E[X]$	$\text{Var}(X)$
Uniform(A) $A = \{a, a+1, \dots, b\}$	$\frac{1}{n}, \quad x = k$ $n = b - a + 1$ $k = a, a+1, \dots, b$	$\begin{cases} 0 & x < 0 \\ \frac{k-a+1}{n} & k \leq x < k+1 \\ & k = a, a+1, \dots, b-1, b \\ 1 & x \geq n \end{cases}$	$\frac{a+b}{2}$	$\frac{n^2-1}{12}$
Bernoulli(p)	$\begin{cases} p & x = 1 \\ 1-p & x = 0 \end{cases}$	$\begin{cases} 0 & x < 0 \\ 1-p & 0 \leq x < 1 \\ 1 & x \geq 1 \end{cases}$	p	$p(1-p)$
Binomial(n, p)	${}^n C_k p^k (1-p)^{n-k}, \quad k = 0, 1, \dots, n$	$\begin{cases} 0 & x < 0 \\ \sum_{i=0}^k {}^n C_i p^i (1-p)^{n-i} & k \leq x < k+1 \\ & k = 0, 1, \dots, n \\ 1 & x \geq n \end{cases}$	np	$np(1-p)$
Geometric(p)	$(1-p)^{k-1} p, \quad k = 1, \dots, \infty$	$\begin{cases} 0 & x < 0 \\ 1 - (1-p)^k & k \leq x < k+1 \\ & k = 1, \dots, \infty \end{cases}$	$\frac{1}{p}$	$\frac{1-p}{p^2}$
Poisson(λ)	$\frac{e^{-\lambda} \lambda^k}{k!}, \quad k = 0, 1, \dots, \infty$	$\begin{cases} 0 & x < 0 \\ e^{-\lambda} \sum_{i=0}^k \frac{\lambda^i}{i!} & k \leq x < k+1 \\ & k = 0, 1, \dots, \infty \end{cases}$	λ	λ

Continuous random variables:

Distribution	PDF ($f_X(k)$)	CDF ($F_X(x)$)	$E[X]$	$\text{Var}(X)$
Uniform $[a, b]$	$\frac{1}{b-a}, a \leq x \leq b$	$\begin{cases} 0 & x \leq a \\ \frac{x-a}{b-a} & a < x < b \\ 1 & x \geq b \end{cases}$	$\frac{a+b}{2}$	$\frac{(b-a)^2}{12}$
Exp(λ)	$\lambda e^{-\lambda x}, x > 0$	$\begin{cases} 0 & x \leq 0 \\ 1 - e^{-\lambda x} & x > 0 \end{cases}$	$\frac{1}{\lambda}$	$\frac{1}{\lambda^2}$
Normal(μ, σ^2)	$\frac{1}{\sigma\sqrt{2\pi}} \exp\left(\frac{-(x-\mu)^2}{2\sigma^2}\right),$ $-\infty < x < \infty$	No closed form	μ	σ^2
Gamma(α, β)	$\frac{\beta^\alpha}{\Gamma(\alpha)} x^{\alpha-1} e^{-\beta x}, x > 0$		$\frac{\alpha}{\beta}$	$\frac{\alpha}{\beta^2}$
Beta(α, β)	$\frac{\Gamma(\alpha+\beta)}{\Gamma(\alpha)\Gamma(\beta)} x^{\alpha-1} (1-x)^{\beta-1}$ $0 < x < 1$		$\frac{\alpha}{\alpha+\beta}$	$\frac{\alpha\beta}{(\alpha+\beta)^2(\alpha+\beta+1)}$

1. **Markov's inequality:** Let X be a discrete random variable taking non-negative values with a finite mean μ . Then,

$$P(X \geq c) \leq \frac{\mu}{c}$$

2. **Chebyshev's inequality:** Let X be a discrete random variable with a finite mean μ and a finite variance σ^2 . Then,

$$P(|X - \mu| \geq k\sigma) \leq \frac{1}{k^2}$$

3. **Weak Law of Large numbers:** Let $X_1, X_2, \dots, X_n \sim \text{iid } X$ with $E[X] = \mu, \text{Var}(X) = \sigma^2$.

Define sample mean $\bar{X} = \frac{X_1 + X_2 + \dots + X_n}{n}$. Then,

$$P(|\bar{X} - \mu| > \delta) \leq \frac{\sigma^2}{n\delta^2}$$

4. **Using CLT to approximate probability:** Let $X_1, X_2, \dots, X_n \sim \text{iid } X$ with $E[X] = \mu, \text{Var}(X) = \sigma^2$.

Define $Y = X_1 + X_2 + \dots + X_n$. Then,

$$\frac{Y - n\mu}{\sqrt{n}\sigma} \approx \text{Normal}(0, 1).$$

5. **Bias of an estimator:** $\text{Bias}(\hat{\theta}, \theta) = E[\hat{\theta}] - \theta$.

6. **Method of moments:** Sample moments, $M_k(X_1, X_2, \dots, X_n) = \frac{1}{n} \sum_{i=1}^n X_i^k$

Procedure: For one parameter θ

- Sample moment: m_1
- Distribution moment: $E(X) = f(\theta)$
- Solve for θ from $f(\theta) = m_1$ in terms of m_1 .
- $\hat{\theta}$: replace m_1 by M_1 in the above solution.

7. **Likelihood of i.i.d. samples:** Likelihood of a sampling x_1, x_2, \dots, x_n , denoted

$$L(x_1, \dots, x_n) = \prod_{i=1}^n f_X(x_i; \theta_1, \theta_2, \dots)$$

8. **Maximum likelihood (ML) estimation:**

$$\theta_1^*, \theta_2^*, \dots = \arg \max_{\theta_1^*, \theta_2^*, \dots} \prod_{i=1}^n f_X(x_i; \theta_1, \theta_2, \dots)$$

9. **Bayesian estimation:** Let $X_1, \dots, X_n \sim \text{i.i.d. } X$, parameter Θ .

Prior distribution of Θ : $\Theta \sim f_\Theta(\theta)$.

Samples, S : $(X_1 = x_1, \dots, X_n = x_n)$

Posterior: $\Theta | (X_1 = x_1, \dots, X_n = x_n)$

Bayes' rule: Posterior \propto Prior \times Likelihood

Posterior density $\propto f_\Theta(\theta) \times P(X_1 = x_1, \dots, X_n = x_n | \Theta = \theta)$

10. **Normal samples with unknown mean and known variance:**

$X_1, \dots, X_n \sim \text{i.i.d. Normal}(M, \sigma^2)$.

Prior $M \sim \text{Normal}(\mu_0, \sigma_0^2)$.

Posterior mean: $\hat{\mu} = \bar{X} \left(\frac{n\sigma_0^2}{n\sigma_0^2 + \sigma^2} \right) + \mu_0 \left(\frac{\sigma^2}{n\sigma_0^2 + \sigma^2} \right)$

11. Hypothesis Testing

- Test for mean

Case (1): When population variance σ^2 is known (z -test)

Test	H_0	H_A	Test statistic	Rejection region
right-tailed	$\mu = \mu_0$	$\mu > \mu_0$	$T = \bar{X}$ $Z = \frac{\bar{X} - \mu_0}{\sigma/\sqrt{n}}$	$\bar{X} > c$
left-tailed	$\mu = \mu_0$	$\mu < \mu_0$	$T = \bar{X}$ $Z = \frac{\bar{X} - \mu_0}{\sigma/\sqrt{n}}$	$\bar{X} < c$
two-tailed	$\mu = \mu_0$	$\mu \neq \mu_0$	$T = \bar{X}$ $Z = \frac{\bar{X} - \mu_0}{\sigma/\sqrt{n}}$	$ \bar{X} - \mu_0 > c$

Case (2): When population variance σ^2 is unknown (t -test)

Test	H_0	H_A	Test statistic	Rejection region
right-tailed	$\mu = \mu_0$	$\mu > \mu_0$	$T = \bar{X}$ $t_{n-1} = \frac{\bar{X} - \mu_0}{S/\sqrt{n}}$	$\bar{X} > c$
left-tailed	$\mu = \mu_0$	$\mu < \mu_0$	$T = \bar{X}$ $t_{n-1} = \frac{\bar{X} - \mu_0}{S/\sqrt{n}}$	$\bar{X} < c$
two-tailed	$\mu = \mu_0$	$\mu \neq \mu_0$	$T = \bar{X}$ $t_{n-1} = \frac{\bar{X} - \mu_0}{S/\sqrt{n}}$	$ \bar{X} - \mu_0 > c$

- χ^2 -test for variance:

Test	H_0	H_A	Test statistic	Rejection region
right-tailed	$\sigma = \sigma_0$	$\sigma > \sigma_0$	$T = \frac{(n-1)S^2}{\sigma_0^2} \sim \chi_{n-1}^2$	$S^2 > c^2$
left-tailed	$\sigma = \sigma_0$	$\sigma < \sigma_0$	$T = \frac{(n-1)S^2}{\sigma_0^2} \sim \chi_{n-1}^2$	$S^2 < c^2$
two-tailed	$\sigma = \sigma_0$	$\sigma \neq \sigma_0$	$T = \frac{(n-1)S^2}{\sigma_0^2} \sim \chi_{n-1}^2$	$S^2 > c^2$ where $\frac{\alpha}{2} = P(S^2 > c^2)$ or $S^2 < c^2$ where $\frac{\alpha}{2} = P(S^2 < c^2)$

- Two samples z -test for means:

Test	H_0	H_A	Test statistic	Rejection region
right-tailed	$\mu_1 = \mu_2$	$\mu_1 > \mu_2$	$T = \bar{X} - \bar{Y}$ $\bar{X} - \bar{Y} \sim \text{Normal}\left(0, \frac{\sigma_1^2}{n_1} + \frac{\sigma_2^2}{n_2}\right)$ if H_0 is true	$\bar{X} - \bar{Y} > c$
left-tailed	$\mu_1 = \mu_2$	$\mu_1 < \mu_2$	$T = \bar{Y} - \bar{X}$ $\bar{Y} - \bar{X} \sim \text{Normal}\left(0, \frac{\sigma_2^2}{n_2} + \frac{\sigma_1^2}{n_1}\right)$ if H_0 is true	$\bar{Y} - \bar{X} > c$
two-tailed	$\mu_1 = \mu_2$	$\mu_1 \neq \mu_2$	$T = \bar{X} - \bar{Y}$ $\bar{X} - \bar{Y} \sim \text{Normal}\left(0, \frac{\sigma_1^2}{n_1} + \frac{\sigma_2^2}{n_2}\right)$ if H_0 is true	$ \bar{X} - \bar{Y} > c$

- Two samples F -test for variances

Test	H_0	H_A	Test statistic	Rejection region
one-tailed	$\sigma_1 = \sigma_2$	$\sigma_1 > \sigma_2$	$T = \frac{S_1^2}{S_2^2} \sim F_{(n_1-1, n_2-1)}$	$\frac{S_1^2}{S_2^2} > 1 + c$
one-tailed	$\sigma_1 = \sigma_2$	$\sigma_1 < \sigma_2$	$T = \frac{S_1^2}{S_2^2} \sim F_{(n_1-1, n_2-1)}$	$\frac{S_1^2}{S_2^2} < 1 - c$
two-tailed	$\sigma_1 = \sigma_2$	$\sigma_1 \neq \sigma_2$	$T = \frac{S_1^2}{S_2^2} \sim F_{(n_1-1, n_2-1)}$	$\frac{S_1^2}{S_2^2} > 1 + c_R$ where $\frac{\alpha}{2} = P(T > 1 + c_R)$ or $\frac{S_1^2}{S_2^2} < 1 - c_L$ where $\frac{\alpha}{2} = P(T < 1 - c_L)$

Use the following values if required:

$F_Z(-2.33) = 0.01$
$F_Z(2.33) = 0.99$
$F_Z(-1.96) = 0.025$
$F_Z(1.64) = 0.95$
$F_Z(-1.75) = 0.04$
$F_Z(-1.095) = 0.13786$
$F_{\chi^2_{99}}^{-1}(0.05) = 77.046$
$F_{\chi^2_{99}}^{-1}(0.95) = 123.22$
$F_Z(1.095) = 0.86214$
$F_Z(-0.036) = 0.48405$
$F_Z(0.036) = 0.51595$
$F_Z(-1.64) = 0.05$
$F_Z(1.96) = 0.975$
$F_Z(-1.88) = 0.03$
$F_Z(-1.55) = 0.06057$

Table : Useful values

Options :

6406531176426. ✓ Useful Data has been mentioned above.

6406531176427. ❗ This data attachment is just for a reference & not for an evaluation.

Sub-Section Number : 2

Sub-Section Id : 64065351277

Question Shuffling Allowed : Yes

Question Number : 175 Question Id : 640653354741 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Let $X_1, X_2, \dots, X_n \sim \text{i.i.d. Uniform}[-a, a]$, where a is unknown. An estimator \hat{a} for a is given as

$$\hat{a} = \frac{3}{n}(X_1^2 + X_2^2 + \dots + X_n^2)$$

Is \hat{a} an unbiased estimator of a ?

Options :

6406531176439. ❌ Yes

6406531176440. ✓ No

Sub-Section Number : 3

Sub-Section Id : 64065351278

Question Shuffling Allowed : Yes

Question Number : 176 Question Id : 640653354742 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Consider the null and alternative hypothesis $H_0 : \mu = 0, H_A : \mu > 0$. In which of the following cases can we reject the null hypothesis?

Options :

6406531176441. ✓ $P\text{-value} \leq \text{significance level } (\alpha)$.

6406531176442. ❌ $P\text{-value} > \text{significance level } (\alpha)$.

6406531176443. ✓ Test statistic (T) > critical value (c).

6406531176444. ❌ Test statistic (T) < critical value (c).

Sub-Section Number :	4
Sub-Section Id :	64065351279
Question Shuffling Allowed :	Yes

Question Number : 177 Question Id : 640653354752 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

The standard deviation of the length of bolts manufactured by a machine was 1 mm. A new machine with a supposedly lesser standard deviation is installed. A random sample of 100 bolts from the new machine showed a standard deviation of 0.5 mm. Based on this data, what is your conclusion at a significance level of 0.05, on the standard deviation of length of bolts manufactured by the new machine? Choose the correct options from the following (Select all that apply):

Options :

6406531176458. ✓ Null hypothesis, $H_0: \sigma = 1$

6406531176459. ✗ Null hypothesis, $H_0: \sigma = 0.5$.

6406531176460. ✗ Right tailed test is used.

6406531176461. ✓ Left tailed test is used.

6406531176462. ✗ Two tailed test is used.

6406531176463. ✗ F-test is used.

6406531176464. ✓ χ^2 -test is used.

6406531176465. ✘ Test Statistic used is Sample mean.

6406531176466. ✓ Test Statistic used is Sample variance.

6406531176467. ✘ Test Statistic used is population variance.

6406531176468. ✘ Accept H_0 at a significance level of 0.05.

6406531176469. ✓ Reject H_0 at a significance level of 0.05.

Sub-Section Number : 5

Sub-Section Id : 64065351280

Question Shuffling Allowed : Yes

Question Number : 178 Question Id : 640653354743 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

The average life of a battery is 4 years, with a standard deviation of 1 year. Assuming that the lives of the batteries follow approximately a normal distribution, find the probability that the mean life of a random sample of 30 such batteries falls between 3.8 and 4.2 years. Enter your answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.70 to 0.74

Sub-Section Number : 6

Sub-Section Id :

64065351281

Question Shuffling Allowed :

No

Question Id : 640653354734 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (179 to 180)

Question Label : Comprehension

Let $X_1, X_2, X_3 \sim f_{X_1 X_2 X_3}(t_1, t_2, t_3)$. The joint PMF is given in the following table:

t_1	t_2	t_3	$f_{X_1 X_2 X_3}(t_1, t_2, t_3)$
0	1	0	1/4
0	2	1	1/4
0	1	1	1/4
1	1	0	1/4

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 179 Question Id : 640653354735 Question Type : MSQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Choose the correct option(s) from the following (T_X refers to the values taken by a random variable X):

Options :

6406531176428. ❌ $T_{X_1} = T_{X_2} = T_{X_3} = \{0, 1, 2\}$.

6406531176429. ✓ $T_{X_1} = \{0, 1\}, T_{X_2} = \{1, 2\}, T_{X_3} = \{0, 1\}$.

6406531176430. ✓ Range of $(X_1 \mid X_2 = 1)$ is $\{0, 1\}$.

6406531176431. * Range of $(X_2 \mid X_1 = 0, X_3 = 1)$ is $\{1\}$.

Question Number : 180 Question Id : 640653354736 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Calculate $P(X_1 = 0, X_2 = 1 \mid X_3 = 1)$.

Note: Enter the answer correct to one decimal place.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0.5

Sub-Section Number : 7

Sub-Section Id : 64065351282

Question Shuffling Allowed : No

Question Id : 640653354737 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (181 to 183)

Question Label : Comprehension

Let the random variables X and Y have the following joint PDF:

$$f_{XY}(x, y) = \begin{cases} 4xy, & 0 < x, y < 1 \\ 0, & \text{otherwise} \end{cases}$$

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 181 Question Id : 640653354738 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Find the marginal distribution of Y .

Options :

6406531176433. ❌ $f_Y(y) = \begin{cases} 2y, & 0 < y < 1 \\ 0, & \text{otherwise} \end{cases}$

6406531176434. ❌ $f_Y(y) = \begin{cases} 2x, & 0 < x < 1 \\ 0, & \text{otherwise} \end{cases}$

6406531176435. ✓ $f_Y(y) = \begin{cases} 2y, & 0 < y < 1 \\ 0, & \text{otherwise} \end{cases}$

6406531176436. ❌ $f_Y(y) = \begin{cases} 2x, & 0 < y < 1 \\ 0, & \text{otherwise} \end{cases}$

Question Number : 182 Question Id : 640653354739 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Compute $E[Y]$.

Note: Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.65 to 0.68

Question Number : 183 Question Id : 640653354740 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Compute $E[Y | X = 0.5]$.

Note: Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.65 to 0.68

Question Id : 640653354753 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (184 to 185)

Question Label : Comprehension

Suppose the number of deceased people in a week because of a deadly disease in a country has the Poisson(λ) distribution. A researcher wants to estimate λ . From studies in other countries, prior mean should be 3, and the prior standard deviation 1. He decides to use the Gamma(a, β) prior

that matches his prior mean and standard deviation. The number of deceased people recorded over the next 10 weeks are: 3, 5, 7, 0, 1, 7, 4, 9, 6, 4.

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 184 Question Id : 640653354754 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Find the value of α and β .

Options :

6406531176470. ✘ $\alpha = 3, \beta = 3$

6406531176471. ✘ $\alpha = 9, \beta = 9$

6406531176472. ✘ $\alpha = 3, \beta = 9$

6406531176473. ✓ $\alpha = 9, \beta = 3$

Question Number : 185 Question Id : 640653354755 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

Find the posterior mean of λ for the given sample. Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

4.21 to 4.25

Sub-Section Number :

Sub-Section Id :

64065351283

Question Shuffling Allowed :

No

Question Id : 640653354744 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (186 to 188)

Question Label : Comprehension

The time (in minutes) required to repair electronic gadgets by an electrician is an exponential random variable with unknown parameter λ . Consider a sample (in minutes) 10, 11, 25, 1, 4, 5, 8, 35, 14, 15 from his previous repairing time.

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 186 Question Id : 640653354745 Question Type : SA Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Find the method of moments estimate of λ for the given sample. (Enter the answer correct to three decimal places.)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.070 to 0.085

Question Number : 187 Question Id : 640653354746 Question Type : SA Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Find the maximum likelihood estimate of λ for the given sample. (Enter the answer correct to three decimal places.)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.070 to 0.085

Question Number : 188 Question Id : 640653354747 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Using a Uniform[0,1] prior, find the posterior mean of the given sample. (Enter the answer correct to three decimal places)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.080 to 0.090

Question Id : 640653354748 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (189 to 191)

Question Label : Comprehension

Suppose a principal states that the students studying in her school have an average IQ score equal to 98.5. A reporter suspects that the average may be lower, possibly 98 and took a sample of 100 random students from the school and observed the average IQ score to be 98.29. Assume the IQ scores of the students are normally distributed with standard deviation 1.2.

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 189 Question Id : 640653354749 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Define null hypothesis and alternative hypothesis.

Options :

6406531176449. ❌ $H_0: \mu = 98.5, H_A: \mu \neq 98.5$

6406531176450. ❌ $H_0: \mu = 98.5, H_A: \mu > 98.5$

6406531176451. ✓ $H_0: \mu = 98.5, H_A: \mu < 98.5$

6406531176452. ❌ $H_0: \mu \neq 98.5, H_A: \mu = 98.5$

Question Number : 190 Question Id : 640653354750 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Find the P -value. Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0.04

Question Number : 191 Question Id : 640653354751 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Choose the set of correct options.

Options :

6406531176454. ✓ Reject H_0 at significance level $\alpha = 0.05$.

6406531176455. ✓ Accept H_0 at significance level $\alpha = 0.01$.

6406531176456. ✗ Accept H_0 at significance level $\alpha = 0.05$.

6406531176457. ✗ Reject H_0 at significance level $\alpha = 0.01$.

Sub-Section Number : 9

Sub-Section Id : 64065351284

Question Shuffling Allowed : No

Question Id : 640653354756 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (192 to 193)

Question Label : Comprehension

Answer the given subquestions.

Sub questions

Question Number : 192 Question Id : 640653354757 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Suppose X_1, X_2, \dots, X_{15} is an i.i.d sample from a distribution $\text{Normal}(\mu_1, 4^2)$. Suppose Y_1, Y_2, \dots, Y_{15} is an i.i.d sample from a distribution $\text{Normal}(\mu_2, 3^2)$. Let \bar{X} and \bar{Y} be 40 and 43, respectively. Suppose we want to check if the distribution means are different. Find the P - value of the test. Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.015 to 0.025

Question Number : 193 Question Id : 640653354758 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 0

Question Label : Multiple Select Question

Select the steps from the following options, that you will use for finding the P - value in the previous question.

Note: This question is optional. We will check your answer to this question if you make a mistake in the previous one.

Options :

6406531176476. ✓ Null hypothesis, $H_0 : \mu_1 = \mu_2$.

6406531176477. ✘ Null hypothesis, $H_0 : \mu_1 \neq \mu_2$.

6406531176478. ✘ Right tailed test is used.

6406531176479. ✘ Left tailed test is used.

6406531176480. ✓ Two tailed test is used.

6406531176481. ✘ t -test is used.

6406531176482. ✓ z -test is used.

6406531176483. ✓ $\bar{Y} - \bar{X} \sim \text{Normal} \left(\mu_2 - \mu_1, \frac{16}{15} + \frac{9}{15} \right)$

6406531176484. ✘ $\bar{Y} - \bar{X} \sim \text{Normal} (\mu_2 - \mu_1, 25)$

6406531176485. ✘ $\bar{Y} - \bar{X} \sim \text{Normal} \left(0, \frac{16}{15} + \frac{9}{15} \right)$

6406531176486. ✘ Test: Reject H_0 , if $|\bar{Y} - \bar{X}| < c$.

6406531176487. ✓ Test: Reject H_0 , if $|\bar{Y} - \bar{X}| > c$.

App dev1

Section Id :	64065322268
Section Number :	6
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	31
Number of Questions to be attempted :	31
Section Marks :	100
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065351285
Question Shuffling Allowed :	No

Question Number : 194 Question Id : 640653354759 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "DIPLOMA LEVEL: MODERN APPLICATION DEVELOPMENT 1"

**ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.**

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531176488. ✓ Yes

6406531176489. ✘ No

Sub-Section Number : 2

Sub-Section Id : 64065351286

Question Shuffling Allowed : Yes

Question Number : 195 Question Id : 640653354760 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following correctly represents the components of the given URL?

`https://www.mywebsite.com/home?user=Mad1&key=madcs2003`

Options :

https : Domain name;
www.mywebsite.com : Request parameter;
/home : Directory;
user=Mad1&key=madcs2003 : domain name

6406531176490. ✘

https : Protocol;
www.mywebsite.com : Directory;
/home : Domain name;
user=Mad1&key=madcs2003 : Request parameters

6406531176491. ✘

https : Protocol;
www.mywebsite.com : Domain name;
/home : Directory;
user=Mad1&key=madcs2003 : Request parameters

6406531176492. ✓

https : IP Address;
www.mywebsite.com : Domain name;
/home : Directory;
user=Mad1&key=madcs2003 : Local Host

6406531176493. ✘

Question Number : 196 Question Id : 640653354762 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the following flask app and an HTML file in templates folder:

Python file: app.py

```
from flask import Flask, render_template
app = Flask(__name__)

my_list = ['Web development', 'onlinedegree', 'cs2003',
           'MAD-I', 'Data_science']

@app.route('/')
def render():
    return render_template('index.html', my_list = my_list)


app.run(debug = True)
```

Template file:

```
<!DOCTYPE html>
<head>
    <style>
        body{width: 200px;
              border: 2px solid black}
        #one{color:red;}
        #two{color:blue;}
    </style>
</head>
<body>
    {% for item in my_list %}
        {% set Length = item|length %}
        {% if Length%2 == 0 %}
            <h3 id = "one">{{ item }}</h3>
        {% else %}
            <h3 id = "two">{{ item }}</h3>
        {% endif %}
    {% endfor %}
</body>
```

If the above flask app is running locally on <http://127.0.0.1:5000/>, what will be rendered by the browser for the base URL?

Options :

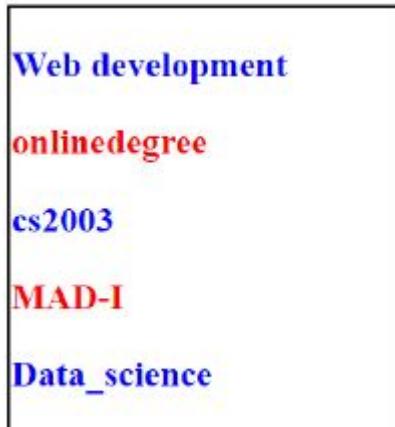

6406531176498. *

6406531176499. *

Web development

onlinedegree

cs2003

MAD-I

Data_science

Web development

onlinedegree

cs2003

MAD-I

Data_science

6406531176500. *

Web development

onlinedegree

cs2003

MAD-I

Data_science

6406531176501. ✓

Question Number : 197 Question Id : 640653354778 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the flask code given below.

Python file: app.py

```
from flask import Flask, jsonify, request

app = Flask(__name__)

my_shops= [
    {
        'name of the shop' : 'Grocery',
        'items' : [
            {
                'item1' : 'Toothpaste',
                'item2' : 'Snacks',
                'item3' : 'Biscuits',
                'item4' : 'Soaps'
            }
        ]
    }
]

@app.route('/')
def show_shop():
    return jsonify({"shops" : my_shops})

#=====
# CODE HERE
#=====

if __name__ == '__main__':
    app.run()
```

Which of the following code snippets must be added in the given space of above application, in order to create a new shop in 'my_shops' list on the server side apart from the existing one?

Options :

```
@app.route('/myshop')
def create_shop():
    new_data = request.get_json()
    new_shop = [
        {
            'New shop' : new_data['name of the shop']
        }
    ]
    my_shops[new_shop]
    return jsonify(new_shop)
```

6406531176551. *

```

@app.route('/myshop', methods=['POST'])
def create_shop():
    new_data = request.get_json()
    new_shop = {
        'New shop' : new_data['name of the shop']
    }
    my_shops.append(new_shop)
    return jsonify(new_shop)

```

6406531176552. ✓

```

@app.route('/myshop', methods=['POST'])
def create_shop():
    new_data = request.get_json()
    new_shop = {
        'New shop' : new_data['name of the shop']
    }
    return jsonify(new_shop)

```

6406531176553. ✗

6406531176554. ✗ All of these

Question Number : 198 Question Id : 640653354781 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

A table ‘person’ is created in the database using model class “Person” with fields and their properties given in the table below.

id	firstname	lastname	email	age	occupation
1	Rahul	Mishra	rahul@gmail.com	23	Engineer
2	Ishan	Vadhera	vadhera@gmail.com	35	Lawyer
3	Abhilasha	Verma	vermaa@gmail.com	25	Teacher

Assuming that `flask_sqlalchemy` is to be used in the ‘main.py’ file, which of the following statements is/are true?

Options :

Both the queries i.e.,

`Person.query.filter_by(firstname="Ishan").all()` and

`Person.query.filter_by(firstname="Ishan").first()` will produce the same result.

6406531176563. ❌

Both the queries i.e.,

`Person.query.filter_by(id=3).first()` and

6406531176564. ✓

`Person.query.get(3)` will produce the same result.

If `person1 = Person.query.get(1)` then, Both the inputs i.e.,

`>>>person1`

6406531176565. ❌

`>>>person1.firstname` will produce the same result.

Both the queries i.e.,

`Person.query.filter_by(firstname="Ishan").first()`, and

`Person.query.get(3)`

6406531176566. ❌

will produce the same result

Question Number : 199 Question Id : 640653354782 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

A flask app and a template files are given below.

Python file: app.py

```
from flask import Flask, render_template
app = Flask(__name__)

@app.route('/home')
def HomePage():
    return "Welcome, folks! This is the Home Page!"

@app.route('/about')
def AboutPage():
    users = [
        {"user": "Shobhit", "gender": "Male", "age": 23, "score": 90},
        {"user": "Deepak", "gender": "Male", "age": 17, "score": 88},
        {"user": "Nikita", "gender": "Female", "age": 20, "score": 87}
    ]
    return render_template('home.html', condition=True, users=users)

if __name__ == "__main__":
    app.run(debug=True)
```

Templates file: home.html

```
<!DOCTYPE html>
<html>
<body>
    <p><a href="{{ url_for('HomePage') }}>Go back to home page?</a></p>
    <h2>About page</h2>
    {% if condition %}
        <h3> You are landed on about page.</h3>
        {% for user in users %}
            <ul>
                <li>Username : {{user.user}}, Age : {{user.age}}, Gender :
                    {{user.gender}}, Score : {{user.score}}</li>
            </ul>
        {% endfor %}
    {% else %}
        <h3> Please Go back.</h3>
    {% endif %}
    </body>
</html>
```

If the above flask application is running locally on “<http://127.0.0.1:5000>”, which of the following statement is true?

Options :

For URL: “<http://127.0.0.1:5000/home/>”, the rendered output will be "Welcome, 6406531176567. ✘ folks! This is the Home Page!"

6406531176568. ✓

For URL: "http://127.0.0.1:5000/about", the rendered output will be:

[Go back to home page?](#)

About page

You are landed on about page.

- Username : Shobhit, Age : 23, Gender : Male, Score : 90
- Username : Deepak, Age : 17, Gender : Male, Score : 88
- Username : Nikita, Age : 20, Gender : Female, Score : 87

For URL: "http://127.0.0.1:5000/about", the rendered output will be:

[Go back to home page?](#)

About page

You are landed on about page.

- Username : Shobhit
- Age : 23
- Gender : Male
- Score : 90
- Username : Deepak
- Age : 17
- Gender : Male
- Score : 88
- Username : Nikita
- Age : 20
- Gender : Female
- Score : 87

6406531176569. ✶

6406531176570. ✶

For URL: "http://127.0.0.1:5000/about", the rendered output will be:

[Go back to home page?](#)

About page

You are landed on about page.

Username : Shobhit

Age : 23

Gender : Male

Score : 90

Username : Deepak

Age : 17

Gender : Male

Score : 88

Username : Nikita

Age : 20

Gender : Female

Score : 87

Question Number : 200 Question Id : 640653354784 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

An HTML document is given below.

```

<!DOCTYPE html>
<html>
<body>
    <h1 id="id1">Welcome to IITM</h1>
    <h3 class="class1">Welcome to the world's first online degree
        program.</h3>
    <a href="">Go back to main link</a>
    <p class="class1">Lorem ipsum dolor sit amet consectetur
        adipisicing elit. Earum, rerum?</p>
    <p class="class1">Have you enrolled in BSC in Data science
        and Programming? </p>
    <p id="id2">Go to the IITM online degree website and enroll
        now!</p>
</body>
</html>

```

Suppose, if we want to give red color to the text within the heading element having id="id1" and green color to the text within the heading element having class="class1", what will be the correct way to do that?

Options :

By using external CSS as follows:

```

#id1{
    color:green;
}
h3.class1{
    color:red;
}

```

6406531176575. ✘

By using internal CSS as follows:

```

<style>
    .id1{
        color:red;
    }
    p.class1{
        color:green;
    }
</style>

```

6406531176576. ✘

6406531176577. ✓

By using inline CSS as follows:

```
<h1 id="id1" style="color:red;">Welcome to IITM</h1>
<h3 class="class1" style="color:green;">Welcome to the world's
first online degree program.</h3>
```

6406531176578. ✘ All of these

Question Number : 201 Question Id : 640653354789 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2


Question Label : Multiple Choice Question

Consider the following HTML document with internal CSS.

```
<!DOCTYPE html>
<html>
  <head>
    <style type="text/css">
      *{
        margin: 0px;
        width: 253px;
      }
      div{
        margin: 10px;
        padding: 20px;
        border-style: dotted;
        border-width: 10px;
        font-size: 30px;
        color: blue;
        background-color: pink;
        border-color: red;
      }
    </style>
    <title>End Sem</title>
  </head>
  <body>
    <div>This is my content</div>
    <div>Another content</div>
  </body>
</html>
```

How will the browser render the above HTML document?

Options :

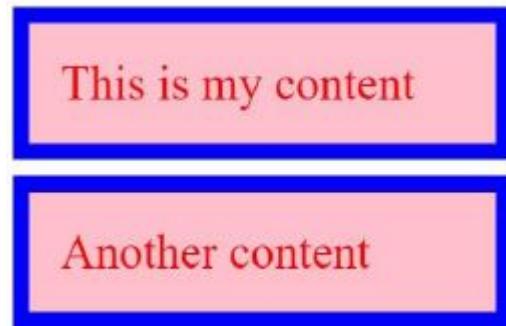

6406531176595. *

6406531176596. *

This is my content

Another content

This is my content
Another content

6406531176597. *

This is my content
Another content

6406531176598. ✓

Sub-Section Number :

3

Sub-Section Id :

64065351287

Question Shuffling Allowed :

Yes

Question Number : 202 Question Id : 640653354763 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Consider the following table “workers” created in SQLite database corresponding to model class “Workers” using flask_sqlalchemy.

Id	Name	Designation	Gender	Salary
Filter	Filter	Filter	Filter	Filter
1	Padma Raja	Supervisor	Female	2000
2	Sameer Gandhi	Labour	Male	1200
3	Latika Murthy	Labour	Female	800
4	Nitya Grover	Supervisor	Female	2000
5	Amit Saxena	Supervisor	Male	2000

The correct way to increase the salary of all the female workers by 500 Rupees using the Python console is:

Options :

```
>>> workers = Workers.query.filter_by(Designation = 'Supervisor').all()
>>> for worker in workers:
...     worker.Salary += 500
...
>>> db.session.commit()
```

6406531176502. ✘

```
>>> workers = Workers.query.filter_by(Gender = 'Female').all()
>>> workers.Salary += 500
>>> db.session.commit()
```

6406531176503. ✘

```
>>> workers = Workers.query.filter_by(Gender = 'Female').all()
>>> for worker in workers:
...     worker.Salary += 500
...
>>> db.session.commit()
```

6406531176504. ✓

```
>>> workers = Workers.query.filter(Workers.Gender.like('F%')).all()
>>> for worker in workers:
...     worker.Salary += 500
...
>>> db.session.commit()
```

6406531176505. ✓

Sub-Section Id :

64065351288

Question Shuffling Allowed :

Yes

Question Number : 203 Question Id : 640653354761 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

How will the browser render the output of the following Python code snippet?

```
from jinja2 import Template

styles=[  
    '.text{color: purple}\n #heading{color:red}\n #subhead{color:blue}',  
    '.text{color: purple}\n #subhead{color:green}\n #main{color:blue}',  
    '.text{color: purple}\n #main{color:red}\n #heading{color:blue}'  
]  
  
template = """  
    <!DOCTYPE html>  
    <style>  
        div{border: 2px solid black;  
             width: 300px;  
             background-color: rgb(247, 247, 230)}  
        {{styles[0]}}  
    </style>  
    <body>  
        <div>  
            <h2 style="color:brown;" class="text" id="heading">  
Programming Degree</h2>  
            <h3 class="text" id="subhead">Modern Application 1</h3>  
            <p class="text" id="main">This is a course on Application  
Development</p>  
        </div>  
    </body>  
"""  
  
test_render = Template(template)  
output = test_render.render(styles = styles)  
print(output)
```

Options :

6406531176494. *

Programming Degree
Modern Application 1
This is a course on Application Development

6406531176495. *

Programming Degree
Modern Application 1
This is a course on Application Development

6406531176496. *

Programming Degree
Modern Application 1
This is a course on Application Development

6406531176497. ✓

Programming Degree
Modern Application 1
This is a course on Application Development

Question Number : 204 Question Id : 640653354767 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

What will be the output of the following python code if method test_request_context() allows flask app to print statements on the terminal?

```
from flask import Flask, url_for

app = Flask(__name__)

@app.route('/')
def home():
    return 'base url'

@app.route('/subscribe')
def subscribe():
    return 'Please subscribe to this page.'

@app.route('/new_course/<coursename>')
def course(coursename):
    return f'The course {coursename} gives basics of web development.'

with app.test_request_context():
    print(url_for('home'))
    print(url_for('subscribe'))
    print(url_for('subscribe', username = 'user_one'))
    print(url_for('course', coursename = 'MAD_I'))
```

Options :

base url
Please subscribe to this page
Please subscribe to this page user one.
The course MAD_I gives basics of web development.

6406531176514. ❌

/
/subscribe
/subscribe/user_one
6406531176515. ❌ /new_course/MAD_I

/
/subscribe
/subscribe?username=user_one
/new_course/MAD_I
6406531176516. ✓

```
/  
/subscribe  
/subscribe?username=user_one  
/new_course?coursename=MAD_I
```

6406531176517. ❌

Question Number : 205 Question Id : 640653354775 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

An internet connection with certain bandwidth is able to serve 10,000 requests of 150 Kilobytes each. What should be the increase in bandwidth (in Gbps) if this internet connection is to handle 12,500 requests of 180 Kilobytes each? (**Use relations:** 1 Byte = 8 bits, 1 MB = 1000 B, 1 GB = 1000 M and so on)

Options :

6406531176539. ❌ 600

6406531176540. ✓ 6

6406531176541. ❌ 0.6

6406531176542. ❌ 12

Question Number : 206 Question Id : 640653354776 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the code snippet given below.

Python file: test_app.py

```
import pytest

@pytest.fixture
def items():
    return "Books"

@pytest.fixture
def order():
    return "Pens"

@pytest.fixture
def order_items(order, items):
    return [order, items]

@pytest.fixture
def expected_list():
    return ["Books", "Pencils", "Pens"]

def test_1(order_items, expected_list):
    order_items.append("Pencils")
    assert order_items == expected_list

def test_2(order_items):
    order_items.append("Pencils")
    assert order_items == ["Pens", "Books", "Pencils"]
```

Which of the following statement is true about the above code snippet?

Options :

6406531176543. ✓ After running pytest, test_1 will fail, whereas test_2 will pass.

6406531176544. ✗ After running pytest, test_2 will fail, whereas test_1 will pass.

6406531176545. ✗ Both the test cases, test_1 and test_2 will pass successfully.

6406531176546. ✗ Both the test cases, test_1 and test_2 will fail.

Question Number : 207 Question Id : 640653354779 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the Python code snippet given below.

Python file: app.py

```
from flask import Flask, request
from flask_restful import Api, Resource, reqparse

app = Flask(__name__)
api = Api(app)

class Add(Resource):
    def post(self):
        data_args = reqparse.RequestParser()
        data_args.add_argument('Name', help='Name is required',
        required =True)
        data_args.add_argument('Age', help='Age is required',
        required =True)
        args = data_args.parse_args()
        return { "Your Name": args['Name'], "Your Age" : args['Age']}

api.add_resource(Add, '/add')

if __name__ == '__main__':
    app.run(debug=True)
```

If this flask application is running on <http://127.0.0.1:5000>, which of the following is the correct output when a POST request is sent to URL "<http://127.0.0.1:5000/add>"?

Options :

6406531176555. ✘ The server will throw a “405 METHOD NOT ALLOWED” error.

6406531176556. ✘ The server will throw a “404 NOT FOUND” error.

For the request body;

```
{  
    "Name" : "Rahul",  
    "Age": 23  
}
```

The application will return;

```
{  
    "Your Name": "Rahul",  
    "Your Age": "23"  
}
```

6406531176557. ✓

6406531176558. ✘ None of these

Question Number : 208 Question Id : 640653354780 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the Python code given below.

```
import pytest

@pytest.fixture
def first_entry():
    return "Apple"

@pytest.fixture
def order(first_entry):
    return [first_entry]

def test_string(order):
    order.append("Kiwi")
    assert order == ["Banana", "Apple"]

def test_int(order):
    order.append("Banana")
    assert order == ["Banana", "Apple", "Kiwi"]
```

Which of the following statement is true?

Options :

6406531176559. ✘ After running pytest, both test cases will pass successfully.

6406531176560. ✘ After running pytest, the first test case will fail, whereas the second test case will pass.

6406531176561. ✓ After running pytest, both test cases will show a failure report.

6406531176562. ✘ None of these

Question Number : 209 Question Id : 640653354783 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the flask app given below.

```
from flask import Flask, abort
from flask_restful import Resource, Api
app = Flask(__name__)
api = Api(app)

item_list=[{"item1": "Cloths"},  
          {"item2" : "Shoes"},  
          {"item3" : "Sunglasses"}]

class ItemList(Resource):  
    def get(self, item_no, item_name):  
        this_item = {'item'+item_no : item_name}  
        if this_item in item_list:  
            return item_list, 200  
        else:  
            abort('400')  
  
    def post(self, item_no, item_name):  
        my_item = {'item'+item_no : item_name}  
        item_list.append(my_item)  
        return my_item, 201  
  
api.add_resource(ItemList, '/items/<item_no>/<item_name>')
app.run(debug=True)
```

If the above flask application is running locally on “<http://127.0.0.1:5000>”, what will be the output of a GET request sent to the URL: ‘<http://127.0.0.1:5000/items/4/watch>’ just after a POST request that is sent on the same URL?

Options :

6406531176571. ✘ The server will show a “404 NOT FOUND” error.

{
 "item4": "watch"
}

6406531176572. ✘ }

```
[  
  {  
    "item1": "Cloths"  
  },  
  {  
    "item2": "Shoes"  
  },  
  {  
    "item3": "Sunglasses"  
  },  
  {  
    "item4": "watch"  
  }]
```

6406531176573. ✓]

6406531176574. ✘ None of these

Question Number : 210 Question Id : 640653354788 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following flask application.

```

from flask import Flask, render_template

app=Flask(__name__)

@app.route('/')
def home():
    my_items = ['Cake', 'Apple', 'Ice Cream', 'DarkChocolate',
'Donut', 'Grape']
    l1 = []
    for i in range(len(my_items)):
        if i>2:
            l1.append(my_items[i])

    return render_template('index.html', list=l1)

app.run(debug=True)

```

Template File - index.html

```

{% macro display(list) %}
    {% for item in list %}
        <p>{{ item }}</p>
    {% endfor %}
{% endmacro %}
<html>
    <body>
        {{ display(list) }}
    </body>
</html>

```

suppose the application is running locally on the 'http://127.0.0.1:5000', then what will be rendered by the browser?

Options :

6406531176591. ✘ Cake

Apple

Ice Cream

6406531176592. ✘ Cake

Apple

Ice Cream

DarkChocolate

Donut

Grape

6406531176593. ✓ DarkChocolate

Donut

Grape

6406531176594. ✖ Ice Cream

DarkChocolate

Donut

Grape

Question Number : 211 Question Id : 640653354791 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Python code snippets.

File 1: main.py

```
import sys
from new import fun
a = sys.argv[1]
b = sys.argv[2]
c = sys.argv[3]
result = fun(a, b, c)
print(result + " is greater")
```

File 2: new.py

```
def fun(num1,num2,num3):
    if (num1 > num2) and (num1 > num3):
        return num1
    elif (num2 > num1) and (num2 > num3):
        return num2
    else:
        return num3
```

suppose the main.py file is executed in the terminal. What will be the output?

```
python main.py
python main.py 8 10 5
```

Options :

6406531176603. ✘ IndexError: list index out of range

NameError: name 'fun' is not defined

6406531176604. ✘ 3 is greater

NameError: name 'fun' is not defined

6406531176605. ✓ IndexError: list index out of range

10 is greater

6406531176606. ✘ NameError: name 'fun' is not defined

8 is greater

Question Number : 212 Question Id : 640653354793 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider a server that has an Intel i5 processor, 64 GB RAM, 1 TB Hard disk with 3 Gbps network connection. If a client accesses a web page, it requires 1.5 MB. Calculate the maximum number of

such requests per second the server can handle. (**Use relations:** 1 Byte = 8 bits, 1 MB = 1000 B, 1 GB = 1000 M and so on).

Options :

6406531176611. ✘ 25

6406531176612. ✘ 32

6406531176613. ✓ 250

6406531176614. ✘ 200

Sub-Section Number : 5

Sub-Section Id : 64065351289

Question Shuffling Allowed : Yes

Question Number : 213 Question Id : 640653354768 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Consider the following Python code snippet.

```

from flask import Flask, abort, redirect, url_for, render_template

app = Flask(__name__)

weekday_users = ['user_1', 'user_3', 'user_4', 'user_6', 'user_7']
weekend_users = ['user_2', 'user_5']

@app.route('/weekday/<username>')
def user_weekday(username):
    if username in weekday_users:
        return redirect(url_for('login', username = username))
    else:
        abort(401)

@app.route('/weekend/<username>')
def user_weekend(username):
    if username in weekend_users:
        return redirect(url_for('login', username = username))
    else:
        abort(401)

@app.route('/login/<username>')
def login(username):
    return f"<h2>Correct User Found! {username}</h2>"

@app.errorhandler(401)
def page_not_found(error):
    return "<h2>You are not authorized for this day.</h2>", 401

app.run()

```

If the above flask app is running locally on “<http://127.0.0.1:5000>”, Which of the following statements is/are correct?

Options :

For the URL, “http://localhost:5000/weekday/user_4”, the browser will render:
✓ 6406531176518. **Correct User Found! user_4**

For the URL, “http://localhost:5000/weekend/user_3”, the browser will render:
✗ 6406531176519. **Correct User Found! user_3**

For the URL, “http://localhost:5000/weekday/user_5”, the browser will render:
✓ 6406531176520. **You are not authorized for this day.**

For the URL, "http://localhost:5000/weekend/user_2", the browser will render:
6406531176521. ✖ **You are not authorized for this day.**

Question Number : 214 Question Id : 640653354785 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Consider the code given below.

```

from flask import Flask, request
from flask_restful import Api, Resource, reqparse

app = Flask(__name__)

api = Api(app)

Mytasks = {
    1: {"mytask": "Studying"}, 
    2: {"mytask": "Exercise"}, 
    3: {"mytask": "Eating"}, 
    4: {"mytask": "Sleeping"}
}

class Display(Resource):
    def get(self):
        return Mytasks

class DisplayAll(Resource):
    def get(self, MytaskList_id):
        return Mytasks[MytaskList_id]

    def post(self, MytaskList_id):
        data_args = reqparse.RequestParser()
        data_args.add_argument("mytask", help='This is required field', required=True)
        args = data_args.parse_args()
        Mytasks[MytaskList_id] = {"mytask" : args["mytask"]}
        return Mytasks[MytaskList_id]

api.add_resource(Display, '/mytask')
api.add_resource(DisplayAll, '/task/<int:MytaskList_id>')

if __name__ == '__main__':
    app.run(debug=True)

```

If the above flask application is running locally on "<http://127.0.0.1:5000>", which of the following statements is/are true?

Options :

The status code that we get after sending a POST request to the URL: <http://127.0.0.1:5000/mytask/4> will be "404 NOT FOUND".

6406531176579. ✓

6406531176580. ✓

The response that we get after sending a GET request to the URL:<http://127.0.0.1:5000/mytask>" will be:

```
{  
    "1": {  
        "mytask": "Studying"  
    },  
    "2": {  
        "mytask": "Exercise"  
    },  
    "3": {  
        "mytask": "Eating"  
    },  
    "4": {  
        "mytask": "Sleeping"  
    }  
}
```

The response that we get after sending POST request to the URL:<http://127.0.0.1:5000/task/4>" with a sending a request body as,

```
{  
    "mytask" : "Swimming"  
}  
will be :  
{  
    "mytask" : "Swimming"  
}
```

6406531176581. ✓

6406531176582. ✘

The response that we get after sending a GET request to the URL: "<http://127.0.0.1:5000/mytask>" will be:

```
{  
    "1": {  
        "mytask": "Studying"  
    },  
    "2": {  
        "mytask": "Exercise"  
    },  
    "3": {  
        "mytask": "Eating"  
    },  
    "4": {  
        "mytask": "Sleeping"  
    },  
    "4": {  
        "mytask": "Swimming"  
    }  
}
```

Sub-Section Number : 6

Sub-Section Id : 64065351290

Question Shuffling Allowed : Yes

Question Number : 215 Question Id : 640653354772 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Short Answer Question

What will be the decimal representation of binary number 010101100000011_2 ?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

11011

Sub-Section Number :

7

Sub-Section Id :

64065351291

Question Shuffling Allowed :

Yes

Question Number : 216 Question Id : 640653354773 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

A machine takes a minimum of 100 seconds to sort 500 entries in a database. What will be the approximate minimum time taken by the machine to sort 1200 entries if the sorting method employs an algorithm with time complexity of $O(n\log(n))$. Where “n” is the number of entries?

Options :

6406531176531. ❌ 173 seconds

6406531176532. ✓ 273 seconds

6406531176533. ❌ 373 seconds

6406531176534. ❌ 473 seconds


Question Number : 217 Question Id : 640653354774 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

The speed vs. throughput characteristics of a typical HDD is shown in the figure below. If this HDD is to be used as a replacement of an SSD whose read/write speed is 450 MB/s. At what speed (in RPM) should the disk of HDD rotate with to deliver the same performance as that of the SSD?

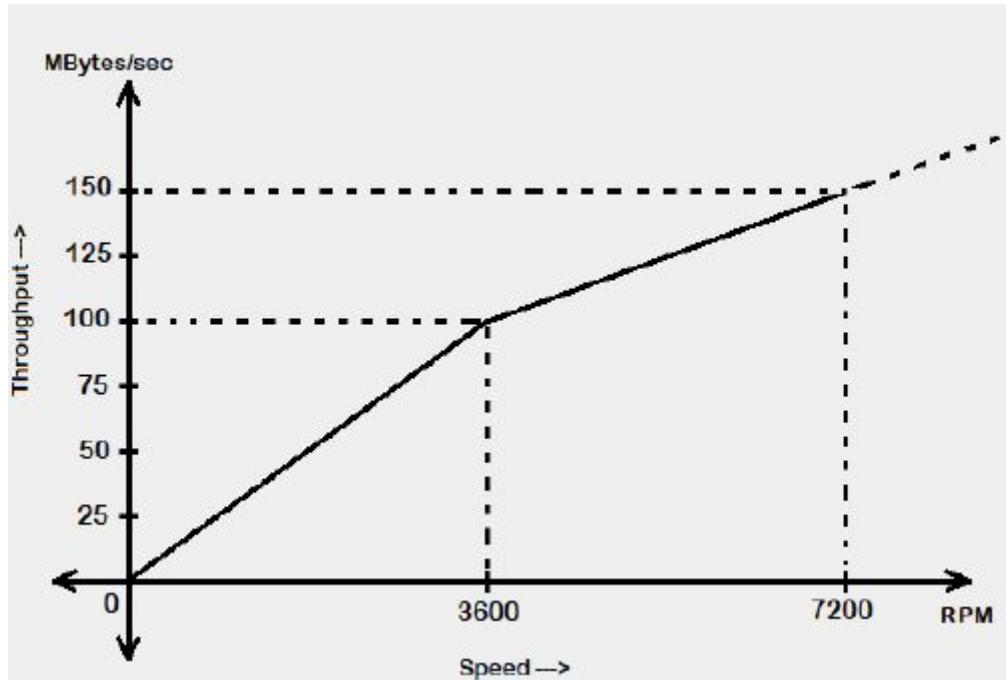

Options :

6406531176535. ✘ 3600 RPM

6406531176536. ✘ 7200 RPM

6406531176537. ✘ 16,200 RPM

6406531176538. ✓ 28,800 RPM

Question Number : 218 Question Id : 640653354786 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following Flask app and an HTML file.

Flask app: app.py

```
from flask import Flask, render_template, request
app = Flask(__name__)
users = {
    '3':{'name': 'Ram', 'Designation': 'Teacher'},
    '2':{'name': 'Dilip', 'Designation': 'student'},
    '5':{'name': 'Sonu', 'Designation': 'computer operator'},
    '1':{'name': 'Guru', 'Designation': 'clerk'}
}
@app.route('/')
def country():
    id = request.args.get('id')
    authenticated_users_id = [3, 2, 5]
    user = users.get(id)
    name = user.get('name') if user is not None else None
    Designation = user.get('Designation') if user is not None else
None
    user = {'is_authenticated': False, 'name': name, 'Designation':
Designation}
    if int(id) in authenticated_users_id:
        user['is_authenticated'] = True
        return render_template('index.html', data = user)
    if int(id) not in authenticated_users_id:
        user['is_authenticated'] = False
        return render_template('index.html', data = user)

app.run(debug = True)
```

HTML File: index.html

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Document</title>
  </head>
  <body>
    {% if data.name == None %}
      User not found
    {% elif data.is_authenticated == True %}
      Hello {{data.name}} you can enter into this site:
    {{data.Designation}}
    {% else %}
      Hello {{data.name}} you have no access to this site:
    {{data.Designation}}
    {% endif %}
  </body>
</html>
```

Suppose the application is running locally on the 'http://127.0.0.1:5000', then what will be rendered by the browser for 'http://127.0.0.1:5000/?id=5', http://127.0.0.1:5000/?id=1' and 'http://127.0.0.1:5000/?id=4' respectively?

Options :

6406531176583. ✓ Hello Sonu you can enter into this site: computer operator
Hello Guru you have no access to this site: clerk

User not found

6406531176584. ✖ Hello Ram you can enter into this site: Teacher

Hello Guru you have no access to this site: Student

Hello Sonu you can enter into this site: computer operator

6406531176585. ✖ User not found

Hello Dilip you have no access to this site: Student

Hello Sonu you can enter into this site: computer operator

6406531176586. ✖ Hello Ram you can enter into this site: Teacher

Hello Dilip you have no access to this site: Student

User not found

Question Number : 219 Question Id : 640653354787 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following Python code snippet.

```
from jinja2 import Template

temp = """{% set numbers = studs | map(attribute = "mark") | list %}
          {{numbers | min}} {{numbers | max}}"""

studs = [
    {"stud_name": "Reeta", "mark": "92"}, 
    {"stud_name": "Veena", "mark": "88"}, 
    {"stud_name": "Meena", "mark": "62"}, 
    {"stud_name": "uma", "mark": "98"}]
]

t1 = """{% for i in studs -%}
          {{i}}
      {- endfor%}"""

output = Template(temp)
out = Template(t1)
print(output.render(studs = studs))
print(out.render(studs = studs))
```

What will be the output of the above program?

Options :

6406531176587. ✘ 98 62

{'stud_name': 'Reeta', 'mark': '92'}

{'stud_name': 'Veena', 'mark': '88'}

{'stud_name': 'Meena', 'mark': '62'}

{'stud_name': 'uma', 'mark': '98'}

6406531176588. ✓ 62 98

{'stud_name': 'Reeta', 'mark': '92'}{'stud_name': 'Veena', 'mark': '88'}{'stud_name': 'Meena', 'mark': '62'}{'stud_name': 'uma', 'mark': '98'}

6406531176589. ✘ 62 98

{'stud_name': 'uma', 'mark': '92'}

{'stud_name': 'Meena', 'mark': '88'}

{'stud_name': 'Veena', 'mark': '62'}

{'stud_name': 'Reeta', 'mark': '98'}

6406531176590. ✘ 98 62

{'stud_name': 'uma', 'mark': '92'}{'stud_name': 'Meena', 'mark': '88'}{'stud_name': 'Veena', 'mark': '62'}{'stud_name': 'Reeta', 'mark': '98'}

Question Number : 220 Question Id : 640653354790 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following table “newtable” in SQLite database.

ID	Name	Age	Mark	course
Filter	Filter	Filter	Filter	Filter
1	Vishnu	20	98	M1
2	Kumar	18	90	M2
3	Leela	20	90	M1
4	Naren	18	98	M2
5	Vishal	19	95	M1
6	Pranav	20	95	M2
7	Vinu	19	90	M1
8	Viki	18	95	M2

What will be the output of the following SQL queries given below?

```
CREATE UNIQUE INDEX IF NOT EXISTS index_name
ON newtable (Name ASC, Mark ASC) WHERE Age>18;
SELECT ID, Name, Age, Mark, course FROM newtable WHERE Age>18;
```

Options :

index_name will be created

ID	Name	Age	Mark	course
2	Kumar	18	90	M2
4	Naren	18	98	M2
8	Viki	18	95	M2

6406531176599. ✘

index_name will be created

ID	Name	Age	Mark	course
3	Leela	20	90	M1
6	Pranav	20	95	M2
7	Vinu	19	90	M1
5	Vishal	19	95	M1
1	Vishnu	20	98	M1

6406531176600. ✓

6406531176601. ✘

index_name will not be created

ID	Name	Age	Mark	course
2	Kumar	18	90	M2
4	Naren	18	98	M2
8	Viki	18	95	M2
3	Leela	20	90	M1
6	Pranav	20	95	M2
7	Vinu	19	90	M1
5	Vishal	19	95	M1
1	Vishnu	20	98	M1

index_name will not be created

ID	Name	Age	Mark	course
1	Vishnu	20	98	M1
2	Kumar	18	90	M2
3	Leela	20	90	M1
4	Naren	18	98	M2

6406531176602. ✘

Question Number : 221 Question Id : 640653354792 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following Python snippet.

```

@app.route("/search", methods = ["GET"])
def search():
    q= request.args.get('q')
    query = "%" +q+ "%"
    results = Details.query.filter(Details.Content.like(query)).all()
    Return render template("result.html", q=q, Details = results)

```

File : result.html

```

{% for item in results %}
    {{item["Title"]}}
{% endfor %}

```

SQLite table: details

ID	Title	Content
1	Introduction	Java is a powerful general-purpose ...
2	learn python	Python is a powerful general-purpose ...
3	Basics	Java works on different platforms (Windo
4	Code	Python is currently the most widely used

If the flask application is running locally on URL: <http://127.0.0.1:5000>, what will be rendered by the web browser for URL <http://127.0.0.1:5000/search/q=Java>?

Options :

6406531176607. ✖ Introduction

Code

6406531176608. ✖ Java is a powerful general purpose ...

Java works on different platforms(windows)

6406531176609. ✖ Introduction - Java is a powerful general purpose ...

learn python - Python is a powerful general purpose ...

Basics - Java works on different platforms(windows)

6406531176610. ✓ Introduction

Basics

Sub-Section Number : 8

Sub-Section Id : 64065351292

Question Shuffling Allowed : Yes

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4.5

Question Label : Multiple Select Question

Consider the HTML code given below.

HTML file: index.html

```
<!DOCTYPE html>
<html lang="en">
<head>
</head>
<body>
<h1>
    <h1>CSS Selectors</h1>
</h1>
<div>
    <h2 id="header-id1" class="header-class">Hi, Folks!</h2>
    <p id="paragraph-id1" class="paragraph-class">Welcome to IITM.</p>
    <a href="https://iitm.ac.in">
        IIT Bsc Degree Website</a>
    <p class="class1 class2">We are launching World's first online
degree course.</p>
</div>
<div>
    <h2 id="header-id2">Have you enrolled to the program?</h2>
    <p id="paragraph-id2">If not, enroll now!</p>
    <a href="https://mywebsite.com
        ">Link to Enroll</a>
    <p class="class2 class3">Happy Learning!</p>
</div>
</body>
</html>
```

CSS Selectors

Hi, Folks!

Welcome to IITM.

[IIT Bsc Degree Website](https://iitm.ac.in)

We are launching World's first online degree course.

Have you enrolled to the program?

If not, enroll now!

[Link to Enroll](https://mywebsite.com)

Happy Learning!

To obtain the output as given in figure above, which of the following snippets of CSS code must be used?

Options :

```
<style>
    #header-id1, #header-id2, #header-id3
    {
        color: red;
    }
    .header-class{
        color:blue;
    }
    .paragraph-class{
        color:purple;
    }
    p.class2{
        color:green;
    }
</style>
```

6406531176547. ❌

```
<style>
    #header-id1, #header-id2, #header-id3
    {
        color: red;
    }
    .header-class{
        color:blue;
    }
    p.class2{
        color:green;
    }
    #paragraph-id1, #paragraph-id2{
        color:purple;
    }
</style>
```

6406531176548. ✓

6406531176549. ❌

```
<style>
    h2{
        color: red;
    }
    .header-class{
        color:blue;
    }
    p.class3{
        color:green;
    }
    #paragraph-id{
        color:purple;
    }
</style>
```

```
<style>
    h2{
        color: blue;
    }
    h2{
        color: red;
    }
    #paragraph-id1, #paragraph-id2{
        color:purple;
    }
    p.class2{
        color:green;
    }
</style>
```

6406531176550. ✓

Sub-Section Number : 9

Sub-Section Id : 64065351293

Question Shuffling Allowed : No

Question Id : 640653354764 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (223 to 224)

Question Label : Comprehension

Consider the following model classes “State” and “City” corresponding to tables “state” and “city”

respectively in the SQLite database.

```
class State(db.Model):
    state_id = db.Column(db.Integer(), primary_key = True)
    state_name = db.Column(db.String(50), nullable = False)
    cities = db.relationship("City", backref = "stateof")

class City(db.Model):
    city_id = db.Column(db.Integer(), primary_key = True)
    city_name = db.Column(db.String(50), nullable = False)
    state = db.Column(db.Integer(), db.ForeignKey("state.state_id"))
```

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 223 Question Id : 640653354765 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

If an object “s1” that represents an existing record in the table “state” is defined as s1 = State.query.get(1),

The correct way(s) to add a city with the name “Chennai” that belongs to s1 using the Python console is.

Options :

```
>>> c1 = City(city_name = "Chennai", state = s1)
>>> db.session.add(c1)
>>> db.session.commit()
```

6406531176506. *

```
>>> c1 = City(city_name = "Chennai", state = 1)
>>> db.session.add(c1)
>>> db.session.commit()
```

6406531176507. ✓

6406531176508. ✓

```
>>> c1 = City(city_name = "Chennai", stateof = s1)
>>> db.session.add(c1)
>>> db.session.commit()
```

```
>>> c1 = City(city_name = "Chennai", stateof = 1)
>>> db.session.add(c1)
>>> db.session.commit()
```

6406531176509. ✖

Question Number : 224 Question Id : 640653354766 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

If "s1" and "c1" are existing objects in the tables "state" and "city" respectively where:

```
s1 = State.query.filter_by(state_name = "Maharashtra").first()
```

and

```
c1 = City.query.filter_by(city_name = "Mumbai").first()
```

Which of the following statements is/are correct?

Options :

6406531176510. ✖ The input s1.cities on Python console will return a single object

6406531176511. ✓ The input s1.cities on Python console will return a list of object(s)

6406531176512. ✓ The input c1.state on Python console will return a single object

6406531176513. ✖ The input c1.state on Python console will return a list of object(s)

Question Id : 640653354769 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (225 to 226)

Question Label : Comprehension

Consider the following resource API for the employee information given below and answer the given subquestions.

```
from flask import Flask
from flask_restful import Resource, Api, reqparse, fields,
marshal_with

app = Flask('__main__')
api = Api(app)

parser = reqparse.RequestParser()
parser.add_argument("first_name")
parser.add_argument("last_name")
parser.add_argument("role")
parser.add_argument("salary", type=int, help='Salary must be an
integer')

out_fields_1 = {"first_name": fields.String, "role": fields.String}
out_fields_2 = {"first_name": fields.String, "last_name": fields.String}
out_fields_3 = {"first_name": fields.String, "salary": fields.Integer}

class MyApi(Resource):
    @marshal_with(out_fields_2)
    def get(self):
        info = parser.parse_args()
        return info

    @marshal_with(out_fields_1)
    def post(self):
        info = parser.parse_args()
        return info

    @marshal_with(out_fields_3)
    def put(self):
        info = parser.parse_args()
        return info

api.add_resource(MyApi, '/myinfo')
app.run(debug = True)
```

Sub questions

Question Number : 225 Question Id : 640653354770 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

If the flask application is running locally on URL "<http://127.0.0.1:5000/myinfo>", what will be the output of the following curl request?

```
curl "http://127.0.0.1:5000/myinfo" -X POST -d "{\"first_name\": \"Shrivatsa\", \"last_name\": \"Tandon\", \"role\": \"Analyst\", \"salary\": 50000}" -H "Content-Type: application/json"
```

Options :

```
{  
    "first_name": "Shrivatsa",  
    "last_name": "Tandon"  
}
```

6406531176522. *

```
{  
    "first_name": "Shrivatsa",  
    "salary": 50000  
}
```

6406531176523. *

```
{  
    "first_name": "Shrivatsa",  
    "role": "Analyst"  
}
```

6406531176524. ✓

```
{  
    "first_name": "Shrivatsa",  
    "last_name": "Tandon",  
    "role": "Analyst",  
    "salary": 50000  
}
```

6406531176525. *

Question Number : 226 Question Id : 640653354771 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

If the flask application is running locally on URL "<http://127.0.0.1:5000/myinfo>", what will be the output of the following Python code snippet?

```
import requests

data = {"first_name": "Rajnish",
        "last_name": "Dey",
        "role": "Manager",
        "salary": "10 thousand"}

response = requests.put('http://127.0.0.1:5000/myinfo', data = data)
print(response.json())
```

Options :

{
 'first_name': 'Rajnish',
 'salary': '10 thousand'
}

6406531176526. ✘

{
 'first_name': 'Rajnish',
 'role': 'Manager'
}

6406531176527. ✘

{
 'first_name': 'Rajnish',
 'last_name': 'Dey'
}

6406531176528. ✘

6406531176529. ✓ None of these

App dev2

Section Id :	64065322269
Section Number :	7
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	33
Number of Questions to be attempted :	33
Section Marks :	100
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065351294
Question Shuffling Allowed :	No

Question Number : 227 Question Id : 640653354794 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "DIPLOMA LEVEL: MODERN APPLICATION DEVELOPMENT 2"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531176615. ✓ Yes

6406531176616. ✗ No

Sub-Section Number :

2

Sub-Section Id :	64065351295
Question Shuffling Allowed :	Yes

Question Number : 228 Question Id : 640653354795 Question Type : MSQ Is Question
Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statement(s) is/are true regarding JavaScript language?

Options :

6406531176617. ❌ JavaScript is a low level programming language.

6406531176618. ✓ The “const” keyword can be used to declare objects with block level scope.

6406531176619. ❌ Int, char are some primitive data types in the JavaScript language.

6406531176620. ✓ The JavaScript language supports both the first order and higher order functions.

Question Number : 229 Question Id : 640653354801 Question Type : MSQ Is Question
Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statement(s) is/are false?

Options :

6406531176641. ✓ A web application must implement token based authentication to make the application secure.

6406531176642. ❌ The JAMStack approach separates out the frontend from the backend, and they both can be updated/modified independently without affecting the other.

6406531176643. ❌ It is recommended to avoid the usage of verbs in the API data URLs.

6406531176644. ✓ The idea behind bringing an API is to implement caching.

Question Number : 230 Question Id : 640653354802 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statement(s) is/are true regarding Celery and Redis?

Options :

6406531176645. ❌ A Celery system can only use Redis as the message broker.

6406531176646. ✓ A Celery system may consist of a number of batch jobs.

6406531176647. ✓ A Celery system needs worker(s) to execute tasks.

6406531176648. ❌ All of these

Question Number : 231 Question Id : 640653354810 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statement(s) is/are true regarding webhooks and polling?

Options :

6406531176677. ✓ A webhook uses HTTP protocol.

6406531176678. ✓ The term “polling” generally refers to short polling.

6406531176679. ✓ Webhooks are used for 1 way communication, unlike web sockets.

6406531176680. ❌ In polling, the connection to the server is kept open, until the data is available.

Question Number : 232 Question Id : 640653354811 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statement(s) is/are true regarding cookies?

Options :

6406531176681. ❌ Cookies are stored on the server.

6406531176682. ✓ Cookies are stored on the browser.

6406531176683. ✓ Browser sends the cookies to the origin server automatically in general.

6406531176684. ❌ Client has to include cookies manually with the request, in general.

Question Number : 233 Question Id : 640653354813 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statement(s) is/are true regarding OAuth?

Options :

6406531176689. ✓ It is a protocol to allow access to resources, hosted on a different server, on behalf of a user.

6406531176690. ✓ It is used for authorization.

6406531176691. ❌ It is used for authentication.

6406531176692. ❌ None of these

Question Number : 234 Question Id : 640653354814 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following is true regarding the Closure in JavaScript?

Options :

6406531176693. ❌ Closure is the state of the outer function.

6406531176694. ❌ Closure is the state of a variable.

6406531176695. ✓ Closure is a function along with its lexical environment or surrounding state.

6406531176696. ✓ Closures are created every time a function is created in JavaScript.

Sub-Section Id :

64065351296

Question Shuffling Allowed :

Yes

Question Number : 235 Question Id : 640653354796 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Which of the following shows the correct output if the javascript program written below is executed?

```
const arr = [1, 2, 3, 4, 5, 6, 7, 8]
const arr1 = arr.map(r => r**3)
const arr2 = arr1.filter(r => ((r % 3 == 2) || (r % 4 == 3)))
console.log(arr2)
```

Options :

6406531176621. ❌ [1, 8, 125, 343, 512]

6406531176622. ❌ [8, 27, 64, 343, 512]

6406531176623. ✓ [8, 27, 125, 343, 512]

6406531176624. ❌ None of these

Question Number : 236 Question Id : 640653354799 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<div id = "app">
  <input v-model = "name" @input = "do_something">
  <p> {{age}} </p>
</div>
<script scr = "app.js"></script>
```

app.js:

```
new Vue({
  el : "#app",
  data : {
    name : "#app",
    age : 0,
  },
  mounted () {
    try {
      this.name = localStorage.getItem("name").split(" ")[0];
      this.age = localStorage.getItem("name").split(" ")[1];
    }
    catch {
      this.name = "Default";
      this.age = "Default";
    }
  },
  methods : {
    do_something() {
      localStorage.setItem("name", this.name);
      localStorage.setItem("age", this.age);
    }
  }
})
```

Suppose you open “index.html” file in a browser, and type the text “IIT Madras” in the text box shown (after removing the previous text, if any), and hard refresh the page twice, without clicking anywhere. What will be the value shown in the text box, and the “age” placeholder, respectively?

Options :

6406531176633. ❌ The app will show an error in the console

6406531176634. ❌ Default, Default

6406531176635. ✓ IIT, Madras

6406531176636. ✗ None of these

Question Number : 237 Question Id : 640653354804 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Which of the following statements is false regarding CORS and CSRF?

Options :

6406531176653. ✓ The flask framework enforces CSRF protection by default.

6406531176654. ✗ The CORS mechanism allows a developer to secure a web application from external origins.

6406531176655. ✗ The CORS headers are generally prefixed with the value "Access-Control-Allow".

6406531176656. ✗ An anti CSRF token must be sent with the request, if CSRF protection is enabled.

Question Number : 238 Question Id : 640653354817 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup "index.html" and javascript file "app.js".

index.html:

```
<html>
  <head>
    <style>
      .onstrike {
        color: blue;
      }
    </style>
  </head>
  <body>
    <div id="app">
      <div :class="{onstrike:changeStrike}" id="run">{{run}}</div>
      <button @click="run+=4">Six</button>
      <button @click="run+=3">Four</button>
    </div>
    <script
      src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
    <script src="app.js" type="module"></script>
  </body>
</html>
```

app.js:

```
new Vue({
  el: '#app',
  data: { run: 0 },
  computed: {
    changeStrike() {
      return this.run % 2 === 0 ? true : false
    },
  },
})
```

What will be the color of text rendered inside the div with ID “run”, if the user clicks on the button with text “Six”, 3 times and the button with text “Four”, 4 times?

Options :

6406531176705. ❌ Black

6406531176706. ✓ Blue

6406531176707. ✘ White

6406531176708. ✘ None of these

Question Number : 239 Question Id : 640653354818 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <style>
      .active {
        color: blue;
      }
      .bold {
        font-weight: bold;
      }
    </style>
  </head>
  <body>
    <div id="app">
      <Home class="bold" />
    </div>
  </body>
  <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
  <script src="app.js" type="module"></script>
</html>
```

app.js:

```
Vue.component('Home', {  
  template: `<div class='active'>  
    IITM online degree  
</div>`,  
})  
  
new Vue({  
  el: '#app',  
})
```

What will be the color and font-weight of the text “IITM online degree”?

Options :

6406531176709. ✘ blue, normal

6406531176710. ✘ black, normal

6406531176711. ✓ blue, bold

6406531176712. ✘ black, bold

Question Number : 240 Question Id : 640653354819 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<body>
  <div id="app">
    <template v-for="cont in contributions">
      <div>{{cont.player}}: {{cont.run}}/{{partnerShip}}</div>
    </template>
  </div>
  <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
  <script src="app.js" type="module"></script>
</body>
```

app.js:

```
new Vue({
  el: '#app',
  data: {
    partnerShip: 210,
    contributions: [
      { player: 'Rohit', run: 100 },
      { player: 'Kohli', run: 110 },
    ],
  },
})
```

What will be rendered on the screen?

Options :

6406531176713. ✓ Rohit: 100/210

Kohli: 110/210

6406531176714. ✗ Rohit: 0.48

Kohli: 0.52

6406531176715. ✗ Rohit: 100

Kohli: 110

6406531176716. ✗ None of these

Question Number : 241 Question Id : 640653354821 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<body>
  <div id="app">
    <div>
      <select v-model="collType">
        <option value="all">All</option>
        <option value="typeOne">Type One</option>
        <option value="typeTwo">Type Two</option>
      </select>
    </div>
    <div id="collections">
      <Numbers :numbers="numbers" v-show="collType==='all'">
        <Numbers :numbers="typeOne" v-show="collType==='typeOne'">
          <Numbers :numbers="typeTwo" v-show="collType==='typeTwo'">
        </Numbers>
      </Numbers>
    </div>
    <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
    <script src="app.js" type="module"></script>
  </body>
```

app.js:

```
Vue.component('Numbers', {
  template: `<div>
    <span v-for="num in numbers">
      {{num}}
    </span></div>`,
  props: ['numbers'],
})

new Vue({
  el: '#app',
  data: {
    numbers: [2, 3, 4, 6, 7],
    collType: 'typeOne',
  },
  computed: {
    typeOne() {
      return this.numbers.filter((num) => num % 2 === 0)
    },
    typeTwo() {
      return this.numbers.filter((num) => num % 2 != 0)
    },
  },
})
```

What will be rendered inside the div with ID “collections”, when the user selects the option “Type Two” ?

Options :

6406531176721. ✘ 2 3 4 6 7

6406531176722. ✘ 2 4 6

6406531176723. ✓ 3 7

6406531176724. ✘ None of these

Question Number : 242 Question Id : 640653354822 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<body>
  <div id="app">
    <custom-input v-model="searchText"></custom-input>
    <div id="result">Searching for: {{searchText}}</div>
  </div>
  <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
  <script src="app.js" type="module"></script>
</body>
```

app.js:

```
Vue.component('custom-input', {
  props: ['value'],
  template: `
    <input
      v-bind:value="value"
      v-on:input="$emit('input', $event.target.value)"
    >
  `,
})
new Vue({
  el: '#app',
  data: { searchText: 'type something ...' },
})
```

Suppose the user types “Apple” in the input box (after removing the existing text, if any). What will be rendered inside the div with ID “result”?

Options :

6406531176725. ✘ Searching for:

6406531176726. ✘ Apple

6406531176727. ✘ Searching for: ‘type something ...’

Question Number : 243 Question Id : 640653354823 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<body>
  <div id="app">
    <router-view></router-view>
  </div>
  <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
  <script
src="https://unpkg.com/vue-router@2.0.0/dist/vue-router.js"></script>
  <script src="app.js" type="module"></script>
</body>
```

app.js:

```
const Profile = {
  template: `<div> Welcome {{this.$route.params.name}}</div>`,
}

const Home = {
  template: `<div> This is home page
    <button @click='goToProfile'> Go to profile </button>
  </div>`,
  methods: {
    goToProfile() {
      this.$router.push({ name: 'profile', params: { name: 'narendra' } })
    },
  },
}

const router = new VueRouter({
  routes: [
    { path: '/profile/:name', name: 'profile', component: Profile },
    { path: '/', component: Home },
  ],
})
new Vue({  
  el: '#app',  
  router,  
})
```

Suppose the application is running on '<http://127.0.0.1:8080/>'. If the user visits the application for the first time and clicks on the button "Go to profile", what will be displayed on the screen?

Options :

6406531176729. ✓ Welcome narendra

6406531176730. ✗ Welcome

6406531176731. ✗ narendra

6406531176732. ✗ None of these

Question Number : 244 Question Id : 640653354824 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<body>
  <div id="app">
    <router-view></router-view>
  </div>
  <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
  <script
src="https://unpkg.com/vue-router@2.0.0/dist/vue-router.js"></script>
  <script src="app.js" type="module"></script>
</body>
```

app.js:

```
const Movies = {
  template: `<div><ul>
    <div>Movies</div>
    <router-view />
  </ul></div>`,
}
const Error = {
  template: `<div> Some Error</div>`,
}
const Hindi = {
  template: `<div><ul>
    <li v-for='movie in hindiMovies'>{{movie.name}}</li>
  </ul></div>`,
  data() {
    return {
      movies: [
        { name: 'Soley', language: 'hindi' },
        { name: 'Dexter', language: 'english' },
      ],
    }
  },
  computed: {
    hindiMovies() {
      return this.movies.filter((movie) => {
        return movie.language === 'english'
      })
    },
  },
}
}

const router = new VueRouter({
  routes: [
    {
      path: '/',
      component: Movies,
      children: [
        { path: 'hindi', component: Hindi },
        { path: '*', component: Error },
      ],
    },
  ],
})
new Vue({
  el: '#app',
  router,
})
```

Suppose the application is running on '<http://127.0.0.1:8080/>'. What will be rendered for the URL "<http://127.0.0.1:8080/#/>"?

Options :

6406531176733. ❌ Movies

6406531176734. ✓ Movies

Some Error

6406531176735. ✘ Movies

Soley

6406531176736. ✘ Movies

Dexter

Question Number : 245 Question Id : 640653354826 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<body>
  <div id="app">
    <custom-comp ref="custom" />
  </div>
  <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
  <script src="app.js" type="module"></script>
</body>
```

app.js:

```
Vue.component('custom-comp', {
  data() {
    return { name: 'Rohit Sharma' }
  },
  template: `<div>Welcome {{name}}</div>`,
})
```

```
new Vue({
  el: '#app',
  mounted() {
    this.$refs.custom.name = 'Virat Kohli'
  },
})
```

What will be rendered inside the “custom-comp” component?

Options :

6406531176741. ❌ Welcome Rohit Sharma

6406531176742. ✓ Welcome Virat Kohli

6406531176743. ❌ Welcome

6406531176744. ❌ None of these

Sub-Section Number : 4

Sub-Section Id : 64065351297

Question Shuffling Allowed : Yes

Question Number : 246 Question Id : 640653354797 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following is the correct way to do class binding in Vue (to apply 'classA' on the div element), if the data object in the Vue constructor is defined as below?

```
data : {  
  
    classObj : {  
        classA : true,  
        classB : false  
    },  
  
    classA : true,  
    classB : false,  
}
```

Options :

6406531176625. ✓ <div :class = “{classA : classA, classB : classB}”> </div>

6406531176626. ✗ <div :class = “{classA : ‘classA’, classB : ‘classB’}”> </div>

6406531176627. ✓ <div :class = “classObj”> </div>

6406531176628. ✗ <div :class = “{classObj}”> </div>

Question Number : 247 Question Id : 640653354803 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following statement(s) is/are false?

Options :

6406531176649. ❌ The server sent events is a mechanism for a server to push events, and it must require service workers on the client to function properly.
6406531176650. ✓ In general, a webhook is meant to pull message(s) from an application.
6406531176651. ❌ The usage of a message broker over “point-to-point” communication makes the application scalable.
6406531176652. ✓ There is no difference between webhooks and short polling.

Question Number : 248 Question Id : 640653354806 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following statement(s) is/are true regarding Celery and Redis, assuming a task named “send_email” is defined using 2 approaches given below?

Approach 1: send_email.delay()

Approach 2: send_email.apply_async(countdown = 10)

Options :

6406531176661. ❌ The approach 1 will wait for a user input before dispatching the task to the celery system.
6406531176662. ❌ The approach 2 will dispatch the task to the celery system after waiting for 10 seconds, and start the execution, assuming a worker is available.
6406531176663. ✓ The approach 2 will immediately dispatch the task to the celery system, but start the execution after waiting for 10 seconds, assuming a worker is available.
6406531176664. ✓ The approach 1 will immediately dispatch the task to the celery system, and start the execution, assuming a worker is available.

Question Number : 249 Question Id : 640653354809 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following statement(s) is/are false regarding Vuex and Vue router?

Options :

6406531176673. ✓ In general, an application should have separate Vuex stores for all the components.

6406531176674. ❌ A path defined in the routes array in Vue router can consist of a number of children paths.

6406531176675. ✓ The wildcard (*) should be put at the top of the routes array in the Vue router, so that it matches with all the paths, which are not implemented.

6406531176676. ✓ A Vuex store must be used with all Vue applications.

Question Number : 250 Question Id : 640653354812 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following statement(s) is/are true regarding fetch API?

Options :

6406531176685. ✓ The credentials property of the Request interface allows the user agent to send or receive cookies in cross-origin requests.

6406531176686. ✓ The value "omit" of "credentials" will force the browser not to send cookies with the request.

6406531176687. ✓ The value "include" of "credentials" will allow the browser to send credentials even in cross-origin requests.

6406531176688. ❌ The value "include" of "credentials" will allow the browser to send credentials only for same origin requests.

Sub-Section Number :

5

Sub-Section Id :

64065351298

Question Shuffling Allowed :

Yes

Question Number : 251 Question Id : 640653354798 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Which of the following shows the correct output, if the javascript program written below is executed?

```
new Promise((reject, resolve) => {
    let a = 2 * 4 || 0 / 4;
    let b = 3 * 4 && 0 / 4;

    if (a > b) resolve(a);
    else reject(b);
}).then(d => console.log("Passed:", d))
.catch(e => console.log("Failed:", e))
.finally(d => {
    console.log("About to finish")
    return "Over"
}).then(d => console.log("Finished !!", d))
```

Options :

6406531176629. ✘ Failed: 2

About to finish

Finished !! Over

6406531176630. ✘ Passed: 0

About to finish

Finished !! undefined

6406531176631. ✘ Passed: 0

About to finish

Finished !! Over

6406531176632. ✓ Failed: 8

About to finish

Finished !! undefined

Question Number : 252 Question Id : 640653354800 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Suppose you own a company where you want to hire candidates for an upcoming project on a deputation basis, and you have received a lot of applications. On discussing with your team members, you decided to shortlist the candidates based on the following 2 criteria:

1. The candidate must have at least 3 years of experience
2. The candidate's age must be less than 30 years

Fill in the **code1** & **code2**, which can be used in Vuex Store to update the “shortlisted” state variable with the objects of those candidates who satisfy the above-mentioned criteria. Also, predict the length of the state variable “shortlisted”, after the mutation has completed its execution.

```

const store = new Vuex.Store({
  state : {
    candidates : [
      {
        name : 'sample1',
        age : 28,
        experience : 2.5
      },
      {
        name : 'sample2',
        age : 35,
        experience : 3.5
      },
      {
        name : 'sample3',
        age : 32,
        experience : 3
      },
      {
        name : 'sample4',
        age : 38,
        experience : 2
      },
    ],
    shortlisted : []
  },
  mutations : {
    update_final(state, minimum) {
      for (candidate of state.candidates)
        code2
    }
  },
  actions : {
    send_task : function (context) {
      code1
    }
  }
})

```

Options :

code1: this.\$store.commit("update_final", 2);
 code2: if (candidate.experience >= minimum && candidate.age < 30)
 state.shortlisted.push(candidate)

6406531176637. ✖ Length: 3

```
code1: context.commit("update_final", 2);
code2: if (experience >= minimum && candidate.age < 30)
      state.shortlisted.push(company)
```

6406531176638. ✖ Length: 2

```
code1: this.$store.commit("update_final", 3);
code2: if (experience >= minimum && candidate.age < 30)
      state.shortlisted.push(company)
```

6406531176639. ✖ Length: 3

```
code1: context.commit("update_final", 3);
code2: if (candidate.experience >= minimum && candidate.age < 30)
      state.shortlisted.push(company)
```

6406531176640. ✓ Length: 2

Question Number : 253 Question Id : 640653354805 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following javascript program, and predict the output, if executed.

```
let propA = 10;

const obj1 = {
    propA : 20,
    propB : function () {
        console.log(propA, this.propA)
    }
}

const obj2 = {
    propA : 30,
    propB : function () {

        let func = () => console.log(propA, this.propA)

        func()
    }
}

obj2.propB.call(obj1);
```

Options :

6406531176657. ✘ 10 30

6406531176658. ✓ 10 20

6406531176659. ✘ 10 undefined

6406531176660. ✘ The program will raise an error

Question Number : 254 Question Id : 640653354807 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following javascript program, and predict the output, if executed. Also, predict the minimum time taken (in seconds) to log the value "Executing" on the console.

```
async function some () {  
  
    let promise = await new Promise((res, rej) => {  
        setTimeout(() => res("Execution Started"), 1000)  
    });  
    let a = await promise;  
    let b = a.replace("e", "")  
    return new Promise ((rej, res) => {  
  
        let c = a + "\n" + b;  
        rej(c);  
    })  
}  
some().then(d => console.log(d))  
.catch(e => console.log("Error"))  
console.log("Executing")
```

Options :

6406531176665. ✖ Executing

Execution Started

Excution Started

Time: 2 seconds

6406531176666. ✖ Execution Started

Excution Startd

Executing

Time: 2 seconds

6406531176667. ✓ Executing

Execution Started

Excution Started

Time: 0 seconds

6406531176668. ✖ Execution Started

Excution Started

Executing

Time: 0 seconds

Question Number : 255 Question Id : 640653354815 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following JavaScript program.

```
const p = function (t) {
    return new Promise((resolve, reject) => {
        setTimeout(() => {
            resolve(t)
        }, t * 1000)
    })
}

data = []
asyncFunc = async function () {
    p1 = await p(1)
    p2 = await p(2)
    data.push(p2)
    data.push(p1)
}
asyncFunc()
data.push('Outer')
console.log(data)
```

What will be logged on to the console?

Options :

6406531176697. ❌ ['Outer', 2, 1]

6406531176698. ❌ ['Outer', 1, 2]

6406531176699. ❌ [2, 1, 'Outer']

6406531176700. ✓ ['Outer']

Question Number : 256 Question Id : 640653354816 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<html>
  <head>
    <style>
      .onstrike {
        color: blue;
      }
    </style>
  </head>
  <body>
    <div id="app">
      <div :class="{onstrike:changeStrike}" id="run">{{ run }}</div>
      <button @click="run+=4">Six</button>
      <button @click="run+=3">Four</button>
    </div>
    <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
    <script src="app.js" type="module"></script>
  </body>
</html>
```

app.js:

```
new Vue({
  el: '#app',
  data: { run: 0 },
  computed: {
    changeStrike() {
      return this.run % 2 === 0 ? true : false
    },
  },
})
```

What will be rendered inside the div for ID “run”, if the user clicks on the button with text “Six”, 3 times and the button with text “Four”, 4 times?

Options :

6406531176701. ✓ 24

6406531176702. ✗ 34

6406531176703. ✗ 48

6406531176704. ✗ None of these

Question Number : 257 Question Id : 640653354820 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<body>
  <div id="app">
    <div>
      <select v-model="collType">
        <option value="all">All</option>
        <option value="typeOne">Type One</option>
        <option value="typeTwo">Type Two</option>
      </select>
    </div>
    <div id="collections">
      <Numbers :numbers="numbers" v-show="collType==='all'">
    /></Numbers>
      <Numbers :numbers="typeOne" v-show="collType==='typeOne'">
    /></Numbers>
      <Numbers :numbers="typeTwo" v-show="collType==='typeTwo'">
    /></Numbers>
    </div>
  </div>
  <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
  <script src="app.js" type="module"></script>
</body>
```

app.js:

```
Vue.component('Numbers', {
  template: `<div>
    <span v-for="num in numbers">
      {{num}}
    </span></div>`,
  props: ['numbers'],
})

new Vue({
  el: '#app',
  data: {
    numbers: [2, 3, 4, 6, 7],
    collType: 'typeOne',
  },
  computed: {
    typeOne() {
      return this.numbers.filter((num) => num % 2 === 0)
    },
    typeTwo() {
      return this.numbers.filter((num) => num % 2 != 0)
    },
  },
})
```

What will be rendered inside the div with ID “collections”, when the browser loads the application for the first time?

Options :

6406531176717. ✘ 2 3 4 6 7

6406531176718. ✓ 2 4 6

6406531176719. ✘ 3 7

6406531176720. ✘ None of these

Question Number : 258 Question Id : 640653354825 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following Vue application with markup “index.html” and javascript file “app.js”.

index.html:

```
<body>
  <div id="app">
    <router-view></router-view>    \  \
  </div>
  <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
  <script
src="https://unpkg.com/vue-router@2.0.0/dist/vue-router.js"></script>
  <script src="app.js" type="module"></script>
</body>
```

app.js:

```
const Movies = {
  template: `<div><ul>
    <div>Movies</div>
    <router-view />
  </ul></div>`,
}
const Error = {
  template: `<div> Some Error</div>`,
}
const Hindi = {
  template: `<div><ul>
    <li v-for='movie in hindiMovies'>{{movie.name}}</li>
  </ul></div>`,
  data() {
    return {
      movies: [
        { name: 'Soley', language: 'hindi' },
        { name: 'Dexter', language: 'english' },
      ],
    }
  },
  computed: {
    hindiMovies() {
      return this.movies.filter((movie) => {
        return movie.language === 'english'
      })
    },
  },
}
const router = new VueRouter({
  routes: [
    {
      path: '/',
      component: Movies,
      children: [
        { path: 'hindi', component: Hindi },
        { path: '**', component: Error },
      ],
    },
  ],
})
new Vue({
  el: '#app',
  router,
})
```

What will be rendered inside the router-view component of Movies component for the URL "<http://127.0.0.1:8080/#/hindi>"?

Options :

6406531176737. ✘ Some Error

6406531176738. ✘ Soley

6406531176739. ✓ Dexter

6406531176740. ✘ None of these

Sub-Section Number : 6

Sub-Section Id : 64065351299

Question Shuffling Allowed : Yes

Question Number : 259 Question Id : 640653354808 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following statement(s) is/are correct regarding cookies, local storage, and session storage?

Options :

6406531176669. ✘ The local storage is a browser based persistent storage.

6406531176670. ✘ Cookies are preferred over session or local storage, when the data needs to be sent with every request.

6406531176671. ✘ The cookies can be set from the server as well as using javascript on the client.

6406531176672. ✓ All of these

BDM

Section Id : 64065322270

Section Number : 8

Section type : Online

Mandatory or Optional : Mandatory

Number of Questions : 32

Number of Questions to be attempted : 32

Section Marks : 40

Display Number Panel : Yes

Group All Questions :

No

Enable Mark as Answered Mark for Review and

Yes

Clear Response :

Maximum Instruction Time :

0

Sub-Section Number :

1

Sub-Section Id :

64065351300

Question Shuffling Allowed :

No

Question Number : 260 Question Id : 640653354827 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "DIPLOMA LEVEL: BUSINESS DATA MANAGEMENT"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531176745. ✓ Yes

6406531176746. ✗ No

Sub-Section Number :

2

Sub-Section Id :

64065351301

Question Shuffling Allowed :

Yes


Question Number : 261 Question Id : 640653354839 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Given the below figure on the relationship between price, supply and demand, what are the equilibrium price, shortage price and surplus price respectively?

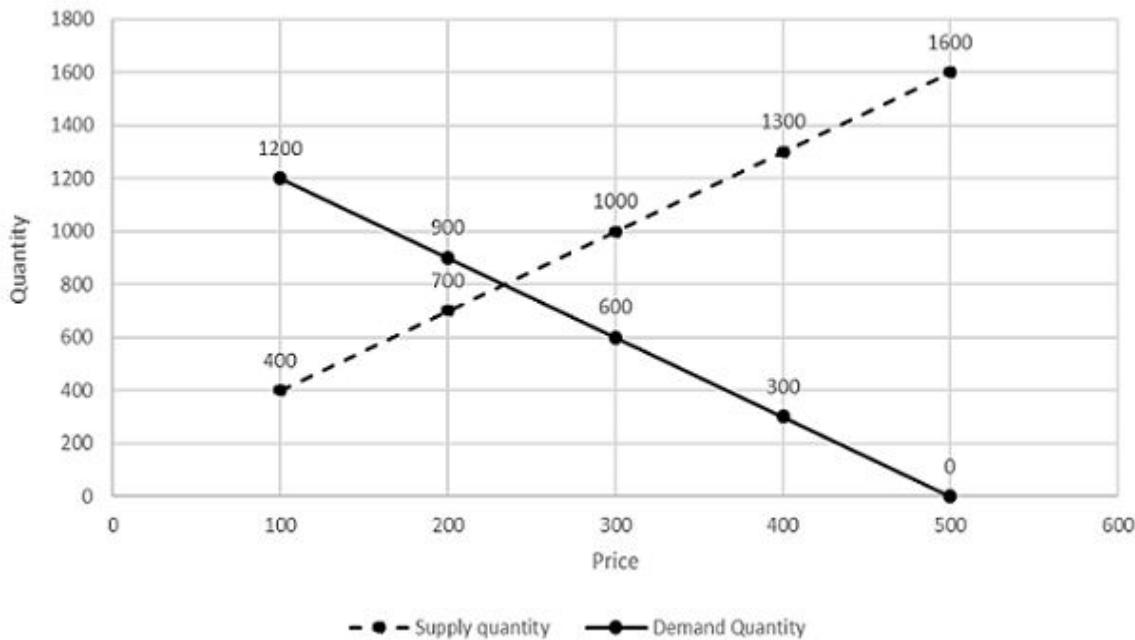

Options :

6406531176765. ❌ Rs. 233, Rs. 250 and Rs.200

6406531176766. ✓ Rs. 233, Rs. 200 and Rs.250

6406531176767. ❌ Rs. 800, Rs. 1000 and Rs. 600

6406531176768. ❌ Rs. 800, Rs. 600 and Rs. 1000

Question Number : 262 Question Id : 640653354840 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following is not a source of survey data?

Options :

6406531176769. ✓ Stock market data

6406531176770. ❌ Market research data

6406531176771. ❌ Consumer pyramid data

6406531176772. ❌ None of these

Question Number : 263 Question Id : 640653354841 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Match the following:

1. Grain grinding	a. Ancillary industry
2. Leather work	b. Consumer good industry
3. Textiles	c. Village industry
4. Manufacturing tractors	d.Cottage industry

Options :

6406531176773. ✓ 1 - c, 2 - d, 3 - b, 4 - a

6406531176774. ✗ 1 - d, 2 - c, 3 - b, 4 - a

6406531176775. ✗ 1 - b, 2 - d, 3 - c, 4 - a

6406531176776. ✗ 1 - a, 2 - d, 3 - c, 4 - b

Question Number : 264 Question Id : 640653354843 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

With the following data, figure out which SKU has the maximum Average Days of Inventory

Stock Keeping Unit	Open Stock in Warehouse	Avg Daily Sales
F01	34.2	14.0
F02	24.1	5.8
F03	19.9	5.1
F04	19.6	3.9

Options :

6406531176781. ✘ F01

6406531176782. ✘ F02

6406531176783. ✘ F03

6406531176784. ✓ F04

Question Number : 265 Question Id : 640653354844 Question Type : MCQ Is Question**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0****Correct Marks : 1**

Question Label : Multiple Choice Question

From the table, calculate the revenue growth on 8th July 2022 with respect to 7th July 2022 and select the closest option given below.

Date	Revenue Generated
01-07-2022	₹ 6,03,880
02-07-2022	₹ 5,72,620
03-07-2022	₹ 5,96,220
04-07-2022	₹ 6,21,660
05-07-2022	₹ 6,39,420
06-07-2022	₹ 6,17,920
07-07-2022	₹ 5,79,140
08-07-2022	₹ 5,80,380
09-07-2022	₹ 6,14,380
10-07-2022	₹ 5,91,360
11-07-2022	₹ 6,20,220
12-07-2022	₹ 5,64,220
13-07-2022	₹ 5,97,820
14-07-2022	₹ 6,05,160
15-07-2022	₹ 5,80,020
Grand Total	₹ 89,84,420

Options :

6406531176785. ✘ 3%

6406531176786. ✘ -3%

6406531176787. ✘ 1%

6406531176788. ✓ 0%

Question Number : 266 Question Id : 640653354845 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Pareto chart does not identify _____.

Options :

6406531176789. ❌ The Products which contribute to all of the company's revenue and sales volumes

6406531176790. ❌ The Products which do not contribute at all towards the revenue and sales

6406531176791. ❌ Company's best performing Products

6406531176792. ✓ Future Trends

Question Number : 267 Question Id : 640653354846 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Match the following.

1	Pareto Principle	a	Current Assets - Current Liabilities
2	Working Capital	b	With the available Open Stock, how many days of demand can be met?
3	Average Days of Inventory Cover	c	80:20 Analysis
4	Backorder	d	Accepting an order that is temporarily out of stock

Options :

6406531176793. ✓ 1: c; 2: a; 3: b; 4: d

6406531176794. ✘ 1: a; 2: c; 3: b; 4: d

6406531176795. ✘ 1: b; 2: c; 3: a; 4: d

6406531176796. ✘ 1: a; 2: b; 3: d; 4: c

Question Number : 268 Question Id : 640653354854 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

When arranging the type of plans in ascending order, their duration of the plan (in terms of Time), Which of the following sequence is more appropriate for low technology and quick set up factory operation?

Options :

6406531176822. ✘ Strategic Plan – Capacity Requirement Plan – Purchase Plan – Production Plan – Shift Operation Plan

6406531176823. ✓ Shift Operation Plan – Production Plan – Purchase Plan – Capacity Requirement Plan – Strategic Plan

6406531176824. ✘ Shift Operation Plan – Production Plan – Purchase Plan – Strategic Plan - Capacity Requirement Plan

6406531176825. ✘ Shift Operation Plan – Purchase Plan – Production Plan – Capacity Requirement Plan – Strategic Plan

Question Number : 269 Question Id : 640653354855 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The graph below indicates which of the following

Production Issue and Order Quantity (Blank-011)



Options :

6406531176826. ✘ Order Quantity is constant between Mar-19 and Jan-20
6406531176827. ✘ Order Quantity follows production issues
6406531176828. ✓ Order Quantity is likely to be influenced by existing inventory
6406531176829. ✘ No meaningful conclusion can be arrived from the graph.

Question Number : 270 Question Id : 640653354856 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Internal Pool Sourcing is_____

Options :

6406531176830. ✘ pooling employees together to form a team
6406531176831. ✓ filling a vacant position from within the organisation
6406531176832. ✘ transferring an employee to the bench once the project is completed
6406531176833. ✘ firing an employee from the project

Question Number : 271 Question Id : 640653354859 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following is typically not a component of the “job description”?

Options :

6406531176842. ❌ Skills required for the job

6406531176843. ❌ Key responsibilities

6406531176844. ❌ job performance indicators

6406531176845. ✓ recruitment process

Question Number : 272 Question Id : 640653354860 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following is not true?

Options :

6406531176846. ✓ appraisal of the candidate is a mandatory input during the recruitment process

6406531176847. ❌ appraisal is the process of evaluating an employee's current and/or past performance against certain predetermined standards

6406531176848. ❌ All organisations have formal or informal means of appraising their employees' performance

6406531176849. ❌ The performance appraisal process will include defining the job, appraising performance and providing feedback

Question Number : 273 Question Id : 640653354861 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0


Correct Marks : 1

Question Label : Multiple Choice Question

The graph below indicates which of the following?

This graph is based on the HR manager's analysis of various job application channels. Please answer based on the graph only.

Weekly application count

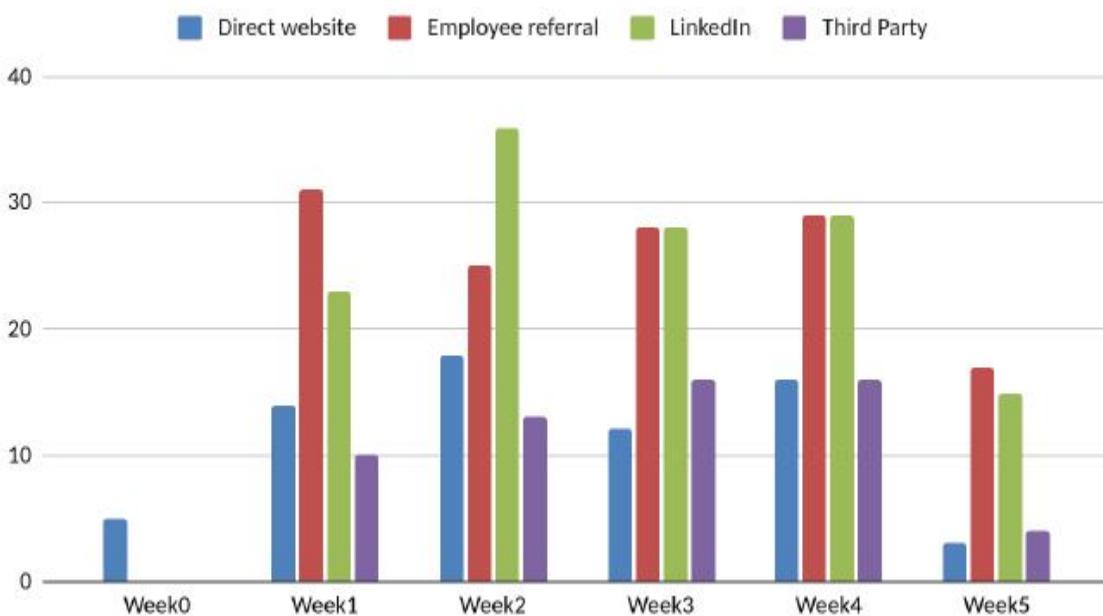

Options :

6406531176850. ❌ Third Party and Direct Website Advertisements contribute to the least application receipt per unit cost.

6406531176851. ❌ Employee Referral is the most preferred channel of application receipt

6406531176852. ❌ The likelihood of a candidate getting selected is higher when he applies through LinkedIn rather than the employer's Direct Website

6406531176853. ✓ LinkedIn fares better than Third Party Sources in application receipt

Question Number : 274 Question Id : 640653354866 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following is not an actionable inference from A/B Testing?

Options :

6406531176866. ❌ Understanding Purchase Behaviors of Customers

6406531176867. ✓ Deciding Stock Keeping Limits of Warehouses

6406531176868. ✗ Promoting specific products

6406531176869. ✗ Making UI/UX changes in the website

Question Number : 275 Question Id : 640653354868 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction


Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The following graph shows the distribution of Funding Instruments used on Mobile Devices by users for various purchases. State whether the following statement is True or False

Statement : *The chart follows the Pareto Principle.*

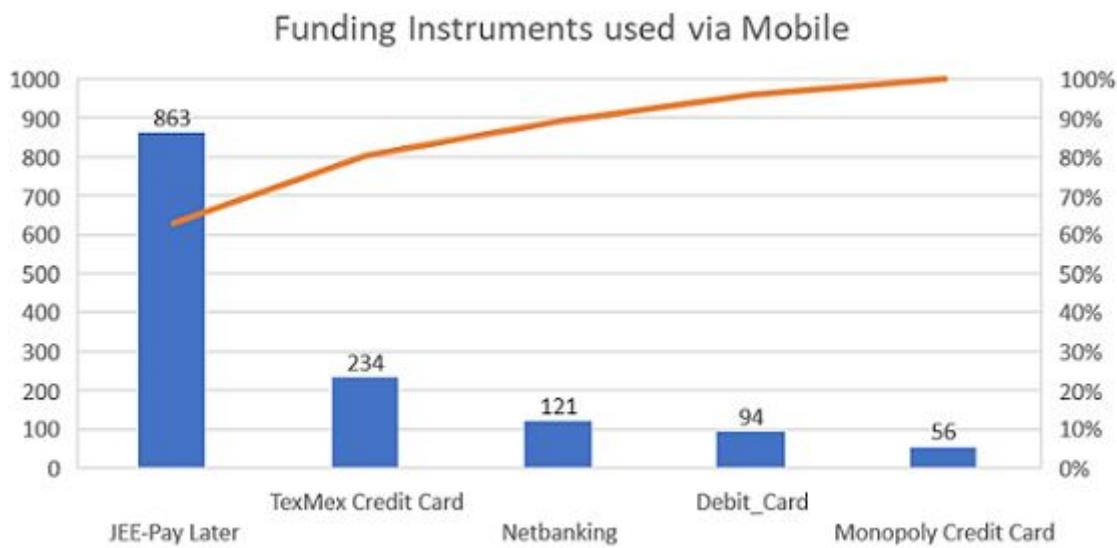

Options :

6406531176874. ✓ FALSE

6406531176875. ✗ TRUE

Question Number : 276 Question Id : 640653354869 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Point out the drawback of BNPL (Buy Now Pay Later) for companies.

Options :

6406531176876. ✘ It increases the level of engagement of customers

6406531176877. ✘ Enables Cash-Strapped millennials to make purchases

6406531176878. ✓ Increases prospects of defaulting by customer

6406531176879. ✘ Shift's user's loyalty away from the competition

Question Number : 277 Question Id : 640653354870 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

If a FinTech company wants to cut down losses, which of the following should they do?

Options :

6406531176880. ✘ Decrease approval cutoff of credit score

6406531176881. ✘ Increase approval limit for loans

6406531176882. ✓ Increase approval cutoff of credit score

6406531176883. ✘ Give more loans

Sub-Section Number : 3

Sub-Section Id : 64065351302

Question Shuffling Allowed : Yes

Question Number : 278 Question Id : 640653354829 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Why is the quick ratio a more rigorous test of short-term solvency than the current ratio? (Choose all that are applicable)

Options :

6406531176748. ✓ The quick ratio considers only cash and marketable securities as current assets
6406531176749. ✗ The quick ratio eliminates prepaid expenses for the numerator
6406531176750. ✗ The quick ratio eliminates prepaid expenses for the denominator
6406531176751. ✓ The quick ratio eliminates inventories from the numerator

Question Number : 279 Question Id : 640653354838 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Which of the following statement(s) is/are true (choose all that is applicable)

Options :

6406531176761. ✓ Cross Price Elasticity and Income Elasticity both measure shift in demand curve
6406531176762. ✗ Cross Price Elasticity and Income Elasticity both measure movement along demand curve
6406531176763. ✗ Cross Price Elasticity measures shift in demand curve and Income Elasticity measure movement along demand curve
6406531176764. ✗ Cross Price Elasticity measure movement along demand curve and Income Elasticity both measure shift in demand curve

Question Number : 280 Question Id : 640653354842 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Which of the following options is/are correct? (Multi-Select)

If you increase the production volume:

Options :

6406531176777. ✓ The capacity utilization is increased
6406531176778. ✗ The capacity utilization is decreased

6406531176779. ❌ ROCE is decreased

6406531176780. ✓ ROCE is increased

Question Number : 281 Question Id : 640653354847 Question Type : MSQ Is Question


Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

From the following Figure and options, which quadrant products will be placed in the secure area?

- Select all that apply

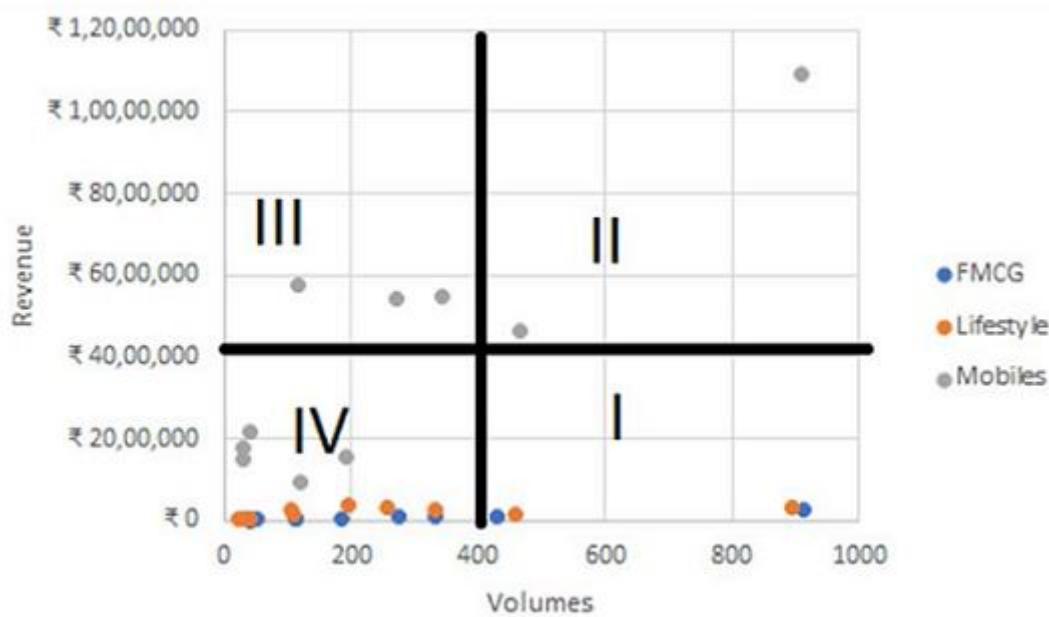

Options :

6406531176797. ❌ I

6406531176798. ✓ II

6406531176799. ✓ III

6406531176800. ❌ IV

Question Number : 282 Question Id : 640653354848 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Increase in which of the following items reduces the Net Margin? Choose all that apply

Options :

6406531176801. ❌ Revenue

6406531176802. ✓ Direct Material Cost

6406531176803. ✓ Direct Labour Cost

6406531176804. ✓ Shipping Cost

6406531176805. ✓ Tax on the Manufactured Product

Question Number : 283 Question Id : 640653354849 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Enterprise Resource Planning (ERP) enables the integration of which of the following domains?

Choose all that apply

Options :

6406531176806. ✓ Sales and Marketing

6406531176807. ✓ Operations

6406531176808. ✓ Human Resources

6406531176809. ✓ Logistics

Question Number : 284 Question Id : 640653354857 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

In which recruiting process(es) would an HR manager be dealing with qualitative (subjective) data?

Choose all that apply

Options :

6406531176834. ✓ resume shortlisting

6406531176835. ✓ job planning

6406531176836. ✗ interview scheduling

6406531176837. ✓ interview

Question Number : 285 Question Id : 640653354858 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Which parameters would be useful during a typical “Resume Shortlisting” exercise? Choose all that apply

Options :

6406531176838. ✓ Last drawn Salary

6406531176839. ✓ Skill set of the Employee

6406531176840. ✓ Years of Work Experience

6406531176841. ✗ Hobbies of the Employee

Question Number : 286 Question Id : 640653354867 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

From a Credit approver’s perspective, who among the following would be allowed to draw a credit for purchases?

Options :

6406531176870. ✓ Person B with High credit score, with low engagement with the platform

6406531176871. ✓ Person C with Average Credit Score, with High Engagement with the platform

6406531176872. ✗ Person A with low credit score with low engagement with the platform

6406531176873. ✗ Person D with maximum number of credit cards with no credit score

Sub-Section Number :

4

Sub-Section Id :

64065351303

Question Shuffling Allowed :

Yes

Question Number : 287 Question Id : 640653354828 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

A straight-line demand curve with slope of -1 intersects the horizontal axis at 100 tons per week At the midpoint of the demand curve (corresponding to 50 tons per week) the price elasticity of demand is __

(Hint: The demand curve is moving from the mid-point to the point on the horizontal axis)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

-1

Sub-Section Number : 5

Sub-Section Id : 64065351304

Question Shuffling Allowed : No

Question Id : 640653354830 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (288 to 289)

Question Label : Comprehension

The data for producing a product is provided in the Table below Using this information, answer the given subquestions

Total Fixed cost (Rs.)	Variable cost per unit (Rs./ unit)	Number of units produced (units)
15	0	0
15	3	10
15	5	14
15	5	19
15	4	21
15	2	32

Sub questions

Question Number : 288 Question Id : 640653354831 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is the point (in terms of number of units to be produced in the given table) where the production should be located?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

32

Question Number : 289 Question Id : 640653354832 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Why do you choose the previous point (choose all that is applicable)?

Options :

6406531176753. ✘ Because, fixed cost is constant at all points

6406531176754. ✘ Because it is point where the marginal cost is minimum

6406531176755. ✘ Because it is the point where the profit is maximum

6406531176756. ✓ None of these

Question Id : 640653354850 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (290 to 292)

Question Label : Comprehension

Please answer the given subquestions on the Overall Equipment Effectiveness of fasteners manufacturing.

Hint:

Just in case you forgot the formula

Availability = Run Time / Planned Production Time

Run Time = Planned Production Time – Lost Time

Performance = (Total Count / Run Time) / Ideal Run Rate

Quality = Good Count / Total Count

OEE = Availability × Performance × Quality

Sub questions

Question Number : 290 Question Id : 640653354851 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

In a factory that manufactures fasteners, the bolt manufacturing process went out of control only in terms of the number of scraps produced. Which factor(s) of Overall Equipment Effectiveness (OEE) will be affected?

a) availability, b) performance, c) quality

Options :

6406531176810. ❌ only b

6406531176811. ✓ only c

6406531176812. ✗ b and c

6406531176813. ✗ only a

Question Number : 291 Question Id : 640653354852 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Calculate the OEE of the Bolt Manufacturing Equipment

Parameters	Week 1
Planned Production Hours (PPH)	100
Lost Time (LOT)	16
Designed Gear Output Speed from Equipment (DO) per Hour	60
Total Product Output	4650
Scrap (S)	143

Hint: Choose the closest Answer

Options :

6406531176814. ✗ 0.83

6406531176815. ✓ 0.75

6406531176816. ✗ 0.90

6406531176817. ✗ Insufficient Information

Question Number : 292 Question Id : 640653354853 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

An 8-hour no downtime shift has an OEE of 0.90 performing at its designed speed and produces a total scrap of 90 units. What is the total number of units produced in the shift?

Options :

6406531176818. ✘ 810

6406531176819. ✘ 9000

6406531176820. ✓ 900

6406531176821. ✘ Insufficient Information

Question Id : 640653354862 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (293 to 295)

Question Label : Comprehension

Company HiringSoft wants to recruit Software Engineers for its new project. The hiring manager was tasked with choosing the appropriate hiring channel. The manager collected previous hiring data (provided in the table below) to help narrow down the appropriate channel. All channels advertised for the vacant positions on the same day.

Recruitment Channels	Application Received in 14 days	Application Shortlisted	No. of Candidates appeared for Interview	No. of Candidates Selected	Cost of Advertisement for 14 Days (INR)
Employee Referrals	40	32	24	12	120000
Direct Company Website	60	12	8	2	5000
Social and Professional Media	260	36	16	4	20000
Hiring Portals	220	90	30	6	100000
Print Ads	20	10	8	1	5000

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 293 Question Id : 640653354863 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which channel has the best shortlist success rate? The Shortlist success rate is defined as the shortlisted applications to applications received.

Options :

6406531176854. ❌ Hiring Portals

6406531176855. ❌ Social and Professional Media

6406531176856. ❌ Print Ads

6406531176857. ✓ Employee Referrals

Question Number : 294 Question Id : 640653354864 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

If the hiring manager has to go only with the parameter, cost per candidated selected, which would be the most appropriate channel?

Options :

6406531176858. ✓ Direct Company Website

6406531176859. ❌ Print Ads

6406531176860. ❌ Employee Referrals

6406531176861. ❌ Social and Professional Media

Question Number : 295 Question Id : 640653354865 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which channel has the worst selection success rate? The Selection success rate is defined as the no. of candidates selected to the no. of applications shortlisted.

Options :

6406531176862. ❌ Social and Professional Media

6406531176863. ❌ Print Ads

6406531176864. ✓ Hiring Portals

6406531176865. ❌ Employee Referrals

Sub-Section Number : 6

Sub-Section Id : 64065351305

Question Shuffling Allowed : No

Question Id : 640653354833 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (296 to 299)

Question Label : Comprehension

The below table provides the consolidated values of a company-X's financial performance (ignore all other non-mentioned financial parameters) Using this, answer the given subquestions

Particular	Rs.
Current assets	320000
Current liabilities	140000
Total value of inventory	140000
Fixed expenses	120000
Gross profit earned	130000
Total sales achieved	250000

Sub questions

Question Number : 296 Question Id : 640653354834 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What is the gross profit margin (in %) for company-X (round to two decimal places)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

51 to 53

Question Number : 297 **Question Id :** 640653354835 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 1

Question Label : Short Answer Question

What is the net profit for company-X?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

10000

Question Number : 298 **Question Id :** 640653354836 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 1

Question Label : Short Answer Question

What is the current ratio for company-X (round to two decimal places)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

2.10 to 2.30

Question Number : 299 Question Id : 640653354837 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What is the quick ratio for company-X (round to two decimal places)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

1.10 to 1.30

Business Analytics

Section Id :	64065322271
Section Number :	9
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	18
Number of Questions to be attempted :	18
Section Marks :	55
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1

Sub-Section Id : 64065351306

Question Shuffling Allowed : No

Question Number : 300 Question Id : 640653354871 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "DIPLOMA LEVEL: BUSINESS ANALYTICS"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531176884. ✓ Yes

6406531176885. ✗ No

Sub-Section Number : 2

Sub-Section Id : 64065351307

Question Shuffling Allowed : Yes

Question Number : 301 Question Id : 640653354896 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

A leading European two-wheeler manufacturer is trying to build an ideal scooter for the Indian market. Which of the following tools will help him understand: how important the attributes such as Engine Capacity, LED Lights, Fuel Efficiency, and Smart Connect Technology are to the customers?

Options :

6406531176933. ✗ Data Envelopment Analysis

6406531176934. ✓ Conjoint Analysis

6406531176935. ❌ Chi-Square test

6406531176936. ❌ Both Data Envelopment Analysis & Chi-Square test

Sub-Section Number : 3

Sub-Section Id : 64065351308

Question Shuffling Allowed : Yes

Question Number : 302 Question Id : 640653354887 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Suppose you conduct a chi-squared test of independence on the categorical variables cities and brand preferences at the significance level 0.1. You obtain a p-value of 0.05. What will you conclude?

Options :

6406531176912. ❌ Reject the null hypothesis and conclude that the categorical variables are independent

6406531176913. ✓ Reject the null hypothesis and conclude that the categorical variables are not independent

6406531176914. ❌ Fail to reject the null hypothesis and conclude that the categorical variables are independent

6406531176915. ❌ Fail to reject the null hypothesis and conclude that the categorical variables are not independent

Question Number : 303 Question Id : 640653354893 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

There are 4 business units. Using the DEA, you solve the LP for all the four business units and find the efficiencies for these units. The efficiency is denoted by E. For these units, $E_1 = 0.92$, $E_2 = 0.89$,

E3 = 1, E4 = 0.91. Which of these units are efficient?

Options :

6406531176924. ✘ 1

6406531176925. ✘ 2

6406531176926. ✓ 3

6406531176927. ✘ 4

Question Number : 304 Question Id : 640653354898 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following is not a form of conjoint analysis?

Options :

6406531176941. ✘ Choice based

6406531176942. ✘ Adaptive based

6406531176943. ✘ Full profile

6406531176944. ✓ Selective attribute type

6406531176945. ✘ Menu-based

Question Number : 305 Question Id : 640653354899 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

In a conjoint problem with 4 products and 2 attributes, how many pair-wise preferences are possible?

Options :

6406531176946. ✘ 8

6406531176947. ✓ 6

6406531176948. ✘ 16

6406531176949. ✘ 12

Question Number : 306 Question Id : 640653354900 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Let's say a customer wants to buy a car and has 3 brands to choose from; 2 engine options; and 3 type of gear boxes. How many options will the customer rate or rank for performing the conjoint analysis?

Options :

6406531176950. ✓ 18

6406531176951. ✘ 27

6406531176952. ✘ 54

6406531176953. ✘ 72

Sub-Section Number : 4

Sub-Section Id : 64065351309

Question Shuffling Allowed : Yes

Question Number : 307 Question Id : 640653354878 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Say a data is distributed as "Normal" with a right tail. If it is compared with an "Symmetric Normal" distribution, then which of the following states is/ are true (choose all that is applicable)

Options :

6406531176900. ✘ In a "P-P plot", the data will fall on a line which is indicate at 45-degree to the X-axis

6406531176901. ✓ In a "Q-Q plot", the data will fall on a line which is indicate at 45-degree to the

X-axis

6406531176902. ✓ In a “P-P plot”, the data will not entirely fall on a line which is indicate at 45-degree to the X-axis

6406531176903. ✗ In a “Q-Q plot”, the data will not entirely fall on a line which is indicate at 45-degree to the X-axis

6406531176904. ✗ Cannot use P-P plot or Q-Q plot as the assumed distribution is discrete

Question Number : 308 Question Id : 640653354889 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

There are 7 business units and you are using the DEA to compare them. You solve the LP for business unit 5. You find from the constraint expression that the business unit 3 has obtained an efficiency of 0.8 and the business unit 7 has obtained an efficiency of 0.9 with the optimal weights of business unit 5. Which of the following statements are correct?

Options :

6406531176917. ✓ Business unit 3 may be inefficient

6406531176918. ✗ Business unit 3 will be efficient

6406531176919. ✓ Business unit 7 may be inefficient

6406531176920. ✗ Business unit 7 will be efficient

Question Number : 309 Question Id : 640653354897 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

What is the format of data needed for performing the conjoint analysis using the Statistical or Linear Regression Approach?

Options :

6406531176937. ✓ Consumer Choice Data is Ranking or Ratings

6406531176938. ✖ Consumer Choice Data is Pairwise Comparison

6406531176939. ✖ Value of the attributes are continuous

6406531176940. ✓ Value of the product attributes are categorical

Sub-Section Number : 5

Sub-Section Id : 64065351310

Question Shuffling Allowed : Yes

Question Number : 310 Question Id : 640653354888 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

You have estimated the demand to follow the following relationship: $D(p)=100 - 20*p$. Now, you intend to maximize the revenue $R(p)=D(p)*p$. You find the first derivative of $R(p)$ with respect to p , equate it to 0 and find p^* . What is the value of p^* ?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

2.4 to 2.6

Sub-Section Number : 6

Sub-Section Id : 64065351311

Question Shuffling Allowed : Yes

Question Number : 311 Question Id : 640653354891 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

In a multiple linear regression with 3 explanatory variables, you find that R-squared value is 0.75.

The number of observations is 25. What is the value of adjusted R-squared?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.66 to 0.76

Question Number : 312 **Question Id :** 640653354895 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 3

Question Label : Short Answer Question

You are conducting a multiple linear regression with sales as the dependent variable. Price, quantity and rating score are the independent variables. In the multiple linear regression, you find that the direct effect of price on sales is 0.3, the direct effect of quantity on sales is 0.2 and the direct effect of rating score on sales is 0.4. And, you also know that the effect of price on quantity is 0.2 and the effect of price on rating score is 0.1. What is the total effect of price on sales?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.36 to 0.40

Sub-Section Number : 7

Sub-Section Id : 64065351312

Question Shuffling Allowed : Yes

Question Number : 313 **Question Id :** 640653354894 **Question Type :** MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

You solve the primal of a linear program with maximization objective, three decision variables and two constraints of the less than or equal to type. Non-negativity restrictions apply on the decision variables. After solving the linear program, you find that the first constraint is not binding ($\text{lhs} < \text{rhs}$) and the second constraint is not binding ($\text{lhs} < \text{rhs}$). Which of the following statements are correct?

Options :

6406531176928. ❌ There are three decision variables in the dual

6406531176929. ✓ The dual variable corresponding to the first constraint is zero

6406531176930. ❌ There are four decision variables in the dual

6406531176931. ✓ The dual variable corresponding to the second constraint is zero

Sub-Section Number : 8

Sub-Section Id : 64065351313

Question Shuffling Allowed : Yes

Question Number : 314 Question Id : 640653354890 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

There are 6 business units. There are two outputs and one input under consideration. You are solving the optimization problem for business unit 3 and find that the efficiency is 0.7. You find that the dual variables corresponding to the constraints of business units 4 and 5 are non-zero and the dual variables corresponding to the constraints of other units are zero. The dual variables corresponding to the constraints of business units 4 and 5 are 0.3 and 0.4 respectively. You are given the following table where sales and number of leads are the two outputs.

	Sales	Number of leads
Business unit 4	8500	10
Business unit 5	8200	12

What is the sales in HCU 3?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

8325 to 8335

Question Number : 315 Question Id : 640653354892 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

You are conducting a multiple linear regression with sales as the dependent variable. Price, quantity and rating score are the independent variables. In order to calculate the VIF for the variable quantity, you implement a linear regression with quantity as the dependent variable and other variables as independent variables and obtain R-squared of 0.6. What is the VIF for the variable quantity?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

2.4 to 2.6

Sub-Section Number : 9

Sub-Section Id : 64065351314

Question Shuffling Allowed : No

Question Id : 640653354872 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (316 to 320)

Question Label : Comprehension

Ms. X is working is with the data given in Table-1 below. Using this information answer the given subquestions

Product	Sales of a Product in a City for a given Year								
	City-1 (1990)	City-2 (1990)	City-3 (1990)	City-1 (1991)	City-2 (1991)	City-3 (1991)	City-1 (1992)	City-2 (1992)	City-3 (1992)
A	100	90	250	120	50	120	140	20	500
B	145	300	500	175	250	250	195	230	1000
C	90	180	30	100	110	15	110	95	58
D	130	220	132	140	200	61	150	180	270

Table-1

Sub questions

Question Number : 316 Question Id : 640653354873 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

If X wants visualize how the sales of a product has changed over the years in the different cities, then which visualization would be most appropriate?

Options :

6406531176886. ✓ Line graph for each product's sales over the years for each city

6406531176887. ✗ Line graph for each city's sale over the years for each product

6406531176888. ✗ Line graph for each year's sale for every product in each city

6406531176889. ✗ Pie chart for each product's sales in the year 1992 for each city

6406531176890. ✗ Pie chart for each city's sales in the year 1992

6406531176891. ✗ The given table data with columns re-arranged as specified below

Product	Sales of a Product in a City for a given Year								
	City-1 (1990)	City-1 (1991)	City-1 (1992)	City-2 (1990)	City-2 (1991)	City-2 (1992)	City-3 (1990)	City-3 (1991)	City-3 (1992)

Question Number : 317 Question Id : 640653354874 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

If Ms. X has created the below visualization (Figure-1) for the data of product-A in Table-1. **What is the primary message** that is conveyed through this?

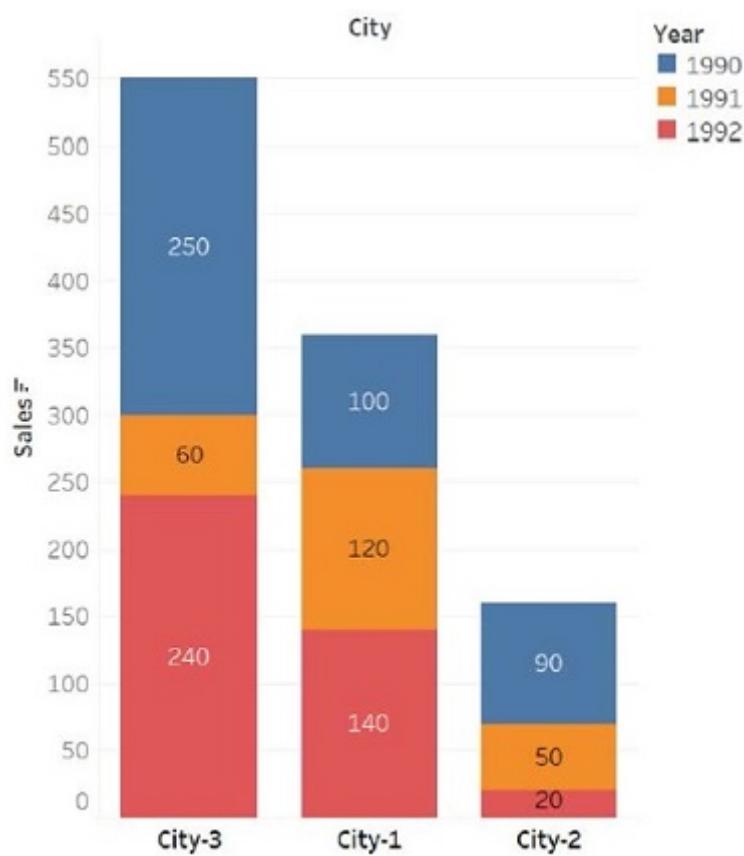


Figure-1

Options :

- 6406531176892. ✘ City-3 has the highest sales for the product-A in the current year
- 6406531176893. ✘ The sales of Product-A is constantly fluctuating over the years
- 6406531176894. ✘ The sales of Product-A is drastically different across cities in any given year
- 6406531176895. ✓ The sales of product-A in city-2 is lowest among all the cities in any given year

6406531176896. ✘ None of these

Question Number : 318 Question Id : 640653354875 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Say you want to see if the distribution of sales of Product-A in the Table-1 follows a uniform distribution within the range of 0 to 300 when split into bins as specified in Table-2. Then what is the expected frequency in any given bin (round your answer to two decimal places)?

Bin Number	Bin Range
Bin-1	Sales value less than or equal to 50
Bin-2	Sales value greater than 50 but less than or equal to 100
Bin-3	Sales value greater than 100 but less than or equal to 150
Bin-4	Sales value greater than 150 but less than or equal to 200
Bin-5	Sales value greater than 200 but less than or equal to 250
Bin-6	Sales value greater than 250 but less than or equal to 300

Table-2

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1.5

Question Number : 319 Question Id : 640653354876 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

If a Chi-Square Goodness-Of-Fit Test to check if the data for Product-A in Table-1 follows a Uniform Distribution with bins as specified in Table-2, then what is the value of the Test statistic (round your answer to two decimal places)?

$$\{ \text{Hint: Chi-square} = \sum_k \frac{(observed_k - Expected_k)^2}{Expected_k} \}$$

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

3.50 to 3.70

Question Number : 320 **Question Id :** 640653354877 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Short Answer Question

A Chi-squared Goodness-Of-Fit test with the bins as specified in Table-2 is going to be carried out to check if the data on sales (whole data in Table-1) is normal or not. Then what is the degrees of freedom for the test?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

3

Question Id : 640653354879 **Question Type :** COMPREHENSION **Sub Question Shuffling**

Allowed : No Group Comprehension Questions : No **Calculator :** None **Response Time :** N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (321 to 327)

Question Label : Comprehension

A logistic model has been fit for a data set with the goal to predict the positive class (Y=1). The confusion matrix obtained for this model on the test dataset is provided in Table-3. Using this, answer the given subquestions

Actual	Predictions	
	1	0
1	11	45
0	77	23

Table-3

Sub questions

Question Number : 321 Question Id : 640653354880 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

How many "True Positives" is the model predicting?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

11

Question Number : 322 Question Id : 640653354881 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

How many “False Positives” is the model predicting?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

77

Question Number : 323 **Question Id :** 640653354882 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 1

Question Label : Short Answer Question

How many “True Negatives” is the model predicting?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

23

Question Number : 324 **Question Id :** 640653354883 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 1

Question Label : Short Answer Question

How many “False Negatives” is the model predicting?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

45

Question Number : 325 **Question Id :** 640653354884 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 1

Question Label : Short Answer Question

What is the accuracy for the model (enter only the numerical value in percentage, without the "%" symbol and round it to two decimal places)?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

21.00 to 22.00

Question Number : 326 **Question Id :** 640653354885 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Short Answer Question

What is the recall for the model when predicting the negative class (enter only the numerical value in percentage, without the "%" symbol and round it to two decimal places)?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

22.80 to 23.20

Question Number : 327 Question Id : 640653354886 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is the precision for the model when predicting the positive class (enter only the numerical value in percentage, without the "%" symbol and round it to two decimal places)?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

12.00 to 13.00

DBMS

Section Id :	64065322272
Section Number :	10
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	26
Number of Questions to be attempted :	26
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and	Yes
Clear Response :	

Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065351315
Question Shuffling Allowed :	No

Question Number : 328 Question Id : 640653354901 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "DIPLOMA LEVEL: DATABASE MANAGEMENT SYSTEMS"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531176954. ✓ Yes

6406531176955. ✗ No

Sub-Section Number :	2
-----------------------------	---

Sub-Section Id :	64065351316
-------------------------	-------------

Question Shuffling Allowed :	Yes
-------------------------------------	-----

Question Number : 329 Question Id : 640653354905 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Consider the relation $R(A, B, C, D, E)$ and the functional dependencies set $\mathcal{F} = \{AD \rightarrow E, B \rightarrow D, BC \rightarrow A, E \rightarrow A, AB \rightarrow C, AC \rightarrow B\}$.

Let $R1(A, B, C, E)$ be the one of the decomposed relation. Find out the number of candidate keys applicable to $R1(A, B, C, E)$.

Options :

6406531176969. ✘ 1

6406531176970. ✓ 2

6406531176971. ✘ 3

6406531176972. ✘ 4

Question Number : 330 Question Id : 640653354910 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

A role **Department_Lead** has the privilege of delete and update on all the tables of the database.

A new role **Employee1** is created, and the following statement is executed.

```
grant Department_Lead to Employee1
```

What privileges will be inherited by **Employee1**?

Options :

6406531176990. ✘ All privileges - select, insert, delete and update

6406531176991. ✘ Only select

6406531176992. ✓ Only delete and update

6406531176993. ✘ Only select and insert

Question Number : 331 Question Id : 640653354911 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Consider the following statements:

Statement 1: In case a transaction is not completely executed due to logical errors, the redo operation is used for transaction rollback.

Statement 2: A transaction T_1 needs to be undone, if it contains the record $\langle T_1, \text{start} \rangle$ and also contains the record $\langle T_1, \text{commit} \rangle$.

Statement 3: A transaction T_1 needs to be redone, if it contains the record $\langle T_1, \text{start} \rangle$, but does not contain the record $\langle T_1, \text{commit} \rangle$.

Statement 4: When a transaction T_1 finishes its last statement successfully, the log record $\langle T_1, \text{commit} \rangle$ is written.

Which among the given statements is/are correct?

Options :

6406531176994. ✘ Only statement 1

6406531176995. ✘ Statement 2 & 3

6406531176996. ✘ Statement 1 & 4

6406531176997. ✓ Only statement 4

Question Number : 332 Question Id : 640653354919 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Consider a relational schema **student**(*roll_no, name, class*).

In order to insert a record in student table, which of the following category of SQL command is used for this purpose?

Options :

6406531177023. ✓ DML

6406531177024. ✘ TCL

6406531177025. ✘ DDL

6406531177026. ✘ DCL

Sub-Section Number : 3

Sub-Section Id : 64065351317

Question Shuffling Allowed : Yes

Question Number : 333 Question Id : 640653354907 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the relation $\text{students}(roll_no, name, course, section, department)$ having functional dependencies

$$\mathcal{F} = \{roll_no \rightarrow name, \\ roll_no \rightarrow section, department \\ course \rightarrow department\}$$

If the relation students is decomposed into $\text{student_dept}(roll_no, course, section, department)$ and $\text{student_info}(roll_no, name)$

Then, choose the appropriate SQL query to create student_dept and student_info tables.

Options :

CREATE TABLE student_dept (roll_no varchar(10), course varchar(10),
section varchar(10), department varchar(10), primary key (roll_no, course))

CREATE TABLE student_info(roll_no varchar(10),

6406531176978. ✘ name varchar(10), primary key (roll_no, name))

CREATE TABLE student_dept (roll_no varchar(10), course varchar(10),
section varchar(10), department varchar(10), primary key (course))

CREATE TABLE student_info(roll_no varchar(10) primary key,

6406531176979. ✘ name varchar(10))

CREATE TABLE student_dept (roll_no varchar(10), course varchar(10),
section varchar(10), department varchar(10), primary key (roll_no))

CREATE TABLE student_info(roll_no varchar(10) primary key,

6406531176980. ✘ name varchar(10))

CREATE TABLE student_dept (roll_no varchar(10), course varchar(10),
section varchar(10), department varchar(10), primary key (roll_no, course))

CREATE TABLE student_info(roll_no varchar(10) primary key,

6406531176981. ✓ name varchar(10))

Question Number : 334 Question Id : 640653354908 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the relation **players**(Name, Team, Coach, Runs) with the data:

Name	Team	Coach	Runs
Sharma	CSK	Steven	99
Sharma	MI	Mahela	50
Sharma	MI	Mahela	99
Sharma	CSK	Steven	50
Khan	RCB	S K Joseph	45
Khan	GT	Matthew	80
Khan	GT	Matthew	45
Khan	RCB	S K Joseph	80

Table 1: players

Check whether the relation **players** is in 4NF or not. If not, then decomposed it into 4NF.

Choose the correct option.

Options :

Name	Runs
Sharma	99
Sharma	50
Khan	45
Khan	80

6406531176982. ✓

Table 2: players1

Name	Team	Coach
Sharma	CSK	Steven
Sharma	MI	Mahela
Khan	RCB	S K Joseph
Khan	GT	Matthew

Table 3: players2

6406531176983. ✗

Name	Team	Runs
Sharma	CSK	99
Sharma	MI	50
Khan	RCB	45
Khan	GT	80

Table 4: players1

Team	Coach
CSK	Steven
MI	Mahela
RCB	S K Joseph
GT	Matthew

Table 5: players2

Name	Team	Runs
Sharma	CSK	99
Sharma	MI	50
Khan	RCB	45
Khan	GT	80

Table 6: players1

Name	Coach	Runs
Sharma	Steven	99
Sharma	Mahela	50
Khan	S K Joseph	80
Khan	Matthew	45

Table 7: players2

6406531176984. *

6406531176985. * The relation players is in 4NF.

Question Number : 335 Question Id : 640653354909 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the given **grocery** table which represents the items purchased while grocery shopping

grocery_item	quantity	value	discount
Cereal	3	450	10
Chips	5	200	5
Milk	2	300	0
Banana	10	350	5
Tomato	5	200	5

Figure 1: grocery

Which among the following query will fetch the output given below?

grocery_item	discount
Cereal	10
Milk	0

Options :

SELECT grocery_item, discount
FROM grocery

6406531176986. ✘ WHERE quantity<=5 ORDER BY value

SELECT grocery_item, discount
FROM grocery

6406531176987. ✘ WHERE quantity>5 ORDER BY discount DESC

SELECT grocery_item, discount
FROM grocery

6406531176988. ✘ WHERE quantity>=5 ORDER BY quantity ASC

SELECT grocery_item, discount
FROM grocery

6406531176989. ✓ WHERE quantity<5 ORDER BY value DESC

Question Number : 336 Question Id : 640653354918 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the following schedule **S** with four transactions T1, T2, T3, T4:

S: R3(A);W4(A);R2(A);W2(A);R4(B);R1(B);

Where, Ri(A) denotes a read operation by transaction Ti on a data item A, Wi(A) denotes a write operation by transaction Ti on a data item A.

What is the possible number of conflict serializable schedule of the above schedule **S**?

Options :

6406531177019. ✓ 4

6406531177020. ✗ 3

6406531177021. ✗ 1

6406531177022. ✗ 0

Question Number : 337 Question Id : 640653354920 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the given relations:



instructor(ID, name, dept_name, salary)


department(dept_name, building, budget)

Identify the most optimized expression tree from the given options that find the name of instructor whose salary is greater than 90000 and department building is 'Palmer'.

Options :

6406531177027. ✓

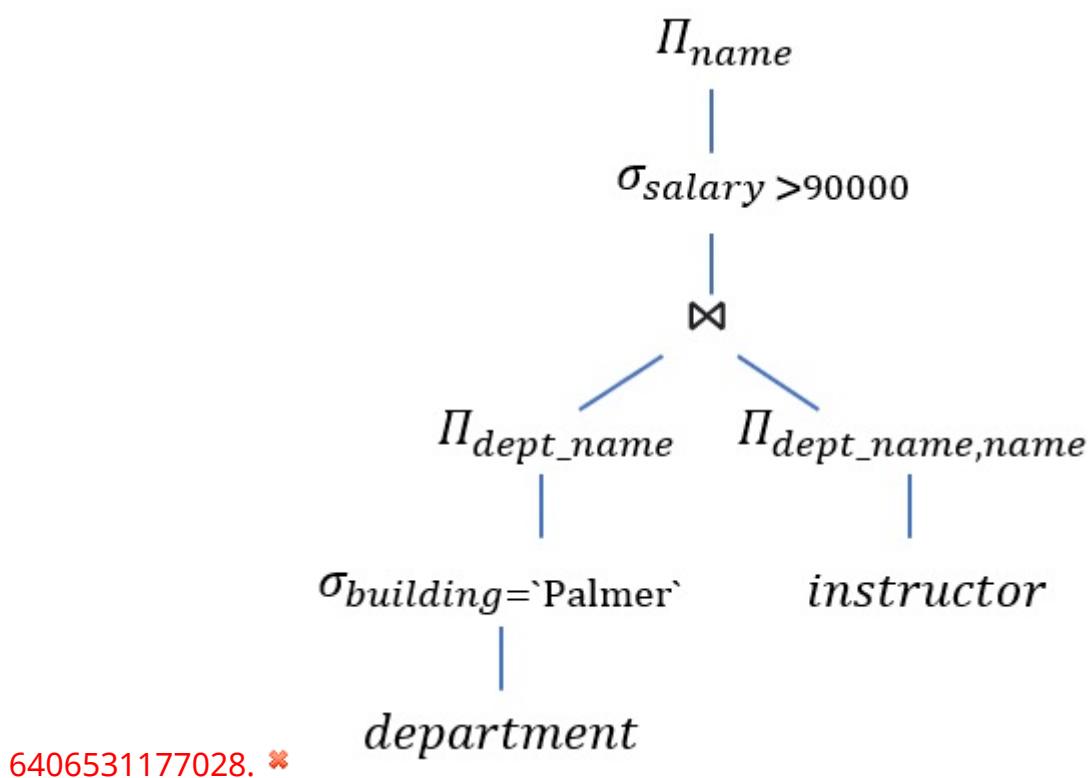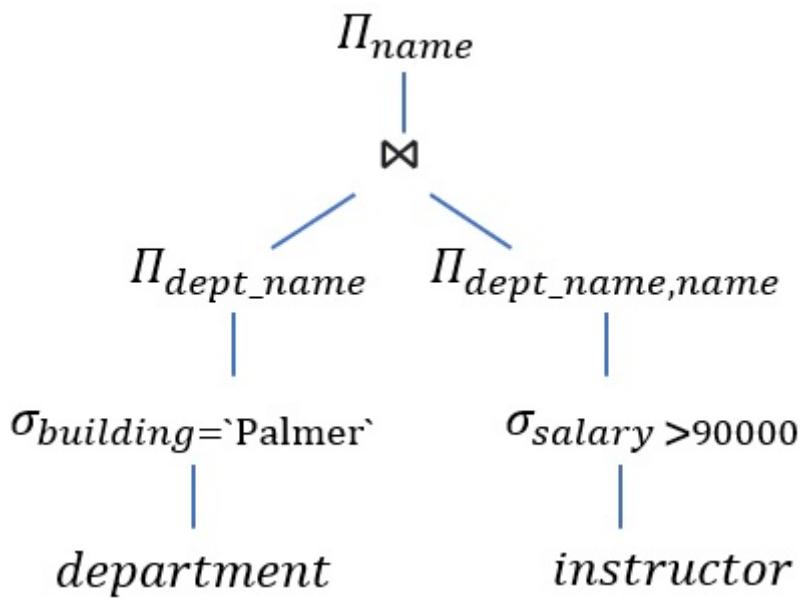

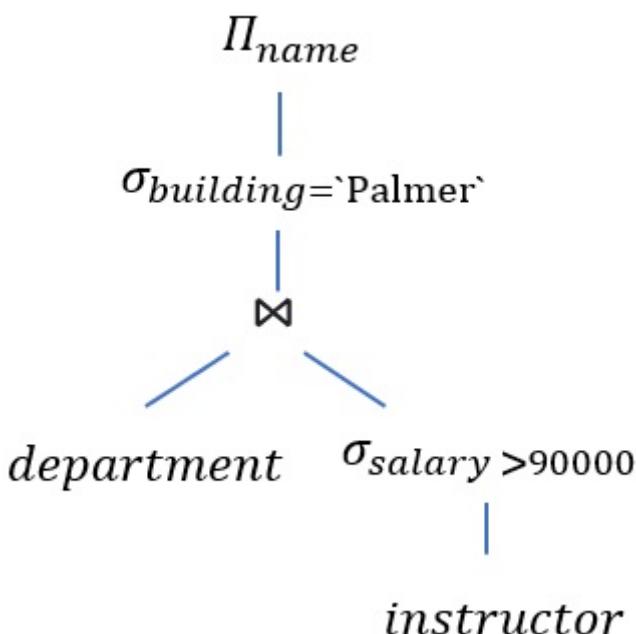

6406531177030. ✘ All of these expression trees are the same.

Question Number : 338 Question Id : 640653354921 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the relation **Car**(*Car_num_plate*, *Engine_num*, *Model*, *Make*, *Fuel_type*).

Construct a bitmap index for relation **Car** on the attribute *Fuel_type*. The number of records in the relation **Car** is **x**. The size of the bitmap index file is 1000 bytes. The attribute *Fuel_type* has 4 different values(i.e., Petrol, Diesel, CNG, Electric). The value of the **x** is

Options :

6406531177031. ✘ 250

6406531177032. ✘ 500

6406531177033. ✘ 1000

6406531177034. ✓ 2000

Question Number : 339 Question Id : 640653354923 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider a primary sparse index on the **instructor table**. The number of records in the instructor relation is 10000. The block size is 512 bytes. The record size is 32 bytes. The size of the search key is 16 bytes and the size of the block pointer is 14 bytes. The number of the blocks in the primary sparse indexing file is

Options :

6406531177036. ✘ 16

6406531177037. ✘ 36

6406531177038. ✓ 37

6406531177039. ✘ 625

Question Number : 340 Question Id : 640653354924 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the **smartphone** relation as shown below:

smartphone(IMEI, brand, color, price)

(Note: IMEI is the unique number of each smartphone.)

Construct a B tree indexing of order 8 using search key as IMEI. If the size of the block is 1024 bytes. IMEI attribute is of varchar datatype and size is 13 bytes. The size of the tree pointer is 64 bytes. The size of the record pointer of a non-leaf node of the B tree is

Options :

6406531177040. ✓ 60 bytes

6406531177041. ✘ 64 bytes

6406531177042. ✘ 73 bytes

6406531177043. ✘ 128 bytes

Sub-Section Number :

4

Sub-Section Id :

64065351318

Question Shuffling Allowed :

Yes

Question Number : 341 Question Id : 640653354902 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3



Question Label : Multiple Choice Question

Consider the following case study:

An IITM Online Degree Project needs a database to store information about instructors (identified by ins_id, name and phone as attributes), courses (identified by cid, cname and credits as attributes), and health information (identified by health_id and checkup_date as attributes). The instructor can work in various courses and courses can have more than one instructor; each course is managed by an instructor and an instructor can manage more than one courses. A health information must be identified uniquely by health_id when the instructor is known. We are not interested in information about a health record once the instructor leaves the organization. Choose the correct ER-Diagram based on the given information.



Options :

6406531176956. ❌

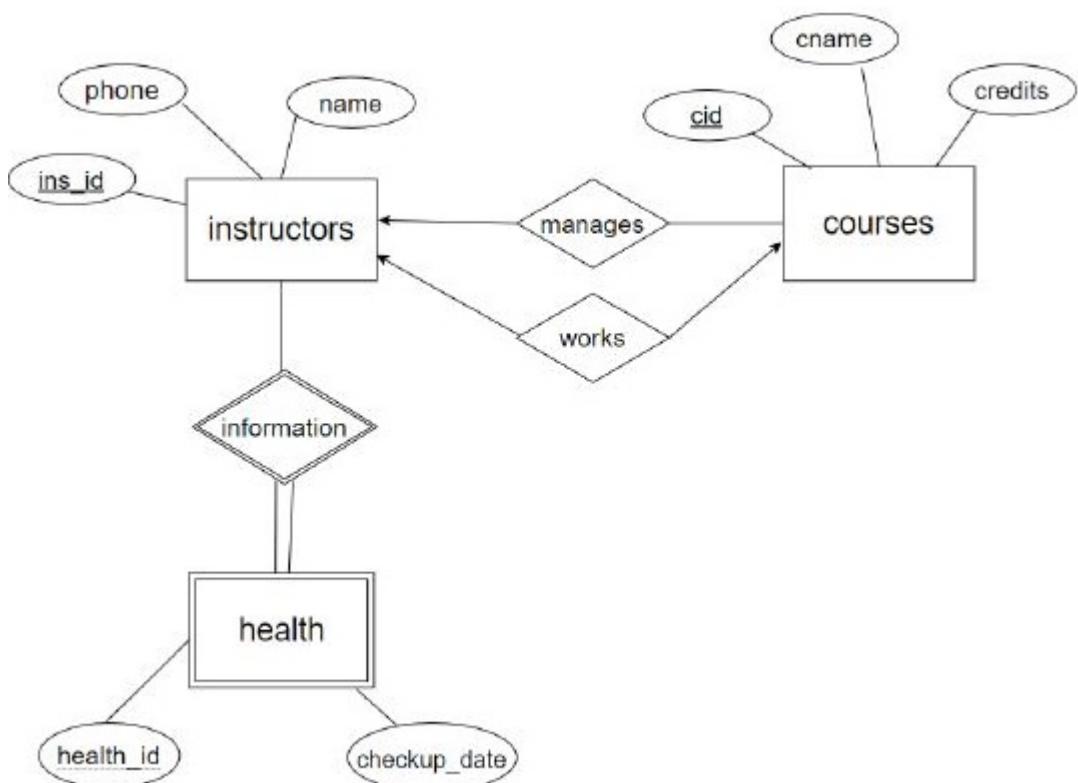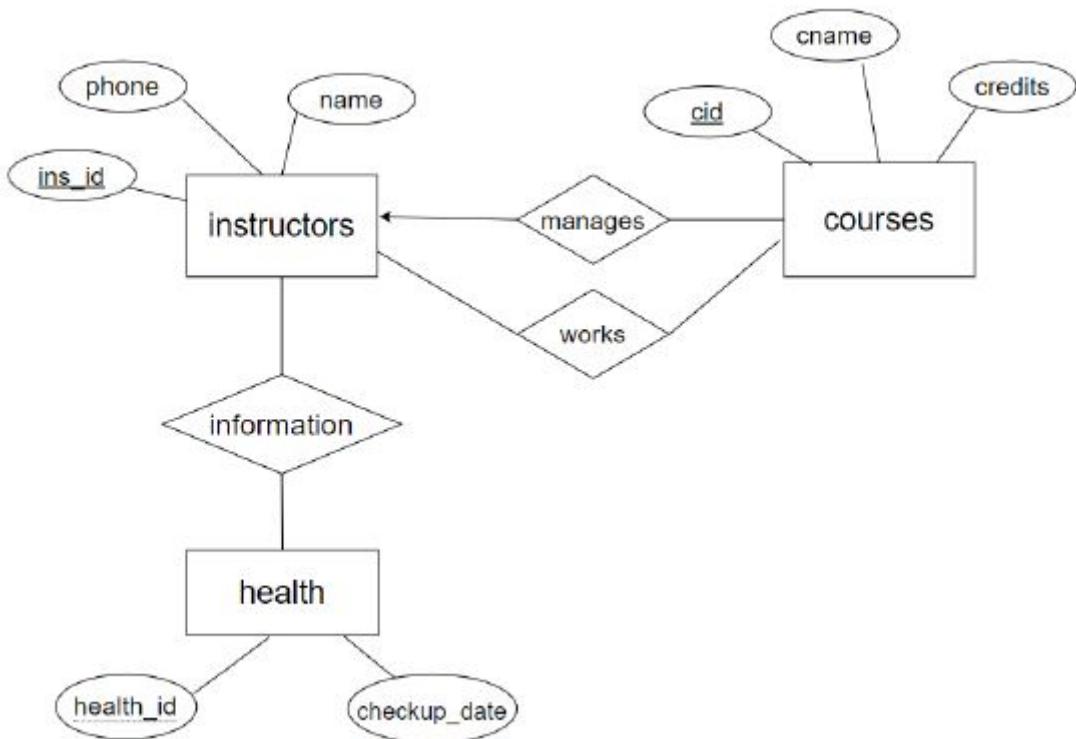

6406531176957. *

6406531176958. ✓

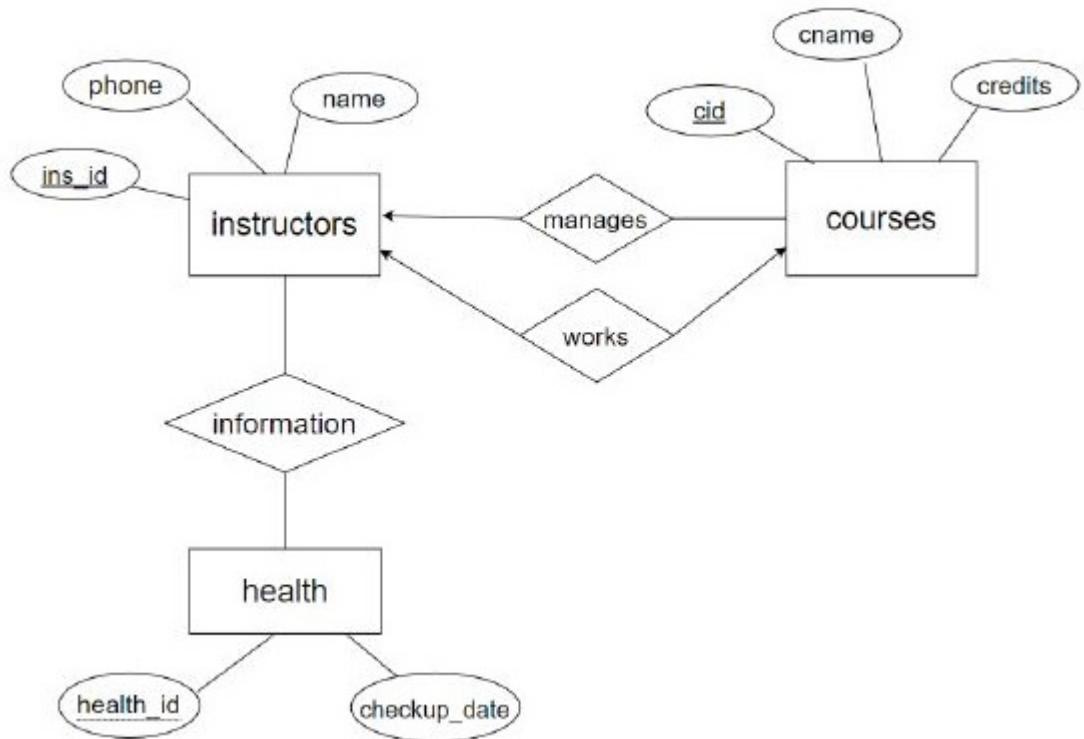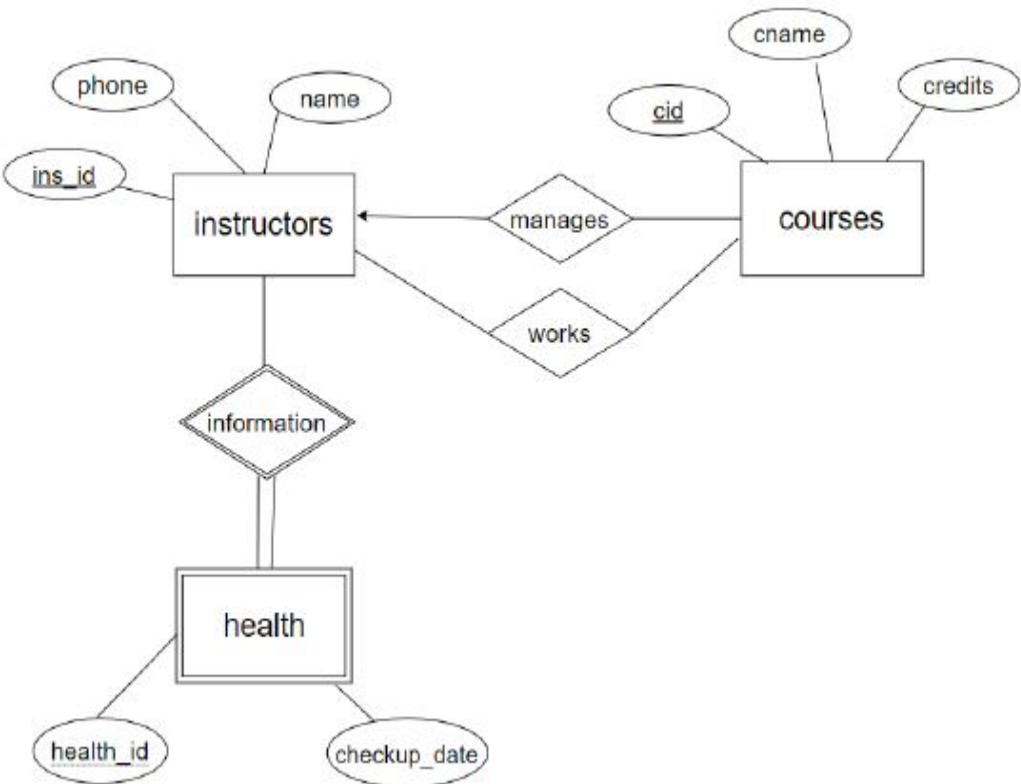

6406531176959. *

Question Number : 342 Question Id : 640653354913 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider a RAID-4 system with 5 disks which stores the following data shown in Figure 3:

Disk-1	Disk-2	Disk-3	Disk-4	Disk-5	
0100	1100	---	0101	1001	Block A
0100	0001	---	0100	0101	Block B
0100	0101	---	0010	0110	Block C

Figure 3: RAID-4 data

According to the figure, Disk-3 has crashed. Identify the correct data present in the three blocks of Disk-3. Also, assuming that the binary values represent 8 bit ASCII code, identify the correct data word present inside the RAID-4 storage system.

Consider the following statements and identify the correct statements.

1. Block A: 0100, Block B: 0110, Block C: 0101
2. Block A: 0100, Block B: 1011, Block C: 0010
3. Block A: 0100, Block B: 0100, Block C: 0101
4. The word is : 'leader'
5. The word is: 'LEADER'

Note:

- Assuming block size is 4 bits.
- Disk-5 is the parity disk.
- The ASCII value of 'A' is 65 and 'a' is 97.

Options :

6406531177002. ✘ Statements 3 & 4

6406531177003. ✘ Statements 2 & 5

6406531177004. ✘ Statements 1 & 4

6406531177005. ✓ Statements 3 & 5

Question Number : 343 Question Id : 640653354915 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the given schedules **S1** and **S2** which performs independent tasks.

T1	T2
	Lock-X(A)
	Write-(A)
	Lock-S(B)
Lock-S(B)	Read-(B)
Read-(B)	Unlock-(B)
	Commit
	Unlock-(A)
Lock-X(A)	
Write-(A)	
Unlock-(A)	
Unlock-(B)	
Commit	

Table 8: Schedule S1

T1	T2
	Lock-S(A)
	Read-(A)
Lock-X(B)	
Read-(B)	
Write-(B)	
commit	
Unlock-(B)	
	Unlock-(A)
	commit

Table 9: Schedule S2

Which among the following statement is correct?

Options :

6406531177010. ✘ Both S1 and S2 follow the rigorous two-phase locking protocol.
6406531177011. ✘ Both S1 and S2 follow the Strict two-phase locking protocol.

6406531177012. ✓ Only S2 follows Strict two-phase locking protocol.

6406531177013. ✗ Only S1 follows Strict two-phase locking protocol.

Question Number : 344 Question Id : 640653354926 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the relation as shown in the table :

customer_name
Akash
Akshay
A
A.K.
Aksh
Ak
Ak.S.
Aks

Table 11: customer

Which of the following SQL statement gives the result given below?

customer_name
Ak.S.
Akash
Aks

Options :

```
SELECT customer_name  
FROM customer  
WHERE customer_name LIKE 'Ak_%'  
ORDER BY customer_name DESC
```

6406531177048. ✗ FETCH FIRST 3 ROWS ONLY

```
SELECT customer_name  
FROM customer  
WHERE customer_name LIKE 'Ak_%'  
ORDER BY customer_name ASC
```

6406531177049. ✓ FETCH FIRST 3 ROWS ONLY

```
SELECT customer_name  
FROM customer  
WHERE customer_name LIKE 'Ak%'  
ORDER BY customer_name ASC
```

6406531177050. ✗ FETCH FIRST 3 ROWS ONLY

```
SELECT customer_name  
FROM customer  
WHERE customer_name LIKE 'A__%'  
ORDER BY customer_name DESC
```

6406531177051. ✗ FETCH FIRST 3 ROWS ONLY

Sub-Section Number : 5

Sub-Section Id : 64065351319

Question Shuffling Allowed : Yes

Question Number : 345 Question Id : 640653354903 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Consider the following relations:

players(pid, name, jersey_no, team_id)

teams(team_id, matches, points)

Choose the correct TRC or DRC expression which is equivalent to the below SQL query.

```
SELECT p.name, t.points  
FROM players p natural join teams t  
WHERE p.jersey_no = 7
```

Options :

{ $x \mid \exists p \in \text{players} \exists t \in \text{teams}(p.\text{team_id} = t.\text{team_id} \wedge p.\text{jersey_no} = 7 \wedge$

6406531176960. ✓ $x.\text{name} = p.\text{name} \wedge x.\text{points} = t.\text{points})\}$

$\{x \mid \exists p \in players \exists t \in teams(p.team_id = t.team_id \wedge p.jersey_no = 7 \wedge x.name \wedge x.points)\}$

6406531176961. ✘

$\{\langle b, o \rangle \mid \exists a, b, c, d (\langle a, b, c, d \rangle \in players \wedge c = 7) \wedge \exists m, n, o (\langle m, n, o \rangle \in teams \wedge d = m)\}$

6406531176962. ✓

$\{\langle b, o \rangle \mid \exists a, b, c, d (\langle a, b, c, d \rangle \in players \wedge c = 7) \wedge \exists m, n, o (\langle m, n, o \rangle \in teams)\}$

6406531176963. ✘

$\{\langle b, o \rangle \mid (\langle a, b, c, d \rangle \in players \wedge c = 7) \wedge (\langle m, n, o \rangle \in teams \wedge d = m)\}$

6406531176964. ✘

Question Number : 346 Question Id : 640653354904 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Choose the correct sets of functional dependencies for the relation $R(A,B,C,D)$ under which R is in 3NF but not in BCNF.

Options :

6406531176965. ✘ $\{AB \rightarrow CD\}$

6406531176966. ✓ $\{AB \rightarrow CD, C \rightarrow A\}$

6406531176967. ✘ $\{AB \rightarrow C, B \rightarrow D, C \rightarrow D\}$

6406531176968. ✘ $\{AB \rightarrow C, C \rightarrow D, AB \rightarrow D\}$

Question Number : 347 Question Id : 640653354906 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Consider the relation $R(A, B, C, D, E, G)$ having the following functional dependencies:

$$\mathcal{F} = \{AB \rightarrow C, AC \rightarrow B, AD \rightarrow E, B \rightarrow D, BC \rightarrow A, E \rightarrow G\}$$

Let decompose the relation R into $R1(BC)$, $R2(ABDE)$ and $R3(EG)$. Check whether the decomposition is lossless or lossy, and if it is lossy, then by adding which of the following functional dependencies, the decomposition will become lossless.

Options :

6406531176973. ✘ The decomposition is lossless.

6406531176974. ✘ $B \rightarrow E$

6406531176975. ✘ $B \rightarrow G$

6406531176976. ✓ $D \rightarrow C$

6406531176977. ✓ $D \rightarrow A$

Question Number : 348 Question Id : 640653354912 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Consider a state of transactions as shown in Figure 2.

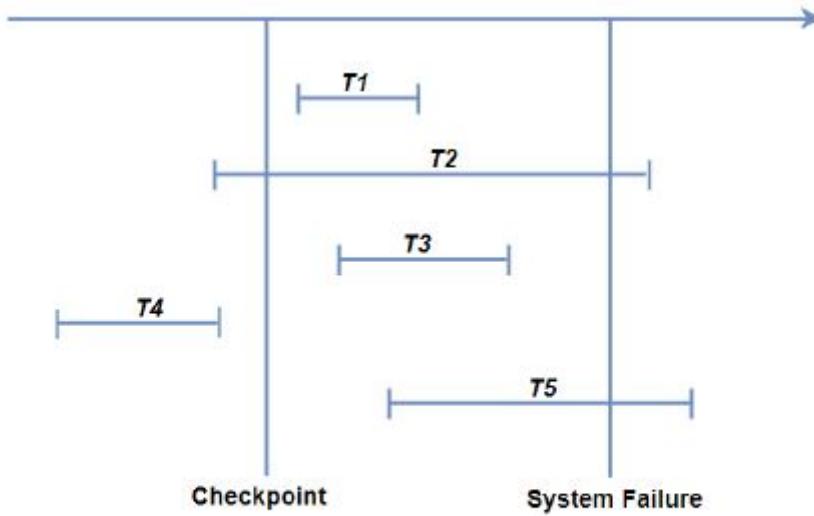


Figure 2: State of Transactions

According to the above figure, which among the following statement(s) is/are incorrect?

Options :

6406531176998. ✘ The transaction T4 can be ignored.

6406531176999. ✘ The transactions that need to be undone are T2 and T5.

6406531177000. ✓ The transactions T1 and T3 can be ignored.

6406531177001. ✘ The transactions that need to be redone are T1 and T3.

Question Number : 349 Question Id : 640653354916 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Consider the following schedule **S** with three transactions T1, T2 and T3:

S: R2(A);W2(A);C2;R3(A);W3(A);C3;R1(B);W1(B);R1(D);C1;

Where Ri(A) denotes a read operation by transaction Ti on a data item X, Wi(A) denotes a write operation by transaction Ti on a data item A, Ci denotes a commit by Ti.

Which among the following statement(s) is/are correct?

Options :

6406531177014. ✓ S is a recoverable schedule.

6406531177015. ✘ S is a non recoverable schedule.

6406531177016. ✓ S is a cascadeless schedule

6406531177017. ✘ S is a cascading rollback

Sub-Section Number : 6

Sub-Section Id : 64065351320

Question Shuffling Allowed : Yes

Question Number : 350 Question Id : 640653354914 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Consider two logs of transaction as shown below, where immediate database modification scheme is used in **Table 1** and deferred database modification scheme is used in **Table 2**.

Steps	Details of log
1	$\langle T_0, \text{start} \rangle$
2	$\langle T_0, P, 750, 400 \rangle$
3	$\langle T_0, Q, 1000, 800 \rangle$
4	$\langle T_1, \text{start} \rangle$
5	$\langle T_1, R, 1500, 1000 \rangle$
6	$\langle T_1, \text{commit} \rangle$

Table 1: Immediate Database Modification Scheme

Steps	Details of log
1	$\langle T_2, \text{start} \rangle$
2	$\langle T_2, A, 1600, 1200 \rangle$
3	$\langle T_2, \text{commit} \rangle$
4	$\langle T_3, \text{start} \rangle$
5	$\langle T_3, B, 1400, 1100 \rangle$
6	$\langle T_3, \text{commit} \rangle$

Table 2: Deferred Database Modification Scheme

In Table 1 & Table 2, if a system crash occurs after the step 6 and the recovery of the system is successfully completed, identify the correct actions from the above diagram.

Options :

6406531177006. ❌ After completion of recovery in immediate database modification scheme, the value of P , Q and R in the buffer will be 750, 1000 and 1000 respectively.

6406531177007. ❌ In Table 1, $\{T_0\}$ needs to be redone and $\{T_1\}$ needs to be undone.

6406531177008. ✓ After completion of recovery in immediate database modification scheme, the value of P , Q and R in the buffer will be 400, 800 and 1500 respectively

6406531177009. ❌ After completion of recovery in deferred database modification scheme, the value of A and B in the buffer will be 1600 and 1400 respectively

Question Number : 351 Question Id : 640653354925 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Consider the following relations:

```
music(music_id, music_name, duration, genre, producer)
singer(singer_id, singer_name, city, country)
music_playback_singer(music_id, singer_id)
```

Choose the correct SQL statement(s) to find names of the music which were produced by producer name 'YourFavMusic.com' but the songs which were not sung by singer 'Lady Jaye'.

Options :

6406531177044. ✓

```
SELECT music_name
FROM music
WHERE producer = 'YourFavMusic.com'
EXCEPT
SELECT music_name
FROM music INNER JOIN music_playback_singer
ON music.music_id = music_playback_singer.music_id
INNER JOIN singer ON singer.singer_id = music_playback_singer.singer_id
WHERE singer.singer_name = 'Lady Jaye'
```

6406531177045. ✗

```
SELECT music_name
FROM music
WHERE producer = 'YourFavMusic.com'
UNION
SELECT music_name
FROM music INNER JOIN music_playback_singer
ON music.music_id = music_playback_singer.music_id
INNER JOIN singer ON singer.singer_id = music_playback_singer.singer_id
WHERE singer.singer_name = 'Lady Jaye'
```

6406531177046. ✓

```
SELECT music_name
FROM music INNER JOIN music_playback_singer
ON music.music_id = music_playback_singer.music_id
INNER JOIN singer ON singer.singer_id = music_playback_singer.singer_id
WHERE music.producer= 'YourFavMusic.com' AND
singer.singer_name != 'Lady Jaye'
```

6406531177047. ✗

```
SELECT music_name
FROM music INNER JOIN music_playback_singer
ON music.music_id = music_playback_singer.music_id
INNER JOIN singer ON singer.singer_id = music_playback_singer.singer_id
WHERE music.producer= 'YourFavMusic.com'
OR singer.singer_name = 'Lady Jaye'
```

Sub-Section Number :	7
Sub-Section Id :	64065351321
Question Shuffling Allowed :	Yes

Question Number : 352 Question Id : 640653354917 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Consider the following schedule **S** with four transactions T1, T2, T3 and T4:

S: R2(B);R1(B);R1(A);W1(A);R3(C);W3(C);R4(B)

The number of serial schedule for given schedule **S** is_____

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

24

Question Number : 353 Question Id : 640653354922 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Construct a binary search tree by inserting the following values in the following order 30, 20, 27, 86, 103, 25, 60, 90, 10, 15. What is the sum of the key values in non-leaf (including root) nodes of the constructed binary search tree?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

276

Java

Section Id : 64065322273

Section Number : 11

Section type : Online

Mandatory or Optional : Mandatory

Number of Questions : 23

Number of Questions to be attempted : 23

Section Marks : 100

Display Number Panel : Yes

Group All Questions : No

Enable Mark as Answered Mark for Review and Clear Response : Yes

Maximum Instruction Time : 0

Sub-Section Number : 1

Sub-Section Id : 64065351322

Question Shuffling Allowed : No

Question Number : 354 **Question Id :** 640653354927 **Question Type :** MCQ **Is Question**

Mandatory : No **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 0

Question Label : Multiple Choice Question

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531177052. ✓ Yes

6406531177053. ✗ No

Sub-Section Number : 2

Sub-Section Id : 64065351323

Question Shuffling Allowed : Yes

Question Number : 355 Question Id : 640653354929 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the Java code given below.

```

class Customer{
    private String name;
    public Customer(String n){
        this.name = n;
    }
    public Customer(Customer c){
        this.name = c.name;
    }
    public void setName(String n){
        name = n;
    }
    public String getName(){
        return name;
    }
}
public class Test{
    public static void main(String[] args){
        Customer c1 = new Customer("Latha");
        Customer c2 = c1;
        Customer c3 = new Customer(c1);
        c1.setName("Geeta");
        System.out.println("c2.name : " + c2.getName());
        System.out.println("c3.name : " + c3.getName());
    }
}

```

What will the output be?

Options :

c2.name : Latha
 6406531177059. ❌ c3.name : Latha

c2.name : Geeta
 6406531177060. ✓ c3.name : Latha

c2.name : Geeta
 6406531177061. ❌ c3.name : Geeta

c2.name : Latha
 6406531177062. ❌ c3.name : Geeta

Question Number : 356 Question Id : 640653354933 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Assume that the file “test.txt” contains the following two lines of text.

M.S Dhoni is a professional Indian cricketer
M.S Dhoni is from jharkhand

Consider the code given below.

```
import java.io.*;
import java.util.*;
public class FileTest {
    public static void main(String[] args) {
        try {
            var in=new FileInputStream("test.txt");
            var sc=new Scanner(in);
            var data=new TreeSet<String>();
            while(sc.hasNext()) {
                data.add(sc.next()+" ");
            }
            for(String str:data)
                System.out.print(str);
        } catch (FileNotFoundException e) {
            System.out.println("File does not exist.");
        }
        catch (IOException e) {
            System.out.println("Error in writing a file.");
        }
    }
}
```

What will the output be?

Options :

6406531177075. ❌ M.S Dhoni is a professional Indian cricketer M.S Dhoni is from jharkhand

6406531177076. ✓ Dhoni Indian M.S a cricketer from is jharkhand professional

6406531177077. ❌ Dhoni Indian M.S a cricketer is professional

6406531177078. ✘ Dhoni M.S from is jharkhand

Question Number : 357 Question Id : 640653354945 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following java code

```
import java.util.stream.*;
public class Main{
    public static void main(String[] args){
        Integer[] a = {11, 8, 20, 13, 6};
        Stream.of(a)
            .map((i) -> i - 8).filter((i) -> i% 2 == 0)
            .forEach((x) -> System.out.println(x));
    }
}
```

What will the output be?

Options :

8

20

6406531177123. ✘ 6

0

6406531177124. ✘ 12

6406531177125. ✘ 12

0

12

6406531177126. ✓ -2

Sub-Section Number :

3

Sub-Section Id :

64065351324

Question Shuffling Allowed :

Yes

Question Number : 358 Question Id : 640653354928 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the Java code given below.

```
import java.util.*;
class Mountain{
    public String getState(String name){
        String answer;
        switch(name){
            case "Kanchenjunga": answer = "Sikkim";
                break;
            case "Nanda Devi":   answer = "Uttarakhand";
                break;
            default:             answer = null;
                break;
        }
        return answer;
    }
}
public class Test{
    public static void main(String[] args){
        Optional<String> op = Optional.ofNullable(new Mountain()
            .getState("Saraswati"));
        op.ifPresent(n->System.out.println(n.toUpperCase()));
    }
}
```

Choose the correct option.

Options :

6406531177054. ✓ This program does not generate any output.

6406531177055. ❌ This program generates a NullPointerException.

This program generates the output:
6406531177056. ❌ NULL

This program generates the output:
6406531177057. ❌ SIKKIM

This program generates the output:
6406531177058. ❌ UTTARAKHAND

Question Number : 359 Question Id : 640653354934 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the Java code given below.

```

import java.io.*;
class Rewards implements Serializable{
    private String r_type="****";
    private transient String code="****";
    private String exp="****";
    public Rewards(String t, String c, String e) {
        r_type = t;
        code = c;
        exp = e;
    }
    public String toString() {
        return "Reward_Type = " + r_type + ", code = " + code + ", exp = " + exp;
    }
}
public class SerialTest{
    public static void main(String[] args) throws Exception{
        var fos = new FileOutputStream("reward.txt");
        var os = new ObjectOutputStream(fos);
        os.writeObject(new Rewards("Fashion", "BXBP0689", "12/08/22"));
        var fis = new FileInputStream("reward.txt");
        var ois = new ObjectInputStream(fis);
        Rewards r = (Rewards)ois.readObject();
        System.out.println(r);
    }
}

```

What will the output be?

Options :

6406531177079. ❌ Reward_Type = Fashion, code = ****, exp = 12/08/22

6406531177080. ✓ Reward_Type = Fashion, code = null, exp = 12/08/22

6406531177081. ❌ Reward_Type = Fashion, code = BXBP0689, exp = 12/08/22

6406531177082. ❌ Reward_Type = null, code = null, exp = null

Question Number : 360 Question Id : 640653354947 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the following java code

```
public class Test{
    public static double compute(int a, int b){
        int c = 0;
        assert a > 0: "a must be > 0";      //assert-1
        assert b > 0: b;                      //assert-2
        c = a / b;
        assert c >= 0: c;                    //assert-3
        return Math.sqrt(c);
    }
    public static void main(String[] args){
        int a = -10;
        int b = 5;
        assert b != 0: "b == 0";            //assert-4
        compute(a, b);
    }
}
```

Identify the first assert statement that throws the `AssertionError` when the class is executed as:

`java -ea Test`

Options :

6406531177131. ✓ assert-1

6406531177132. ✗ assert-2

6406531177133. ✗ assert-3

6406531177134. ✗ assert-4

Sub-Section Number :

4

Sub-Section Id :

64065351325

Question Shuffling Allowed :

Yes

Question Number : 361 Question Id : 640653354931 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider the Java code given below.

```
import java.util.*;
public class MapEx {
    public static void main(String args[]) {

        Map<String, Integer> tmap, lhmap, hmap;

        hmap = new HashMap<String, Integer>();
        hmap.put("Banana", 2);
        hmap.put("Apple", 3);
        hmap.put("Grapes", 7);
        hmap.put("Kiwi", 10);

        lhmap = new LinkedHashMap<String, Integer>();
        tmap = new TreeMap<String, Integer>();

        for(Map.Entry<String, Integer> entry:hmap.entrySet()) {
            tmap.put(entry.getKey(), entry.getValue());
        }

        for(Map.Entry<String, Integer> entry:tmap.entrySet()) {
            lhmap.put(entry.getKey(), entry.getValue());
        }

        System.out.println(hmap);
        System.out.println(tmap);
        System.out.println(lhmap);
    }
}
```

Choose the correct option regarding predicting the order of elements, with respect to the original ordering, in each map object.

Options :

6406531177067. ✶ We cannot predict the order of elements in hmap, tmap or lhmap.

6406531177068. ✘ We can predict the order of elements in hmap and lhmap, but not tmap.

6406531177069. ✓ We can predict the order of elements in tmap and lhmap but not that of hmap.

6406531177070. ✘ We can predict the order of elements in hmap, tmap and lhmap.

Question Number : 362 Question Id : 640653354932 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider the Java code given below.

```
import java.util.*;
import java.util.stream.*;
public class CollectRes {
    public static void main(String[] args) {
        var list = new ArrayList<String>();
        list.add(null);
        list.add("Sonalika");
        list.add(null);
        list.add("Mahindra");
        list.add("Mahindra");
        list.add("John Deere");
        list.add("Escorts");
        list.add("Escorts");
        Stream<String> stream = list.stream();
        //CODE BLOCK
        System.out.println(obj);
    }
}
```

Choose the correct option(s) to fill in place of CODE BLOCK so that the output is:

[Escorts, John Deere, Mahindra, Sonalika]

Options :

```
var obj = list.stream()
    .filter(str -> str != null)
    .limit(4)
    .collect(Collectors.toSet());
```

6406531177071. ✘

```
var obj = list.stream()
    .map(str -> str != null)
    .collect(Collectors.toList());
```

6406531177072. ✘

```
var obj= list.stream()
    .filter(str -> str != null)
    .collect(Collectors.toCollection(TreeSet::new));
```

6406531177073. ✓

```
var obj = list.stream()
    .filter(str -> str != null)
    .limit(4)
    .collect(Collectors.toList());
```

6406531177074. ✘

Question Number : 363 Question Id : 640653354935 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider the Java code given below.

```

interface ClassOne{
    default void show(){
        System.out.println("Inside show of ClassOne");
    }
}
interface ClassTwo extends ClassOne{                                //LINE-1
    default void show(){
        System.out.println("Inside show of ClassTwo");
    }
}
class ClassThree implements ClassTwo {
    public void show(){                                         //LINE-2
        System.out.println("Inside show of ClassThree");
    }
}
public class AbstrInterface {
    public static void main(String[] args) {
        ClassOne ct = new ClassThree();                         //LINE-3
        ct.show();
    }
}

```

Choose the correct option.

Options :

Compilation error at LINE-1, because an interface cannot extend another interface.
6406531177083. ✘

Compilation error at LINE-2, because there is ambiguity in which show() method is being implemented.
6406531177084. ✘

Runtime error, because an object of ClassThree cannot be assigned to a variable of type ClassOne (see LINE-3).
6406531177085. ✘

This program generates the output:
6406531177086. ✓ Inside show of ClassThree

Question Number : 364 Question Id : 640653354936 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider the Java code given below.

```
import java.util.*;
public class QueueTest{
    public static void main(String[] args) {
        PriorityQueue<String> queue1 = new PriorityQueue<String>();
        queue1.add("Ganga");
        queue1.add("Crompton");
        queue1.add("Usha");
        queue1.add("Orient");
        queue1.add("Havells");

        ArrayDeque<String> queue2 = new ArrayDeque<String>();
        while(queue1.size()>0) {
            queue2.addFirst(queue1.poll()); //LINE-1
        }
        System.out.print(queue2);
    }
}
```

Choose the correct option.

Options :

This program generates the output:
[Usha, Orient, Havells, Ganga, Crompton]
6406531177087. ✓

This program generates the output:
[Havells, Orient, Usha, Crompton, Ganga]
6406531177088. ❌

This program generates the output:
6406531177089. ❌ []

6406531177090. ❌ Compilation error at LINE-1

Question Number : 365 Question Id : 640653354937 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider the Java code given below.

```

interface Iterable{
    public boolean has_previous();
    public Object get_previous();
}
class Data{
    private String[] arr = {"Apple", "Banana", "Cipla", "Dog", "Eagle", "Fanta"};
    public Iterable getIterable(int i) {
        return new IterableImpl(i);
    }
    private class IterableImpl implements Iterable{
        private int index;
        public IterableImpl(int i) {
            index = i;
        }
        public boolean has_previous() {
            if (index-2 >= 0 )
                return true;
            return false;
        }
        public String get_previous() {
            index-=2;
            return arr[index];
        }
    }
}
public class IteratorTest{
    public static void main(String[] args) {
        Data d;
        Iterable it;

        d = new Data();
        it=_____ //LINE 1
        while(it.has_previous())
            System.out.println(it.get_previous());

        System.out.println("=====");
        d = new Data();
        it=_____ //LINE 2
        while(it.has_previous())
            System.out.println(it.get_previous());
    }
}

```

Choose the correct option to fill in the blank at LINE 1 and LINE 2 so that the output is:

```

Eagle
Cipla
Apple
=====
Fanta
Dog
Banana

```

Options :

6406531177091. ❌ LINE 1 : d.getIterable(7);
 LINE 2 : d.getIterable(6);

6406531177092. ✓ LINE 1 : d.getIterable(6);
 LINE 2 : d.getIterable(7);

LINE 1 : d.getIterable(5);
LINE 2 : d.getIterable(6);

6406531177093. *

LINE 1 : d.getIterable(6);
LINE 2 : d.getIterable(5);

6406531177094. *

Question Number : 366 Question Id : 640653354942 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider the following java code

```
import java.util.*;
class MiddleElementException extends Exception{
    public String toString(){
        return "middle element cannot be processed";
    }
}
public class Test{
    public static void update(int[] a, int i) throws MiddleElementException{
        if(i == a.length/2){
            throw new MiddleElementException();
        }
        a[i] = a[i] * 2;
    }
    public static void main(String[] args) {
        int[] arr = {4, 5, 6, 7, 8};
        try{
            for(int i = 0; i < arr.length; i++){
                update(arr, i);
            }
        } catch(MiddleElementException e){
            System.out.println(e);
        }
        for(int i = 0; i < arr.length; i++){
            System.out.print(arr[i] + " ");
        }
    }
}
```

What will the output be?

Options :

middle element cannot be processed
6406531177111. ✘ 8 10

6406531177112. ✘ middle element cannot be processed

6406531177113. ✘ 8 10 6 7 8

middle element cannot be processed
8 10 6 7 8
6406531177114. ✓

Question Number : 367 Question Id : 640653354943 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider the following java code

```

class Department implements Cloneable{
    String dname;
    public Department(String n){
        dname = n;
    }
    public Department clone() throws CloneNotSupportedException{
        return (Department)super.clone();
    }
}
class University implements Cloneable{
    String uName;
    Department[] dept;
    public University(String n, Department[] d){
        uName = n;
        dept = d;
    }
    public University(University u){
        this.uName = u.uName;
        this.dept = u.dept;
    }
    public University clone() throws CloneNotSupportedException{
        University unv = (University)super.clone();
        unv.dept = dept.clone();
        return unv;
    }
}
public class Test{
    public static void main(String[] args){
        Department[] dep = {new Department("CSE"), new Department("EEE")};
        University u1 = new University("xyz", dep);
        try{
            University u2 = u1.clone();
            u2.dept[1] = new Department("MECH");
            System.out.println(u1.dept[1].dname + " " + u2.dept[1].dname);

            University u3 = new University(u1);
            u3.dept[1] = new Department("CIVIL");
            System.out.println(u1.dept[1].dname + " " + u3.dept[1].dname);
        }
        catch(CloneNotSupportedException e) {
            System.out.println("clone() not supported");
        }
    }
}

```

What will the output be?

Options :

MECH MECH
6406531177115. ✘ MECH CIVIL

EEE MECH
6406531177116. ✓ CIVIL CIVIL

Question Number : 368 Question Id : 640653354944 Question Type : MCQ Is Question**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0****Correct Marks : 5**

Question Label : Multiple Choice Question

Consider the following java code

```
import java.util.*;
public class Marks{
    public static void main(String[] args){
        Map<String, Integer> quiz1 = new TreeMap<String, Integer>();
        quiz1.put("Sita", 300);
        quiz1.put("Geeta", 200);
        quiz1.put("Latha", 300);
        quiz1.put("Reena", 340);

        Map<String, Integer> quiz2 = new TreeMap<String, Integer>();
        quiz2.put("Sita", 400);
        quiz2.put("Latha", 400);
        quiz2.put("Reena", 360);
        quiz2.put("Pragna", 400);

        Map<String, Integer> avg = new TreeMap<String, Integer>();

        for(Map.Entry<String, Integer> m1 : quiz1.entrySet())
            avg.put(m1.getKey(), m1.getValue());

        for(Map.Entry<String, Integer> m2 : quiz2.entrySet())
            avg.merge(m2.getKey(), m2.getValue(), (x, y) -> (x + y)/2); // LINE 1

        System.out.println(avg);
    }
}
```

Choose the correct option

Options :

6406531177119. ❌ Compile time error at LINE 1 because of invalid key

This program generates the output:

6406531177120. ✓ {Geeta=200, Latha=350, Pragna=400, Reena=350, Sita=350}

This program generates the output:

6406531177121. ❌ {Sita=350, Geeta=200, Latha=350, Reena=350, Pragna=400}

This program generates the output:

6406531177122. ❌ {Latha=350, Reena=350, Sita=350}

Sub-Section Number : 5

Sub-Section Id : 64065351326

Question Shuffling Allowed : Yes

Question Number : 369 Question Id : 640653354939 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

Consider the two Java files given below.

Test1.java:

```
package pack1;
public class Test1 {
    protected void f1() {
        System.out.println("Inside Test1");
    }
}
```

Test2.java:

```
package pack2;
import pack1.Test1; //LINE-1

public class Test2 extends Test1{ //LINE-2
    public static void main(String[] args) {
        Test2 obj = new Test2();
        obj.f2();
    }
    public void f2() {
        f1(); //LINE-3
    }
}
```

Choose the correct option.

Options :

The program generates the output:

6406531177099. ✓ Inside Test1

6406531177100. ✗ Runtime error, because custom packages cannot be imported (see LINE-1).

6406531177101. ✗ LINE-2 generates a compilation error because of extending class **Test1**, which is located in another package.

6406531177102. ✗ LINE-3 generates a compilation error because method **f1()** is not visible from class **Test2**.

Question Number : 370 Question Id : 640653354940 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0


Correct Marks : 4

Question Label : Multiple Select Question


Consider the Java program given below.

```
import javax.swing.*;
import java.awt.event.*;
public class ButtonEvents extends JFrame implements ActionListener{
    private JButton b1, b2;
    private JLabel l1;
    JPanel panel1, panel2;
    public ButtonEvents() {
        b1=new JButton("Hi");
        b2=new JButton("Hello");
        panel1=new JPanel();
        panel1.add(b1);
        panel1.add(b2);
        add(panel1,"South");
        l1=new JLabel("");
        panel2=new JPanel();
        panel2.add(l1);
        add(panel2,"North");
        setVisible(true);
        setSize(400,400);
        b1.setActionCommand("s1");
        b2.setActionCommand("s2");
        b1.addActionListener(this);
        b2.addActionListener(this);
    }
    public void actionPerformed(ActionEvent e) {
        //CODE BLOCK
    }
    public static void main(String[] args) {
        new ButtonEvents();
    }
}
```


GUI 1: Before clicking on any of the buttons

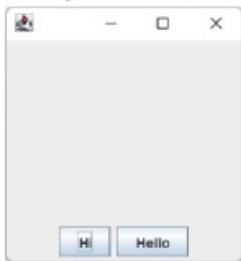

GUI 2: After clicking on Hi button

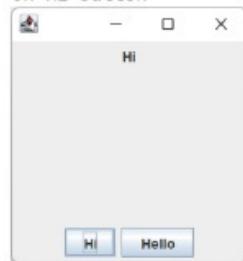

GUI 3: After clicking on Hello button



Choose the correct code segment inside method `actionPerformed()` such that whenever either of the two buttons (Hi/Hello) is clicked on panel1, the label text of panel2 will change accordingly.

Options :

```
if(e.getSource().equals(b1))
    l1.setText("Hi");
else if(e.getSource().equals(b2))
    l1.setText("Hello");
```

6406531177103. ✓

```
if(e.getActionCommand().equals(b1))
    l1.setText("Hi");
else if(e.getActionCommand().equals(b2))
    l1.setText("Hello");
```

6406531177104. ✗

```
if(e.getActionCommand().equals("s1"))
    l1.setText("Hi");
else if(e.getActionCommand().equals("s2"))
    l1.setText("Hello");
```

6406531177105. ✓

```
if(e.getSource().equals("s1"))
    l1.setText("Hi");
else if(e.getSource().equals("s2"))
    l1.setText("Hello");
```

6406531177106. ✗

Question Number : 371 Question Id : 640653354941 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

Consider the following code

```

import java.util.*;
interface Rankable{
    public Map<String, Integer> rank();
}
class BankAccount implements Rankable{
    Map<String, Integer> account; // account number mapped to account balance
    public BankAccount(Map<String, Integer> a){
        account = a;
    }
    public Map<String, Integer> rank(){
        // returns a new account map object ranked on decreasing order of
        // account balance
    }
}
class Bakery implements Rankable{
    Map<String, Integer> bak; // item number mapped to item price
    public Bakery(Map<String, Integer> b){
        bak = b;
    }
    public Map<String, Integer> rank(){
        // returns a new bak map object ranked on decreasing order of item price
    }
}

public class Test {
    //----- FUNCTION HEADER -----
    Map<String, Integer> m1 = obj.rank();
    // prints the key that is mapped to 1
}
public static void main(String[] args) {
    Map<String, Integer> m = new HashMap<>();
    m.put("1024", 100);
    m.put("1023", 230);
    m.put("0013", 140);
    BankAccount ba = new BankAccount(m);
    Bakery bk = new Bakery(m);
    findRankOne(ba);
    findRankOne(bk);
}
}

```

Identify the appropriate option(s) to fill in place of FUNCTION HEADER such that the code generates the following output:

1023
1023

Options :

6406531177107. ❌ public static <T> void findRankOne(T obj){

6406531177108. ✓ public static <T extends Rankable> void findRankOne(T obj){

6406531177109. ❌ public static void findRankOne(<?> obj){

6406531177110. ✓ public static void findRankOne(Rankable obj){

Question Number : 372 Question Id : 640653354948 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

Consider the Java code given below:

```

class Stock{
    int available = 40;
    public synchronized void request(String uname, int n){
        if(available >= n){
            available = available - n;
            System.out.println(uname + " ordered " + n + " item(s)");
        }
        else
            System.out.println(uname + " cannot order " + n + " item(s)");
    }
}
class OnlineOrder implements Runnable{
    Stock st;
    String username;
    int nItems;
    public OnlineOrder(Stock s, String u, int n){
        st = s;
        username = u;
        nItems = n;
    }
    public void run(){
        st.request(username, nItems);
    }
}
public class SaleThreadTest {
    public static void main(String[] args) {
        Stock stk = new Stock();
        OnlineOrder od1 = new OnlineOrder(stk, "user123", 16);
        OnlineOrder od2 = new OnlineOrder(stk, "iamjohn", 25);
        Thread t1 = new Thread(od1);
        Thread t2 = new Thread(od2);
        t1.start();
        t2.start();
    }
}

```

From among the options given below, which are possible outputs of the given code?

Options :

iamjohn ordered 25 item(s)
 6406531177135. ✓ user123 cannot order 16 item(s)

user123 ordered 16 item(s)
 6406531177136. ✓ iamjohn cannot order 25 item(s)

user123 ordered 16 item(s)

6406531177137. ✖ iamjohn ordered 25 item(s)

iamjohn cannot order 25 item(s)

6406531177138. ✖ user123 cannot order 16 item(s)

Sub-Section Number : 6

Sub-Section Id : 64065351327

Question Shuffling Allowed : Yes

Question Number : 373 Question Id : 640653354949 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Select Question

Consider the following code

```

class BookSeat{
    int available = 1;
    public void request(int n, String name){
        if(available >= n){
            available = available - n;
            System.out.println(name + " booked " + n + " seat");
        }
        else{
            System.out.println(name + " cannot book " + n + " seat");
        }
    }
}

class WorkShopRegistration implements Runnable{
    BookSeat b;
    String name;
    int n_seats;
    public WorkShopRegistration(BookSeat b1, String n, int s){
        // constructor to initialize the instance variables
    }
    public void run(){
        b.request(n_seats, name);
    }
}

public class Student {
    public static void main(String[] args) {
        BookSeat obj = new BookSeat();
        WorkShopRegistration r1 = new WorkShopRegistration(obj, "Rohan", 1);
        WorkShopRegistration r2 = new WorkShopRegistration(obj, "Priya", 1);
        Thread t1 = new Thread(r1);
        Thread t2 = new Thread(r2);
        t1.start();
        t2.start();
    }
}

```

Which of the following is/are NOT possible outputs?

Options :

Rohan cannot book 1 seat
 6406531177139. ❌ Priya booked 1 seat

Rohan cannot book 1 seat
 6406531177140. ✓ Priya cannot book 1 seat

Rohan booked 1 seat

Priya cannot book 1 seat

6406531177141. *

Rohan booked 1 seat

Priya booked 1 seat

6406531177142. *

Priya cannot book 1 seat

Rohan booked 1 seat

6406531177143. *

Sub-Section Number :

7

Sub-Section Id :

64065351328

Question Shuffling Allowed :

Yes

Question Number : 374 Question Id : 640653354930 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 6

Question Label : Multiple Select Question

Consider the Java code given below.

```

abstract class Payable{
    abstract double pay();
}

class Salary extends Payable{
    double empSalary;
    public Salary(double s) {
        empSalary = s;
    }
    public double pay() {
        return empSalary;
    }
}

class SalaryWithBonus extends Salary{
    final double BONUS = 0.1; //10% BONUS
    public SalaryWithBonus(double s) {
        super(s);
    }
    public double pay() {
        return empSalary * (1 + BONUS);
    }
}

public class Employee {
    String name;
    double sal;
    public Employee(String n, double s) {
        name = n; sal = s;
    }
    public double getFinalPay(){
        // CODE BLOCK
    }
    public static void main(String[] args) {
        Employee e1 = new Employee("Alan",20000);
        Employee e2 = new Employee("Calvin",10000);
        System.out.println(e1.getFinalPay());
        System.out.println(e2.getFinalPay());
    }
}

```

If the code generates the following as output, what should be filled in place of CODE BLOCK?

20000.0
11000.0

Options :

```

        Payable p;
        if (sal > 10000)
            p = new Salary(sal);
        else
            p = new SalaryWithBonus(sal);
6406531177063. ✓ return p.pay();

```

```
Salary s;
SalaryWithBonus sb;
if (sal > 10000) {
    s = new Salary(sal);
    return s.pay();
}
else{
    sb = new SalaryWithBonus(sal);
    return sb.pay();
}
```

6406531177064. ✓

```
Payable p = new Salary(sal);
```

6406531177065. ✗ return p.pay();

```
Salary s;
SalaryWithBonus sb;
if (sal > 10000) {
    s = new Payable(sal);
    return s.pay();
}
else{
    sb = new Payable(sal);
    return sb.pay();
}
```

6406531177066. ✗ }

Question Number : 375 Question Id : 640653354938 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 6

Question Label : Multiple Select Question

Consider the Java code given below.

```

interface Washable{
    void wash();
}

interface Dryable extends Washable{
    void dry();
}

class WashingMachine{
    public Dryable getPulsator(){
        return new Pulsator();
    }

    private class Pulsator implements Dryable {
        public void wash() {
            System.out.println("Wash support to a washing machine");
        }

        public void dry() {
            System.out.println("Dry support to a washing machine");
        }
    }
}

public class PrivateTest {
    public static void main(String[] args) {
        WashingMachine wm = new WashingMachine();
        //CODE BLOCK
    }
}

```

Choose the correct option(s) to fill in place of CODE BLOCK so that the output is:

Wash support to a washing machine
Dry support to a washing machine

Options :

6406531177095. ✓
Dryable d = wm.getPulsator();
d.wash();
d.dry();

6406531177096. ✘
Washable w = wm.getPulsator();
w.wash();
w.dry();

6406531177097. ✓
Dryable d=wm.getPulsator();
((Washable)d).wash();
d.dry();

6406531177098. ✘

```
Washable w = wm.getPulsator();
w.wash();
Dryable d = w;
d.dry();
```

Question Number : 376 Question Id : 640653354946 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 6

Question Label : Multiple Select Question

Consider the following java code

```

import java.util.*;
abstract class Employee{
    double salary;
    public Employee(double s){
        salary = s;
    }
    //Accessor Method getSalary() here
    public abstract double bonus();
}
class Manager extends Employee{
    public Manager(double s){
        super(s);
    }
    public double bonus(){
        return 0.2 * getSalary();
    }
}
class Developer extends Employee{
    public Developer(double s){
        super(s);
    }
    public double bonus(){
        return 0.1 * getSalary();
    }
}
public class Industry{
    // ----- FUNCTION HEADER -----
    double total_bonus = 0;
    for(Employee e : emp){
        total_bonus = total_bonus + e.bonus();
    }
    return total_bonus;
}
public static void main(String[] args){
    Manager m1 = new Manager(200);
    Manager m2 = new Manager(100);
    List<Manager> mList = new ArrayList<Manager>();
    mList.add(m1);
    mList.add(m2);
    Developer d1 = new Developer(250);
    Developer d2 = new Developer(150);
    List<Developer> dList = new ArrayList<Developer>();
    dList.add(d1);
    dList.add(d2);
    double m_bous = getTotalBonus(mList);
    double d_bonus = getTotalBonus(dList);
    System.out.println("Manager_bonus " + m_bous + ", " + "Developer_bonus: "
        + d_bonus);
}
}

```

Identify the correct option to be filled in place of FUNCTION HEADER to generate the output

Manager_bonus 60.0, Developer_bonus: 40.0.

Options :

6406531177127. ❌ public static double getTotalBonus(List<Employee> emp){

6406531177128. ✓ public static double getTotalBonus(List<? extends Employee> emp){

6406531177129. ❌ public static double getTotalBonus(List<?> emp){

6406531177130. ✓ public static <T extends Employee> double getTotalBonus(List<T> emp){

MLT

Section Id :	64065322274
Section Number :	12
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	33
Number of Questions to be attempted :	33
Section Marks :	100
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065351329
Question Shuffling Allowed :	No

Question Number : 377 Question Id : 640653354950 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531177144. ✓ Yes

6406531177145. ✗ No

Question Number : 378 Question Id : 640653354951 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

Note:

Do not write your answer as percentage. Always enter fractions as they are. e.g. if your answer is 0.245, enter the same, do not enter 24.5 %.

Options :

6406531177146. ✓ Useful Data has been mentioned above.

6406531177147. ✗ This data attachment is just for a reference & not for an evaluation.

Sub-Section Number : 2

Sub-Section Id : 64065351330

Question Shuffling Allowed : Yes

Question Number : 379 Question Id : 640653354962 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

During classification of linearly separable data-set using perceptron algorithm, as the value of learning rate α is decreased,

Options :

6406531177178. ✘ The number of steps required for convergence increases.
6406531177179. ✘ The number of steps required for convergence decreases.
6406531177180. ✓ The number of steps required for convergence is independent of the learning rate.
6406531177181. ✘ The perceptron algorithm may not converge.

Question Number : 380 Question Id : 640653354966 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

A knn algorithm with $k = 30$ gives high training error and high validation error. What value of the k we should choose to get the better performance of the algorithm?

Options :

6406531177189. ✓ Less than 30

6406531177190. ✘ Greater than 30

Question Number : 381 Question Id : 640653354972 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0



Correct Marks : 2

Question Label : Multiple Choice Question

Consider a binary classification problem. Let p_1 denote the proportion of class 0 examples in a particular node. Which of the following graphs shows correct curves for the Gini-index, Entropy and misclassification error of that node?



Options :

6406531177195. ✓

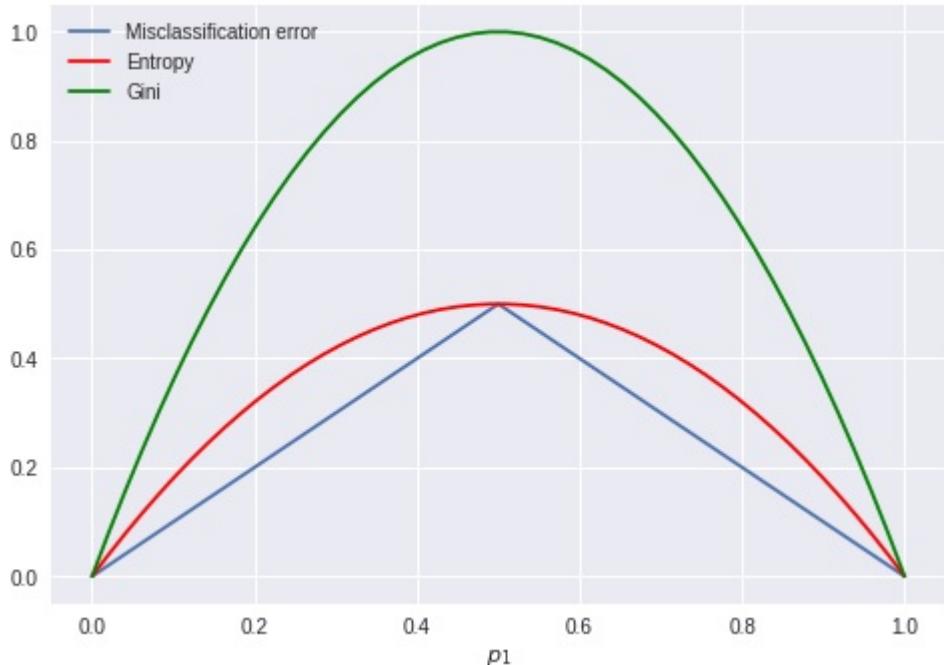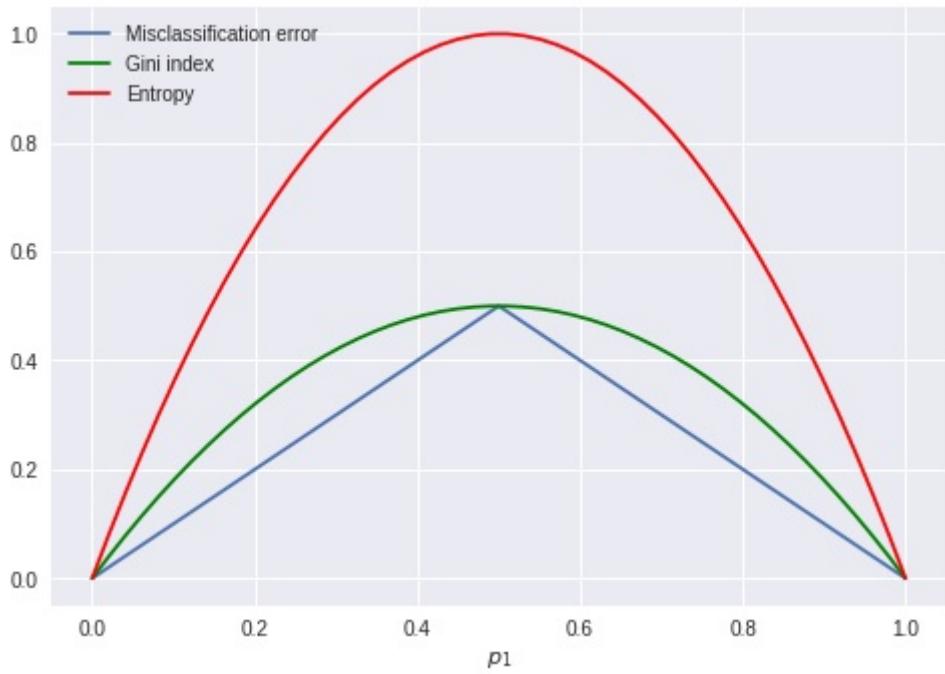

6406531177196. ✎

6406531177197. ✎

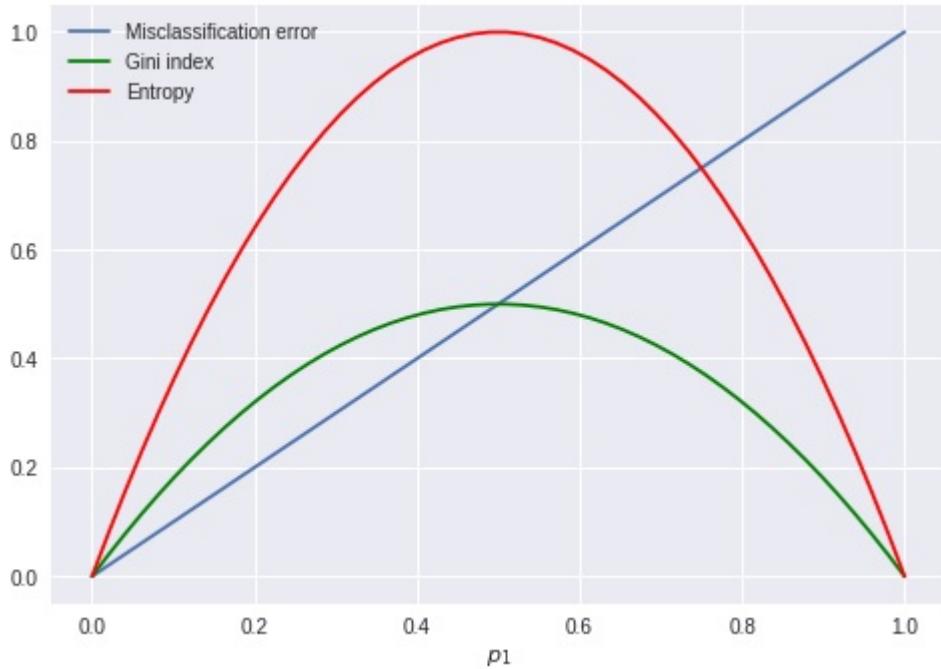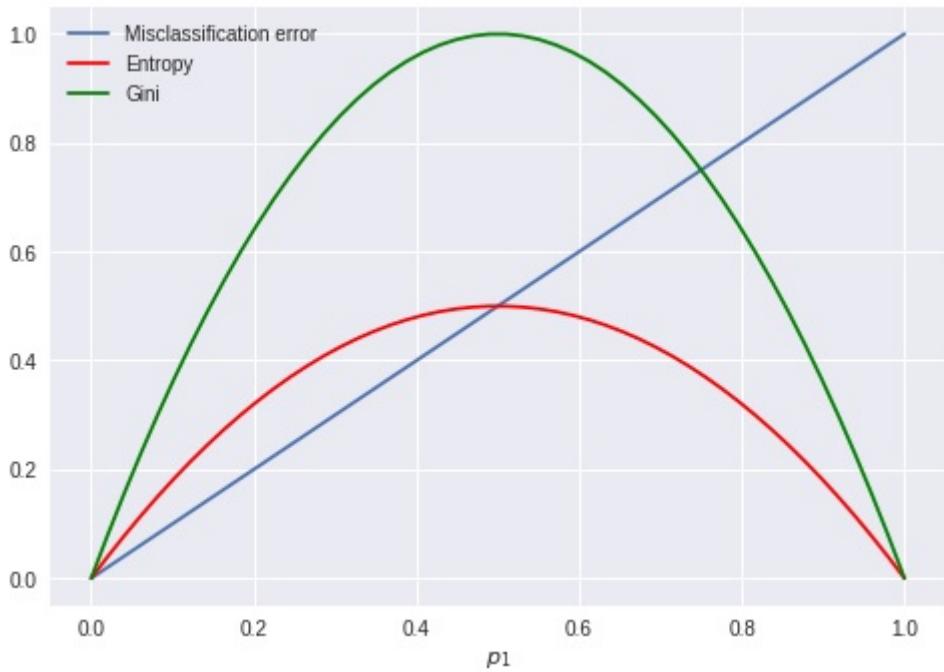

6406531177198. *

Question Number : 382 Question Id : 640653354983 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The following is the activation vector output by some hidden layer in a neural network when some input vector is given to it:

$$\begin{bmatrix} 0.2 \\ 1.8 \\ 3.9 \\ 0.1 \\ 0 \\ 5.8 \end{bmatrix}$$

Which of the following could be the activation function used in this layer?

Options :

6406531177221. ❌ Softmax

6406531177222. ❌ Sigmoid

6406531177223. ✓ ReLU

6406531177224. ❌ Tanh

Sub-Section Number : 3

Sub-Section Id : 64065351331

Question Shuffling Allowed : Yes

Question Number : 383 Question Id : 640653354952 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following are multi label problems? For each option, assume suitable features are available.

Options :

6406531177148. ❌ Predicted number of run Indian Cricket team will score in their next ODI.

6406531177149. ✓ Amount of money that Amitabh Bachchan's next three movies each will make.

6406531177150. ✓ Predicting number of goals Ronaldo will score in next 10 matches each.

6406531177151. ❌ Predicting blood group of a person

6406531177152. ✓ Predicting blood sugar level of a person for next 15 days each.

Question Number : 384 Question Id : 640653354976 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

In a random forest model let $p < m$ be the number of randomly selected features that are used to identify the best split at any node of a tree. Which of the following are true? (m is the original number of features)

Options :

6406531177201. ❌ Increasing p reduces the correlation between any two trees in the forest.

6406531177202. ✓ Decreasing p reduces the correlation between any two trees in the forest.

6406531177203. ✓ Increasing p increases the performance of individual trees in the forest.

6406531177204. ❌ Decreasing p increases the performance of individual trees in the forest.

Sub-Section Number : 4

Sub-Section Id : 64065351332

Question Shuffling Allowed : Yes

Question Number : 385 Question Id : 640653354955 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Consider feature matrix $\mathbf{X} = \begin{bmatrix} 1 & 2 \\ 2 & 1 \\ 2 & 3 \end{bmatrix}$, label vector $\mathbf{y} = \begin{bmatrix} 1 \\ 2 \\ 3 \end{bmatrix}$ and the weight

vector is $\mathbf{w} = \begin{bmatrix} 1 \\ -2 \\ 3 \end{bmatrix}$. Add a dummy feature to \mathbf{X} .

What will be the value of the loss function if a regression model without regularization is fitted?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

14 to 15

Question Number : 386 **Question Id :** 640653354986 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Short Answer Question

Consider a test-dataset of 100 points for a binary classification problem, where 60 belong to the positive class (true label) and the rest belong to the negative class (true label). The following is a table for some classifier that has been prepared by an ML engineer:

	Predicted label (+)	Predicted label (-)
True label (+)	30	30
True label (-)	10	30

If this is a valid confusion matrix (just by looking at the numbers), enter the classifier's recall as the answer. If this is not a valid confusion matrix, enter 0 as the answer. Your answer should be in the interval [0, 1], endpoints inclusive. Enter your answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.49 to 0.51

Sub-Section Number : 5

Sub-Section Id : 64065351333

Question Shuffling Allowed : Yes

Question Number : 387 **Question Id :** 640653354959 **Question Type :** MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider a modified loss function for linear regression that is of the following form for a training dataset that has n points:

$$L(\mathbf{w}) = \frac{1}{2} \sum_{i=1}^n r_i (\mathbf{w}^T \mathbf{x}_i - y_i)^2$$

Here, r_i is some constant in $[0, 1]$ associated with each data-point in the training dataset. The dummy feature and the corresponding weight are already included in the vectors \mathbf{x} and \mathbf{w} respectively. What is the expression of the gradient of $L(\mathbf{w})$ with respect to \mathbf{w} ?

Options :

6406531177172. ✓
$$\sum_{i=1}^n r_i (\mathbf{w}^T \mathbf{x}_i - y_i) \mathbf{x}_i$$

6406531177173. ✗
$$\sum_{i=1}^n r_i (\mathbf{w}^T \mathbf{x}_i - y_i)$$

6406531177174. ✗
$$\sum_{i=1}^n (\mathbf{w}^T \mathbf{x}_i - y_i) \mathbf{x}_i$$

6406531177175. ✗
$$\sum_{i=1}^n r_i (\mathbf{w}^T \mathbf{x}_i - y_i)^2 \mathbf{x}_i$$


Question Number : 388 Question Id : 640653354977 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider unlabeled data with two features X_1 and X_2 as shown in the figure.

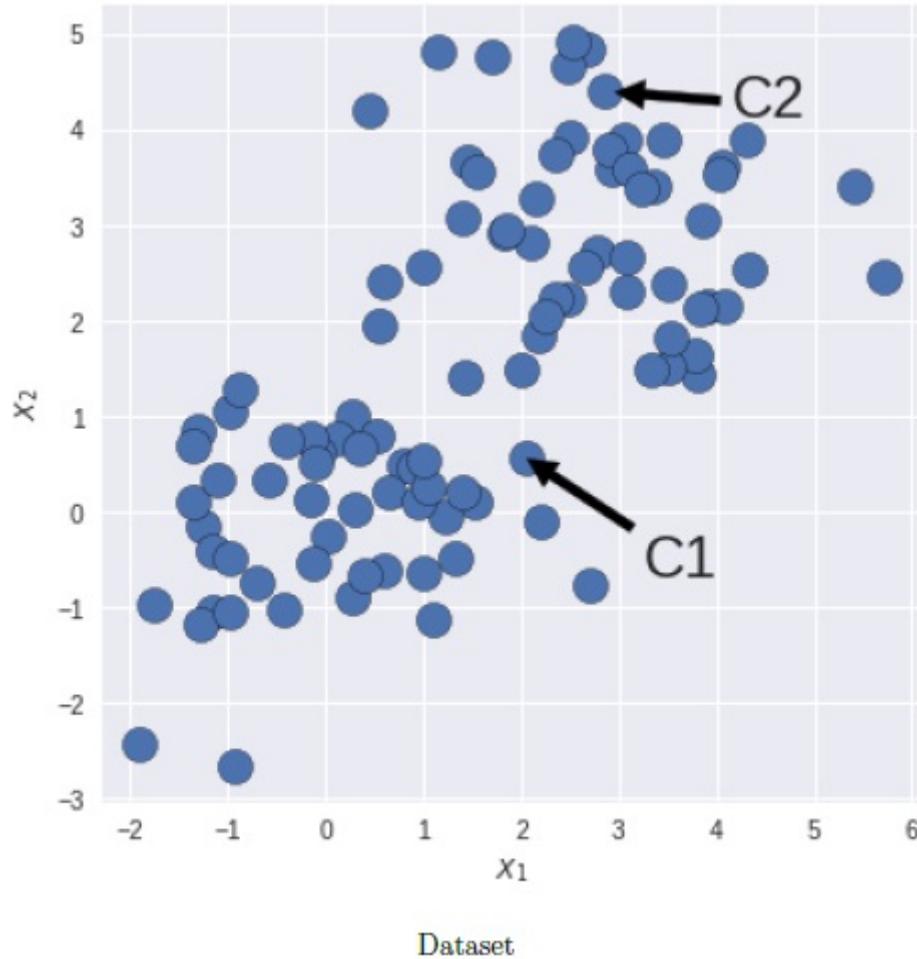

C_1 and C_2 are the coordinates of centroids obtained after certain iterations of K -means algorithm with $K = 2$. Which of the following options is correct about the silhouette score S ? Note: Euclidean distance is used to calculate the distances.

Options :

- 6406531177205. ❌ S will be positive and close to 0.
- 6406531177206. ❌ S will be positive and close to 1.
- 6406531177207. ❌ S will be exact -1.
- 6406531177208. ✓ S will be negative but need not be exact -1.

Question Number : 389 Question Id : 640653354980 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider a neural network for a multi-class, image classification problem. When the network is trained on the images as they are, it does a good job on the test data. Call the dataset (train + test) for this setup D_1 and the network N_1 . Assume that we now turn all images upside down, in both the training and test dataset. Now, the network with the same architecture is trained from scratch on this modified dataset. Call the dataset (train + test) for this setup D_2 and network N_2 . Select the most appropriate option.

Options :

6406531177213. ❌ The network N_2 will not be able to learn anything from D_2 . Its test accuracy on D_2 will be very low.

6406531177214. ✓ The network N_2 will be able to learn useful patterns from D_2 . In fact, the performance of network N_2 on D_2 will be similar to N_1 on D_1 .

6406531177215. ❌ The network N_2 will be able to learn somewhat useful patterns from D_2 . But the performance of N_1 on D_1 will be much better than N_2 on D_2 .

Question Number : 390 Question Id : 640653354985 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Two classifiers are trained on a dataset for a binary classification problem. They are then tested on the same dataset. The F_1 scores of both classifiers are the same. (p_1, r_1) and (p_2, r_2) are the precision-recall scores for the two classifiers. Consider the following statements:

Statement-1

If $p_1 > p_2$, then $r_1 < r_2$

Statement-2

If $p_1 = p_2$, then $r_1 = r_2$

Select the most appropriate option.

Options :

6406531177226. ❌ Statement-1 is correct, statement-2 is incorrect

6406531177227. ❌ Statement-1 is incorrect, statement-2 is correct

6406531177228. ✓ Both statements 1 & 2 are correct

6406531177229. ❌ Both statements 1 & 2 are incorrect

Sub-Section Number : 6

Sub-Section Id : 64065351334

Question Shuffling Allowed : Yes

Question Number : 391 Question Id : 640653354953 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following code blocks will produce the same value for the variable 'Ans'? Assume the 'numpy' library is imported as 'np'.

Options :

A = np.diag(np.arange(6))
B = np.arange(6)

6406531177153. ✓ Ans = A@B

A = np.arange(6).astype('int')

6406531177154. ✓ Ans = A**2

A = np.diag(np.arange(5, -1, -1))
B = np.ones(6)
Ans = (5 - A@B).astype('int')

6406531177155. ✓ Ans = Ans*Ans

A = np.array([1, 2, 4, 8, 16, 32])

6406531177156. ❌ Ans = np.log2(A).astype('int')

6406531177157. ❌ All the code blocks produce unique results.

6406531177158. ❌ All the code blocks produce same results.

Question Number : 392 Question Id : 640653354954 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Rajesh trained a model on house price prediction problem. After training he came up with following model:

$$y = 4000 - 20 \cdot x_1 + 15 \cdot x_2 + 500 \cdot x_3 - 30 \cdot x_4$$

where,

y is predicted house price,

x_1 is number of years the house was built before,

x_2 is the carpet area in square feet,

x_3 is the number of floors the apartment/house has,

x_4 represents distance of the property from railway station.

According to Rajesh's model, which of the following statements are correct?

Options :

6406531177159. ✘ Presence of the lift/elevator is the most important feature.

6406531177160. ✓ No. of floors in the building is the most important feature.

6406531177161. ✘ Area is the most important feature.

6406531177162. ✘ Age is the most important feature.

6406531177163. ✓ Distance from railway station is the second most important feature.

6406531177164. ✘ None of these.

Question Number : 393 Question Id : 640653354957 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Consider that you have 100 non-linear data points randomly generated from a $\cos(2\pi x)$ function $0 \leq x \leq 3$. Choose the correct statement(s) from the following.

Options :

6406531177167. ✓ The polynomial regression model of degree 6 adds a smooth fitting to this data.

6406531177168. ✓ The polynomial regression model of degree 98 overfits this data.

6406531177169. ✖ The polynomial regression model of degree 2 adds a smooth fitting to this data.

6406531177170. ✓ The polynomial regression model of degree 3 underfits this data.

Sub-Section Number : 7

Sub-Section Id : 64065351335

Question Shuffling Allowed : Yes

Question Number : 394 Question Id : 640653354956 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

What is the output of the following code?

```
import numpy as np

def aFunction(A, d):
    temp = np.ones(1)

    for i in range(1, d + 1):
        temp = np.concatenate((temp, A ** i))

    return temp

A = np.arange(4)
print(np.sum(aFunction(A, 2)))
```

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

21.0

Question Number : 395 Question Id : 640653354958 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

Consider the feature matrix $\mathbf{X} = \begin{bmatrix} 1 & 2 & 3 \\ 3 & 2 & 4 \end{bmatrix}$ and corresponding label vector

$\mathbf{y} = \begin{bmatrix} 2 \\ 4 \end{bmatrix}$. Let regularization rate, $\lambda = 0.1$. Compute lasso regression loss using weight

$$\mathbf{w} = \begin{bmatrix} 1 \\ 0.01 \\ -0.5 \\ 0 \end{bmatrix}.$$

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

9.5 to 10.5

Question Number : 396 **Question Id :** 640653354960 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 3

Question Label : Short Answer Question

You are given a linearly separable dataset with feature matrix \mathbf{X} , for which a perceptron has been trained until it converges (perfectly separates the data). The weight vector corresponding to it is \mathbf{w} . This dataset has 60 points from the positive class and 40 from the negative class. What is the output of the following snippet of code?

Notes

- The labels for a perceptron lie in $\{-1, 1\}$.
- The NumPy arrays \mathbf{X} and \mathbf{w} are compatible for matrix multiplication, the dummy feature and the corresponding weight are already built into the arrays.
- None of the 100 points lie on the decision boundary.

```
import numpy as np
y_hat = np.where(X @ w > 0, 1, -1)
print(np.sum(y_hat))
```

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

20

Question Number : 397 **Question Id :** 640653354965 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 3

Question Label : Short Answer Question

A Gaussian Naive Bayes model is trained for a multi-class classification problem that has 12 features and 5 classes. Find the total number of parameters that have to be estimated for this model. Consider each parameter to be a scalar value. In other words, if we decide to store all the parameters in a Python list, with each element of the list being a float value corresponding to a single parameter, what is the size of this list? Ignore the priors in the calculation. Only focus on the parameters of the class conditional densities.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

120

Question Number : 398 **Question Id :** 640653354979 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 3

Question Label : Short Answer Question

Consider the following network architecture:

Layer	Number of Neurons
Input	15
Hidden layer-1	30
Hidden layer-2	20
Output layer	5

How many parameters (weights + biases) does this network have?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1205

Question Number : 399 Question Id : 640653354984 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

A multi-class classification problem has 5 classes. The training dataset has n data-points, with an equal number of points from each of the 5 classes. Consider a dummy classifier that does prediction as follows: for each input data-point, it picks one of the 5 classes at random (uniformly) and outputs that as its prediction. What is the accuracy of the model on the training dataset as n becomes very large? Your answer should be between 0 and 1. Enter your answer correct to two decimal places.

Hint: Think about it in the probabilistic sense.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.19 to 0.21

Sub-Section Number : 8**Sub-Section Id :** 64065351336**Question Shuffling Allowed :** Yes**Question Number : 400 Question Id : 640653354964 Question Type : MCQ Is Question****Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0****Correct Marks : 4****Question Label : Multiple Choice Question**

Consider a logistic regression model for a binary classification problem with

two features x_1 and x_2 . The feature vector is $\begin{bmatrix} x_1 \\ x_2 \end{bmatrix}$ and labels lie in $\{0, 1\}$. The threshold for inference is 0.5. The dummy feature and the weight corresponding to it can be ignored for this problem. Let x_1 be the horizontal axis and x_2 be the vertical axis. You are given two feature vectors:

$$\mathbf{x}_1 = \begin{bmatrix} \sqrt{3} \\ 1 \end{bmatrix}, \mathbf{x}_2 = \begin{bmatrix} -\sqrt{3} \\ 1 \end{bmatrix}$$

The weight vector makes an angle of θ with the positive x_1 axis (horizontal). Each θ corresponds to a different classifier. For what range of values of θ are both \mathbf{x}_1 and \mathbf{x}_2 predicted to belong to class-1?

Hints:

- To draw the weight vector $\mathbf{w} = \begin{bmatrix} w_1 \\ w_2 \end{bmatrix}$, plot the point (w_1, w_2) and draw an arrow starting at the origin to this point.
- $\tan(30^\circ) = \frac{1}{\sqrt{3}}$

Options :6406531177183. ✓ $60^\circ < \theta < 120^\circ$ 6406531177184. ✗ $0^\circ < \theta < 30^\circ$

6406531177185. ✘ $30^\circ < \theta < 180^\circ$

6406531177186. ✘ $0^\circ < \theta < 180^\circ$

6406531177187. ✘ $0^\circ < \theta < 360^\circ$

Question Number : 401 Question Id : 640653354978 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the following data points

(2,2)
(2,3)
(6,5)
(3.6,4)
(3.4, 4)

We perform k-means clustering on the above data, with $k = 2$, using Manhattan distance as the distance measure. At t th iteration, we have (2,2) as the centroid for cluster-1 and (6,5) as the centroid for cluster-2. After performing $(t + 1)$ th iteration the point (3.4,4) will belong to

Options :

6406531177209. ✘ cluster-1

6406531177210. ✓ cluster-2

6406531177211. ✘ can not be determined

Sub-Section Number : 9

Sub-Section Id : 64065351337

Question Shuffling Allowed : Yes

Question Number : 402 Question Id : 640653354981 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

If W_{ij} is the weight of the edge from neuron i in layer $l - 1$ to neuron j in layer l , which of the following statements about the matrix \mathbf{W} are true? Neurons in a layer are processed (indexed) from top to bottom. So, the first neuron in a layer is the top-most neuron in that layer.

Options :

6406531177216. ✓ The first row of the matrix corresponds to all outgoing connections from the first neuron in layer $l - 1$.

6406531177217. ✗ The first row of the matrix corresponds to all incoming connections to the first neuron in layer l .

6406531177218. ✓ The last column of the matrix corresponds to all incoming connections to the last neuron in layer l .

6406531177219. ✗ The last column of the matrix corresponds to all the outgoing connections from the last neuron in layer $l - 1$.

Sub-Section Number : 10

Sub-Section Id : 64065351338

Question Shuffling Allowed : Yes

Question Number : 403 Question Id : 640653354961 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

A perceptron model is trained on the following binary classification data-set.

X_1	X_2	Label (y)
0	0	-1
0	1	1
1	0	1
1	1	-1

At one of the iterations, weights are: $w_0 = -0.7$, $w_1 = 0.8$ and $w_2 = 0.1$. Assume that w'_0 , w'_1 and w'_2 are the updated weights after one epoch (one epoch is completed on going through all the data points). Find the value of $w'_0 + w'_1 + w'_2$. Consider the learning rate to be one. Don't change the order of samples while updating the weight vector. Take the original order of samples.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

-1.8

Question Number : 404 Question Id : 640653354963 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Inference using logistic regression happens as follows. T is called the threshold and is some real number in the interval $(0, 1)$. \hat{y} stands for the predicted label.

$$\hat{y} = \begin{cases} 1, & P(y = 1 | \mathbf{x}) \geq T \\ 0, & \text{otherwise} \end{cases}$$

Given this setup, the equation of the decision boundary is given below:

$$\mathbf{w}^T \mathbf{x} - u = 0$$

\mathbf{w} has the same dimensions as \mathbf{x} . The dummy feature is included in \mathbf{x} and the corresponding weight is included in \mathbf{w} . If $T = \frac{e^2}{1 + e^2}$, what is the value of the unknown quantity u ? Here, e is the Euler's number that is associated with the natural logarithm and is the same one found on your calculator. Enter the closest integer as your answer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 405 **Question Id :** 640653354967 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

An SVM has been trained for a 2D problem. The feature vector is $\mathbf{x} = \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}$.

It has the following weight vector and bias:

$$\mathbf{w} = \begin{bmatrix} 2 \\ 1 \end{bmatrix}, b = -2$$

Recall that the labels in the SVM setup are +1 and -1. Consider a unit square whose vertices are at:

$$(0, 0), (1, 0), (0, 1), (1, 1)$$

The horizontal axis corresponds to x_1 and the vertical axis corresponds to x_2 . A point is picked at random (uniformly) from the region bounded by the square. What is the probability that this point is predicted as belonging to class +1 by the SVM? Enter your answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.24 to 0.26

Question Number : 406 Question Id : 640653354968 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Find the hinge loss for this soft-margin SVM classifier on the dataset that is given in the table. The weight vector and bias are as follows:

$$\mathbf{w} = \begin{bmatrix} 1 \\ -1 \end{bmatrix}, \quad b = 1$$

The coefficient C can be assumed to be 1.

x_1	x_2	y
1	4	-1
-1	2	-1
-2	0	-1
1	2	-1
1	3	1
1	0	1
2	1	1
2	3	1

Note that you just need to report the hinge loss. Do not compute the margin loss which involves only the term w . Also note that the hinge loss does not have a factor of 0.5 before it. Enter the closest integer as your answer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

4

Question Number : 407 Question Id : 640653354982 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Consider two networks N_1 and N_2 for a binary classification task. N_1 has two neurons at the output layer and uses the softmax activation function. N_2 has one neuron at the output layer and uses sigmoid activation function. We don't need the information about the hidden layers for this problem.

For some test data-point x , the pre-activations at the output layer for N_1 is given below. The first neuron corresponds to class-0 and the second corresponds to class-1:

$$z = \begin{bmatrix} 1 \\ 3 \end{bmatrix}$$

It turns out that for this data-point, both networks predict the same probability of this point belonging to class-1. That is $P(y = 1 | x)$ is the same for both networks. If this is the case, what should be the pre-activation value at the output layer of N_2 , call it z , corresponding to this data-point? Enter the closest integer as your answer.

Notes

- The activation of N_2 at the output-layer is interpreted as $P(y = 1 | x)$.
- The z for N_1 is a vector and the z for N_2 is a scalar.
- Be careful about the distinction between pre-activation and activation.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Sub-Section Number : 11

Sub-Section Id : 64065351339

Question Shuffling Allowed : No

Question Id : 640653354969 **Question Type :** COMPREHENSION **Sub Question Shuffling Allowed :** No **Group Comprehension Questions :** No **Calculator :** None **Response Time :** N.A

Think Time : N.A **Minimum Instruction Time :** 0

Question Numbers : (408 to 409)

Question Label : Comprehension

Consider the following training data-set with three features:


X_1 = Present price of the car (values are given in lac)

X_2 = Age (How many years the car has been driven)

X_3 = Fuel-type (diesel or LPG)

X_1	X_2	X_3	Selling price (y)
8.3	4	LPG	4.5
5.5	6	Diesel	2.0
16.3	7	LPG	7.0
8.4	4	Diesel	5.0
7.8	6	LPG	3.5
11.5	9	LPG	5.5
9.2	7	LPG	3.5
8.9	3	Diesel	5.0
22.4	8	Diesel	15.0
4.5	8	LPG	1.5

Its regression tree is given below. In the tree, each node is denoted by the feature along which it is split.

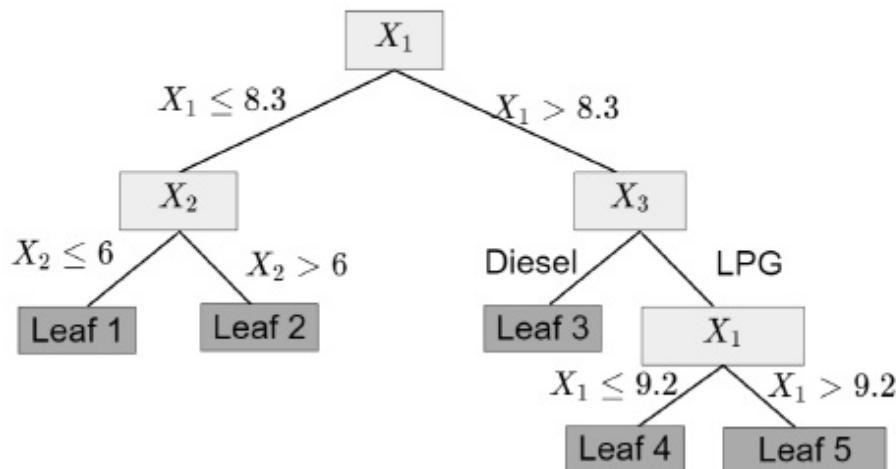

Regression tree

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 408 Question Id : 640653354970 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

How many samples of the training data-set belong to Leaf 2?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1

Question Number : 409 Question Id : 640653354971 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

If the present price of a car which is driven for 5 years is 9.5 lac. If the car has an LPG engine, what will be the prediction for the selling price of the car according to the given regression tree? Enter your answer in lac. If your answer is 5.6 lac, enter the answer 5.6.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

7.0

Sub-Section Number : 12

Sub-Section Id : 64065351340

Question Shuffling Allowed : No

Question Id : 640653354973 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (410 to 411)

Question Label : Comprehension

Consider that adaboost model is trained on the following binary classification data-set.

X_1	X_2	Label (y)
3.7	2	false
2.0	2	false
5	4	true
2.9	5	false
4.1	6	true

The data-set is split according to feature X_2 to create the first stump.

Equal sample weights are assigned to each examples to create the first stump and Gini-index measure is used to split the data.

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 410 Question Id : 640653354974 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

What will be the performance of the first stump? Enter your answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.67 to 0.72

Question Number : 411 Question Id : 640653354975 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

What sample weight will be assigned to the last example to create the next stump? Don't normalize the sample weights. Enter your answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.08 to 0.12

PDSA

Section Id : 64065322275

Section Number : 13

Section type : Online

Mandatory or Optional : Mandatory

Number of Questions : 31

Number of Questions to be attempted : 31

Section Marks : 100

Display Number Panel : Yes

Group All Questions : No

Enable Mark as Answered Mark for Review and

Yes

Clear Response :

Maximum Instruction Time : 0

Sub-Section Number : 1

Sub-Section Id : 64065351341

Question Shuffling Allowed : No

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "DIPLOMA LEVEL: PROGRAMMING DATA STRUCTURES AND ALGORITHMS USING PYTHON"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531177231. ✓ Yes

6406531177232. ✗ No

Sub-Section Number : 2

Sub-Section Id : 64065351342

Question Shuffling Allowed : Yes

Question Number : 413 Question Id : 640653354988 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Here is a function to return the maximum value among three positive integers. There is a logical error in this function.

```
1 def max3bad(x,y,z):
2     maximum = 0
3     if x >= y:
4         if x >= z:
5             maximum = x
6     elif y >= z:
7         maximum = y
8     else:
9         maximum = z
10    return(maximum)
```

Select the input for which `max3bad` produces an incorrect output.

Options :

6406531177233. ❌

6406531177234. ❌

6406531177235. ❌

6406531177236. ✓

Question Number : 414 Question Id : 640653354989 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

A list having 2^k items has to be processed using either of two given algorithms. Algorithm A takes $8n \log n$ time units and algorithm B takes $0.02n^2$ time units to process a list of n items. What is the largest value of k for which algorithm B would be preferred ?

Options :

6406531177237. ❌ 11

6406531177238. ✓ 12

6406531177239. ❌ 13

6406531177240. ❌ Algorithm A would be preferred always irrespective of k

Question Number : 415 Question Id : 640653354990 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following iterative code:

```
1 def fun(n):
2     i,j = 1,1
3     while(j <= n):
4         i = i+2
5         j = j+i
6         print(j)
```

What would be the running time complexity of the above given function ?

Options :

6406531177241. ✘ $O(\log n)$

6406531177242. ✘ $O(n \log n)$

6406531177243. ✓ $O(\sqrt{n})$

6406531177244. ✘ $O(n^2)$

Question Number : 416 Question Id : 640653354991 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

What is the time complexity of the following recurrence relation ?

$T(1) = 1$

For $n > 1$, $T(n) = 8T(n/2) + n$

Options :

6406531177245. ✘ $O(n^2)$

6406531177246. ✓ $O(n^3)$

6406531177247. ✘ $O(n^2 \log_2 n)$

6406531177248. ✖ $O(n^3 \log_2 n)$

Question Number : 417 Question Id : 640653354992 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

```
1 def selectionsort(L):
2     n = len(L)
3     if n < 1:
4         return(L)
5     for i in range(n):
6         mpos = i
7         for j in range(i+1,n):
8             if L[j] < L[mpos]:
9                 mpos = j
10            (L[i],L[mpos]) = (L[mpos],L[i])
11    return(L)
```

Which of the following statement(s) is/are correct with regard to the given Selection Sort?

1. Selection sort is not stable and it sorts In-place
2. The complexity of Selection sort is $O(n^2)$ in best, average and worst case.
3. In Selection sort, after m passes through the list, the first m elements in the list are the m smallest element of the list.

Options :

6406531177249. ✖ Only statement 1 is true

6406531177250. ✖ Statement 1 and Statement 2 are true

6406531177251. ✖ Statement 1 and Statement 3 are true

6406531177252. ✓ All statements are true

Question Number : 418 Question Id : 640653354993 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Assuming that the median of n elements can be found in $O(n)$ time. What would be the complexity of quick sort, if the median item is always selected as the pivot?

Options :

6406531177253. ✘ $O(\log n)$

6406531177254. ✘ $O(n \log \log n)$

6406531177255. ✓ $O(n \log n)$

6406531177256. ✘ $O(n)$

Question Number : 419 Question Id : 640653354997 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Let G be a undirected connected graph. Let T_d be a depth first search tree of G . Let T_b be a breadth first search tree of G . Consider the following statements.

1. No edge of G is a cross edge with respect to T_d
2. For every edge (u, v) of G , if u is at depth i and v is at depth j in T_b , Then $|i - j| = 1$.

Which of the above statements must necessarily be **true**?

Options :

6406531177263. ✓ 1 only

6406531177264. ✘ 2 only

6406531177265. ✘ Both 1 and 2

6406531177266. ✘ Neither 1 nor 2

Question Number : 420 Question Id : 640653354998 Question Type : MCQ Is Question


Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following directed graph. Run DFS on this graph from vertex 0 . Which of the following is a cross edge.

Note: In the case of multiple neighbours, the algorithms first pick the node which has the largest labelled value.

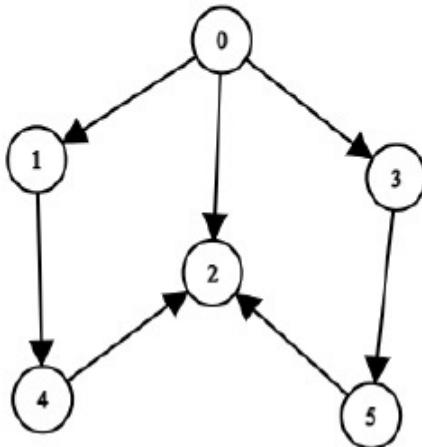

Options :

6406531177267. ✘ (0,1)

6406531177268. ✘ (0,3)

6406531177269. ✘ (5,2)

6406531177270. ✘ (0,2)

6406531177271. ✓ (4,2)

Question Number : 421 Question Id : 640653355001 Question Type : MCQ Is Question


Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following directed weighted graph on which Dijkstra algorithm is run with vertex P as the source vertex.

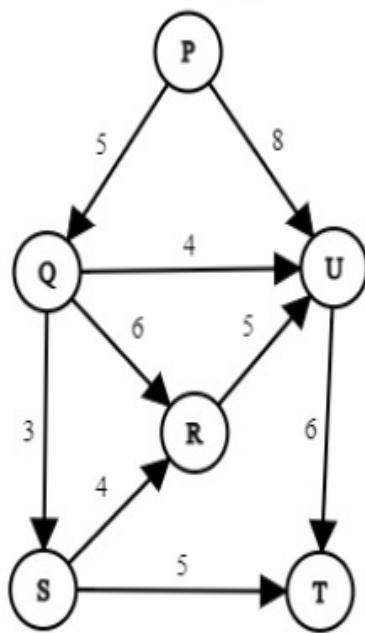

What is the order of nodes in which the nodes are marked as visited by Dijkstra's algorithm ?

Note: If two vertices have same distance, the algorithm picks the next vertex which comes first alphabetically

Options :

6406531177274. ❌ P, Q, S, U, T, R

6406531177275. ✓ P, Q, S, U, R, T

6406531177276. ❌ P, Q, R, S, T, U

6406531177277. ❌ P, Q, S, T, U, R

Question Number : 422 Question Id : 640653355002 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider a undirected connected graph G, where each edge contains the equal weight 1. Which one of the following is **true**?

Options :

6406531177278. ✘ Graph G has no minimum spanning tree

6406531177279. ✘ Graph G has unique MST of cost $n-1$

6406531177280. ✓ Graph G has multiple MSTs, each of cost $n-1$

6406531177281. ✘ Graph G has multiple MSTs of different cost

Question Number : 423 Question Id : 640653355003 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

The maximum and minimum number of nodes in a binary search tree of height 7 are _____.

Consider that the height of the empty tree is 0.

Options :

6406531177282. ✘ 64 and 6, respectively

6406531177283. ✘ 128 and 7, respectively

6406531177284. ✘ 127 and 6, respectively

6406531177285. ✓ 127 and 7, respectively

Question Number : 424 Question Id : 640653355004 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider a complete binary tree with n nodes, where the left and right subtrees of the root are max heaps. The upper bound to convert the tree to a max heap by an efficient algorithm is _____.

Options :

6406531177286. ✓ $O(\log n)$

6406531177287. ✘ $O(n)$

6406531177288. ✘ $O(n \log n)$

6406531177289. ✘ $O(n^2)$

Question Number : 425 Question Id : 640653355005 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider a binary min-heap made up of $\{1, 2, 3, 4, \dots, 1024\}$. Assume that each number occurs exactly once in the heap. The depth of a node in the heap is equal to the number of edges to that node from the root node. Thus, the root is at depth 0. What is the maximum possible depth of the node number 7?

Options :

6406531177290. ✘ 8

6406531177291. ✘ 7

6406531177292. ✘ 2

6406531177293. ✓ 6

Question Number : 426 Question Id : 640653355007 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Which of the following statement(s) is/are **true** about Huffman code algorithm?

1. In an optimal Huffman tree, if leaf labelled **x** is at depth smaller than leaf labelled **y**, then

frequency(x) >= frequency(y)

2. Huffman code algorithm always generates prefix code.
3. Huffman code algorithm is based on a greedy approach.

Options :

6406531177298. ✘ 1 and 2

6406531177299. ✘ 2 and 3

6406531177300. ✘ 1 and 3

6406531177301. ✓ 1, 2 and 3

Question Number : 427 Question Id : 640653355009 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

There are 5 sorted arrays of sizes 10, 20, 36, 45, and 12. If the `merge` algorithm is used to optimally combine all of these sorted arrays together into one sorted sequence, then what is the total number of comparisons needed by the `optimal merge` algorithm in the worst case?

Note: the `merge` algorithm would merge the arrays pairwise, i.e. it would only merge two arrays into a single larger one.

Options :

6406531177303. ✘ 186

6406531177304. ✘ 281

6406531177305. ✓ 264

6406531177306. ✘ 271

Question Number : 428 Question Id : 640653355010 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

In a list `L`, two elements `L[i]` and `L[j]` form a inversion if `L[i] > L[j]` and `i < j`. Which of the following options represents the inversions in the list `L = [2,1,6,4,5,3]` ?

Options :

6406531177307. ✘ (2,1), (5,2), (6,5), (6,3), (4,1), (5,3)

6406531177308. ✘ (2,1), (6,4), (6,5), (6,2), (4,3), (5,2)

6406531177309. ✓ (2,1), (6,4), (6,5), (6,3), (4,3), (5,3)

6406531177310. ✘ (2,1), (6,4), (6,5), (6,3), (4,1), (5,2)

Question Number : 429 Question Id : 640653355014 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Which of the following option represents the fail function (or prefix function) for pattern 'abababaa' in the Knuth-Morris-Pratt (KMP) algorithm?

Options :

6406531177314. ✘ [1,1,1,2,3,4,0,1]

6406531177315. ✓ [0,0,1,2,3,4,5,1]

6406531177316. ✘ [0,0,0,1,1,2,3,4]

6406531177317. ✘ [0,0,1,2,3,4,4,1]

Question Number : 430 Question Id : 640653355016 Question Type : MCQ Is Question


Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following network.

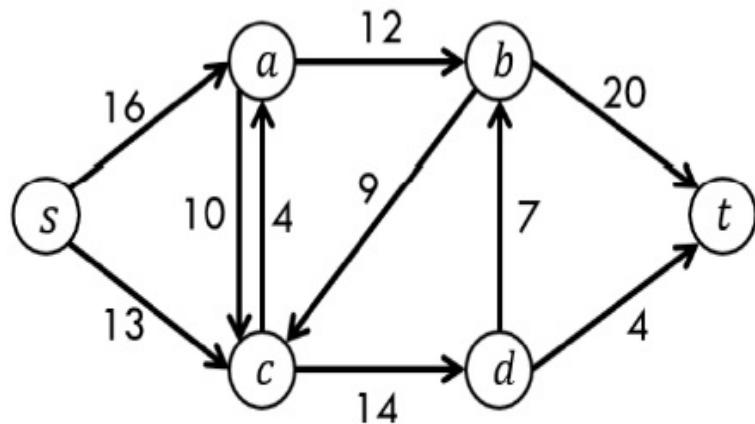

Consider the network given above with source s and sink t , with the numbers on the edges denoting maximum capacity across a particular edge. Which of the following edges form a **valid min cut** in the given network?

Options :

6406531177322. ✘ Edges {ab, cd, dt, db}

6406531177323. ✓ Edges {ab, db, dt}

6406531177324. ✘ Edges {ca, db, dt}

6406531177325. ✘ Edges {ab, cd, bc}

Question Number : 431 Question Id : 640653355017 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following statements and select the appropriate option regarding them

1. SAT is a NP complete problem.
2. Given a problem α which is reduced in polynomial time from another problem β . If β is solvable in polynomial time then α is also solvable within polynomial time.

Options :

6406531177326. ✓ Only statement 1 is correct

6406531177327. ✘ Only statement 2 is correct

6406531177328. ✘ Both the statements are correct

6406531177329. ✘ Both the statements are wrong

Sub-Section Number :

3

Sub-Section Id :

64065351343

Question Shuffling Allowed :

Yes

Question Number : 432 Question Id : 640653354994 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the following implementation for Queue

```
1 class Queue:  
2     def __init__(self):  
3         self.queue = []  
4     def enqueue(self,v):  
5         self.queue.append(v)  
6     def isempty(self):  
7         return(self.queue == [])  
8     def dequeue(self):  
9         v = None  
10        if not self.isempty():  
11            v = self.queue[0]  
12            self.queue = self.queue[1:]  
13        return(v)
```

```
1 def fun(Q):  
2     if (not Q.isempty()):  
3         i = Q.dequeue()  
4         fun(Q)  
5         Q.enqueue(i)
```

Assuming that the initial state of the queue was [12,24,20,6,12,8,16] , what is `Q.queue[2]` after `fun(Q)` is executed?

Options :

6406531177257. ✘ 40

6406531177258. ✘ 6

6406531177259. ✓ 12

6406531177260. ✘ 16

Question Number : 433 Question Id : 640653355015 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

First kind of cake requires 200g of flour and 25g of fat, and second kind of cake requires 100g of flour and 50g of fat. Formulate this problem as a linear programming problem to find the maximum number of cakes that can be made from 5 kg of flour and 1 kg of fat, assuming that there is no shortage of the other ingredients used in making the cakes.

The above problem is to be formulated as a linear programming problem. Let x and y be the number of cake of kind first and second, respectively. Objective function to maximize the number of cakes $z = x + y$.

Which of the following is **not a valid** constraint for the given problem?

Options :

6406531177318. ❌ $2x + y \leq 50$

6406531177319. ✓ $x + 2y \leq 50$

6406531177320. ❌ $x \geq 0, y \geq 0$

6406531177321. ❌ $x + 2y \leq 40$

Sub-Section Number : 4

Sub-Section Id : 64065351344

Question Shuffling Allowed : Yes

Question Number : 434 Question Id : 640653355006 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following statement(s) is/are **true** ?

Options :

While inserting a new element in a max heap of n elements, binary search is performed on the path from the new node to the root to find the correct position of the new node. Number of

6406531177294. ❌ comparisons performed in this process is $O(\log^2 n)$

Given a binary search tree and a min-heap with the same constituent items, the min-heap is
6406531177295. ❌ more efficient for printing the items in ascending order.

When we implement Prim's algorithm using min-heap the time complexity is improved to
6406531177296. ✓ $O((m + n) \log n)$.

When we implement Dijkstra's algorithm using min-heap the time complexity is improved to
6406531177297. ✓ $O((m + n) \log n)$.

Sub-Section Number : 5

Sub-Section Id : 64065351345

Question Shuffling Allowed : Yes

Question Number : 435 Question Id : 640653354995 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

A hash table of size 8 (index 0 to 7) uses open addressing with hash function $h(k) = k \bmod 8$, and linear probing. The following elements are added into the hash table which was initially empty

22, 11, 85, 27, 34 and 50

The key value 50 is stored at which index of the hash table?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

7

Question Number : 436 Question Id : 640653354996 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Consider a **undirected graph** G with **65** edges with the least number of vertices possible. What will be the number of vertices in graph G ?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

12


Question Number : 437 Question Id : 640653354999 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Consider the following directed graph.

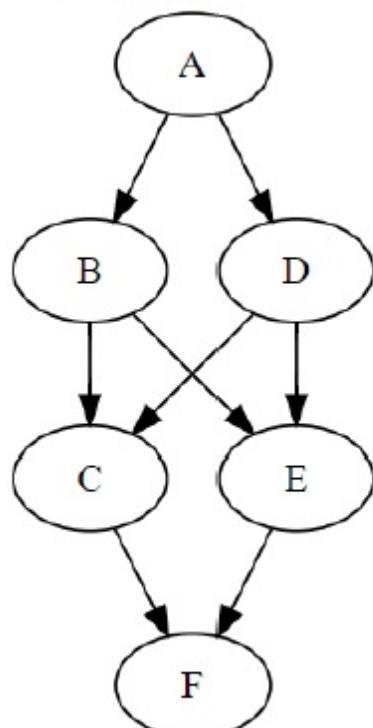

The number of different topological orderings of the vertices of the graph is _____

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

4

Question Number : 438 **Question Id :** 640653355000 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

Consider the following adjacency matrix AMat of an undirected graph with 5 vertices.

$$\text{AMat} = \begin{pmatrix} 0 & 1 & 8 & 1 & 4 \\ 1 & 0 & 12 & 10 & 9 \\ 8 & 12 & 0 & 7 & 3 \\ 1 & 10 & 7 & 0 & 2 \\ 4 & 9 & 3 & 2 & 0 \end{pmatrix}$$

What is the cost of the minimum spanning tree for the given adjacency matrix of a graph?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

7

Question Number : 439 **Question Id :** 640653355008 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

What will be the minimum number of nodes in an AVL tree of height 9? Consider that the height of the empty tree is 0.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

88

Question Number : 440 Question Id : 640653355011 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Let A_1, A_2, A_3, A_4 be 4 matrices with dimensions $(10 \times 5), (5 \times 20), (20 \times 10), (10 \times 15)$ respectively. What is the minimum number of scalar multiplications required to find the product $A_1 \times A_2 \times A_3 \times A_4$?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2500


Question Number : 441 Question Id : 640653355012 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Consider the following grid.

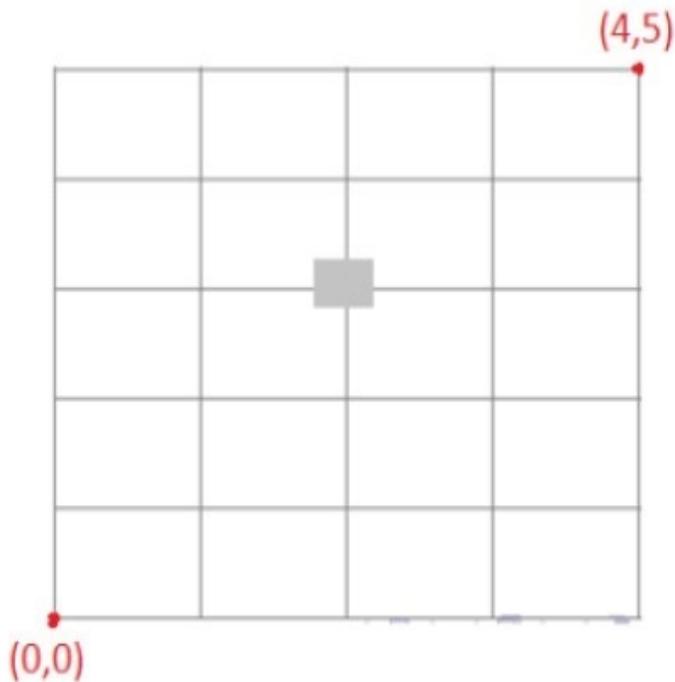

How many unique paths are available from (0,0) to (4,5)? Condition is that you can only travel one step right or one step up at a time, and the gray box at intersection point (2,3) represents a blockage.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

66

Question Number : 442 **Question Id :** 640653355013 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

Consider the Rabin-Karp algorithm using modulo arithmetic to match the pattern in base 10. Taking modulo $q = 11$, how many **false positives** matches does the Rabin-Karp matcher encounter while searching pattern 26 in the text 3141592653589793 ?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

3

System Commands

Section Id :	64065322276
Section Number :	14
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	21
Number of Questions to be attempted :	21
Section Marks :	100
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065351346
Question Shuffling Allowed :	No

Question Number : 443 Question Id : 640653355018 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531177330. ✓ Yes

6406531177331. ✗ No

Sub-Section Number : 2

Sub-Section Id : 64065351347

Question Shuffling Allowed : Yes

Question Number : 444 Question Id : 640653355023 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider that you have checked out a `version1` branch of a git repository on your local machine. You have modified a file named `getStudents.sh` and added a new file named `utilities.sh`. You have also run the `git add` command for the file `getStudents.sh`, but not on the newly added file `utilities.sh`.

What could be the correct output if you executed the command `git status` in this state locally on your repository.

Options :

```
$ git status
On branch version1
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    modified:   getStudents.sh
    new file:   utilities.sh
```

6406531177349. ✗

6406531177350. ✗

```
$ git status
On branch version1
Changes to be committed:
(use "git restore --staged <file>..." to unstage)
  new file: utilities.sh
```

Untracked files:

```
(use "git add <file>..." to include in what will be committed)
  modified: getStudents.sh
```

```
$ git status
On branch version1
Changes to be committed:
(use "git restore --staged <file>..." to unstage)
  new file: utilities.sh

Changes not staged for commit:
  (use "git add <file>..." to include in what will be committed)
6406531177351. ✘      modified: getStudents.sh
```

```
$ git status
On branch master
Changes to be committed:
(use "git restore --staged <file>..." to unstage)
  modified: getStudents.sh

Untracked files:
  (use "git add <file>..." to include in what will be committed)
6406531177352. ✓      new file: utilities.sh
```

Question Number : 445 Question Id : 640653355024 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Which of the following options can be used to count the number of empty lines in the file `input.txt`?

Options :

6406531177353. ✘ `sed '^.*$' input.txt`

6406531177354. ❌ sed '^[]*\$' input.txt

6406531177355. ❌ sed '^[[]]*\$' input.txt

6406531177356. ✓ 'sed '^\$' input.txt

Question Number : 446 Question Id : 640653355032 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Select the command to find all files (but not directories) within the current directory that are modified in the last 3 days and delete them.

Options :

6406531177389. ✓ find . -type f -mtime -3 -delete

6406531177390. ❌ find / -type f -mtime -3 -delete

6406531177391. ❌ find .. -type f -atime -3 -delete

6406531177392. ❌ find . -type d -mtime -3 -delete

Question Number : 447 Question Id : 640653355037 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

What is the command to exit without saving a file in vim and Emacs respectively?

Options :

6406531177409. ✓ Vim: :q! Emacs: Ctrl-x Ctrl-c

6406531177410. ✗ Vim: :wq Emacs: Ctrl-x Ctrl-c

6406531177411. ✗ Vim: :q! Emacs: Ctrl-z

6406531177412. ✗ Vim: :wq Emacs: Ctrl-k Ctrl-z

Question Number : 448 Question Id : 640653355038 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider a file `emp_details.txt` as:

```
$ cat emp_details.txt
A1998001,Ram Kumar,10,Male
B2000002,Sanjay Narayan,7,Male
B2000003,Srishti Rai,10,Female
E1997001,Manoj Pillai,12,Male
G1998001,Preeti Suresh,9,Female
G1999001,Leela L G,16,Female
```

What is the output of the command displayed below?

```
$ awk 'BEGIN{OFS=":";} /Male/ {if (NR>=3 && NR<=5) print NR,$1}' emp_details.txt
```

Options :

6406531177413. ✗ 4:E1997001

3:B2000003
4:E1997001

6406531177414. ✗ 5:G1998001

6406531177415. ✗ 4 E1997001

3:B2000003,Srishti

4:E1997001,Manoj

6406531177416. ❌ 5:G1998001,Preeti

6406531177417. ✓ 4:E1997001,Manoj

Sub-Section Number : 3

Sub-Section Id : 64065351348

Question Shuffling Allowed : Yes

Question Number : 449 Question Id : 640653355035 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

Consider the below command and the output.

```
$ ls -l
-rwxr--r-- 1 gu1 gu2 4096 October 21 06:03 config.sh
-r-xr--r-- 1 gu1 gu2 4096 October 21 06:03 start.sh
```

Which of the following commands will **not** overwrite the complete file.

Options :

6406531177400. ✓ touch config.sh

6406531177401. ❌ cat start.sh >config.sh

6406531177402. ✓ cat config.sh >start.sh

6406531177403. ✓ echo start.sh >>config.sh

6406531177404. ✓ echo config.sh >>start.sh

Sub-Section Number :

4

Sub-Section Id :

64065351349

Question Shuffling Allowed :

Yes

Question Number : 450 Question Id : 640653355019 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

```
awk '  
NR == FNR {  
    arr[$0]++  
}  
NR != FNR && !arr[$0] {  
    print $0  
}  
' file1 file2
```

What does the above awk command do?

Note: `NR` and `FNR` is the number of current record being processed overall(including all the input files) and in the current file respectively.

Options :

6406531177332. ✅ Prints the lines in file2 that are not present in file1

6406531177333. ❌ Prints the lines in file1 that are not present in file2

6406531177334. ❌ Prints the lines in file1

6406531177335. ❌ Prints the lines in file2

Question Number : 451 Question Id : 640653355020 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider a file `myfile` with the below contents,

```
welcome
(you)
\(all)
\(to\
\(the\
world
```

and the below command.

```
sed 's/(...)/{...}/' myfile
```

Select the correct output of the above sed command.

Note: Consider that the system on which this command is run uses the Basic Regular Expression engine(BRE).

Options :

```
welcome
(you)
\(all)
\(to\
\(the\)
```

6406531177336. ❌ world

```
welcome
{...}
\{...
\{...
\(the\)
```

6406531177337. ✓ world

```
welcome
{...}
\(all)
\(to\
\(the\)
```

6406531177338. ❌ world

6406531177339. ❌

```
{....}{....}e  
{....}  
\{....}  
\{....}  
\{....}{....}  
{...}ld
```

Question Number : 452 Question Id : 640653355021 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider a file named `myfile`. We want to merge every two consecutive lines starting from line 1 with a delimiter as `:` between the lines. Suppose the contents of `myfile` are given below.

```
name  
Divya  
location  
New Delhi  
occupation  
Teacher  
education-status  
Master of Education
```

Select the command that will merge the lines as described above, and prints to the terminal. The expected output on running the command for the above input should be.

```
name:Divya  
location:New Delhi  
occupation:Teacher  
education-status:Master of Education
```

Options :

```
while read line; do  
    echo "$line:"
```

6406531177340. ✘ done < myfile

6406531177341. ✘

```
while read line; do
    # with -n this will not add a new line character at the end
    echo -n "$line:"
done < myfile
```

```
while true; do
    read keyline
    read valueline
    [[ $keyline == "" || $valueline == "" ]] && break
    echo "$keyline:$valueline"
```

6406531177342. ✓ done < myfile

```
while true; do
    read keyline
    read valueline
    echo "$keyline:$valueline"
```

6406531177343. ✗ done < myfile

Question Number : 453 Question Id : 640653355029 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Described below are some options of the command `tar`, that can be useful for the below task.

Usage: `tar [OPTION...] [FILE]...`

GNU 'tar' saves many files together into a single tape or disk archive, and can restore individual files from the archive.

<code>-c, --create</code>	create a new archive
<code>-x, --extract, --get</code>	extract files from an archive
<code>-f, --file=ARCHIVE</code>	use archive file or device ARCHIVE

Compression options:

<code>-a, --auto-compress</code>	use archive suffix to determine the compression program
<code>-z, --gzip, --gunzip, --ungzip</code>	filter the archive through gzip

Also, consider the state of the current working directory below.

```
$ ls -l
total 32
-rw-r--r-- 1 runner runner    0 Jun 23 08:00 '{'
drwxr-xr-x 1 runner runner   22 Jun 21 13:48 current
-rw-r--r-- 1 runner runner 10240 Jul 26 09:02 file1
-rw-r--r-- 1 runner runner    1 Jul 26 09:02 file2
-rw-r--r-- 1 runner runner    1 Jul 26 09:02 file3
-rw-r--r-- 1 runner runner   43 Jul 26 07:19 input.txt
-rw-r--r-- 1 runner runner   90 Jul 26 08:10 main.sh
drwxr-xr-x 1 runner runner   60 Jul 26 07:37 prices
```

Select the command that will **compress** only the files `file1`, `file2` and `file3` to the file `ar.gz`.

Options :

6406531177372. ✗ `tar -xf ar.gz file1 file2 file3`

6406531177373. ✗ `tar -acf ar.gz *`

6406531177374. ✗ `tar -zxf ar.gz file1 file2 file3`

6406531177375. ✓ `tar -zcf ar.gz file*`

Question Number : 454 Question Id : 640653355036 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Which of the following command will run the script /user/home/daily/sunday/run.sh on 1st day of every month at 10:00 AM.

Hint: Below is the description of the sequence in the cron job command. It tells at what date/time periodically the job needs to be executed.

```
* * * * * <Command(s) with argument>
| | | | |
| | | | | Command or Script to Execute
| | | |
| | | |
| | | |
| | | |
| | | Day of the Week(0-6)
| | |
| | |
| | Month of the Year(1-12)
| |
| |
| | Day of the Month(1-31)
| |
| Hour(0-23)
|
Min(0-59)
```

Options :

6406531177405. ❌ 0 22 1 * * /user/home/daily/sunday/run.sh

6406531177406. ✓ 0 10 1 * * /user/home/daily/sunday/run.sh

6406531177407. ❌ 0 22 * 1 0 /user/home/daily/sunday/run.sh

6406531177408. ❌ 0 10 * 1 0 /user/home/daily/sunday/run.sh

Sub-Section Number : 5

Sub-Section Id : 64065351350

Question Shuffling Allowed : Yes

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Select Question

Consider a file myfile located at /home/linda/myfile . The following commands are executed sequentially.

```
ln /home/linda/myfile /home/meena/myfile  
ln /home/meena/myfile /home/abdul/myfile  
ln /home/abdul/myfile /home/arun/myfile  
ln /home/arun/myfile /home/sanjay/myfile
```

Assuming all the directories in /home have read and execute permission for all the users. Select the command running which individually will make the link /home/sanjay/myfile a broken link.

Options :

6406531177344. ✘ rm /home/linda/myfile

6406531177345. ✘ rm /home/meena/myfile

6406531177346. ✘ mv /home/abdul/myfile /home/abdul/myfile_new

6406531177347. ✘ echo "LAST LINE" >>/home/arun/myfile

6406531177348. ✓ None of these.

Question Number : 456 Question Id : 640653355026 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Select Question

Select all the correct statements with respect to RAID.

Hint:

RAID 1 consists of an exact copy (or mirror) of a set of data on two or more disks

RAID 4 consists of block-level striping with a dedicated parity disk.

RAID 6 uses block striping with two parity blocks distributed across all member disks

Options :

6406531177361. ✓ RAID 1 can handle one disk failure without losing the data.

6406531177362. ✓ RAID 4 can handle one disk failure without losing the data.

6406531177363. ✓ RAID 6 can be deployed to achieve higher read speeds.

6406531177364. ✗ RAID 1 can be deployed to achieve higher write speeds.

Question Number : 457 Question Id : 640653355028 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 5

Question Label : Multiple Select Question

Select all the files that are either a soft link or a hard link. If linked these files are linked only with files in the current working directory.

```
$ ls -li
total 0
18748538 -rw-rw-r-- 3 user user 0 Jul 25 17:50 a
18748523 -rw-rw-r-- 1 user user 0 Jul 25 17:50 b
18748522 -rw-rw-r-- 5 user user 0 Jul 25 17:50 c
18748774 lrwxrwxrwx 1 user user 1 Jul 25 17:51 d -> c
18748823 -rw-rw-r-- 1 user user 0 Jul 25 17:51 e
18748823 -rw-rw-r-- 1 user user 0 Jul 25 17:51 f
```

Options :

6406531177366. ✗ a

6406531177367. ✓ b

6406531177368. ✗ c

6406531177369. ✓ d

6406531177370. ✓ e

6406531177371. ✓ f

Sub-Section Number :

6

Sub-Section Id :

64065351351

Question Shuffling Allowed :

Yes

Question Number : 458 Question Id : 640653355027 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Short Answer Question

The below examples show how the brace expansion work.

```
$ echo {a,b}{a,b}
aa ab ba bb
$ echo {a,b}{a,a} | sed 's/ /\n/g'
aa
aa
ba
ba
```

What will be the output of the below bash command? Enter only a number.

```
echo {b,b}{a,b,c,d} | sed 's/ /\n/g' | sort |uniq | wc -l
```

Hint: `sort` command sorts the values, `uniq` command outputs only distinct consecutive values.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

4

Question Number : 459 Question Id : 640653355033 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Short Answer Question

How many sleep processes are active at the end of execution of for loop?

Note: kill % will kill the last job

```
for i in {1..11}; do
    sleep 100 &
    (( $i % 2 )) && kill %
done
```

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

6

Sub-Section Number : 7

Sub-Section Id : 64065351352

Question Shuffling Allowed : Yes

Question Number : 460 **Question Id :** 640653355030 **Question Type :** MCQ **Is Question**

Mandatory : No **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction**

Time : 0

Correct Marks : 6

Question Label : Multiple Choice Question

The file input.txt has a list of dates in MM-DD-YYYY format. Which of the following commands can be used to convert it to YYYY:MM:DD format?

Options :

6406531177376. ❌ sed 's/\([0-9]{2}\)\([0-9]{2}\)\([0-9]{4}\)/\3:\1:\2' input.txt

6406531177377. ❌ sed 's/\([0-9]{2}\)-\([0-9]{2}\)-\([0-9]{4}\)/\2:\3:\1/' input.txt

6406531177378. ✓ sed 's/\([0-9]{2}\)-\([0-9]{2}\)-\([0-9]{4}\)/\3:\1:\2/' input.txt

6406531177379. ❌ sed 's/\([0-9]{2}\)\([0-9]{2}\)\([0-9]{4}\)/\2:\3:\1/' input.txt

Sub-Section Number : 8

Sub-Section Id : 64065351353

Question Shuffling Allowed : Yes

Question Number : 461 Question Id : 640653355025 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 6

Question Label : Multiple Select Question

Select the command that can be used to extract the hardware address from the output of the command `ip addr`.

```
$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
8637: eth0@if8638: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc tbf state UP group default qlen 1000
    link/ether 02:42:ac:12:00:53 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 172.18.0.83/16 brd 172.18.255.255 scope global eth0
        valid_lft forever preferred_lft forever
```

Consider the above command output, which of the following bash commands will give the output as below?

02:42:ac:12:00:53

Description of the option of `grep` command from its man page.

`-o, --only-matching`
Print only the matched (non-empty) parts of a matching line, with each such part on a separate output line.

Description of the option of `sed` command from its man page.

`-n, --quiet, --silent`
suppress automatic printing of pattern space

Note: There are no tabs in the output of the command `ip addr` and the command `sed 's/^ *//'` will delete all the spaces at the start of every line.

Options :

6406531177357. ❌ `ip addr | grep -o '.....'`

6406531177358. ✓ `ip addr | sed -n '/ether/ p' | grep -o '.....' | head -1`

6406531177359. ✓ `ip addr | sed 's/^ *//' | grep 'ether' | cut -d' ' -f2`

6406531177360. ❌ `ip addr | sed 's/^ *//' | cut -d' ' -f2 | grep 'ether'`

Question Number : 462 Question Id : 640653355034 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 6

Question Label : Multiple Select Question

Consider the below commands that are already run in the current working directory.

```
$ ls -l
-rw-r--r-- 1 ind ind 325 Jul 22 15:39 script1.sh
-rwxr--r-- 1 ind ind 633 Jul 22 01:15 script2.sh
-rw-r--r-- 1 ind ind 33 Jul 22 01:15 script3.sh
$
$echo $PATH
:/usr/local/sbin:/usr/local/bin:/usr/sbin:/home/commands:/usr/bin:/sbin:/bin
$
$ chmod 777 script3.sh; mv script3.sh /home/commands/
$ chmod 777 script1.sh; cp script1.sh /home/bin/
```

Now, which of the following commands will run successfully on the terminal under the current working directory and return with exit code 0.

Options :

6406531177394. ✓ script3.sh

6406531177395. ✗ script1.sh

6406531177396. ✗ ./script1.sh

6406531177397. ✓ ./script2.sh

6406531177398. ✗ bash script3.sh

6406531177399. ✓ bash script1.sh

Sub-Section Number :

9

Sub-Section Id :

64065351354

Question Shuffling Allowed :

Yes

Question Number : 463 Question Id : 640653355031 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 8

Question Label : Multiple Select Question

Consider some pattern matching criteria as:

- Should not contain anything except digits on the line.
- Should match AA, aa, Aa or aA, but not AAA, Aaa, AaaA etc.
- Should match any word of two characters of which one is a digit and no restriction on the other character.
- The line should not start with the digit 0 and should end with the character dot(.)

Select the regular expressions from below which will match according to at least one criteria above correctly. The regular expressions below are written to be run with the egrep command that uses the Extended regular expression (ERE) engine.

Options :

6406531177380. ❌ aa|Aa|aA|AA

6406531177381. ❌ \b.[0-9].\b

6406531177382. ✓ ^[^0].*\\$.

6406531177383. ✓ \b[Aa][Aa]\b

6406531177384. ❌ !0.\\$

6406531177385. ❌ ^[0-9]+

6406531177386. ✓ ^[0-9][0-9]*\\$

6406531177387. ❌ ^!0.*\\$.

TDS

Section Id :	64065322277
Section Number :	15
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	46
Number of Questions to be attempted :	46
Section Marks :	46
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065351355
Question Shuffling Allowed :	No

Question Number : 464 Question Id : 640653355039 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "DIPLOMA LEVEL: TOOLS IN DATA SCIENCE"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531177418. ✓ Yes

6406531177419. ✗ No

Sub-Section Number :	2
Sub-Section Id :	64065351356
Question Shuffling Allowed :	Yes

Question Number : 465 Question Id : 640653355040 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The analysis metric slope can be observed through which of the following ways?

Options :

6406531177420. ✗ Trend Line in Line Chart

6406531177421. ✗ SLOPE function

6406531177422. ✓ Both Trend Line in Line Chart and SLOPE function

6406531177423. ✗ None of these

Question Number : 466 Question Id : 640653355041 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Quill provides the option to turn on/off, for displaying the individual comments from the narrative generation process?

Options :

6406531177424. ✓ TRUE

6406531177425. ✗ FALSE

Question Number : 467 Question Id : 640653355042 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

We are analyzing how much the use of fertilizers affects the agricultural yield of the farmers.

Which Excel function would you use as a starting point in this analysis?

Options :

6406531177426. ❌ STDEV.P()

6406531177427. ❌ STDEV.S()

6406531177428. ✓ SLOPE()

6406531177429. ❌ EXACT()

Question Number : 468 Question Id : 640653355043 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Subjectivity score in TextBlob ranges from _____.

Options :

6406531177430. ✓ 0 to 1

6406531177431. ❌ -1 to +1

6406531177432. ❌ -inf to +inf

6406531177433. ❌ 0 to inf

6406531177434. ❌ 0 to 10

Question Number : 469 Question Id : 640653355044 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Flourish cannot be used to create animated bar charts.

Options :

6406531177435. ✘ TRUE

6406531177436. ✓ FALSE

Question Number : 470 Question Id : 640653355045 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which piece of code below will extract details of all Bollywood movies that were released in Jan – March 2009 and later prints out only those rows where the respective movie was categorized only as a Drama?

Options :

```
import requests
import pandas as pd
from bs4 import BeautifulSoup
website_url=requests.get('https://web.archive.org/web/20220429
040949/https://en.wikipedia.org/wiki/List_of_Hindi_films_of_2009').t
ext
soup = BeautifulSoup(website_url,'html.parser')
required_table = soup.find_all('table')[3]
df = pd.read_html(str(required_table))
df=pd.DataFrame(df[0])
df[df['Genre'].isin(['Drama'])]
```

6406531177437. ✓

```
import requests
import pandas as pd
from bs4 import BeautifulSoup
website_url=requests.get('https://web.archive.org/web/20220429
040949/https://en.wikipedia.org/wiki/List_of_Hindi_films_of_2009').t
ext
soup = BeautifulSoup(website_url,'html.parser')
required_table = soup.find_all('table', "January-March")
df = pd.read_html(str(required_table))
df=pd.DataFrame(df[0])
df[df['Genre'].isin(['Drama'])]
```

6406531177438. ✘

6406531177439. ✘

```
import requests
import pandas as pd
from bs4 import BeautifulSoup
website_url=requests.get('https://web.archive.org/web/20220429040949/https://en.wikipedia.org/wiki/List_of_Hindi_films_of_2009').text
soup = BeautifulSoup(website_url,'html.parser')
required_table = soup.find_all('table', id = "January-March")
df = pd.read_html(str(required_table))
df=pd.DataFrame(df[0])
df[df['Genre'].isin(['Drama'])]
```

```
import requests
import pandas as pd
from bs4 import BeautifulSoup
website_url=requests.get('https://web.archive.org/web/20220429040949/https://en.wikipedia.org/wiki/List_of_Hindi_films_of_2009').text
soup = BeautifulSoup(website_url,'html.parser')
required_table = soup.find_all('table')[5]
df = pd.read_html(str(required_table))
df=pd.DataFrame(df[0])
df[df['Genre'].isin(['Drama'])]
```

6406531177440. ✘

Question Number : 471 Question Id : 640653355047 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

A very large Matrix **A** has a lot of zero entries in it. Which function from the *scipy* library is useful in efficient storage of such a matrix **A**?

Options :

6406531177445. ✓ `csr_matrix`

6406531177446. ✘ `interpolate`

6406531177447. ✘ `compressed_mat`

6406531177448. ✘ `zip_mat`

Question Number : 472 Question Id : 640653355048 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Kumu is a tool that allows you to (select the most appropriate answer):

Options :

6406531177449. ✓ Visualize complex network data

6406531177450. ✗ create stunning dashboards for large projects

6406531177451. ✗ merge Comicgen characters into a comic

6406531177452. ✗ Narrate data stories

Question Number : 473 Question Id : 640653355049 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following Python libraries has functions and tools that are useful in the analysis of large graphs?

Options :

6406531177453. ✓ scikit-network

6406531177454. ✗ pandas-network

6406531177455. ✗ numpy-network

6406531177456. ✗ pd-network

Question Number : 474 Question Id : 640653355050 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following Python libraries has functions extensively written to perform numerical operations?

Options :

6406531177457. ✘ csr_matrix

6406531177458. ✓ numpy

6406531177459. ✘ seaborn

6406531177460. ✘ itertools

Question Number : 475 Question Id : 640653355054 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

You developed a sudden interest in English Premier League. Post the TDS course, you wanted to perform an analysis on all teams which played EPL from the year 1992. You performed PDF scraping using ‘tabula’ and appended every year standings of teams one below the other and saved as a single csv file. For looking at aggregating at various levels (viz Year wise, Team wise) the following can be used in Excel:

Options :

6406531177469. ✘ Pilot Table

6406531177470. ✓ Pivot Table

6406531177471. ✘ Pivol Table

6406531177472. ✘ None of these

Question Number : 476 Question Id : 640653355055 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Assume you have data with a column “Direction” which takes the values “Left”, “Right”. If you had used one hot encoding, the new columns added would be:

Options :

6406531177473. ✓ Direction_Left, Direction_Right

6406531177474. ✘ Left_Direction, Right_Direction

6406531177475. ✅ Left-Direction, Right-Direction

6406531177476. ✅ Direction-Left, Right-Direction

Question Number : 477 Question Id : 640653355056 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

One of quick ways to generate a descriptive stats file for variables along with correlation is to use

Options :

6406531177477. ✓ pandas_profiling

6406531177478. ✅ profiling_pandas

6406531177479. ✅ describe_dataset

6406531177480. ✅ Dataframe_profile

Question Number : 478 Question Id : 640653355057 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

You decide to use keras to classify images into one of the following categories: cat, dog, bull.

Which of the following loss functions from *Keras* would you pick for the task?

Options :

6406531177481. ✅ binary_crossentropy

6406531177482. ✓ categorical_crossentropy

6406531177483. ✅ mean_squared_error

6406531177484. ✅ mean_absolute_error

Question Number : 479 Question Id : 640653355058 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Logical calculations in tableau helps to determine if a certain condition is true or false. Is the following expression valid?

```
IF [Profit] > 0 THEN 'Profitable' ELSEIF [Profit] = 0 THEN  
'Breakeven' ELSE 'Loss' END
```

Options :

6406531177485. ✓ TRUE

6406531177486. ✗ FALSE

Question Number : 480 Question Id : 640653355059 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Identify which of the following statements is/are TRUE

1. A story contains a single view along with shelves, cards, legends, and the Data and Analytics panes in its side bar.
2. A worksheet contains a sequence of stories that work together to convey information
3. A dashboard is a collection of views from multiple worksheets

Options :

6406531177487. ✗ 1 Only

6406531177488. ✓ 3 Only

6406531177489. ✗ 2 & 3 Only

6406531177490. ✗ 1 & 2 Only

Question Number : 481 Question Id : 640653355060 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The dataset consists of geographic, demographic information about countries and their respective GDPs. You would like to visualize this data and study the relationship between the location of countries and their GDPs. You decide to use Tableau to visualize the dataset. But you would also like to generate a summary of the data. Choose the most suitable answer among the given options.

Options :

6406531177491. ✓ The summary can be generated using Quill and this is possible because Quill can be used as an extension in Tableau.

6406531177492. ✗ Tableau can be used for visualization. But Quill is incompatible with Tableau.

6406531177493. ✗ Quill does not support generation of summary. Therefore using other visualization tools such as Tableau would work.

6406531177494. ✗ None of the options are appropriate for the generation of summary for the given question.

Question Number : 482 Question Id : 640653355061 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

What are the two outputs provided by the Excel Azure Machine Learning plugin?

Options :

6406531177495. ✗ Percentage, Labels

6406531177496. ✗ Sentiment, Percentage

6406531177497. ✓ Sentiment, Score

6406531177498. ✗ Score, Labels

Question Number : 483 Question Id : 640653355062 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Provided below is an incomplete code snippet that enables you to compute distance between two locations. Choose the most appropriate option that can be used in place of <missing line> to compute the distance. Assume the coordinates of location one is stored in the variable "loc1" and the coordinates of location 2 is stored in the variable "loc2".

Code Snippet:

```
distances_km = []

for row in df.itertuples(index=False):
    distances_km.append(
        <missing line>
    )

df['Distance'] = distances_km
df.head(10)
```

Options :

- 6406531177499. ❌ geopy.distance(loc1, loc2).km
- 6406531177500. ❌ geopy.distance(loc1, loc2).km.km
- 6406531177501. ✓ geopy.distance.distance(loc1, loc2).km
- 6406531177502. ❌ geopy.distance.distance.distance(loc1_coord, loc2_coord).km

Question Number : 484 Question Id : 640653355063 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Provided below is a snippet of the code block of HTML tags from a website providing weather forecast. Your goal is to scrape the high and low values for the 10-day temperature forecast.

```

<div class="wr-day-temperaturehigh">
    <span class="wr-day-temperature__high-label wr-hide-visually">High</span>
        <span class="wr-day-temperature__high-value">
            <span class="wr-value--temperature ">
                <span class="wr-value--temperature--c">31°</span>
                <span class="wr-hide"> </span>
                <span class="wr-value--temperature--f">87°</span>
            </span>
        </span>
    </div>
<div class="wr-day-temperaturelow">
    <span class="wr-day-temperature__low-label wr-hide-visually">Low</span>
        <span class="wr-day-temperature__low-value">
            <span class="wr-value--temperature ">
                <span class="wr-value--temperature--c">21°</span>
                <span class="wr-hide"> </span>
                <span class="wr-value--temperature--f">71°</span>
            </span>
        </span>
    </div>

```

Also provided below, is the python code to extract values from the tags. But the tags represented as <A> and are missing. Choose the most appropriate tag that will get you the high and low values for the 14-day temperature forecast..

```

#Daily High Values
daily_high_values = soup.find_all('span', attrs={'class': '<A>'})

#Daily Low Values
daily_low_values = soup.find_all('span', attrs={'class': '<B>'})

```

Options :

6406531177503. ❌ <A> = wr-value--temperature--f
 <A> = wr-value--temperature--c

6406531177504. ❌ = wr-day--temperature--c
 = wr-day--temperature--f

6406531177505. ✓ <A> = wr-day-temperaturehigh
 <A> = wr-day-temperaturelow

6406531177506. ❌ <A> = low-label wr-hide-visually
 = high-label wr-hide-visually

Question Number : 485 Question Id : 640653355064 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The final output from the BBC Weather Location Service API is in CSV format:

Options :

6406531177507. ❌ TRUE

6406531177508. ✓ FALSE

Question Number : 486 Question Id : 640653355065 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which among the following properties are returned by the sentiment function of the TextBlob library?

Options :

6406531177509. ❌ Score, Polarity

6406531177510. ❌ Polarity, Negativity

6406531177511. ❌ Median, Subjectivity

6406531177512. ✓ Polarity, Subjectivity

Question Number : 487 Question Id : 640653355066 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Subjectivity score ranges between -1 to +1.

Options :

6406531177513. ✘ TRUE

6406531177514. ✓ FALSE

Question Number : 488 Question Id : 640653355067 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

A subjectivity score of 0.4 means that the text statement:

Options :

6406531177515. ✘ has a positive sentiment

6406531177516. ✘ has a negative sentiment

6406531177517. ✘ is more of an opinion statement

6406531177518. ✓ is more of a factual statement

Question Number : 489 Question Id : 640653355068 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

A polarity score of 0.1 means that the text statement:

Options :

6406531177519. ✓ has a positive sentiment

6406531177520. ✘ has a negative sentiment

6406531177521. ✘ is more of an opinion statement

6406531177522. ✘ is more of a factual statement

Question Number : 490 Question Id : 640653355069 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Provided below is a snapshot of the dataset which consists of movie reviews and respective labels.

	A	B
1	sentiment	review
2	positive	One of the other reviewers has mentioned
3	positive	A wonderful little production.
4	positive	I thought this was a wonderful way to spe
5	negative	Basically there's a family where a little bo
6	positive	Petter Mattei's "Love in the Time of Money"
7	positive	Probably my all-time favorite movie, a st
8	negative	This show was an amazing, fresh & innova
9	negative	Encouraged by the positive comments abo
10	positive	If you like original gut wrenching laughter
11	negative	Phil the Alien is one of those quirky films

To compute the sentiment scores the Azure Machine Learning add-in requires input and output values. In the figure provided below the input and output cells need to be populated with appropriate values to obtain sentiment scores.

2. PREDICT

Input: input1

Type range or click button to select 

My data has headers

[Use sample data](#) 

Output: output1

Enter output cell (e.g. A20)

Include headers

Choose the most appropriate option that enables you to predict sentiment scores using the Excel Azure Machine Learning add-in.

Options :

Input: Sheet1!A1:A11

6406531177523. ✘

Output: Sheet1!C1

Input: Sheet1!B1:B11

6406531177524. ✓

Output: Sheet1!C1

Question Number : 491 Question Id : 640653355070 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

We are interested in analyzing the effect of money spent on TV advertising on the sales volume of a product. Which Excel function would you use as a starting point in this analysis?

Options :

6406531177525. ✘ STDEV.P()

6406531177526. ✘ STDEV.S()

6406531177527. ✓ SLOPE()

6406531177528. ✘ EXACT()

Question Number : 492 Question Id : 640653355071 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

We have predictions (y_{hat}) on a train dataset of 100 records. Let y be the true value. We are interested in calculating $\text{median}(|y_1 - y_{\text{hat}}_1|, |y_2 - y_{\text{hat}}_2|, \dots, |y_{100} - y_{\text{hat}}_{100}|)$. Which of the following functions will help you in achieving this easily?

Options :

6406531177529. ✘ from sklearn.metrics import mean_absolute_error

6406531177530. ✓ from sklearn.metrics import median_absolute_error

6406531177531. ✘ from sklearn.metrics import median_absolute_percentage_error

6406531177532. ✘ from sklearn.metrics import average_absolute_percentage_error

Question Number : 493 Question Id : 640653355072 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

You are working on a piece of code that classifies different vehicles into its respective class (car, LCV, truck, earth movers). Which of the following loss functions from *Keras* would you pick for the task?

Options :

6406531177533. ✘ binary_crossentropy

6406531177534. ✓ categorical_crossentropy

6406531177535. ✘ mean_squared_error

6406531177536. ✘ Mean_absolute_error

Question Number : 494 Question Id : 640653355073 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Tableau automatically divides the data fields into two categories. What are they?

Options :

6406531177537. ✘ Measures and categories

6406531177538. ✓ Dimensions and Measures

6406531177539. ✘ Columns and rows

6406531177540. ✘ Matrices and columns

Question Number : 495 Question Id : 640653355074 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which Extension in Tableau transforms visualizations into narratives?

Options :

6406531177541. ❌ Narrator

6406531177542. ❌ Navigator

6406531177543. ✓ Quill

6406531177544. ❌ Quora

Question Number : 496 Question Id : 640653355075 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

If you want to create comical characters while building business stories, which tool would be helpful.?

Options :

6406531177545. ❌ Cartoongen

6406531177546. ❌ Image size

6406531177547. ✓ Comicgen

6406531177548. ❌ Gentoon

Question Number : 497 Question Id : 640653355076 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following is used to build and host web applications?

Options :

6406531177549. ✓ Streamlit for building web applications, Heroku for hosting web applications

6406531177550. ❌ Heroku for building web applications, Streamlit for hosting web applications
6406531177551. ❌ Streamlit for building web applications, Streamlit for hosting web applications
6406531177552. ❌ Heroku for building web applications, Heroku for hosting web applications

Question Number : 498 Question Id : 640653355077 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which among the following excel charts is the most suitable for detecting outliers in the data?

Options :

6406531177553. ❌ Bar chart
6406531177554. ❌ Line chart
6406531177555. ✓ Box and Whisker chart
6406531177556. ❌ Histogram

Question Number : 499 Question Id : 640653355078 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following libraries is used to construct API urls?

Options :

6406531177557. ✓ Urllib
6406531177558. ❌ BeautifulSoup
6406531177559. ❌ Requests
6406531177560. ❌ Pandas

Question Number : 500 Question Id : 640653355079 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following tabs is used to identify API calls in the Inspect element in any browser?

Options :

6406531177561.  Network

6406531177562.  Elements

6406531177563.  Console

6406531177564.  Sources

Question Number : 501 Question Id : 640653355080 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Google Studio is a tool that allows you to

Options :

6406531177565.  merge Comicgen characters into a comic

6406531177566.  visualize complex network data

6406531177567.  create dashboards for small scale projects

6406531177568.  Edit photographs and videos

Question Number : 502 Question Id : 640653355082 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

csr_matrix from the scipy library:

Options :

6406531177573.  always helps reduce matrix space

6406531177574. ✓ helps reduce matrix space when there are a lot of zero entries in the matrix

6406531177575. ✗ helps reduce matrix space when there are a lot of negative entries in the matrix

6406531177576. ✗ makes matrix multiplication more meaningful and powerful

Question Number : 503 Question Id : 640653355083 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

classification_report function from the sklearn.metrics module

Options :

6406531177577. ✗ builds a decision tree classifier and prints the accuracy of the classifier

6406531177578. ✗ reports the root mean square error of the model

6406531177579. ✗ runs different classification models and compares the results

6406531177580. ✓ builds a text report displaying the main classification metrics

Question Number : 504 Question Id : 640653355084 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

pycaret is a

Options :

6406531177581. ✗ Visualization tool

6406531177582. ✗ Dashboard helper

6406531177583. ✓ low-code machine learning library

6406531177584. ✗ Data cleaning solution

Question Number : 505 Question Id : 640653355085 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

We are interested in fitting an ARIMA model to our time series data. Specifically, we are interested in a moving average model of 0, setting a lag value of 4 for autoregression, and a difference order of 1. Which of the following gives you such a model?

Options :

6406531177585. ❌ ARIMA(..., trend = (4,1,0))

6406531177586. ✓ ARIMA(..., order = (4,1,0))

6406531177587. ❌ ARIMA(..., order = (0,4,1))

6406531177588. ❌ ARIMA(..., trend = (0,4,1))

Question Number : 506 Question Id : 640653355086 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Scikit-learn has a DecisionTreeClassifier module that is useful in building decision tree classifiers. Suppose, our dataset is imbalanced in class. Which feature in the DecisionTreeClassifier() will help us tackle this problem?

Options :

6406531177589. ❌ random_state

6406531177590. ❌ min_sample_split

6406531177591. ❌ class_balance

6406531177592. ✓ class_weight

Sub-Section Number : 3

Sub-Section Id : 64065351357

Question Shuffling Allowed : Yes

Question Number : 507 Question Id : 640653355046 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Comicgen is a useful tool in narrating data stories using comics. Which of the following are capabilities of comicgen?

Options :

6406531177441. ✓ Comicgen can create comic characters

6406531177442. ✓ Comicgen provides options to custom create different comic characters and their emotions and pose

6406531177443. ✓ Comicgen can be easily integrated into Google sheets or Excel to narrate your data stories

6406531177444. ✗ You can type in your data story into comicgen to get your comic in return

Question Number : 508 Question Id : 640653355081 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

scikit-network package contains functions for (pick all correct sentences):

Options :

6406531177569. ✗ analysis of faults in a computer network

6406531177570. ✓ social network analysis

6406531177571. ✓ analysis of large graphs

6406531177572. ✗ enhancing one's social network

Sub-Section Number : 4

Sub-Section Id : 64065351358

Question Shuffling Allowed : No

Question Id : 640653355051 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (509 to 510)

Question Label : Comprehension

Answer the given subquestions

Sub questions

Question Number : 509 Question Id : 640653355052 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

You decided to perform analysis of the IPL teams year on year. You downloaded the teams standings table which got downloaded as a PDF. You wish to convert to a csv file for further analysis in Excel. The following method in 'tabula' can be used for the same:

Options :

6406531177461. ✓ convert_into

6406531177462. ✗ convert_file

6406531177463. ✗ convert_all

6406531177464. ✗ convert_csv

Question Number : 510 Question Id : 640653355053 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

From the converted csv file in previous question, you realize that the team 'Delhi Daredevil' has changed its name to 'Delhi Capital'. Using excel, you wish to replace the old name with a new name. It can be done in Excel using

Options :

6406531177465. ✓ Find and Replace

6406531177466. ✗ Finding and Replacing

6406531177467. ✎ Replace and Find

6406531177468. ✎ Search and Replace