

Indian Institute of Technology, Madras - Centre for Continuing Education

Notations :

- 1.Options shown in **green** color and with ✓ icon are correct.
- 2.Options shown in **red** color and with ✗ icon are incorrect.

Question Paper Name :

IIT M DIPLOMA QUIZ1 EXAM QPE1 05 Jun
2022 IBA

Subject Name :

2022 Jun: IIT M DIPLOMA QUIZ1 EXAM QPE1

Creation Date :

2022-05-31 15:46:04

Duration :

120

Total Marks :

680

Display Marks:

Yes

Share Answer Key With Delivery Engine :

Yes

Actual Answer Key :

Yes

Calculator :

Scientific

Magnifying Glass Required? :

No

Ruler Required? :

No

Eraser Required? :

No

Scratch Pad Required? :

No

Rough Sketch/Notepad Required? :

No

Protractor Required? :

No

Show Watermark on Console? :

Yes

Highlighter :

No

Auto Save on Console?

Yes

Change Font Color :

No

Change Background Color :

No

Change Theme :	No
Help Button :	No
Show Reports :	No
Show Progress Bar :	No

Group I

Group Number :	1
Group Id :	6406538783
Group Maximum Duration :	0
Group Minimum Duration :	90
Show Attended Group? :	No
Edit Attended Group? :	No
Break time :	0
Group Marks :	680
Is this Group for Examiner? :	No
Examiner permission :	Cant View
Show Progress Bar? :	No
Revisit allowed for group Instructions? :	Yes
Maximum Instruction Time :	0
Minimum Instruction Time :	0
Group Time In :	Minutes
Navigate To Group Summary From Last Question? :	No
Disable Submit Button During Assessment? :	No

Maths 2

Section Id :	64065321944
Section Number :	1

Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	12
Number of Questions to be attempted :	12
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349173
Question Shuffling Allowed :	No

Question Number : 1 Question Id : 640653346788 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "MATHEMATICS FOR DATA SCIENCE 2"

**ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.**

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531152863. ✓ YES

6406531152864. ✗ NO

Sub-Section Number :	2
Sub-Section Id :	64065349174
Question Shuffling Allowed :	Yes

Question Number : 2 Question Id : 640653346789 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

If $A + 3I = 0$, where A is a 2×2 matrix and I is the identity matrix of order 2, then find out the $\det(A)$.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

9

Question Number : 3 Question Id : 640653346790 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

If matrix $A = \begin{bmatrix} 3 & -3 \\ -3 & 3 \end{bmatrix}$ and $A^2 = \lambda A$, then find the value of λ .

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

6

Question Number : 4 Question Id : 640653346791 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

If $\begin{bmatrix} a+4 & 3b \\ 8 & -6 \end{bmatrix} = \begin{bmatrix} 2a+2 & b+2 \\ 8 & a-8b \end{bmatrix}$, then find the value of $a+2b$.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

4

Sub-Section Number : 3

Sub-Section Id : 64065349175

Question Shuffling Allowed : Yes

Question Number : 5 **Question Id :** 640653346792 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

If addition and scalar multiplication on $V = \mathbb{R}^2$ is defined as follows:

$$\text{Addition: } (x_1, y_1) + (x_2, y_2) = (x_1 + x_2, y_1 + y_2); \\ (x_1, y_1), (x_2, y_2) \in V$$

$$\text{Scalar multiplication: } c(x, y) = (x, cy); (x, y) \in V, c \in \mathbb{R}$$

Consider the following statements.

1. There exists an element 0 (called the zero vector of V) in V such that $0 + v = v, \forall v \in V$.
2. There exists a vector v' in V such that $v' + v = v + v' = 0, \forall v \in V$.
3. For each vector $v \in V$, $1v = v$.
4. For each vector of $v \in V$ and for each pair $a, b \in \mathbb{R}$, $(a + b)v = av + bv$.
5. For each vector of $a \in \mathbb{R}$ and for each pair $v_1, v_2 \in V$, $a(v_1 + v_2) = av_1 + av_2$.
6. For each vector of $v \in V$ and for each pair $a, b \in \mathbb{R}$, $(ab)v = a(bv)$.

Which of the above statements is not true with respect to the addition and scalar multiplication on $V = \mathbb{R}^2$ defined above? (Enter the serial number of the statement which is not true. If statement 2 is incorrect, then enter 2 as your answer.)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

4

Question Number : 6 **Question Id :** 640653346793 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

If $W = \text{Span}\{(1, 1, -1), (3, -2, 0), (5, 0, -2), (0, 5, -3)\}$, then find out the dimension of W .

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 7 **Question Id :** 640653346794 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

Which of the following subsets are not a vector subspace of \mathbb{R}^3 with respect to usual addition and scalar multiplication ?

- 1) $W = \{(x, y, z) \mid x, y, z \in \mathbb{R}, \text{ and } x^2 = z^2\}$
- 2) $W = \{(x, y, z) \mid x, y, z \in \mathbb{R}, \text{ and } x = z\}$
- 3) $W = \{(x, y, z) \mid x, y, z \in \mathbb{R}, \text{ and } x = y + z\}$
- 4) $W = \{(x, y, z) \mid x, y, z \in \mathbb{R}, \text{ and } (x+1) + (y-1) + z = 0\}$

Enter the serial number of the subset which is not a vector subspace of \mathbb{R}^3 with respect to usual addition and scalar multiplication. (If the subset corresponding to serial number 2 is not a subspace, then enter 2 as your answer.)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1

Sub-Section Number : 4

Sub-Section Id : 64065349176

Question Shuffling Allowed : No

Question Id : 640653346795 **Question Type :** COMPREHENSION **Sub Question Shuffling Allowed :** No **Group Comprehension Questions :** No **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Question Numbers : (8 to 9)

Question Label : Comprehension

Answer the given subquestions.

Sub questions

Question Number : 8 **Question Id :** 640653346796 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Short Answer Question

If S is a (non-empty) linearly independent subset of \mathbb{R}^3 (with respect to usual addition and scalar multiplication), then what can be the maximum possible cardinality of S ?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

3

Question Number : 9 **Question Id :** 640653346797 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Short Answer Question

If S is a (non-empty) linearly dependent subset of \mathbb{R}^3 (with respect to usual addition and scalar multiplication), then what can be the minimum possible cardinality of S ?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1

Question Id : 640653346798 **Question Type :** COMPREHENSION **Sub Question Shuffling**

Allowed : No Group **Comprehension Questions :** No **Calculator :** None **Response Time :** N.A

Think Time : N.A **Minimum Instruction Time :** 0

Question Numbers : (10 to 11)

Question Label : Comprehension

Consider the vector space \mathbb{R}^3 with respect to usual addition and scalar multiplication,

i.e.,

$$\text{Addition: } (x_1, y_1, z_1) + (x_2, y_2, z_2) = (x_1 + x_2, y_1 + y_2, z_1 + z_2); \\ (x_1, y_1, z_1), (x_2, y_2, z_2) \in V$$

$$\text{Scalar multiplication: } c(x, y, z) = (cx, cy, cz); \quad (x, y, z) \in V, \quad c \in \mathbb{R}$$

Suppose W_1 and W_2 are two vector subspaces of \mathbb{R}^3 (with respect to usual addition and scalar multiplication) defined as follows:

$$W_1 = \{(x, y, 0) \mid x, y \in \mathbb{R}\}$$

and

$$W_2 = \{(0, y, 0) \mid y \in \mathbb{R}\}$$

with usual addition and scalar multiplication,

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 10 Question Id : 640653346799 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is the dimension of $W_1 \cap W_2$?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1

Question Number : 11 Question Id : 640653346800 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is the dimension of W_1 ?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Sub-Section Number : 5

Sub-Section Id : 64065349177

Question Shuffling Allowed : Yes

Question Number : 12 **Question Id :** 640653346801 **Question Type :** MSQ Is Question

Mandatory : No **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Multiple Select Question

Choose the set of correct options.

Options :

If v and w are linearly independent, then $v + w$ and w are also
6406531152875. ✓ linearly independent.

If $A^n = 0$ for some 2×2 matrix A and some non-zero natural number
6406531152876. ✘ n , then A must be 0 (zero matrix of order 2).

If a homogeneous system of linear equations $Ax = 0$ has a non-zero
6406531152877. ✓ solution, then it must have infinite number of solutions.

If $A^3 = I$ for some $n \times n$ matrix A , then it is not necessary that A^2
6406531152878. ✘ is an invertible matrix.

Sub-Section Number :

6

Sub-Section Id :

64065349178

Question Shuffling Allowed :

No

Question Id : 640653346802 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (13 to 15)

Question Label : Comprehension

From the list of given terms find out the best possible options for each of the given subquestions:

- 1) Transpose of a matrix
- 2) Determinant
- 3) Closure with respect to addition
- 4) Closure with respect to scalar multiplication
- 5) Existence of additive inverse
- 6) Commutativity of addition
- 7) Associativity of addition
- 8) Spanning set
- 9) Linearly independent set
- 10) Basis

Sub questions

Question Number : 13 Question Id : 640653346803 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

$S = \{(1, 0, 1), (0, 1, 1), (1, 1, 0)\}$ is a _____ of \mathbb{R}^3 .

(Enter 3 best possible options. Enter only the serial numbers of those options in increasing order without adding any comma or space in between them.) [Suppose your answer is 7, 8 and 10, then you should enter 7810]

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

8910

Question Number : 14 Question Id : 640653346804 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

The conditions that need to be checked to identify a subspace W of a vector space V :

_____. (Enter 2 best possible options. Enter only the serial numbers of those options in increasing order without adding any comma or space in between them.)

[Suppose your answer is 7 ans 8, then you should enter 78]

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

34

Question Number : 15 Question Id : 640653346805 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

A spanning set of \mathbb{R}^2 with 2 elements must be a _____. (Enter 2 best possible options. Enter only the serial numbers of those options in increasing order without adding any comma or space in between them.) [Suppose your answer is 7 and 8, then you should enter 78]

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

910

Sub-Section Number : 7

Sub-Section Id : 64065349179

Question Shuffling Allowed : No

Question Id : 640653346806 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (16 to 19)

Question Label : Comprehension

Shubham bought 2 kg of potatoes and c kg of dal and 1 kg of wheat from a shop, and paid ₹80 to the shopkeeper. Sushmitha bought 4 kg of potatoes and 1 kg of dal and 2 kg of wheat, and paid ₹ d to the shopkeeper. Subhasis bought 2 kg of potatoes, 1 kg of dal and 2 kg of wheat, and paid ₹80 to the shopkeeper. If $x_1(\neq 0)$ represents the price of 1 kg of potato and $x_2(\neq 0)$ represents the price of 1 kg of dal, and $x_3(\neq 0)$ represents the price of 1 kg of wheat, then answer the given subquestions.

Sub questions

Question Number : 16 Question Id : 640653346807 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The matrix representation to find x_1 , x_2 , and x_3 is

Options :

6406531152882. *

$$\begin{bmatrix} 2 & c & 1 \\ 2 & 1 & 2 \\ 4 & 1 & 2 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} 80 \\ d \\ 80 \end{bmatrix}$$

$$\begin{bmatrix} 2 & c & 1 \\ 4 & 1 & 2 \\ 2 & 1 & 2 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} 80 \\ 80 \\ d \end{bmatrix}$$

6406531152883. *

$$\begin{bmatrix} 2 & c & 1 \\ 4 & 1 & 2 \\ 2 & 1 & 2 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} 80 \\ d \\ 80 \end{bmatrix}$$

6406531152884. ✓

$$\begin{bmatrix} 4 & 1 & 2 \\ 2 & c & 1 \\ 2 & 1 & 2 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} 80 \\ d \\ 80 \end{bmatrix}$$

6406531152885. *

Question Number : 17 Question Id : 640653346808 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

If we try to find x_1 , x_2 , and x_3 using appropriate matrix representation by taking $c = 0.5$ and $d = 100$, then

Options :

We will find that the price of 1 kg potato is unique.

6406531152886. *

We will fail to find the price (as a numerical value) of 1 kg potato.

6406531152887. ✓

We will find that the price of 1 kg potato is ₹20.

6406531152888. *

We will find infinitely many values as

6406531152889. ✘ the price of 1 kg potato.

Question Number : 18 Question Id : 640653346809 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

If we try to find x_1 , x_2 , and x_3 using appropriate matrix representation by taking $c = 2$ and $d \neq 160$, then which of the following options is always true?

Options :

6406531152890. ✘ $x_1 = x_3$

6406531152891. ✘ $x_1 = x_2$

6406531152892. ✓ $x_2 = x_3$

6406531152893. ✘ $x_1 = x_2 = x_3$

Question Number : 19 Question Id : 640653346810 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

If we try to find x_1 , x_2 , and x_3 using appropriate matrix representation by taking $c = 3$ and $d = 100$, then which of the following options is always true?

Options :

6406531152894. ✘ $x_1 = 12$, $x_2 = 20$ and $x_3 = 10$

6406531152895. ✘ $x_1 = x_2 = 24$ and $x_3 = 10$

6406531152896. ✓ $x_1 = 10$, $x_2 = 12$ and $x_3 = 24$

6406531152897. ✘ $x_1 = x_2 = x_3 = 10$

Statistics 2

Section Id :	64065321945
Section Number :	2
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	12
Number of Questions to be attempted :	12
Section Marks :	40
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349180
Question Shuffling Allowed :	No

Question Number : 20 Question Id : 640653346811 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "STATISTICS FOR DATA SCIENCE 2"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531152898. ✓ Yes

6406531152899. ✗ No

Question Number : 21 Question Id : 640653346812 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

Discrete random variables:

Distribution	PMF ($f_X(k)$)	CDF ($F_X(x)$)	$E[X]$	$\text{Var}(X)$
Uniform(A) $A = \{a, a+1, \dots, b\}$	$\frac{1}{n}, \quad x = k$ $n = b - a + 1$ $k = a, a+1, \dots, b$	$\begin{cases} 0 & x < 0 \\ \frac{k-a+1}{n} & k \leq x < k+1 \\ & k = a, a+1, \dots, b-1, b \\ 1 & x \geq n \end{cases}$	$\frac{a+b}{2}$	$\frac{n^2-1}{12}$
Bernoulli(p)	$\begin{cases} p & x = 1 \\ 1-p & x = 0 \end{cases}$	$\begin{cases} 0 & x < 0 \\ 1-p & 0 \leq x < 1 \\ 1 & x \geq 1 \end{cases}$	p	$p(1-p)$
Binomial(n, p)	${}^n C_k p^k (1-p)^{n-k},$ $k = 0, 1, \dots, n$	$\begin{cases} 0 & x < 0 \\ \sum_{i=0}^k {}^n C_i p^i (1-p)^{n-i} & k \leq x < k+1 \\ & k = 0, 1, \dots, n \\ 1 & x \geq n \end{cases}$	np	$np(1-p)$
Geometric(p)	$(1-p)^{k-1} p,$ $k = 1, \dots, \infty$	$\begin{cases} 0 & x < 0 \\ 1 - (1-p)^k & k \leq x < k+1 \\ & k = 1, \dots, \infty \end{cases}$	$\frac{1}{p}$	$\frac{1-p}{p^2}$
Poisson(λ)	$\frac{e^{-\lambda} \lambda^k}{k!},$ $k = 0, 1, \dots, \infty$	$\begin{cases} 0 & x < 0 \\ e^{-\lambda} \sum_{i=0}^k \frac{\lambda^i}{i!} & k \leq x < k+1 \\ & k = 0, 1, \dots, \infty \end{cases}$	λ	λ

Continuous random variables:

Distribution	PDF ($f_X(k)$)	CDF ($F_X(x)$)	$E[X]$	$\text{Var}(X)$
Uniform $[a, b]$	$\frac{1}{b-a}, a \leq x \leq b$	$\begin{cases} 0 & x \leq a \\ \frac{x-a}{b-a} & a < x < b \\ 1 & x \geq b \end{cases}$	$\frac{a+b}{2}$	$\frac{(b-a)^2}{12}$
Exp(λ)	$\lambda e^{-\lambda x}, x > 0$	$\begin{cases} 0 & x \leq 0 \\ 1 - e^{-\lambda x} & x > 0 \end{cases}$	$\frac{1}{\lambda}$	$\frac{1}{\lambda^2}$
Normal(μ, σ^2)	$\frac{1}{\sigma\sqrt{2\pi}} \exp\left(\frac{-(x-\mu)^2}{2\sigma^2}\right), -\infty < x < \infty$	No closed form	μ	σ^2
Gamma(α, β)	$\frac{\beta^\alpha}{\Gamma(\alpha)} x^{\alpha-1} e^{-\beta x}, x > 0$		$\frac{\alpha}{\beta}$	$\frac{\alpha}{\beta^2}$
Beta(α, β)	$\frac{\Gamma(\alpha+\beta)}{\Gamma(\alpha)\Gamma(\beta)} x^{\alpha-1} (1-x)^{\beta-1}$ $0 < x < 1$		$\frac{\alpha}{\alpha+\beta}$	$\frac{\alpha\beta}{(\alpha+\beta)^2(\alpha+\beta+1)}$

1. **Markov's inequality:** Let X be a discrete random variable taking non-negative values with a finite mean μ . Then,

$$P(X \geq c) \leq \frac{\mu}{c}$$

2. **Chebyshev's inequality:** Let X be a discrete random variable with a finite mean μ and a finite variance σ^2 . Then,

$$P(|X - \mu| \geq k\sigma) \leq \frac{1}{k^2}$$

Options :

6406531152900. ✓ Useful Data has been mentioned above

6406531152901. ✗ This data attachment is just for a reference & not for an evaluation.

Sub-Section Number : 2

Sub-Section Id : 64065349181

Question Shuffling Allowed : No

Question Id : 640653346813 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (22 to 24)

Question Label : Comprehension

The joint probability mass function of two discrete random variables X and Y is given by

$X \backslash Y$	1	2	3
1	0.1	0.2	0.1
2	0.2	0.3	0.1

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 22 Question Id : 640653346814 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Find the distribution of $S = X + Y$.

Options :

s	2	3	4	5
$P(X + Y = s)$	0.1	0.3	0.5	0.1

s	2	3	4	5
$P(X + Y = s)$	0.1	0.4	0.4	0.1

s	1	2	3	4	5
$P(X + Y = s)$	0.1	0.2	0.1	0.5	0.1

s	1	2	3	4	5
$P(X + Y = s)$	0.1	0.2	0.1	0.4	0.2

Question Number : 23 Question Id : 640653346815 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Find the distribution of $Z_1 = \max(X, Y)$.**Options :**

6406531152906.	✖	<table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>z_1</td><td>1</td><td>2</td><td>3</td></tr> <tr> <td>$P(\max(X, Y) = z_1)$</td><td>0.1</td><td>0.4</td><td>0.5</td></tr> </table>	z_1	1	2	3	$P(\max(X, Y) = z_1)$	0.1	0.4	0.5
z_1	1	2	3							
$P(\max(X, Y) = z_1)$	0.1	0.4	0.5							

6406531152907.	✖	<table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>z_1</td><td>1</td><td>2</td><td>3</td></tr> <tr> <td>$P(\max(X, Y) = z_1)$</td><td>0.3</td><td>0.4</td><td>0.3</td></tr> </table>	z_1	1	2	3	$P(\max(X, Y) = z_1)$	0.3	0.4	0.3
z_1	1	2	3							
$P(\max(X, Y) = z_1)$	0.3	0.4	0.3							

6406531152908.	✓	<table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>z_1</td><td>1</td><td>2</td><td>3</td></tr> <tr> <td>$P(\max(X, Y) = z_1)$</td><td>0.1</td><td>0.7</td><td>0.2</td></tr> </table>	z_1	1	2	3	$P(\max(X, Y) = z_1)$	0.1	0.7	0.2
z_1	1	2	3							
$P(\max(X, Y) = z_1)$	0.1	0.7	0.2							

6406531152909.	✖	<table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>z_1</td><td>1</td><td>2</td><td>3</td></tr> <tr> <td>$P(\max(X, Y) = z_1)$</td><td>0.4</td><td>0.4</td><td>0.2</td></tr> </table>	z_1	1	2	3	$P(\max(X, Y) = z_1)$	0.4	0.4	0.2
z_1	1	2	3							
$P(\max(X, Y) = z_1)$	0.4	0.4	0.2							

Question Number : 24 Question Id : 640653346816 Question Type : MCQ Is Question**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0****Correct Marks : 2**

Question Label : Multiple Choice Question

Find the distribution of $Z_2 = \min(X, Y)$.**Options :**

6406531152910.	✓	<table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>z_2</td><td>1</td><td>2</td></tr> <tr> <td>$P(\min(X, Y) = z_2)$</td><td>0.6</td><td>0.4</td></tr> </table>	z_2	1	2	$P(\min(X, Y) = z_2)$	0.6	0.4
z_2	1	2						
$P(\min(X, Y) = z_2)$	0.6	0.4						

6406531152911.	✖	<table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>z_2</td><td>1</td><td>2</td></tr> <tr> <td>$P(\min(X, Y) = z_2)$</td><td>0.4</td><td>0.6</td></tr> </table>	z_2	1	2	$P(\min(X, Y) = z_2)$	0.4	0.6
z_2	1	2						
$P(\min(X, Y) = z_2)$	0.4	0.6						

6406531152912.	✖	<table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>z_2</td><td>1</td><td>2</td></tr> <tr> <td>$P(\min(X, Y) = z_2)$</td><td>0.9</td><td>0.1</td></tr> </table>	z_2	1	2	$P(\min(X, Y) = z_2)$	0.9	0.1
z_2	1	2						
$P(\min(X, Y) = z_2)$	0.9	0.1						

6406531152913. *

z_2	1	2	3
$P(\min(X, Y) = z_2)$	0.3	0.5	0.2

Sub-Section Number :

3

Sub-Section Id :

64065349182

Question Shuffling Allowed :

Yes

Question Number : 25 Question Id : 640653346817 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

A coin is biased so that the probability of obtaining a head is 0.75. The coin is tossed four times and number of heads obtained is given by X . Find $\text{Var}(X)$. Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0.75

Question Number : 26 Question Id : 640653346818 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Let $f : \mathbb{R} \rightarrow \mathbb{R}$ be defined by

$$f(x) = \begin{cases} 0 & \text{for } -\infty < x < 0, \\ \frac{1}{4} & \text{for } 0 < x \leq 1, \\ \frac{3}{4x^2} & \text{for } 1 < x < \infty. \end{cases}$$

If a random variable X has the PDF $f(x)$, calculate $P\left(-\frac{1}{2} < X < \frac{3}{2}\right)$. Enter the answer correct to one decimal place.

Hint: Use $\int_a^b \frac{1}{x^2} dx = \frac{1}{a} - \frac{1}{b}$

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0.5

Question Number : 27 **Question Id :** 640653346819 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Short Answer Question

Let X be a discrete random variable with the following PMF and CDF:

$$p_X(x) = \begin{cases} a, & x = 1 \\ b, & x = 2 \\ c, & x = 3 \\ 0.3, & x = 4 \end{cases}$$

$$F_X(x) = \begin{cases} 0, & x < 1 \\ 0.2, & 1 \leq x < 2 \\ 0.6, & 2 \leq x < 3 \\ 0.7, & 3 \leq x < 4 \\ d, & x \geq 4 \end{cases}$$

Evaluate $a + b + c + d$.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1.7

Sub-Section Number : 4

Sub-Section Id : 64065349183

Question Shuffling Allowed : No

Question Id : 640653346820 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (28 to 29)

Question Label : Comprehension

Consider two random variables X and Y with Joint PMF given in Table 1.1.

$X \backslash Y$	0	1	2
0	$\frac{1}{12}$	$\frac{1}{8}$	$\frac{1}{24}$
1	$\frac{1}{4}$	$\frac{3}{8}$	$\frac{1}{8}$

Table 1.1: Joint PMF of X and Y

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 28 Question Id : 640653346821 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following options are true?

Options :

6406531152917. ✓ X and Y are independent random variables

6406531152918. ✗ X and Y are dependent random variables

6406531152919. ✓ $P(X \leq 1) = \frac{5}{6}$

6406531152920. ✗ $P(Y = 1|X = 2) = \frac{1}{4}$

Question Number : 29 Question Id : 640653346822 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Find the value of

$$\frac{1}{P(X \leq 1, Y = 0) + P(X = 2, Y = 1)}.$$

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

3

Question Id : 640653346823 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (30 to 31)

Question Label : Comprehension

In a book store, there are two types of books (Type 1 and Type 2). Let X denote the number of books of Type 1 that is sold in a week. Let Y denote the number of books of Type 2 that is sold in a week. Suppose X and Y follows the Poisson distribution with parameters 2 and 3, respectively. Let Z denote the total number of books of Type 1 and Type 2 sold in a week. Assume that X and Y are independent.

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 30 Question Id : 640653346824 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following options are true?

Options :

6406531152922. ❌ $(Y|Z = 5) \sim \text{Binomial}\left(5, \frac{2}{5}\right)$.

6406531152923. ✓ $(X|Z = 5) \sim \text{Binomial}\left(5, \frac{2}{5}\right)$.

6406531152924. ❌ $(X|Z = 5) \sim \text{Binomial}\left(5, \frac{3}{5}\right)$.

6406531152925. ✓ $(Y|Z = 5) \sim \text{Binomial}\left(5, \frac{3}{5}\right)$

Question Number : 31 Question Id : 640653346825 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

Find the value of $P(X = 1 | Z = 5)$. Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.24 to 0.27

Question Id : 640653346827 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (32 to 33)

Question Label : Comprehension

Let X be a continuous random variable with the following PDF:

$$f_X(x) = \begin{cases} \frac{p}{x^2} & 1 \leq x \leq 5 \\ 0 & \text{otherwise} \end{cases}$$

Hint: Use $\int_{x=a}^b \frac{1}{x^2} dx = \frac{1}{a} - \frac{1}{b}$

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 32 Question Id : 640653346828 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Find the value of p so that $f_X(x)$ is a valid PDF. Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1.25

Question Number : 33 **Question Id :** 640653346829 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 3

Question Label : Short Answer Question

Find the value of $P(X < 4 \mid X > 2)$.

Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.82 to 0.84

Question Id : 640653346830 **Question Type :** COMPREHENSION **Sub Question Shuffling Allowed :** No **Group Comprehension Questions :** No **Calculator :** None **Response Time :** N.A

Think Time : N.A **Minimum Instruction Time :** 0

Question Numbers : (34 to 35)

Question Label : Comprehension

Let X denote the number of products delivered to a fixed destination using a drone. There are problems with either too many or too few products to the destination. Assume $E[X] = 2000, \text{Var}(X) = 100$.

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 34 Question Id : 640653346831 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Use Markov's inequality to find an upper bound on $P(X \geq 2040)$. Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.98 to 0.99

Question Number : 35 Question Id : 640653346832 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

Use Chebyshev's inequality to find a lower bound on $P(1988 < X < 2012)$. Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.30 to 0.31

Question Id : 640653346833 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (36 to 37)

Question Label : Comprehension

During an IPL cricket match, amount of time (in minutes) Jadeja bats follows the exponential distribution with an expected time of 50 minutes.

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 36 Question Id : 640653346834 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is the probability that Jadeja will bat for more than 40 minutes? Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.44 to 0.46

Question Number : 37 Question Id : 640653346835 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

What is the probability that Jadeja will bat for more than 60 minutes given that he has already batted for more than 40 minutes? Enter the answer correct to two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.66 to 0.68

Sub-Section Number : 5

Sub-Section Id : 64065349184

Question Shuffling Allowed : Yes

Question Number : 38 **Question Id :** 640653346826 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 3

Question Label : Short Answer Question

Steven and Selena throw a die each simultaneously. If the two numbers appearing on the dice are different, Steven will receive ₹300. If the numbers are same, Steven will pay ₹1200. Find the expected money that will be won by Steven.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

50

CT

Section Id : 64065321946

Section Number : 3

Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	16
Number of Questions to be attempted :	16
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349185
Question Shuffling Allowed :	No

Question Number : 39 Question Id : 640653346836 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "**COMPUTATIONAL THINKING**"

**ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.**

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531152934. ✓ YES

6406531152935. ✗ NO

Question Number : 40 Question Id : 640653346837 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

Scores

SeqNo	Name	Gender	DateOfBirth	CityTown	Mathematics	Physics	Chemistry	Total
0	Bhuvanesh	M	7 Nov	Erode	68	64	78	210
					■ ■ ■			

29 Naveen M 13 Oct Vellore 72 66 81 219

Words

SeqNo	Word	PartOfSpeech	LetterCount
0	It	Pronoun	2
			■ ■ ■

64 cane. Noun 4

Library

SeqNo	Name	Author	Genre	Language	Pages	Publisher	Year
0	Igniting Minds	Kalam	Nonfiction	English	178	Penguin	2002
					■ ■ ■		

29 Malgudi Days Narayan Fiction English 150 Indian Thought 1943

Olympics

SeqNo	Name	Gender	Nationality	Host country	Year	Sport	Medal
0	Karnam Malleswari	F	Indian	Australia	2000	Weightlifting	Bronze
					— — —		

49 Michael Phelps M American China 2008 Swimming Gold

Three sample cards out of 30 for Shopping Bills dataset

Item List {

SV Stores		Srivatsan 1	
Item	Category	Qty	Price
Carrots	Vegetables/Food	1.5	50
Soap	Toiletries	4	32
Tomatoes	Vegetables/Food	2	40
Bananas	Vegetables/Food	8	64
Socks	Footwear/Apparel	3	56
Curd	Dairy/Food	0.5	32
Milk	Dairy/Food	1.5	24
			567

Sun General		Vignesh 14	
Item	Category	Qty	Price
Phone Charger	Utilities	1	230
Razor Blades	Grooming	1	12
Razor	Grooming	1	45
Shaving Lotion	Grooming	0.8	144
Earphones	Electronics	1	210
Pencils	Stationery	3	15
			656

Big Bazaar		Sudeep 2	
Item	Category	Qty	Price
Baked Beans	Canned/Food	1	125
Chicken Wings	Meat/Food	0.5	600
Cocoa powder	Canned/Food	1	160
Capiscum	Vegetables/Food	0.8	144
Tie	Apparel	2	390
Clips	Household	0.5	16
			1525

Options :

6406531152936. ✓ Useful Data has been mentioned above.

6406531152937. ❌ This data attachment is just for a reference & not for an evaluation.

Sub-Section Number :

2

Sub-Section Id :

64065349186

Question Shuffling Allowed :

Yes

Question Number : 41 Question Id : 640653346838 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

Kavya used a variable **minBillTotal** to find the minimum total bill amount using "Shopping Bills" dataset. There are many ways to initialize **minBillTotal**, choose the correct option(s). It is a Multiple Select Question (MSQ).

Options :

6406531152938. ✓ Pick any random card **X** from the dataset and initialize **minBillTotal = X.TotalBillAmount**

6406531152939. ✓ Pick the top card **X** from the dataset and initialize **minBillTotal = X.TotalBillAmount**

6406531152940. ✗ Initialize **minBillTotal** with any random value

6406531152941. ✗ Initialize **minBillTotal** with 0

Question Number : 42 Question Id : 640653346841 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

The following pseudocode is executed using the "Library" dataset. At the end of the execution, **N** captures the name of a book written in a language other than English with the maximum number of pages, and **A** captures the number of pages in the book.

```
1 A = 0, N = "None"
2 while(Table 1 has more rows){
3     Read the first row X in Table 1
4     if(X.Language != "English" and X.Pages > A){
5         A = X.Pages
6         N = X.Name
7     }
8     Move X to Table 2
9 }
```

Assume that the rows of the table are shuffled in any random order, choose the correct option(s). It is a Multiple Select Question (MSQ).

Options :

6406531152950. ❌ There might be some change in the values of both **A** and **N**, based on the order of rows

6406531152951. ✓ There might be a change in the value of **N**, based on the order of rows

6406531152952. ❌ There will be NO change in the values of both **A** and **N**, based on the order of rows

6406531152953. ❌ There might be a change in the value of **A**, based on the order of rows

Question Number : 43 Question Id : 640653346846 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

The following pseudocode is executed using the "Library" dataset. At the end of the execution, **A** captures the number of books which are published after 2010 or have less than the average number of pages. Assume that the variable **Avg** holds the value of the average number of pages of the books in the dataset. The pseudocode may have mistakes. Identify all such mistakes (if any). Assume that all statements not listed in the options below are free of errors. It is a Multiple Select Question (MSQ).

```
1 A = 0
2 while(Table 1 has more rows){
3     Read the first row X in Table 1
4     C = False
5     if(X.Year > 2010){
6         C = True
7     }
8     if(X.Pages > Avg){
9         C = True
10    }
11    if(c){
12        A = 1
13    }
14    Move X to Table 2
15 }
```

Options :

6406531152971. ❌ Error in Line 5

6406531152972. ✓ Error in Line 8

6406531152973. ❌ Error in Line 9

6406531152974. ✓ Error in Line 12

6406531152975. ❌ No error in the code

Question Number : 44 Question Id : 640653346848 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

The following pseudocode is executed using the "Shopping Bills" dataset. At the end of execution, **A** captures the lowest price of an item purchased from "Big Bazaar". But the pseudocode may have mistakes in one or more lines. Identify all such lines (if any). Assume that all statements not listed in the options below are free of errors. It is a Multiple Select Question (MSQ).

```

1 A = 0
2 while(Pile 1 has more cards){
3     Read the top card X in Pile 1
4     if(X.shopName == "Big Bazaar"){
5         temp = findItem(X)
6         if(temp > A){
7             A = temp
8         }
9     }
10    Move X to Pile 2
11 }
12
13 Procedure findItem(Y)
14     minPrice = 0
15     while(Card Y has more items){
16         Read an item Z from ItemList of card Y
17         if(minPrice >= Z.Price ){
18             minPrice = Z.Price
19         }
20         Remove Z from ItemList of card Y
21     }
22     return(minPrice)
23 End findItem

```

Options :

6406531152980. ✓ Line 1: Incorrect initialization of **A**

6406531152981. ✓ Line 6: Incorrect conditional statement

6406531152982. ✓ Line 14: Incorrect initialization of **minPrice**

6406531152983. ✗ Line 17: Incorrect conditional statement

6406531152984. ✗ There must be a re-initialization of **minPrice** before the return statement in procedure **findItem**

6406531152985. ✗ No error in the code

Question Number : 45 Question Id : 640653346849 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

The following pseudocode is executed using the "Words" table. At the end of the execution, **C** captures the number of pairs of words where both the words have the same part of speech or

both words end with a full stop and have the same letter count. Choose the correct code fragment(s) to complete the pseudocode. It is a Multiple Select Question (MSQ).

```
1 C = 0
2 while(Table 1 has more rows){
3     Read the first row X in Table 1
4     Move X to Table 2
5     while(Table 1 has more rows){
6         Read the first row Y in Table 1
7         Move Y to Table 3
8         *****
9         * Fill the code *
10        *****
11    }
12    Move all rows from Table 3 to Table 1
13 }
```

Options :

```
1 if((X.Partofspeech == Y.Partofspeech) or (X.word ends with a full stop and
Y.word ends with a full stop and X.LetterCount == Y.LetterCount)){
2     C = C + 1
3 }
```

6406531152986. ✓

```
1 if(X.Partofspeech == Y.Partofspeech){
2     C = C + 1
3 }
4 else{
5     if(x.word ends with a full stop and Y.word ends with a full stop and
X.LetterCount == Y.LetterCount){
6         C = C + 1
7     }
8 }
```

6406531152987. ✓

```
1 if(X.Partofspeech == Y.Partofspeech){
2     C = C + 1
3 }
4 if(x.word ends with a full stop and Y.word ends with a full stop and
X.LetterCount == Y.LetterCount){
5     C = C + 1
6 }
```

6406531152988. ✘

```
1 if(X.Partofspeech == Y.Partofspeech){  
2     if(x.word ends with a full stop and Y.word ends with a full stop and  
3         X.LetterCount == Y.LetterCount){  
4             C = C + 1  
5         }  
6     }  
7 }
```

6406531152989. *

Sub-Section Number : 3

Sub-Section Id : 64065349187

Question Shuffling Allowed : Yes

Question Number : 46 Question Id : 640653346839 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The following pseudocode is executed using the "Scores" dataset. What will A represent at the end of the execution?

```
1 A = 0  
2 while(Table 1 has more rows){  
3     Read the first row X in Table 1  
4     if(x.Gender == 'M' and x.cityTown == "Chennai"){  
5         A = A + X.Mathematics  
6     }  
7     Move X to Table 2  
8 }
```

Options :

6406531152942. * Sum of Mathematics marks of students from Chennai

6406531152943. ✓ Sum of Mathematics marks of male students from Chennai

6406531152944. * Sum of Mathematics marks of male students

6406531152945. * Sum of Mathematics marks of male students not from Chennai

Question Number : 47 Question Id : 640653346840 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The following pseudocode is executed using the "Words" dataset. At the end of the execution, A captures the maximum letter count among words that are not nouns. Choose the correct code fragment to complete the pseudocode.

```
1 | A = 0
2 | while(Table 1 has more rows){
3 |   Read the first row X in Table 1
4 |   *****
5 |   * Fill the code *
6 |   *****
7 |   Move X to Table 2
8 | }
```

Options :

```
1 | if(X.Partofspeech == "Noun" and X.LetterCount > A){
2 |   A = X.LetterCount
3 | }
```

6406531152946. ❌

```
1 | if(X.Partofspeech != "Noun" and X.LetterCount < A){
2 |   A = X.LetterCount
3 | }
```

6406531152947. ❌

```
1 | if(X.Partofspeech == "Noun" and X.LetterCount < A){
2 |   A = X.LetterCount
3 | }
```

6406531152948. ❌

```
1 | if(X.Partofspeech != "Noun" and X.LetterCount > A){
2 |   A = X.LetterCount
3 | }
```

6406531152949. ✓

Sub-Section Number :

4

Sub-Section Id :

64065349188

Question Shuffling Allowed :

Yes

Question Number : 48 Question Id : 640653346847 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

The following pseudocode is executed using the "Words" dataset. At the end of the execution, **A** captures the number of sentences with at least two nouns that have at most two vowels. Choose the correct code fragments to complete the pseudocode.

```
1 A = 0, C = 0
2 while(Table 1 has more rows){
3     Read the first row X from Table 1
4     if(X.PartofSpeech == "Noun" and countVowels(X) <= 2){
5         C = C + 1
6     }
7     if(X.Word ends with a full stop){
8         if(c >= 2){
9             *** Statement1 ***
10        }
11        *** Statement2 ***
12    }
13    Move X to Table 2
14 }

15
16 Procedure countVowels(Y)
17     i = 1, B = 0
18     while(i <= Y.LetterCount){
19         if(ith letter of Y.word is a vowel){
20             B = B + 1
21             *** Statement3 ***
22         }
23         *** Statement4 ***
24     }
25     return(B)
26 End countVowels
```

Options :

6406531152976. ✓ Statement1: A = A + 1

Statement2: C = 0

Statement3: Not required

Statement4: i = i + 1

6406531152977. ✘ Statement1: C = 0

Statement2: A = A + 1

Statement3: i = i + 1

Statement4: Not required

6406531152978. ✘ Statement1: C = 0

Statement2: A = A + 1

Statement3: Not required

Statement4: i = i + 1

6406531152979. ✘ Statement1: A = A + 1

Statement2: C = 0

Statement3: i = i + 1

Statement4: Not required

Sub-Section Number : 5

Sub-Section Id : 64065349189

Question Shuffling Allowed : Yes

Question Number : 49 Question Id : 640653346842 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Let **X** be a row in the "Words" table. Let **isShortVerb** be a procedure to find whether the word in the row **X** is a verb with letter count at most five. Choose the correct code fragment to complete the pseudocode.

```
1 Procedure isShortVerb(X)
2   ****
3   * Fill the code *
4   ****
5 End isShortVerb
```

Options :

6406531152954. ✘

```
1 if(x.PartofSpeech == "verb"){
2     return(True)
3 }
4 else{
5     return(False)
6 }
```

```
1 if(x.PartofSpeech == "Verb" and x.LetterCount <= 5){
2     return(False)
3 }
4 else{
5     return(True)
6 }
```

6406531152955. ✘

```
1 if(x.Partofspeech == "verb" or x.LetterCount <= 5){
2     return(True)
3 }
4 else{
5     return(False)
6 }
```

6406531152956. ✘

```
1 if(x.Partofspeech == "Verb" and x.LetterCount <= 5){
2     return(True)
3 }
4 else{
5     return(False)
6 }
```

6406531152957. ✓

Question Number : 50 Question Id : 640653346843 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

A long word is defined as a word having at least 6 letters. The given pseudocode is used to find the

average number of letters per word for long words from the "Words" dataset. Choose the correct code fragment to complete the pseudocode.

```
1 letterCount = 0, wordCount = 0, avgLetPerword = 0
2 while(Table 1 has more rows){
3     Read the first row X in Table 1
4     *****
5     *   Fill the code   *
6     *****
7 }
8 avgLetPerword = letterCount / wordCount
```

Options :

```
1 wordCount = wordCount + 1
2 if(X.LetterCount >= 6){
3     letterCount = letterCount + X.LetterCount
4 }
5 Move X to Table 2
```

6406531152958. ❌

```
1 if(X.LetterCount >= 6){
2     wordCount = wordCount + 1
3     letterCount = letterCount + X.LetterCount
4 }
5 Move X to Table 2
```

6406531152959. ✓

```
1 if(X.LetterCount >= 6){
2     wordCount = wordCount + 1
3     letterCount = letterCount + X.LetterCount
4     Move X to Table 2
5 }
```

6406531152960. ❌

```
1 if(X.LetterCount >= 6){
2     letterCount = letterCount + X.LetterCount
3     wordCount = wordCount + 1
4 }
```

6406531152961. ❌

Question Number : 51 Question Id : 640653346844 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

The following pseudocode is executed using the "Scores" dataset. What will A represent at the end of the execution?

```
1 A = 0
2 while(Table 1 has more rows){
3     Read the first row X in Table 1
4     B = True
5     if(X.Physics >= 70){
6         B = False
7     }
8     if(X.Chemistry >= 70){
9         B = False
10    }
11    if(X.Mathematics >= 70){
12        B = False
13    }
14    if(B){
15        A = A + 1
16    }
17    Move X to Table 2
18 }
```

Options :

6406531152962. ❌ Number of students with all subject marks more than 70

6406531152963. ❌ Number of students with exactly one subject marks less than 70

6406531152964. ✓ Number of students with all subject marks less than 70

6406531152965. ❌ Number of students with all subject marks at least 70

Question Number : 52 Question Id : 640653346845 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

The given pseudocode is executed using the "Scores" dataset. There is a hypothesis that if a

student performs well overall (i.e., scores at least total 180 marks), then he/she must have performed well in all the subjects (i.e., scored at least 60 marks in each subject). At the end of execution, **fracTrue** stores the fraction of students who satisfy this hypothesis. Choose the correct code fragment to complete the pseudocode.

```
1 countoverall = 0, countPerSub = 0
2 while(Table 1 has more rows){
3     Read the first row X in Table 1
4     if(X.Total >= 180) {
5         *****
6         *   Fill the code   *
7         *****
8     }
9     Move X to Table 2
10 }
11 fracTrue = countPerSub / countoverall
```

Options :

```
1 if(X.Physics >= 60 and X.Chemistry >= 60 and X.Mathematics >= 60){
2     countPerSub = countPerSub + 1
3     countoverall = countoverall + 1
4 }
```

6406531152966. ❌

```
1 if(X.Physics >= 60 and X.Chemistry >= 60 and X.Mathematics >= 60){
2     countPerSub = countPerSub + 1
3 }
4 countoverall = countoverall + 1
```

6406531152967. ✓

```
1 if(X.Physics >= 60 or X.Chemistry >= 60 or X.Mathematics >= 60){
2     countPerSub = countPerSub + 1
3 }
4 countoverall = countoverall + 1
```

6406531152968. ❌

```
1 if(X.Physics >= 60 and X.Chemistry >= 60 and X.Mathematics >= 60){
2     countoverall = countoverall + 1
3 }
4 countPerSub = countPerSub + 1
```

6406531152969. ❌

```
1 if(X.Physics >= 60 or X.Chemistry >= 60 or X.Mathematics >= 60){  
2     countoverall = countoverall + 1  
3 }  
4 countPerSub = countPerSub + 1
```

6406531152970. *

Sub-Section Number : 6

Sub-Section Id : 64065349190

Question Shuffling Allowed : Yes

Question Number : 53 Question Id : 640653346850 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Select Question

The following pseudocode is executed using the "Words" dataset. **A** counts the number of pairs of words which have equal number of vowels and consonants. But the pseudocode may have mistakes in one or more lines. Identify all such lines (if any). Assume that all statements not listed in the options below are free of errors. It is a Multiple Select Question (MSQ).

```

1 A = 0
2 while(Pile 1 has more cards){
3     Read the top card X from Pile 1
4     countV = 0, countC = 0
5     countV, countC = countSomething(X, countV, countC)
6     Move X to Pile 2
7     while(Pile 1 has more cards){
8         Read the top card Y from Pile 1
9         Move Y to Pile 3
10        countV1 = 0, countC1 = 0
11        countV1, countC1 = countSomething(Y, countV1, countC1)
12        if(countV == countV1 and countC != countC1){
13            A = A + 1
14        }
15    }
16    Move all cards from Pile 3 to Pile 2
17 }
18
19 Procedure countSomething(z, B, C)
20     i = z.LetterCount
21     while(i >= 1){
22         if(ith letter of z.Word is vowel){
23             B = B + 1
24         }
25         else{
26             C = C + 1
27         }
28         i = i + 1
29     }
30     return([B, C])
31 End countSomething

```

Options :

6406531152990. ✘ Error in Line 5

6406531152991. ✘ Error in Line 11

6406531152992. ✓ Error in Line 12

6406531152993. ✓ Error in Line 16

6406531152994. ✘ Error in Line 20

6406531152995. ✘ Error in Line 22

6406531152996. ✓ Error in Line 28

6406531152997. ✘ Error in Line 30

6406531152998. ✘ No error in the code

Question Number : 54 Question Id : 640653346851 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Select Question

The following pseudocode is executed using the "Scores" dataset. At the end of the execution, **A** captures the number of female students who are above average in at least one subject. Assume that the variables **M**, **P** and **C** hold the average marks of the subjects Mathematics, Physics and Chemistry respectively. The pseudocode may have mistakes. Identify all such mistakes (if any). Assume that all statements not listed in the options below are free of errors. It is a Multiple Select Question (MSQ).

```
1 A = 0
2 while(Table 1 has more rows){
3     Read the first row X from Table 1
4     if(checksomething(X, M, P, C)){
5         A = 1
6     }
7     Move X to Table 2
8 }
9
10 Procedure checksomething (Y, c1, c2, c3)
11     if(Y.Gender == 'F'){
12         if(Y.Mathematics > c1 and Y.Physics > c2 and Y.Chemistry > c3){
13             return(True)
14         }
15     else{
16         return(False)
17     }
18 }
19 else{
20     return(False)
21 }
22 End checksomething
```

Options :

6406531152999. ❌ Error in Line 4

6406531153000. ✓ Error in Line 5

6406531153001. ❌ Error in Line 11

6406531153002. ✓ Error in Line 12

6406531153003. ❌ Multiple *return(False)* in procedure **CheckSomething**

Intro to Python

Section Id :	64065321947
Section Number :	4
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	15
Number of Questions to be attempted :	15
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349191
Question Shuffling Allowed :	No

Question Number : 55 Question Id : 640653346852 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "INTRODUCTION TO PYTHON"

**ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.**

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153005. ✓ YES

6406531153006. ✗ NO

Question Number : 56 Question Id : 640653346853 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

Useful Data

Presentation

There are two types of blocks that you would see in all the questions:


Code

```
1 | for i in range(10):
2 |     if i % 2 == 0:
3 |         print(i)
```

Input or Output

```
1 | 0
2 | 2
3 | 4
4 | 6
5 | 8
```

In both the blocks, please note that the region to the left of the thin vertical line — | — corresponds to line-numbers. Do not confuse the line numbers with the content of the code or the input-output. Just to be clear:

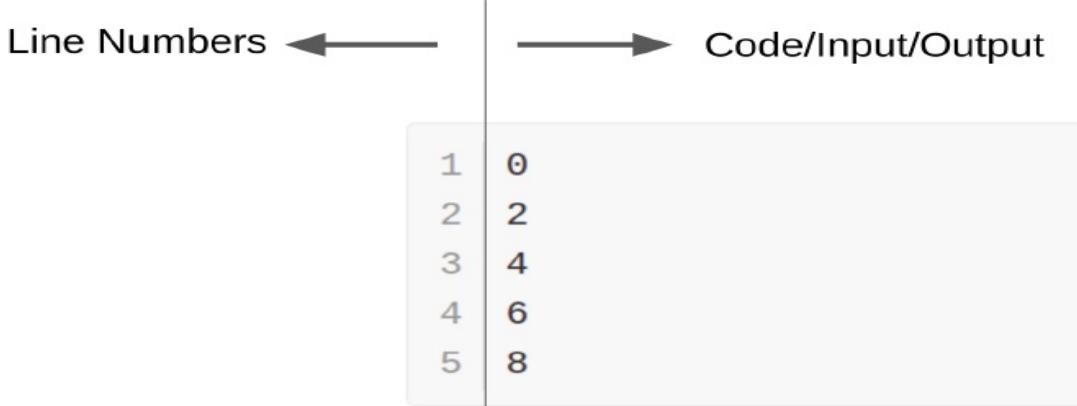

Useful information

`range`

Sample behaviour of the `range` function:

- `range(5)` corresponds to the sequence `0, 1, 2, 3, 4`
- `range(1, 5)` corresponds to the sequence `1, 2, 3, 4`
- `range(1, 1)` is the empty sequence

`// operator`

`//` is the floor division operator. `5 // 2` is `2` and *not* `2.5`

NAT → integer

For all NAT questions in this exam, the answer will always be an integer and not a float value. If the answer to a question is `18`, then just enter that value. Do *not* enter `18.0`

Options :

6406531153007. ✓ Useful Data has been mentioned above.

6406531153008. ❌ This data attachment is just for a reference & not for an evaluation.

Sub-Section Number :

2

Sub-Section Id :

64065349192

Question Shuffling Allowed :

Yes

Question Number : 57 Question Id : 640653346855 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

If n is a positive integer, then what is the value of `count` at the end of execution of the code given below?

```
1 n = int(input())
2 count = 0
3 for x in range(1, n + 1):
4     for y in range(x + 1, n + 1):
5         count = count + 1
```

Options :

6406531153013. ✘ n^2

6406531153014. ✘ $n(n + 1)$

6406531153015. ✘ $\frac{n(n + 1)}{2}$

6406531153016. ✓ $\frac{n(n - 1)}{2}$

Sub-Section Number : 3

Sub-Section Id : 64065349193

Question Shuffling Allowed : Yes

Question Number : 58 Question Id : 640653346859 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

What is the output of the following snippet of code? All words in the list L are in lower case.

```
1 L = ['good', 'done', 'eat', 'trim',
2     'make', 'fake', 'ease', 'epic',
3     'cage', 'list', 'top', 'pot']
4
5 # L[0][-1] is the last letter of the first word
6
7 counts = [ ]
8 count = 1
9 for i in range(1, len(L)):
10     if L[i - 1][-1] == L[i][0]:
11         count += 1
12     else:
13         counts.append(count)
14         count = 1
15
16 counts.append(count)
17
18 print(counts)
```

Options :

6406531153026. ✘ [4, 3, 2]

6406531153027. ✘ [5, 4]

6406531153028. ✓ [5, 4, 3]

6406531153029. ✘ [4, 3, 2, 1]

Question Number : 59 Question Id : 640653346863 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

A programmer wishes to write a code that accepts a string `word` as input and compute a list `V` that stores the frequencies of occurrence of the vowels 'aeiou' in the string. Each element in `V` corresponds to the frequency of one of the vowels in the string:

- `V[0]` : frequency of 'a'
- `V[1]` : frequency of 'e'
- `V[2]` : frequency of 'i'
- `V[3]` : frequency of 'o'
- `V[4]` : frequency of 'u'

Study the two codes given below and determine their correctness for this task. A code is correct only if it is error-free and produces the correct output for any given input. You can assume that the input to the code will have only lower case letters.

Code-1

```
1 word = input()
2
3 V = [ ]
4 for i in range(5):
5     V[i] = 0
6
7 vowels = 'aeiou'
8 for char in word:
9     if char in vowels:
10         index = vowels.index(char)
11         V[index] += 1
```

Code-2

```
1 word = input()
2
3 V = [ ]
4 for i in range(5):
5     V.append(0)
6
7 vowels = 'aeiou'
8 for char in word:
9     if char in vowels:
10         index = vowels.index(char)
11         V[index] += 1
```

Hint: `'great'.index('e')` returns the value 2

Options :

6406531153038. ✘ Code-1 is correct and code-2 is incorrect

6406531153039. ✘ Code-1 is incorrect and code-2 is correct

6406531153040. ✘ Both codes are correct

6406531153041. ✓ Both are incorrect

Question Number : 60 Question Id : 640653346865 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

What is the output of the following snippet of code?

```
1 code = ['# this is a python code',
2         'x = 0',
3         'print(x)',
4         'for i in range(x):',
5             '    x = x + i',
6         'print(x)']
7
8 mod_code = [ ]
9 for line in code:
10     if 'print' in line:
11         # there is a single space between the middle quotes
12         line = '#' + ' ' + line
13     mod_code.append(line)
14
15 for line in mod_code:
16     print(line)
```

Options :

```
1 # this is a python code
2 x = 0
3 # print(x)
4 for i in range(x):
5     x = x + i
6 # print(x)
```

6406531153048. ✓

```
1 # this is a python code
2 x = 0
3 #print(x)
4 for i in range(x):
5     x = x + i
6 #print(x)
```

6406531153049. ✘

6406531153050. ✘

```
1 # this is a python code
2 x = 0
3 print(x)
4 for i in range(x):
5     x = x + i
6 print(x)
```

```
1 # this is a python code
2 # x = 0
3 # print(x)
4 # for i in range(x):
5 #     x = x + i
6 # print(x)
```

6406531153051. *

Sub-Section Number : 4

Sub-Section Id : 64065349194

Question Shuffling Allowed : Yes

Question Number : 61 Question Id : 640653346854 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

A programmer likes to do certain activities depending on the time of the day and the prevailing weather conditions. He writes the following code that accepts two string variables `weather` and `time` as inputs and prints the corresponding `activity` as output.

```
1 weather = input()
2 time = input()
3
4 if weather == 'sunny':
5     if time == 'morning':
6         activity = 'read'
7     else:
8         activity = 'walk'
9
10 if weather == 'rainy':
11     activity = 'sleep'
12
13 if weather == 'cold':
14     if time == 'morning':
15         activity = 'read'
16     else:
17         activity = 'watch'
18
19 print(activity)
```

Which of the following statements about the code's execution are true? The options are independent of each other. That is, assume that each option corresponds to a separate execution of the code.

Hint: The Python interpreter processes the code from top to bottom.

Options :

6406531153009. ✓ If line-6 is executed, then line-8 will not be executed.

6406531153010. ✓ If line-11 is executed, then lines 14 to 17 will not be executed.

6406531153011. ✗ If line-8 is executed, the interpreter will directly jump to line-19 without even reading the remaining lines.

6406531153012. ✓ The interpreter evaluates at least three if conditions for any combinations of inputs.

Question Number : 62 Question Id : 640653346856 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

Select all inputs for which this code will print the value `True` to the console. The input will only contain letters.

```
1 word = input()
2 x = 0
3 y = 0
4 for char in word:
5     # z is in lower case in the if-block given below
6     if 'a' <= char <= 'z':
7         x += 1
8     # Z is in upper case in the if-block given below
9     if 'A' <= char <= 'Z':
10        y += 1
11 if x > y:
12     print(True)
13 else:
14     print(False)
```

Options :

6406531153017. ✓ agaiN

6406531153018. ✗ giVEN

6406531153019. ✗ goodSHOW

6406531153020. ✓ erasE

Question Number : 63 Question Id : 640653346858 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

Select all matrices M for which the following code prints `True` to the console.

```
1 # Look at the options for the value of M
2 n = len(M)
3
4 flag = True
5 for i in range(n):
6     for j in range(n):
7         if (i != j) and (M[i][j] != M[j][i]):
8             flag = False
9
10 print(flag)
```

Options :

6406531153022. ✓ `[[1, 2, 3], [2, 5, 4], [3, 4, 6]]`

6406531153023. ✓ `[[1, 5, 3, 4], [5, 1, 4, 6], [3, 4, 2, 8], [4, 6, 8, 3]]`

6406531153024. ✘ `[[1, 2, 3], [0, 5, 4], [3, 4, 6]]`

6406531153025. ✘ `[[1, 5, 3, 6], [5, 1, 4, 6], [3, 4, 2, 8], [4, 6, 8, 3]]`

Question Number : 64 Question Id : 640653346861 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

Let `n` be some positive integer. `word` is some string. Both `n` and `word` are already defined. The following is a code snippet and the output produced by it.

Code

```
1 # n and word are already defined
2 out = '' # there is no space between the quotes
3
4 for i in range(n):
5     out = out + word
6
7 print(out)
```

Output

```
1 kindkindkindkindkindkind
```

Select all possible values that the string `word` can take. Note that each option is associated with a different value of `n`.

Options :

6406531153031. ✓ kind

6406531153032. ✓ kindkind

6406531153033. ✓ kindkindkind

6406531153034. ✗ kindkindkindkind

6406531153035. ✗ kindkindkindkindkind

6406531153036. ✓ kindkindkindkindkindkind

Question Number : 65 Question Id : 640653346864 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

`M` is a matrix (list of lists) that has already been defined. The dimension of `M` is $m \times n$. Assume that both m and n are greater than or equal to 2. All the elements of `M` are integers.

```
1 # M is a matrix (list of lists) that has already been defined
2 n = len(M[0])
3
4 flag = True
5
6 for i in range(n):
7     if M[0][i] - M[-1][i] != 1:
8         flag = False
9
10 print(flag)
```

Select all correct options about the code given above.

Options :

This code will print `True` if each element in the last row of the matrix is one more than the corresponding element in the first row of the matrix.
6406531153042. ❌

This code will print `True` if each element in the first row of the matrix is one more than the corresponding element in the last row of the matrix.
6406531153043. ✓

This code will print `True` if each element in the last column of the matrix is one more than the corresponding element in the first column of the matrix.
6406531153044. ❌

This code will print `True` if each element in the first column of the matrix is one more than the corresponding element in the last column of the matrix.
6406531153045. ❌

6406531153046. ❌ This code will throw an error if the matrix is rectangular ($m \neq n$)

6406531153047. ✓ This code will NOT throw an error if the matrix is rectangular ($m \neq n$)

Sub-Section Number :

5

Sub-Section Id :

64065349195

Question Shuffling Allowed :

Yes

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

L is a non-empty list of distinct positive integers. That is:

- L has at least one element
- No two elements of L are the same

If the following snippet of code terminates without any error after a finite number of iterations of the while loop, what is the output produced by it?

Hint: L.remove(x) removes the leftmost occurrence of x in L.

```
1 # L is a non-empty list of distinct positive integers
2 # L has already been defined
3 val = 0
4 for x in L:
5     val += x
6
7 while L != [ ]:
8     for y in range(1, 11):
9         if y in L:
10             L.remove(y)
11         else:
12             L.append(y)
13
14 print(val)
```

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

55

Sub-Section Number : 6

Sub-Section Id : 64065349196

Question Shuffling Allowed : Yes

Question Number : 67 Question Id : 640653346860 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

L is a list of years. What is the output of the following snippet of code?

```
1 L = [1943, 2013, 2012, 1920,  
2     1957, 2010, 1985, 2018,  
3     1945, 1978, 2019, 1958,  
4     2009, 1909, 1939, 2021]  
5  
6 year_1 = 1900  
7 year_2 = 2022  
8 for year in L:  
9     if year < 2000:  
10         if year > year_1:  
11             year_1 = year  
12     else:  
13         if year < year_2:  
14             year_2 = year  
15  
16 print(year_2 - year_1)
```

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

24

Question Number : 68 Question Id : 640653346862 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

The following code always accepts a positive even integer as input.

```
1 n = int(input())
2
3 f = n - 2
4 while (f > 0) and (n % f != 0):
5     f = f - 2
6
7 print(f)
```

What is the output produced by the code if the input is 199999978?

Hint: 9999989 is a prime number

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 69 **Question Id :** 640653346866 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

What is the output of the following snippet of code?

```

1 a, b = 8, 28
2
3 if a < b:
4     start = b
5 else:
6     start = a
7
8 end = a * b
9
10 for x in range(start, end + 1):
11     if (x % a == 0) and (x % b == 0):
12         print(x)
13         break

```

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

56

DBMS

Section Id :	64065321948
Section Number :	5
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	18
Number of Questions to be attempted :	18
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes

Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349197
Question Shuffling Allowed :	No

Question Number : 70 Question Id : 640653346867 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "DATABASE MANAGEMENT SYSTEMS"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153053. ✓ YES

6406531153054. ✗ NO

Sub-Section Number :	2
Sub-Section Id :	64065349198
Question Shuffling Allowed :	Yes

Question Number : 71 Question Id : 640653346868 Question Type : MCQ Is Question
Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0
Correct Marks : 2

Question Label : Multiple Choice Question

Which among the following levels of abstraction describes the information about the data stored in the database and the relationships among the data fields?

Options :

6406531153055. ✗ Physical level

6406531153056. ✓ Logical level

6406531153057. ✗ View level

6406531153058. ✗ None of these

Question Number : 72 Question Id : 640653346869 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The ability to modify the physical schema without changing the logical schema is known as

Options :

6406531153059. ✗ Logical Data Independence

6406531153060. ✓ Physical Data Independence

6406531153061. ✗ View Data Independence

6406531153062. ✗ None of these

Question Number : 73 Question Id : 640653346870 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which among the following is used for accessing and manipulating the data organized by the appropriate data model?

Options :

6406531153063. ✗ Data Definition Language

6406531153064. ✓ Data Manipulation Language

6406531153065. ✗ Data Control Language

6406531153066. ✗ Transaction Control Language

Question Number : 74 Question Id : 640653346876 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the relation student shown in Table 8.

roll_no	name	house_name
1	John	Nilgiri
2	Ramesh	Nilgiri
3	Dilip	Arawali
4	Suresh	Shiwalik
5	Kiran	Udaygiri
6	Vijay	Nilgiri

Table 8: Relation student

Which of the following SQL command is used to provide INSERT authorization of the table student to instructor.

Options :

CREATE ROLE instructor;

6406531153087. ✘ GRANT INSERT ON instructor TO student;

CREATE ROLE instructor;

6406531153088. ✘ GRANT student INSERT TO instructor;

CREATE ROLE instructor;

6406531153089. ✘ GRANT ROLE INSERT ON student TO instructor;

CREATE ROLE instructor;

6406531153090. ✓ GRANT INSERT ON student TO instructor;

Question Number : 75 Question Id : 640653346878 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the relational schema given below.

instructor(id, name, dept_name, salary)

Choose the correct SQL command to create a view XYZ, by selecting two columns *name* and *dept_name* from the *instructor* relation. Select those instructors having names starting with 'S' and from the 'Music' department.

Options :

6406531153092. ✓ `CREATE VIEW XYZ(name,dept_name) AS
SELECT name,dept_name from instructor
where name like 'S%' AND dept_name='Music'`

6406531153093. ✗ `CREATE VIEW XYZ(name,dept_name) TO
SELECT name,dept_name from instructor
where name like 'S%' AND dept_name='Music'`

6406531153094. ✗ `CREATE VIEW XYZ(name,dept_name) ON
SELECT name,dept_name from instructor
where name like 'S%' AND dept_name='Music'`

6406531153095. ✗ `CREATE VIEW XYZ(name,dept_name) AS
SELECT name,dept_name from instructor
where name like '%S' AND dept_name='Music'`

Question Number : 76 Question Id : 640653346880 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the relations shown in Figure 1.

Customers			Orders		
cid	cname	cage	oid	cid	amount
C101	Stefen	30	122	C101	40000
C202	Jacob	36	222	C202	20000
C403	Nicolas	29	111	C403	30000
C204	Edward	40	233	C403	25000
C105	Stewart	27			

Figure 1: Relations Customers and Orders

Which of the following expressions will fetch the given tuple?

cname
Stefen

Options :

6406531153100. ❌ $\prod_{cname} (\sigma_{cage \leq 30} \wedge amount \leq 30000 (Customers \bowtie Orders))$

6406531153101. ❌ $\prod_{cname} (\sigma_{cage > 30} \vee amount > 30000 (Customers \bowtie Orders))$

6406531153102. ✓ $\prod_{cname} (\sigma_{cage \geq 30} \wedge amount > 30000 (Customers \bowtie Orders))$

6406531153103. ❌ $\prod_{cname} (\sigma_{cage \geq 30} \vee amount \leq 30000 (Customers \bowtie Orders))$

Sub-Section Number : 3

Sub-Section Id : 64065349199

Question Shuffling Allowed : Yes

Question Number : 77 Question Id : 640653346871 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the relation R shown in Table 1:

A	B	C
1	a	4
1	a	2
2	c	4
3	d	2
2	c	1

Table 1: Relation R

What is the output of the following relational algebra expression?

$$\Pi_{x.B}(\sigma_{x.A=y.C}(\rho_x(R) \times \rho_y(R)))$$

Options :

B
a
a
c
c
c
c

6406531153067. ✘

B
a
c

6406531153068. ✓

B
a
c
d

6406531153069. ✘

B
a
a
c
d
c

6406531153070. ✘

Question Number : 78 Question Id : 640653346872 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the relation **Product** shown in Table 3:

p_id	p_name	price
P1	Sunscreen cream	30
P2	Face Wash	40
P3	Tooth Paste	10
P4	Brush	20
P5	Comb	NULL
P6	Carry bag	0
P7	Olive Oil	NULL

Table 3: Relation Product

Identify the output for the following SQL statement.

```
SELECT AVG(price) FROM Product;
```

Options :

6406531153071. ✘ 14.29

6406531153072. ✘ 16.67

6406531153073. ✓ 20.00

6406531153074. ✘ 25.00

Question Number : 79 Question Id : 640653346873 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the relation Player shown in Table 4:

p_id	player_name	Age	goal_score
P1	Aabhi	32	49
P2	Naba	21	28
P3	Sam	19	22
P4	Lee	24	18
P5	Baba	23	31
P6	Karan	28	37
P7	Mahabir	25	32
P8	Aakash	20	42

Table 4: Relation Player

Result table:

p_id	player_name	Age	goal_score
P1	Aabhi	32	49
P6	Karan	28	37
P8	Aakash	20	42

Choose the correct SQL statement that will return the given resultant table.

Options :

SELECT * FROM Player

WHERE Age >= 20 AND

6406531153075. ❌ goal_score >=(SELECT AVG(goal_score) - MIN(goal_score) FROM Player)

SELECT * FROM Player

WHERE Age > 20 AND

6406531153076. ❌ goal_score >= (SELECT AVG(goal_score) FROM Player)

SELECT * FROM Player

WHERE Age >= 20 AND

6406531153077. ✓ goal_score >= (SELECT AVG(goal_score) FROM Player)

SELECT * FROM Player

WHERE Age >= 20 AND

6406531153078. ❌ goal_score >=(SELECT MAX(goal_score) - AVG(goal_score) FROM Player)

Question Number : 80 Question Id : 640653346875 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the relation **student** shown in Table 7.

roll_no	name	house_name
1	John	Nilgiri
2	Ramesh	Nilgiri
3	Dilip	Arawali
4	Suresh	Shiwalik
5	Kiran	Udaygiri
6	Vijay	Nilgiri

Table 7: Relation student

What will the output of the following query be?

```
SELECT e.name AS student_name
FROM student e,
     (SELECT house_name, COUNT(*) AS house_count
      FROM student
      GROUP BY house_name) AS dc
WHERE e.house_name = dc.house_name
AND dc.house_count > 2
```

Options :

student_name
John
Ramesh

6406531153083. ✘

student_name
Ramesh
Dilip

6406531153084. ✘

student_name
John
Ramesh
Vijay

6406531153085. ✓

student_name
Vijay

6406531153086. ✘

Question Number : 81 Question Id : 640653346879 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the relational schemas given below.

customer(c_id, c_name, contact_no, address)

product(p_id, p_name, product_type, price)

order(o_id, c_id, p_id, date)

Table **order** having two foreign keys *c_id* and *p_id*.

Identify the appropriate “CREATE TABLE” statement for table **order**.

Options :

```
CREATE TABLE order(
    varchar(10) o_id primary key,
    varchar(10) c_id,
    varchar(10) p_id,
    DATE date,
    FOREIGN KEY(c_id) REFERENCES customer,
    FOREIGN KEY(p_id) REFERENCES product)
```

6406531153096. *

```
CREATE TABLE order(
    o_id varchar(10) primary key,
    c_id varchar(10),
    p_id varchar(10),
    date DATE,
    FOREIGN KEY(p_id) REFERENCES customer,
    FOREIGN KEY(c_id) REFERENCES product)
```

6406531153097. *

```
CREATE TABLE order(
    o_id varchar(10),
    c_id varchar(10) primary key,
    p_id varchar(10),
    date DATE,
    FOREIGN KEY(c_id) REFERENCES customer,
    FOREIGN KEY(p_id) REFERENCES product)
```

6406531153098. *

6406531153099. ✓

```
CREATE TABLE order(
o_id varchar(10) primary key,
c_id varchar(10),
p_id varchar(10),
date DATE,
FOREIGN KEY(c_id) REFERENCES customer,
FOREIGN KEY(p_id) REFERENCES product)
```

Sub-Section Number : 4

Sub-Section Id : 64065349200

Question Shuffling Allowed : Yes

Question Number : 82 Question Id : 640653346874 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the relations A and B shown in Table 5 and Table 6 respectively:

x	y
1	a
2	a
3	b
4	c
5	b

Table 5: Relation A

w	z
4	a
5	b
6	b
7	c
8	a
9	a
10	b

Table 6: Relation B

What will be the number of tuples in the resulting table?

```
SELECT y FROM A
UNION ALL
SELECT z FROM B
EXCEPT ALL
SELECT z FROM B
```

Options :

6406531153079. ✘ 0

6406531153080. ✘ 3

6406531153081. ✘ 4

6406531153082. ✓ 5

Question Number : 83 Question Id : 640653346881 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the relations shown in Figure 2.

Students			Course_Section	
sname	course_id	sec_id	course_id	sec_id
Sklivia	DBMS	A	DBMS	A
James	Python	A	Python	C
Shawn	Maths	C		
Sklivia	Python	C		
James	DBMS	B		
Jass	DBMS	A		
Shawn	Python	B		

Figure 2: Relations Students and Course_Section

What will the output of the operation **Students ÷ Course_Section** be?

Options :

6406531153104. ✗ James

6406531153105. ✗ Shawn

6406531153106. ✓ Sklivia

6406531153107. ✗ Jass

Question Number : 84 Question Id : 640653346882 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the following relational schema and answer the question that follows.

Account (ac_no, branch_name, balance)

Branch (branch_name, address)

Customer (c_num, ac_no, branch_name, name, address)

Which of the following queries is equivalent to the statement given below?

Find the name of those customers who have an account at the 'ICICI Bank' and an account balance more than 50000.

Options :

$\{T \mid \exists C \in Customer, \exists A \in Account (C.ac_no = A.ac_no \wedge C.branch_name = "ICICIBank" \wedge A.balance > 50000 \wedge C.branch_name = A.branch_name \wedge$

6406531153108. ✓ $T.name = C.name)\}$

$\{T \mid \exists C \in Customer, \exists A \in Account (C.ac_no = A.ac_no \vee C.branch_name = "ICICIBank" \wedge A.balance > 50000 \vee C.branch_name = A.branch_name \wedge$

6406531153109. ✗ $T.name = C.name)\}$

$\{T \mid \exists C \in Customer (C.ac_no = A.ac_no \wedge C.branch_name = "ICICIBank" \vee$

6406531153110. ✗ $A.balance > 50000)\}$

$\{T \mid \exists C \in Customer, \exists A \in Account (C.ac_no = A.ac_no \vee C.branch_name =$

6406531153111. ✗ $"ICICIBank" \vee A.balance > 50000 \vee C.branch_name = A.branch_name)\}$

Question Number : 85 Question Id : 640653346883 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the following E-R Diagram.

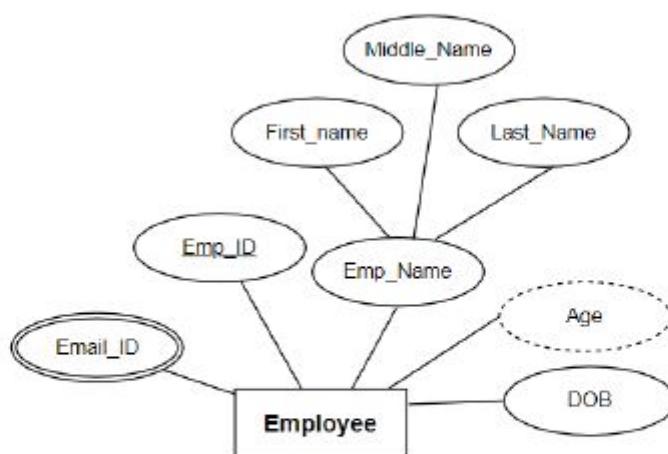


Figure 3: E-R Diagram

Which among the following is the equivalent of the given E-R diagram?

Options :

6406531153112. ✗

Employee	
Emp_ID	
Emp_Name	
First_Name	
Middle_Name	
Last_Name	
Email_ID	
DOB	
Age	

Employee	
Emp_ID	
Emp_Name	
First_Name	
Middle_Name	
Last_Name	
{Email_ID}	
DOB	
Age()	

6406531153113. ✓

Employee	
Emp_ID	
Emp_Name	
First_Name	
Middle_Name	
Last_Name	
Email_ID	
DOB()	
Age	

6406531153114. ✗

6406531153115. ✗

Employee	
Emp_ID	
Emp_Name	
First_Name	
Middle_Name	
Last_Name	
Email_ID()	
DOB	
{Age}	

Sub-Section Number : 5

Sub-Section Id : 64065349201

Question Shuffling Allowed : Yes

Question Number : 86 Question Id : 640653346884 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

Consider the E-R diagram for a B.Sc. Degree Course Project database as given in Figure 4.

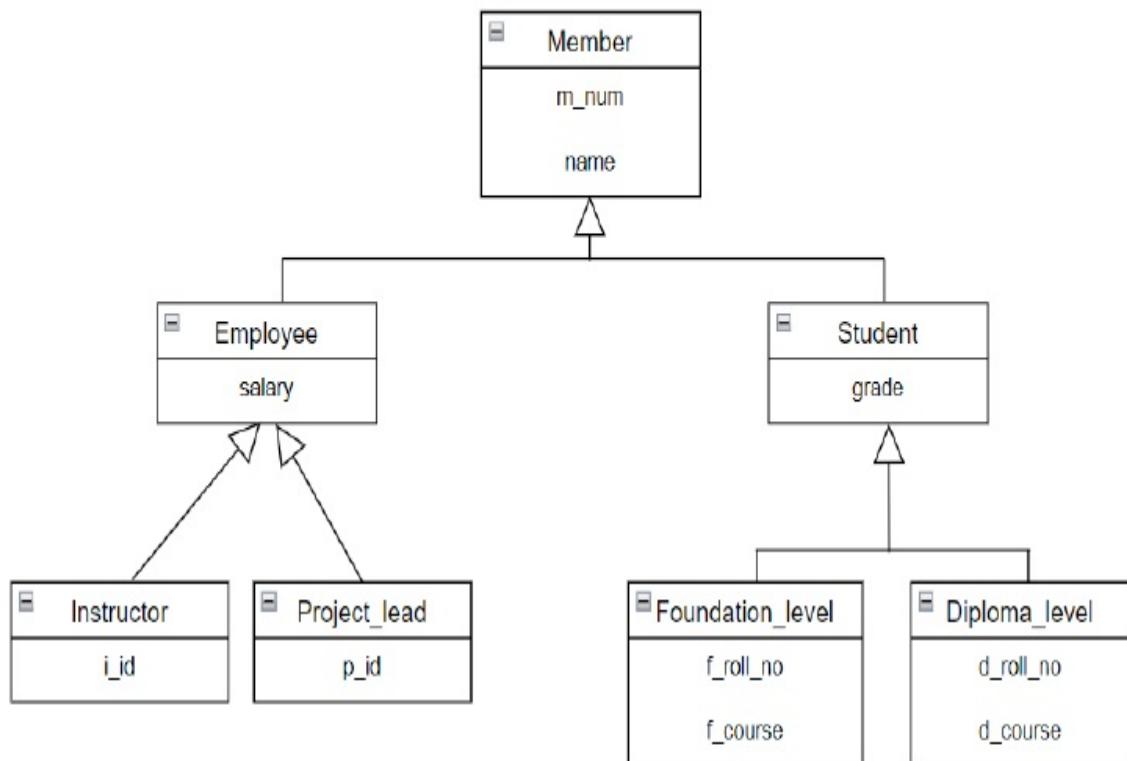


Figure 4: E-R Diagram

Which of the following statement describes the correct relation between the given entity sets?

Note:

- Employee and Student are disjoint specializations of Member.
- Instructor and Project_lead are overlapping specializations of Employee.
- Foundation_level and Diploma_level are disjoint specializations of Student.

Options :

6406531153116. ✓ Each member can be either an employee or a student or just a member of the degree project. However, a member cannot be an employee and a student at the same time.

6406531153117. ✗ Each employee can be an instructor or a project lead. However, an employee cannot be an instructor and a project lead at the same time.

6406531153118. ✗ Each student can be either a foundation_level student or a diploma_level student or both at the same time.

6406531153119. ✓ Each employee can be an instructor or a project lead or both at the same time.

6406531153120. ✗ Each member can be either an employee or a student or both at the same time.

Sub-Section Number :

6

Sub-Section Id :

64065349202

Question Shuffling Allowed :

Yes

Question Number : 87 Question Id : 640653346877 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

Consider the two relations `student` and `mobile_no` shown in Table 9 and Table 10.

roll_no	name
1	Oliver
2	Jack
3	Harry
4	Thomas

Table 9: Relation student

roll_no	contact_no
1	123
2	456
2	131
3	251

Table 10: Relation mobile_no

What is the output of the below SQL query?

```
SELECT COUNT(s.roll_no)
FROM student AS s
NATURAL JOIN
mobile_no AS m
```

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

4

PDSA

Section Id :	64065321949
Section Number :	6
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	17
Number of Questions to be attempted :	17
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349203
Question Shuffling Allowed :	No

Question Number : 88 Question Id : 640653346885 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153121. ✓ YES

6406531153122. ✗ NO

Sub-Section Number : 2

Sub-Section Id : 64065349204

Question Shuffling Allowed : Yes

Question Number : 89 Question Id : 640653346886 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

```
1 def fun(arr):
2     n = len(arr)
3     if n % 2 == 0:
4         while n > 1:
5             n = n // 4
6             print(arr[n])
7     else:
8         for i in range(0,n):
9             print(arr[i])
```

What is the worst case time complexity of the given function **fun** ?

Options :

6406531153123. ✓ $O(n)$

6406531153124. ✗ $O(n^2)$

6406531153125. ✗ $O(\log n)$

6406531153126. ✘ $O(n^4)$

Question Number : 90 Question Id : 640653346887 Question Type : MCQ Is Question Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What will be the time complexity of **Insertion Sort** if the input list consists of n identical elements?

Options :

6406531153127. ✘ $O(\log n)$

6406531153128. ✓ $O(n)$

6406531153129. ✘ $O(n \log n)$

6406531153130. ✘ $O(n^2)$

Sub-Section Number : 3

Sub-Section Id : 64065349205

Question Shuffling Allowed : Yes

Question Number : 91 Question Id : 640653346888 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

What is the recurrence and time complexity for the worst case behaviour of **Quick Sort** ?

Options :

6406531153131. ✘ Recurrence is $T(n) = 2T(n - 1) + O(n)$ and time complexity is $O(n^2)$

6406531153132. ✓ Recurrence is $T(n) = T(n - 1) + O(n)$ and time complexity is $O(n^2)$

6406531153133. ✘ Recurrence is $T(n) = T(n - 1) + O(1)$ and time complexity is $O(n)$

6406531153134. ✘ Recurrence is $T(n) = 2T(n/2) + O(n)$ and time complexity is $O(n \log n)$

Question Number : 92 Question Id : 640653346890 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following functions:

$$f_1 = n\sqrt{n}$$

$$f_2 = \log^2 n$$

$$f_3 = n \log n$$

$$f_4 = \log \log n$$

Which of the following is correct order of increasing growth rate?

Options :

6406531153139. ✘ $f_2 < f_4 < f_1 < f_3$

6406531153140. ✘ $f_2 < f_4 < f_3 < f_1$

6406531153141. ✓ $f_4 < f_2 < f_3 < f_1$

6406531153142. ✘ $f_1 < f_3 < f_2 < f_4$

Question Number : 93 Question Id : 640653346894 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following statements:

1. A single stack can be used to check whether a word is palindrome or not
2. A stack can be used to evaluate expressions.
3. The last element to be inserted into a stack will always be the last element to be taken out of the stack.

Choose the correct option regarding the given statements.

Note: A palindrome is a word that spells the same from both sides. Eg: radar

Options :

6406531153155. ✘ Statement 1 and Statement 3 are false

6406531153156. ✘ Statement 2 and Statement 3 are false

6406531153157. ✘ Only statement 1 is false

6406531153158. ✓ Only statement 3 is false

Question Number : 94 Question Id : 640653346895 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

According to the conventional definition, an array is a fixed size data structure whose values are contiguously located in memory, whereas a linked list is a dynamic collection (size can change) of values that are not contiguously located in memory.

Considering the above definitions, if we use a Binary search algorithm to find a value from a linked list, then what would be the worst-case time complexity of Binary search?

Options :

6406531153159. ✘ $O(n \log n)$

6406531153160. ✘ $O(n^2)$

6406531153161. ✓ $O(n)$

6406531153162. ✘ $O(\log n)$

Question Number : 95 Question Id : 640653346896 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following statements about **Depth First Search (DFS)** on an undirected graph?:

- (1) DFS systematically computes reachability in graphs.
- (2) Complexity of DFS is $O(n^2)$ using adjacency matrix and $O(m + n)$ using adjacency list.
- (3) DFS can be used to identify connected components in an undirected graph.

Choose the correct option regarding the given statements.

Options :

6406531153163. ✘ Only Statement 1 and Statement 3 are true

6406531153164. ✘ Only Statement 2 and Statement 3 are true

6406531153165. ✘ Only Statement 1 and Statement 2 are true

6406531153166. ✓ All statements are true

Question Number : 96 Question Id : 640653346900 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider a connected, directed graph on which DFS is executed. Which of the following options are true regarding pre and post numbering used in the DFS algorithm on the graph?

Options :

If (u, v) is an edge of the graph such that $[pre(u), post(u)]$ contains $[pre(v), post(v)]$ then
6406531153178. ✘ the graph is necessarily cyclic

If (u, v) is an edge of the graph such that $[pre(v), post(v)]$ contains $[pre(u), post(u)]$ then
6406531153179. ✓ the graph is necessarily cyclic

If (u, v) is an edge of the graph such that $[pre(u), post(u)]$ and $[pre(v), post(v)]$ are disjoint
6406531153180. ✘ intervals then the graph is necessarily cyclic

6406531153181. ✘ None of these

Question Number : 97 Question Id : 640653346901 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following statements:

1. Finding the longest path in DAG takes $O(m + n)$ time, where n is the number of vertices and m is the number of edges.
2. A DAG will always have more than one topological ordering.
3. DFS always produces the same number of tree edges, irrespective of the node from which the search started

Choose the correct option.

Options :

6406531153182. ✘ Only statement 1 is true

6406531153183. ✘ Statement 1 and Statement 2 are true

6406531153184. ✓ Statement 1 and Statement 3 are true

6406531153185. ✘ Only statement 3 is true

Sub-Section Number :

4

Sub-Section Id :

64065349206

Question Shuffling Allowed :

Yes

Question Number : 98 Question Id : 640653346889 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the following `partition` function, which uses the last element of the list as the pivot.

```
1 def partition(L, low, high):
2     i = low - 1
3     pivot = L[high]
4     for j in range(low, high):
5         if L[j] <= pivot:
6             i = i + 1
7             L[i], L[j] = L[j], L[i]
8     #putting the pivot element in its appropriate position
9     L[i+1], L[high] = L[high], L[i+1]
10
11 L = [1, 4, 8, 2, 9, 3, 6]
12 partition(L, 0, len(L)-1)
```

What will be the state of the list `L` after the `partition` function terminates?

Options :

6406531153135. ✘ [1, 4, 2, 3, 6, 9, 8]

6406531153136. ✘ [1, 4, 2, 8, 9, 3, 6]

6406531153137. ✓ [1, 4, 2, 3, 6, 8, 9]

6406531153138. ✘ [1, 2, 3, 4, 6, 8, 9]

Question Number : 99 Question Id : 640653346891 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction


Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

```
1 class Node:  
2     def __init__(self,data):  
3         self.data = data  
4         self.next = None
```

Consider an implementation of a singly linked list, where each node is created using the given class `Node`. Suppose it has a `head` pointer that points to the first node of the linked list and a `tail` pointer that points to the last element of the linked list.

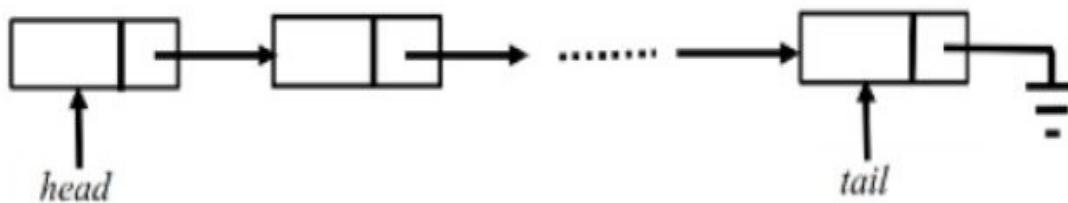

Suppose we want to perform the following operations on the given linked list:-

1. Insertion of the new node at the front of the linked list.
2. Insertion of the new node at the end of the linked list.
3. Deletion of the first node of the linked list.
4. Deletion of the last node of the linked list.

Which of the following option represents the correct complexity for each operation?

Options :

6406531153143. ✘ 1 – $O(1)$, 2 – $O(n)$, 3 – $O(1)$, 4 – $O(1)$

6406531153144. ✘ 1 – $O(1)$, 2 – $O(1)$, 3 – $O(1)$, 4 – $O(1)$

6406531153145. ✘ 1 – $O(1)$, 2 – $O(n)$, 3 – $O(1)$, 4 – $O(n)$

6406531153146. ✓ 1 – $O(1)$, 2 – $O(1)$, 3 – $O(1)$, 4 – $O(n)$

Question Number : 100 Question Id : 640653346892 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider a linked list made up of nodes whose structure is defined by the following class

```
1 class Node:  
2     def __init__(self, value):  
3         self.value = value  
4         self.next = None
```

Assume we have a class `LinkedList` in which `head` refers to the first node of the linked list. A method `fun(self, curr_node, prev_node)` is defined in the `LinkedList` class, as given below:

```
1 def fun(self, curr_node, prev_node):  
2     if curr_node.next is None:  
3         self.head = curr_node  
4         curr_node.next = prev_node  
5         return  
6  
7     temp = curr_node.next  
8     curr_node.next = prev_node  
9  
10    self.fun(temp, curr_node)
```

The initial state of the linked list before calling `fun` was: 34, 12, 67, 9, 12, 4

What would be the state of the linked list after calling `fun(l.head, None)`, where `l` is the `LinkedList` object?

Options :

6406531153147. ✘ 12, 34, 9, 67, 4, 12

6406531153148. ✓ 4, 12, 9, 67, 12, 34

6406531153149. ✘ 4, 12, 67, 9, 12, 34

6406531153150. ✘ None of these

Sub-Section Number :

5

Sub-Section Id :

64065349207

Question Shuffling Allowed :

Yes

Question Number : 101 Question Id : 640653346893 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Linear probing is an open addressing scheme in computer programming for resolving hash collisions in hash tables. Linear probing takes the original hash index and increments the value by 1 until a free slot is found.

Consider the given hash table with hash function $h(key) = key \bmod 5$ which uses linear probing for solving collisions.

Index	Key
0	45
1	51
2	60
3	18
4	34

Which among the following options correspond to possible orders of insertion of values in the hash table?

Options :

6406531153151. ✓ 51, 18, 45, 60, 34

6406531153152. ✗ 18, 60, 45, 51, 34

6406531153153. ✗ 18, 45, 34, 60, 51

6406531153154. ✓ 34, 45, 18, 51, 60

Question Number : 102 Question Id : 640653346897 Question Type : MSQ Is Question


Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Consider the following graph

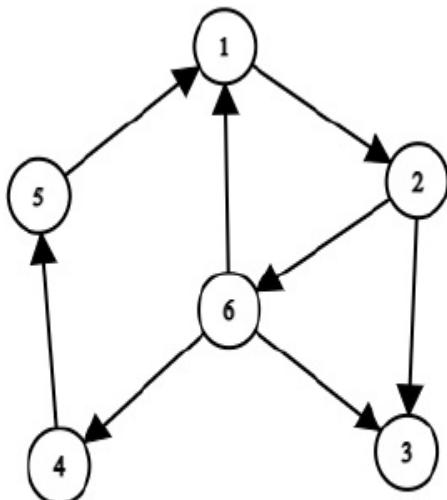

A Breadth First Search (BFS) is started at node 2. The nodes are listed in the order they are first visited. Which of the following is (are) possible output(s)?

Options :

6406531153167. ✓ 2 6 3 4 1 5

6406531153168. ✓ 2 3 6 1 4 5

6406531153169. ✗ 2 6 4 5 1 3

6406531153170. ✓ 2 3 6 4 1 5

6406531153171. ✗ 2 6 1 3 4 5


Question Number : 103 Question Id : 640653346898 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Consider a DAG with $V = \{A, B, C, D, E, F, G\}$, shown below. Which of the following is/are **valid** topological orderings of the DAG?

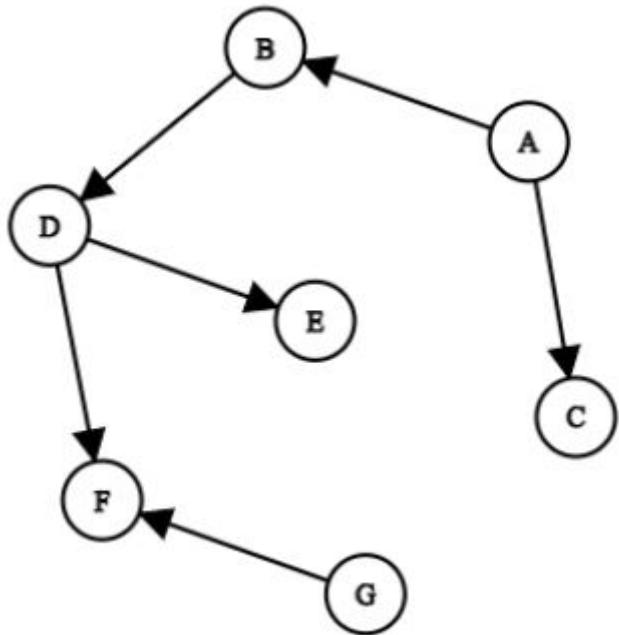

Options :

6406531153172. ✘ A B C D E F G

6406531153173. ✓ A B G C D E F

6406531153174. ✘ G A C F B D E

6406531153175. ✓ A G C B D F E

6406531153176. ✓ G A B D F C E

Sub-Section Number : 6

Sub-Section Id : 64065349208

Question Shuffling Allowed : Yes

Question Number : 104 Question Id : 640653346899 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Consider an undirected graph with 5 vertices {A, B, C, D, E}. DFS is executed on this graph with the start vertex as A. Let $\text{push_time}(v)$ represent the sequence number when the vertex 'v' is first visited (i.e. pushed onto the stack) and let $\text{pop_time}(v)$ represent the sequence number when vertex 'v' is last visited (i.e. popped out of stack).

For the given values of pop_time and push_time of all the vertices, find the number of components in the graph

$$\text{push_time}(A) = 1, \text{pop_time}(A) = 6$$

$$\text{push_time}(B) = 2, \text{pop_time}(B) = 5$$

$$\text{push_time}(C) = 3, \text{pop_time}(C) = 4$$

$$\text{push_time}(D) = 7, \text{pop_time}(D) = 10$$

$$\text{push_time}(E) = 8, \text{pop_time}(E) = 9$$

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

AppDev-1

Section Id : 64065321950

Section Number : 7

Section type : Online

Mandatory or Optional : Mandatory

Number of Questions : 17

Number of Questions to be attempted : 17

Section Marks : 50

Display Number Panel : Yes

Group All Questions : No

Enable Mark as Answered Mark for Review and Yes

Clear Response :

Maximum Instruction Time : 0
Sub-Section Number : 1
Sub-Section Id : 64065349209
Question Shuffling Allowed : No

Question Number : 105 Question Id : 640653346902 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "MODERN APPLICATION DEVELOPMENT 1"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153186. ✓ YES

6406531153187. ✗ NO

Sub-Section Number : 2

Sub-Section Id : 64065349210

Question Shuffling Allowed : Yes

Question Number : 106 Question Id : 640653346903 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following statement is true about MVC architecture?

Options :

6406531153188. ✗ The view redirects the incoming request to model.

6406531153189. ✘ In MVC architecture, the model defines the business-logic layer.

6406531153190. ✓ The controller passes data model information to view.

6406531153191. ✘ It is not possible to share a view across multiple controllers.

Question Number : 107 Question Id : 640653346908 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The hexadecimal representation of the number 5457_8 is _____ .

Options :

6406531153208. ✘ A2F

6406531153209. ✘ B1F

6406531153210. ✓ B2F

6406531153211. ✘ C1E

Question Number : 108 Question Id : 640653346912 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider a file consisting of 2000 alphanumeric characters including spaces. How much would be the total occupied space in bits, assuming UCS-4 is used?

Options :

6406531153224. ✓ 64000 bits

6406531153225. ✘ 32000 bits

6406531153226. ✘ 24000 bits

6406531153227. ✘ 12000 bits

Question Number : 109 Question Id : 640653346913 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Choose the correct internal CSS that sets the body background color to green and the heading color of the text to red.

Options :

```
<style>
  body {
    background-color:"green";
  }
  h1 {
    color:"blue";
  }
</style>
```

6406531153228. ❌

```
<style>
  body {
    background-color:"green";
  }
  h1 {
    color:"red";
  }
</style>
```

6406531153229. ✓

```
<style>
  body {
    background-color:"blue";
  }
  h1 {
    color:"red";
  }
</style>
```

6406531153230. ❌

6406531153231. ❌ None of these

Sub-Section Number :

3

Sub-Section Id :

64065349211

Question Shuffling Allowed :

Yes

Question Number : 110 Question Id : 640653346904 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following HTML code below.

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8"/>
    <style>
      body{text-align: center}
      p{font-size: 30px;font-style: italic;color: black;}
      .blue{color: green;}
      .red{color: blue;}
      .green{color: red;}
      #myId{color: grey;}
    </style>
  </head>
  <body>
    <div>
      <h2>Welcome to IIT</h2>
      <p class="blue red green">Paragraph 1</p>
      <p class="red blue green" id="myId">Paragraph 2</p>
      <p class="green red blue">Paragraph 3 </p>
    </div>
  </body>
</html>
```

How will the browser render the above given HTML file?

Options :

6406531153192. ✓

Welcome to IIT

Paragraph 1

Paragraph 2

Paragraph 3

Welcome to IIT

Paragraph 1

Paragraph 2

Paragraph 3

6406531153193. *

Welcome to IIT

Paragraph 1

Paragraph 2

Paragraph 3

6406531153194. *

Welcome to IIT

Paragraph 1

Paragraph 2

Paragraph 3

6406531153195. *

Question Number : 111 Question Id : 640653346906 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Python code snippet.

filename: code.py

```
import sys
my_args = sys.argv

print("The python file name is:", my_args[1])
print(f"My username is: {my_args[3]}{my_args[4]}")
```

What will be the output on console if the command given is:

python code.py output.py Appdev Michael 2003 1003

Options :

The python file name is: code.py
6406531153200. ✘ My username is: Michael1003

The python file name is: code.py
6406531153201. ✘ My username is: Michael2003

The python file name is: output.py
6406531153202. ✘ My username is: Michael1003

The python file name is: output.py
6406531153203. ✓ My username is: Michael2003

Question Number : 112 Question Id : 640653346907 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the PyHTML program.

```
from pyhtml import *
def items(ctx):
    for title, page in [("coffee", "/drink.html"),
                        ("kitkat", "/chocolate.html"),
                        ("good day", "/biscuit.html")]:
        yield li(a(href=page)(title))

t = html(head(title("Grocery")), body(ol(items)))
print(t.render())
```

What will be the output of the above program?

Options :

6406531153204. ❌

```
<!DOCTYPE html>
<html>
  <head>
    <title>
      Grocery
    </title>
  </head>
  <body>
    <ul>
      <li>
        <a href="/biscuit.html">
          good day
        </a>
      </li>
      <li>
        <a href="/chocolate.html">
          kitkat
        </a>
      </li>
      <li>
        <a href="/drink.html">
          coffee
        </a>
      </li>
    </ul>
  </body>
</html>
```

6406531153205. ✶

```
<!DOCTYPE html>
<html>
  <head>
    <title>
      Grocery
    </title>
  </head>
  <body>
    <ul>
      <li>
        <a href="/drink.html">
          coffee
        </a>
      </li>
      <li>
        <a href="/chocolate.html">
          kitkat
        </a>
      </li>
      <li>
        <a href="/biscuit.html">
          good day
        </a>
      </li>
    </ul>
  </body>
</html>
```

6406531153206. ✓

```
<!DOCTYPE html>
<html>
  <head>
    <title>
      Grocery
    </title>
  </head>
  <body>
    <ol>
      <li>
        <a href="/drink.html">
          coffee
        </a>
      </li>
      <li>
        <a href="/chocolate.html">
          kitkat
        </a>
      </li>
      <li>
        <a href="/biscuit.html">
          good day
        </a>
      </li>
    </ol>
  </body>
</html>
```

6406531153207. ✘ None of these

Question Number : 113 Question Id : 640653346909 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Annie and Curly took Database and Networks courses. Bella took Compiler and Python courses and Deva took Compiler and Database courses. Which of the following list of tuples correctly represents the relationship between names and courses.

names = {0: 'Annie', 1: 'Bella', 2: 'Curly', 3: 'Deva'}

courses = {0: 'Database', 1: 'Compiler', 2: 'Networks', 3: 'Python'}

Options :

rels = [(names[0], courses[0]), (names[2], courses[0]),
(names[0], courses[2]), (names[2], courses[2]),
(names[3], courses[0]), (names[3], courses[1]),
(names[1], courses[1]), (names[1], courses[3])]

6406531153212. ✓

rels = [(names[2], courses[0]), (names[3], courses[0]),
(names[2], courses[2]), (names[3], courses[2]),
(names[0], courses[0]), (names[0], courses[1]),
(names[2], courses[1]), (names[2], courses[3])]

6406531153213. ✗

6406531153214. ✗ rels = [(0, 1), (2,0), (0,2), (2,2), (3,0), (2,1), (1,1), (1,3)]

6406531153215. ✗ rels = [(1, 1), (2,2), (0,0), (2,3), (3,1), (2,4), (4,4), (1,4)]

Question Number : 114 Question Id : 640653346910 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following tables ‘users’ and ‘book’ stored in SQLite database.

Table: users

Id	Name	Age
1	Vinu	25
2	Manu	30
3	Somu	15
4	Ram	20

Table: book

Id	Bookname	Username
1	C++	Somu
2	Database	Vinu
3	C	Manu
4	sqlite	Ram

What will be the output of the following SQL query?

```
SELECT b.Bookname, u.Age FROM user as u, Book as b  
WHERE b.Username = u.Name
```

Options :

Bookname	Username
C++	Somu
Database	Vinu
C	Manu
6406531153216. ✘ sqlite	Ram

Bookname	Age
sqlite	25
C	30
Database	15
6406531153217. ✘ C++	20

Bookname	Age
Database	20
C	15
C++	30
6406531153218. ✘ sqlite	25

Bookname	Age
Database	25
C	30
C++	15
6406531153219. ✓ sqlite	20

Question Number : 115 Question Id : 640653346911 Question Type : MCQ Is Question**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction****Time : 0****Correct Marks : 3**

Question Label : Multiple Choice Question

Consider the following code.

```
from jinja2 import Template
template = """
    {% for i in range(2) %}
    {{user[i]}}'s marks are
    {{mark[i]}}
    {% endfor %}
"""

user = { 0: "Balu", 1: "Kala"}
mark = [[30,40,56,78],[25,67,80,90]]
x = Template(template)
print(x.render(user = user, mark = mark))
```

What will be the output of above program?

Options :

0's marks are
[30, 40, 56, 78]

1's marks are
6406531153220. ✗ [25, 67, 80, 90]

Balu's marks are
[30, 40, 56, 78]

Kala's marks are
6406531153221. ✗ [30, 40, 56, 78]

Balu's marks are
[30, 40, 56, 78]

Kala's marks are
6406531153222. ✓ [25, 67, 80, 90]

Balu's marks are
[25, 67, 80, 90]

Kala's marks are
6406531153223. ✗ [30, 40, 56, 78]

Question Number : 116 Question Id : 640653346917 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

For a network bandwidth of 8 Gbps, what should be the size of each request if 5000 such requests are to be sent over the network per second? [Use these relations: 1 Byte = 8 bits, 1 KB = 1000 Bytes, 1 MB = 1000 KBs and so on.]

Options :

6406531153244. ✘ 1.6 KB

6406531153245. ✓ 200 KB

6406531153246. ✘ 1.6 MB

6406531153247. ✘ 200 MB

Sub-Section Number : 4

Sub-Section Id : 64065349212

Question Shuffling Allowed : Yes

Question Number : 117 Question Id : 640653346905 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following statements is/are true about an HTML 5 document?

Options :

<!DOCTYPE> declaration represents that a given HTML file is HTML5

6406531153196. ✓ compliant.

6406531153197. ✘ We cannot create HTML pages without <head> and <body> tags.

6406531153198. ✓ It is possible to render HTML files without .html extension.

Sub-Section Number :	5
Sub-Section Id :	64065349213
Question Shuffling Allowed :	Yes

Question Number : 118 Question Id : 640653346914 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question



Consider the following HTML document with an embedded style sheet.

```
<!DOCTYPE html>
<html>
    <head>
        <title>Quiz 1</title>
        <style type="text/css">
            div{
                padding-left: 10px;
                margin-right: 15px;
                border-style: solid;
                border-width: 5px;
                width: 2000px;
                height: 20px;
            }
        </style>
    </head>
    <body>
        <div>My first Div element</div>
    </body>
</html>
```


Which of the following figures correctly represents the box model of the above HTML document?

Options :


6406531153232. ❗

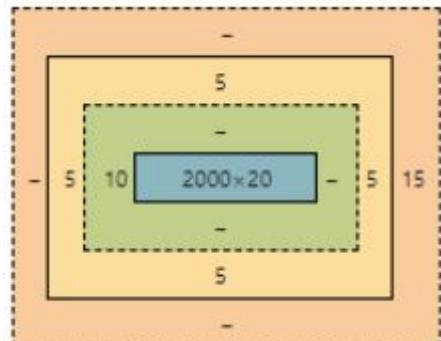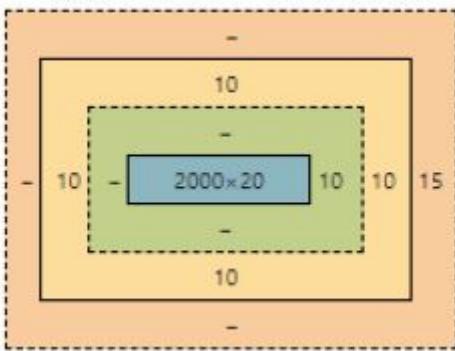

6406531153233. ✓

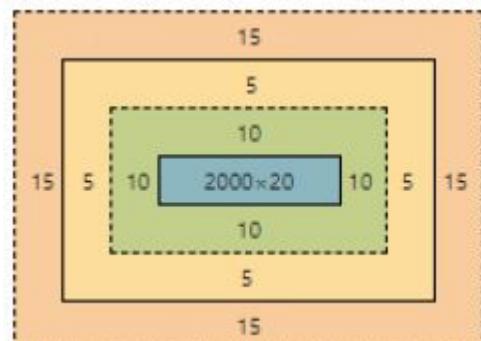

6406531153234. ✗

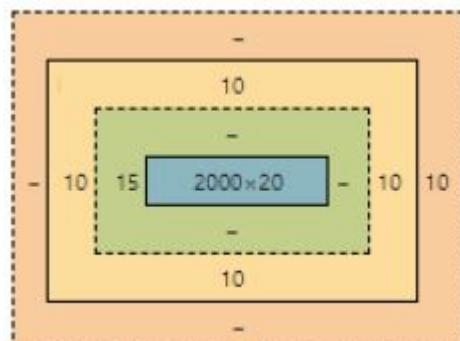

6406531153235. ✗

Question Number : 119 Question Id : 640653346915 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following Python code snippet.

```
from jinja2 import Template

Config_1 = {1:"red",2:"blue",3:"green",4:"yellow"}

Config_2 = {1:"pink",2:"orange",3:"brown",4:"darkblue"}

test_temp = """
    <!DOCTYPE html>
    <html>
        <head>
            <style type="text/css">
                *{
                    margin: 0px;
                    width: 253px;
                }
                div{
                    margin: 10px;
                    padding: 20px;
                    border-style: solid;
                    border-width: 10px;
                    font-size: 30px;
                    color: {{Config_1[1]}};
                    background-color: {{Config_2[1]}};
                    border-color: {{Config_2[4]}};
                }
            </style>
            <title>Quiz 1</title>
        </head>
        <body>
            <div>
                My first Div element
            </div>
        </body>
    </html>
"""

output = Template(test_temp)
print(output.render(Config_1 = Config_1, Config_2 = Config_2))
```

How will the browser render the HTML file generated by the above Python code?

Options :

My first Div element

6406531153236. *

My first Div element

6406531153237. *

My first Div element

6406531153238. ✓

My first Div element

6406531153239. *

Question Number : 120 Question Id : 640653346916 Question Type : MCQ Is Question


Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the DOM structure given below.

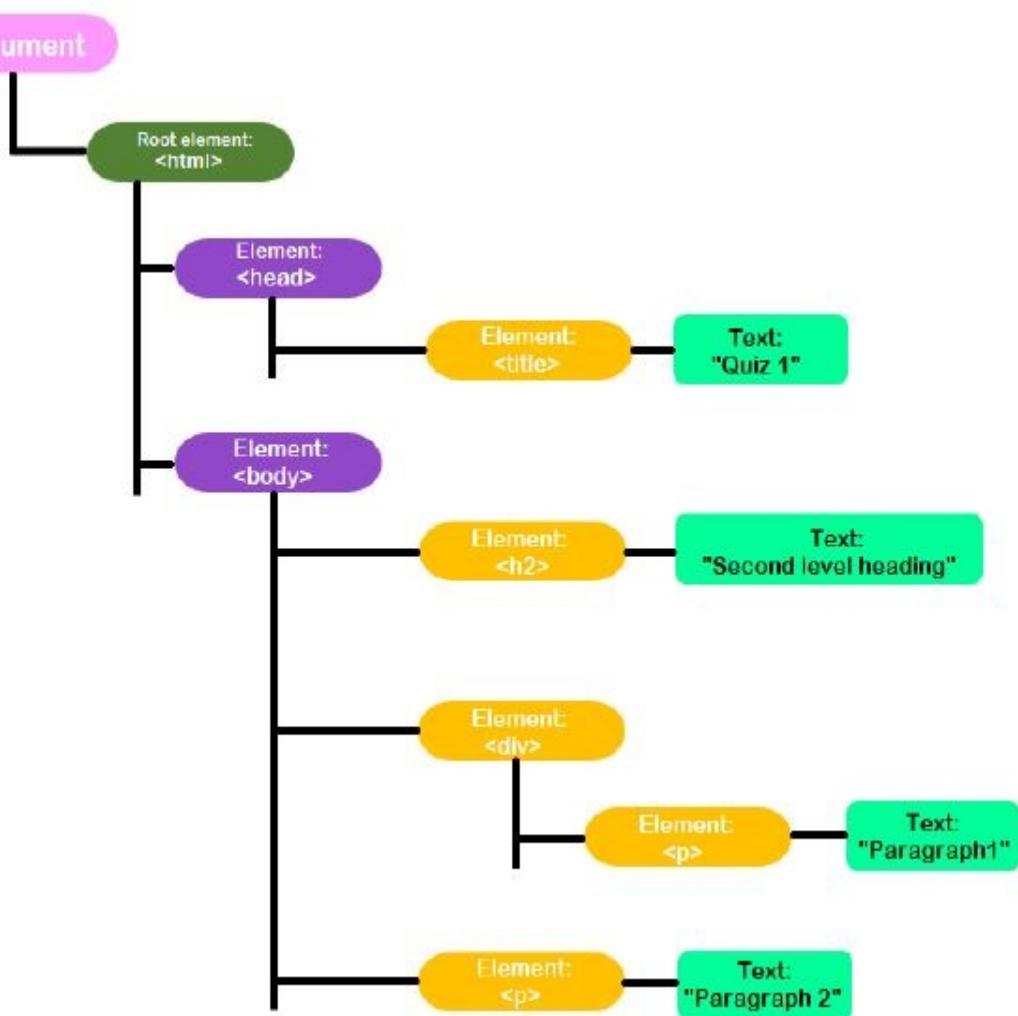

If an HTML document is to be programmatically created using Pyhtml whose DOM structure is exactly the same as the one given above, which of the following Pyhtml code will correctly create the document?

Options :

```

from pyhtml import *
my_html = html(head(title("Quiz 1")),
               body(h2("Second level heading"),
                    div(p("Paragraph1")),
                    p("Paragraph2")
                    )
               )
output = my_html.render()
  
```

6406531153240. ✘ print(output)

6406531153241. ✘

```
from pyhtml import *
my_html = html(head(title("Quiz 1")),
               body(h2("Second level heading"),
                     div(p("Paragraph1"),
                         p("Paragraph2")
                     )))
)
output = my_html.render()
print(output)
```

```
from pyhtml import *
my_html = html(head(title("Quiz 1")),
               body(h2("Second level heading"),
                     div("This is my first div"),
                     p("Paragraph1"),
                     p("Paragraph2")
                     )))
)
output = my_html.render()
```

6406531153242. ✖ print(output)

```
from pyhtml import *
my_html = html(head(title("Quiz 1")),
               body(h2("Second level heading"),
                     div(p("Paragraph1")),
                     p("Paragraph2")
                     )))
)
output = my_html.render()
```

6406531153243. ✓ print(output)

Question Number : 121 Question Id : 640653346918 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider a client which is located 6000 kilometers from the server makes a request through the cable. Suddenly after the request reaches the server, the cable breaks and the response is now to be sent to the client via air with the help of repeaters which added a delay of 75 milliseconds. How

long will the client have to wait before receiving the response? [Note: the speed of light on cable is 2×10^8 m/sec and that in air is 3×10^8 m/sec.]

Options :

6406531153248. ✘ 50 milliseconds

6406531153249. ✘ 135 milliseconds

6406531153250. ✓ 125 milliseconds

6406531153251. ✘ 115 milliseconds

MLF

Section Id :	64065321951
Section Number :	8
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	15
Number of Questions to be attempted :	15
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349214
Question Shuffling Allowed :	No

Question Number : 122 Question Id : 640653346919 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "MACHINE LEARNING FOUNDATIONS"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153252. ✓ YES

6406531153253. ✗ NO

Sub-Section Number : 2

Sub-Section Id : 64065349215

Question Shuffling Allowed : Yes

Question Number : 123 **Question Id :** 640653346920 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

For the data sets $(x^i, y^i) = [(1, 1), (2, 3), (3, 4), (4, 4), (5, 7)]$, $i = 1$ to 5 , Consider the regression model $f(x) = x + 2$. What is the mean squared loss of $f(x)$

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 124 **Question Id :** 640653346921 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

$f(x_1, x_2, x_3) = \frac{x_1+x_2+x_3}{3}$ is used as encoder function and $g(u) = [u, 2u, 3u]$ is used as decoder function for dimensionality reduction of following data set.

X
[1,2,3]
[2,3,4]

Give the reconstruction error for this encoder decoder pair. The reconstruction error is the mean of the squared distance between the reconstructed input and input.

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

24 to 25

Question Number : 125 Question Id : 640653346924 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

What will be the directional derivative of $f(x, y, z) = x^2y^3 - 4xz$ at point $(1, 1, 1)$ in the direction of $[-1, 2, 0]$?

NOTE: Enter your answer in one decimal place.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

3.3 to 3.7

Question Number : 126 **Question Id :** 640653346925 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

For what value of k, will the following function be continuous?

$$f(x) = \begin{cases} 3x^2 - kx + 5, & \text{if } 0 \leq x < 2 \\ 1 - 3x, & \text{if } 2 \leq x \leq 3 \end{cases}$$

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

11

Question Number : 127 **Question Id :** 640653346926 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

Find the linear approximation (L) of $f(x_1, x_2) = 2x_1^2 + 4x_2^4$ around (1, 1), and

use it to compute L(1.1, 1.1). What will be the value of $f(1.1, 1.1) - L(1.1, 1.1)$?

NOTE: Enter your answer in two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.20 to 0.35

Question Number : 128 **Question Id :** 640653346931 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

The eigenvalues of the matrix $\begin{bmatrix} 1 & 0 & -1 \\ 1 & 0 & 0 \\ -2 & 2 & 1 \end{bmatrix}$ are a, b, c in increasing order,
then the value of $a + b$ is

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0

Question Number : 129 **Question Id :** 640653346932 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 4

Question Label : Short Answer Question

If $A = PDP^{-1}$ where $P = \begin{bmatrix} 1 & 2 \\ 1 & -5 \end{bmatrix}$ and $D = \begin{bmatrix} -1 & 0 \\ 0 & 6 \end{bmatrix}$. Calculate A^4 and enter the summation of all the elements of A^4

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1297

Question Number : 130 Question Id : 640653346933 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Short Answer Question

Find the values of α and β for which the matrix $A = \begin{bmatrix} 2 & \alpha \\ 2 & \beta \end{bmatrix}$ has eigenvalues equal to -1 and -3. Enter your answer as $2 \times \alpha + \beta$

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

-21

Sub-Section Number : 3

Sub-Section Id : 64065349216

Question Shuffling Allowed :

Yes

Question Number : 131 Question Id : 640653346922 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Identify which of the following requires use of classification technique.

Options :

6406531153256. ❌ Predicting the amount of rainfall in May 2022 in North India based on precipitation data of the year 2021.

6406531153257. ❌ Predicting the price of a land based on its area and distance from the market.

6406531153258. ✓ Predicting whether an email is spam or not.

6406531153259. ✓ Predicting whether the patient is having cancer or not.

Sub-Section Number : 4

Sub-Section Id : 64065349217

Question Shuffling Allowed : Yes

Question Number : 132 Question Id : 640653346923 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Consider a function

$$f(x) = \begin{cases} \frac{x-|x|}{x}, & \text{if } x \neq 0 \\ 2, & \text{if } x = 0 \end{cases}$$

Is f continuous?

(Provide 1 as answer for 'Yes' and 0 for 'No'.)

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

0

Sub-Section Number : 5

Sub-Section Id : 64065349218

Question Shuffling Allowed : Yes

Question Number : 133 **Question Id :** 640653346927 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 3

Question Label : Short Answer Question

For the matrix $S = \begin{bmatrix} 2 & -1 & 3 \\ 1 & 0 & 1 \\ 0 & 2 & -1 \\ 1 & 1 & 4 \end{bmatrix}$ what is the dimension of its row space?

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

3

Sub-Section Number : 6

Sub-Section Id : 64065349219

Question Shuffling Allowed : Yes

Question Number : 134 **Question Id :** 640653346928 **Question Type :** MCQ Is Question

Mandatory : No **Calculator :** None **Response Time :** N.A **Think Time :** N.A **Minimum Instruction**

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the system $\begin{bmatrix} 1 & 2 & 3 \\ 2 & 5 & 7 \\ 2 & 4 & 6 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} b_1 \\ b_2 \\ b_3 \end{bmatrix}$.

Under what condition on b_1, b_2, b_3 is this system solvable?

Options :

6406531153265. ✘ $b_2 = 2b_1$

6406531153266. ✘ $b_2 = 3b_1$

6406531153267. ✓ $b_3 = 2b_1$

6406531153268. ✘ $b_3 = 3b_1$

Sub-Section Number : 7

Sub-Section Id : 64065349220

Question Shuffling Allowed : Yes

Question Number : 135 Question Id : 640653346929 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Calculate the projection of vector $(2, -1, 3)^T$ onto another vector $(-1, 3, 1)^T$.

Which of the following is the squared length of the projection vector?

Options :

6406531153269. ✘ 0.8686

6406531153270. ✓ 0.3636

6406531153271. ✘ 1.0363

Question Number : 136 Question Id : 640653346930 Question Type : MCQ Is Question**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0****Correct Marks : 4**

Question Label : Multiple Choice Question

Consider the data set with input x and output y as follows.

x	y
1	2
2	1
1	3
3	4

For the above given data set Raj wants to compute a least square approximation that best fits the dataset with minimum error. Which of the following is the correct equation for the best fit line computed by Raj?

Options :6406531153273. ✶ $\hat{y} = 0.412x + 0.215$ 6406531153274. ✶ $\hat{y} = 1.335x + 2.245$ 6406531153275. ✓ $\hat{y} = 0.545x + 1.545$ 6406531153276. ✶ $\hat{y} = 1.713x + 1.175$ 6406531153277. ✶ $\hat{y} = 2.225x + 3.665$

Section Id :	64065321952
Section Number :	9
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	16
Number of Questions to be attempted :	16
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349221
Question Shuffling Allowed :	No

Question Number : 137 Question Id : 640653346934 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "JAVA"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153281. ✓ YES

6406531153282. ✗ NO

Sub-Section Number : 2

Sub-Section Id : 64065349222

Question Shuffling Allowed :

Yes

Question Number : 138 Question Id : 640653346935 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Match the following:

A. Dynamic Lookup	I. Region of the program where a variable is available for use
B. Activation Record	II. Stores the instance variables
C. Scope	III. Duration/time during which a variable is available in the memory
D. Abstraction	IV. Stores the local variables
	V. Choice of method implementation is determined at run-time
	VI. Hiding the implementation details

Options :

6406531153283. ✓ A-V, B-IV, C-I, D-VI

6406531153284. ✗ A-VI, B-II, C-III, D-V

6406531153285. ✗ A-V, B-II, C-I, D-VI

6406531153286. ✗ A-VI, B-IV, C-III, D-V

Question Number : 139 Question Id : 640653346940 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the Java code given below.

```
1 interface Transferable{
2     public void transfer();
3 }
4 interface Receivable{
5     public void receive();
6     public default void sanityCheck() {
7         System.out.println("Checks receipt details");
8     }
9 }
10 class BankAccount implements Transferable, Receivable{
11     public void transfer() {
12         System.out.println("Transfers money");
13     }
14 }
```

Choose the correct option

Options :

6406531153303. ❌ Compilation error at LINE 6 because the method `sanityCheck` is not abstract.

Compilation error at LINE 10 because the class `BankAccount` cannot implement

6406531153304. ❌ two interfaces.

Compilation error at LINE 10 because the class `BankAccount` is not declared

6406531153305. ✓ as abstract.

Compilation error at LINE 2 and LINE 5 because the methods `transfer` and

6406531153306. ❌ `receive` are not abstract.

Question Number : 140 Question Id : 640653346941 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the Java code given below.

```
class Tree{  
    String name;  
    String scientificName;  
    int avg_height;  
    public Tree(String n, String sn, int h){  
        name = n;  
        scientificName = sn;  
        avg_height = h;  
    }  
    *-----*  
    * CODE SEGMENT *  
    *-----*  
}  
public class Test{  
    public static void main(String[] args){  
        Tree t = new Tree("Neem", "Azadirachta indica", 20);  
        System.out.println(t);  
    }  
}
```

Choose the correct option to fill the CODE SEGMENT so that the output is:

Neem:Azadirachta indica:20

Options :

6406531153307. ❌ No additional code is required in place of CODE SEGMENT.

This output will never be printed because Java does not allow printing of

6406531153308. ❌ objects using System.out.println.

```
    public String toString(Object ob){  
        return ob.name + ":" + ob.scientificName + ":" + ob.avg_height;
```

6406531153309. ❌ }

```
    public String toString(){  
        return name + ":" + scientificName + ":" + avg_height;
```

6406531153310. ✓ }

Question Number : 141 Question Id : 640653346943 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the Java code given below.

```
public class Test {  
    public static void show() {  
        for(int i=0;i<5;i++) {  
            switch(i) {  
                case 1:  
                    System.out.print(1+" ");  
                case 2:  
                    System.out.print(2+" ");  
                case 3:  
                    System.out.print(3+" ");  
                default:  
                    System.out.print("wrong number");  
                    break;  
            }  
            System.out.println();  
        }  
    }  
    public static void main(String[] args) {  
        show();  
    }  
}
```

Choose the correct option.

Options :

It generates output:

wrong number
1
2
3

6406531153315. ✘ wrong number

It generates output:

wrong number
1 2 3 wrong number
2 3 wrong number
3 wrong number

6406531153316. ✓ wrong number

It generates output:

wrong number

1 2 3

2 3

3

6406531153317. ✘ wrong number

It generates output:

wrong number

6406531153318. ✘ wrong number

Question Number : 142 Question Id : 640653346947 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the Java code given below.

```
interface Operations{
    public void compute(int m);
}

class Arithmetic{
    public Operations computation(String task){
        Operations pr = null;
        if (task == "square")
            pr = new Square();
        return pr;
    }

    private class Square implements Operations{
        public void compute(int n){
            System.out.println(n*n);
        }
    }

    //Inner classes for other operations are added here
}

public class InnerClass {
    public static void main(String[] args) {
        // CODE SEGMENT //
        arithOp.compute(3);
    }
}
```

Choose the correct option to fill in at CODE SEGMENT such that the output is 9.

Options :

6406531153331. ❌ Square arithOp = new Arithmetic().computation("square");

6406531153332. ✓ Operations arithOp = new Arithmetic().computation("square");

Arithmetic a = new Arithmetic();
6406531153333. ❌ Square arithOp = a.computation("square");

No line/s of code at CODE SEGMENT can generate the given output because it
6406531153334. ❌ generates a compilation error due to the inner class being private.

Sub-Section Number : 3

Sub-Section Id : 64065349223

Question Shuffling Allowed : Yes

Question Number : 143 Question Id : 640653346936 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the Java code given below.

```
class Person{
    public void showDetails(){
        System.out.println("displays person details");
    }
}
class Employee extends Person{
    public void showDetails(){
        System.out.println("displays employee details");
    }
    public void incrementSalary(){
        System.out.println("displays the incremented salary");
    }
}
public class Test{
    public static void main(String[] args){
        Person p = new Employee();
        p.showDetails();
        p.incrementSalary();
    }
}
```

Choose the correct option.

Options :

6406531153287. ✓ Compilation error

6406531153288. ✗ The program compiles successfully but produces no output.

It generates output:

displays employee details

6406531153289. ✗ displays the incremented salary

It generates output:
displays person details
6406531153290. ✖ displays the incremented salary

Question Number : 144 Question Id : 640653346938 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the Java code given below.

```
class Calculator{  
    public void operations(){  
        System.out.println("Performs basic operations");  
    }  
}  
  
class UpdatedCalculator extends Calculator{  
    public void operations(){  
        System.out.println("Performs updated operations");  
    }  
}  
  
class SmartCalculator extends UpdatedCalculator{  
    public void operations(){  
        System.out.println("Performs smart operations");  
    }  
}  
  
public class Test{  
    public static void main(String[] args){  
        Calculator c1 = new SmartCalculator();  
        c1.operations();  
    }  
}
```

What will the output be?

Options :

6406531153295. ✖ Compiler error

It generates output:
6406531153296. ✖ Performs updated operations

It generates output:
6406531153297. ✘ Performs basic operations

It generates output:
6406531153298. ✓ Performs smart operations

Question Number : 145 Question Id : 640653346944 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the Java code given below.

```
public class Test{
    int a=1;
    long b=1;
    boolean c=true;
    String str="";
    public void show(){
        str+=a;
        str+=b;
        str+=c;
        System.out.println(str);
    }
    public static void main(String[] args){
        new Test().show();
    }
}
```

Choose the correct option.

Options :

6406531153319. ✘ This program generates the output:

11

6406531153320. ✓ This program generates the output:

11true

6406531153321. ✘ Compilation error

6406531153322. ✘ This program generates the output:

2true

Question Number : 146 Question Id : 640653346948 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the Java code given below.

```
public class Example {  
    public static void main(String[] args) {  
        String data = "IITM_JAVA_MADRAS";  
        char arr[] = new char[16];  
        int count = 0;  
        for (int i = 0; i < data.length(); i++) {  
            if(data.charAt(i)=='_')  
                arr[i]=' ';  
            else  
                arr[i]=data.charAt(i);  
        }  
        for (int i = 0; i < arr.length; i++) {  
            System.out.print(arr[i]);  
            count++;  
        }  
        System.out.println();  
        System.out.println("No. of elements is: "+count);  
    }  
}
```

Choose the correct option.

Options :

This program generates the output:

IITM JAVA MADRAS

6406531153335. ✓ No. of elements is: 16

6406531153336. ✗ Compilation error

This program generates the output:

IITMJAVAMADRAS

6406531153337. ✗ No. of elements is: 14

This program generates the output:
IITM_JAVA_MADRAS
640653115338. ✘ No. of elements is: 14

Sub-Section Number : 4

Sub-Section Id : 64065349224

Question Shuffling Allowed : Yes

Question Number : 147 Question Id : 640653346937 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider the Java code given below.

```
class Operations{
    int l;
    String[] str;
    public Operations(int n, String[] s){
        l = n;
        str = s;
    }
    public Operations(Operations o){
        this.l = o.l;
        this.str = o.str;
    }
}
public class Test{
    public static void main(String[] args){
        String[] s = {"sonu", "ravi", "vicky"};
        Operations o1 = new Operations(3, s);
        Operations o2 = new Operations(o1);
        o2.str[0] = "ram";
        o2.l= 2;
        System.out.println(o1.str[0] +" , "+ o1.l);
        System.out.println(o2.str[0] +" , "+ o2.l);
    }
}
```

What will the output be?

Options :

It generates output:
ram,3
6406531153291. ✓ ram,2

It generates output:
sonu,3
6406531153292. ✗ ram,2

It generates output:
sonu,2
6406531153293. ✗ ram,2

It generates output:
ram,2
6406531153294. ✗ ram,2

Question Number : 148 Question Id : 640653346939 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Two employees are said to be the same if their ids are equal. Consider the Java code given below. Choose the correct code block to fill the CODE SEGMENT to override the method boolean equals(Object o) in order to compare two Employee objects.

```
public class Employee{  
    String name;  
    int id;  
    public Employee(String n, int i){  
        this.name = n;  
        this.id = i;  
    }  
    *-----*  
    * CODE SEGMENT *  
    *-----*  
}
```

Options :

```
public boolean equals(Object ob){  
    if(this.id == ob.id){  
        return true;  
    }  
    return false;
```

6406531153299. ✘ }

```
public boolean equals(Object ob){  
    if(this.id == ob.id){  
        return true;  
    }  
    return false;
```

6406531153300. ✘ }

```
public boolean equals(Object ob){  
    if(!(ob instanceof Employee)){  
        return false;  
    }  
    Employee e = (Employee)ob;  
    if(this.id == e.id){  
        return true;  
    }  
    return false;
```

6406531153301. ✓ }

```
public boolean equals(Object ob){  
    if(ob instanceof Employee){  
        Employee e = (Employee)ob;  
        if(this.id == e.id){  
  
            return true;  
        }  
        return false;  
    }  
}
```

6406531153302. ✘ }

Question Number : 149 Question Id : 640653346949 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Choice Question

Consider the Java code segment given below.

```
interface Iterator{
    public boolean has_next();
    public Object get_next();
}
abstract class Printable{
    public abstract void print();
}
class CustomerList{
    private class Customer extends Printable{
        private String name, billno;
        public Customer(String n, String b) {
            //initialize name and billno
        }
        public void print() {
            System.out.println(billno + ", " + name);
        }
    }
    private class CustIter implements Iterator{
        private int indx;
        public CustIter() {
            //constructor
        }
        public boolean has_next() {
            //if next element available in list return true; else false
        }
        public Object get_next() {
            //return next element from list
        }
    }
    public Iterator getIterator() {
        return new CustIter();
    }
    private final int limit = 5;
    private Customer[] list = {new Customer("Rahul", "Cust1001"),
                               new Customer("Sai", "Cust1002"),
                               new Customer("Neeraj", "Cust1003")};
}
public class IterTest{
    public static void main(String[] args) {
        CustomerList cList = new CustomerList();
        Iterator iter = cList.getIterator();
        while(iter.has_next()) {

            -----; //LINE-1
        }
    }
}
```

Identify the appropriate statement to fill in the blank at LINE-1, such that the output is

Cust1001, Rahul
Cust1002, Sai
Cust1003, Neeraj

Options :

6406531153339. ✓ ((Printable)iter.get_next()).print()

6406531153340. ✗ ((Customer)iter.get_next()).print()

6406531153341. * ((CustomerList)iter.get_next()).print()

6406531153342. * iter.get_next().print();

Sub-Section Number : 5

Sub-Section Id : 64065349225

Question Shuffling Allowed : Yes

Question Number : 150 Question Id : 640653346942 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 5

Question Label : Multiple Select Question

Consider the Java code given below.

```
abstract class Order{
    public abstract void getFood(); //LINE-1
}
class Twiggy extends Order{
    public void getFood() {
        System.out.println("Get Rs.100 off on first order");
    }
}
class Komato extends Order{
    public void getFood() {
        System.out.println("Refer a friend and get Rs.150");
    }
}
public class Test {
    public static void main(String[] args) {
        Order[] ord = new Order[2];
        ord[0] = new Komato(); //LINE-2
        ord[1] = new Twiggy(); //LINE-3
        for (int i = 0; i < ord.length; i++) //LINE-4
            ord[i].getFood();
    }
}
```

Choose the correct option.

Options :

Compilation error at LINE-1 because an abstract function cannot be declared as public.

6406531153311. ✘

6406531153312. ✘ Compilation error at LINE-2 and LINE-3.

6406531153313. ✘ Compilation error at LINE-4.

This program generates the output:

Refer a friend and get Rs.150

6406531153314. ✓ Get Rs.100 off on first order

Question Number : 151 Question Id : 640653346945 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 5

Question Label : Multiple Select Question

Consider the following code.

```
class Employee{  
    public String name;  
    private String dept;  
    public String getName(){  
        return name;  
    }  
    public void setName(String name){  
        this.name = name;  
    }  
    public String getDept(){  
        return dept;  
    }  
    public void setDept(String dept){  
        this.dept = dept;  
    }  
}  
public class EncapTest {  
    public static void main(String[] args) {  
        Employee obj = new Employee();  
        /*****  
         *CODE SEGMENT*  
        *****/  
    }  
}
```

Choose the correct option(s) to fill in place of CODE SEGMENT so that the output is:

Harshal
Sales

Options :

6406531153323. ✓ `obj.name="Harshal";
obj.setDept("Sales");
System.out.println(obj.name);
System.out.println(obj.getDept());`

6406531153324. ✗ `obj.setName("Harshal");
obj.dept="Sales";
System.out.println(obj.getName());
System.out.println(obj.getDept());`

6406531153325. ✓

```
obj.setName("Harshal");
obj.setDept("Sales");
System.out.println(obj.name);
System.out.println(obj.getDept());
```

```
obj.name="Harshal";
obj.dept="Sales";
System.out.println(obj.getName());
System.out.println(obj.getDept());
```

6406531153326. *

Sub-Section Number : 6

Sub-Section Id : 64065349226

Question Shuffling Allowed : Yes

Question Number : 152 Question Id : 640653346946 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Consider the Java code given below.

```
class Base {
    public void show() {
        System.out.println("Base class method");
    }
    public void show(int a) {
        System.out.println(a);
    }
}
class Sub extends Base{
    public void show() {
        System.out.println("Sub class method");
    }
    public void show(String str) {
        System.out.println(str);
    }
}
```

Choose the correct option regarding the code given above.

Options :

Method public void show(int a) is an overridden method in class Base.
Method public void show(String str) is an overridden method in class
6406531153327. ❌ Sub.

Method public void show(int a) is an overloaded method in class Base.
Method public void show(String str) is an overloaded method in class
6406531153328. ✓ Sub.

Method public void show(int a) is an overridden method in class Base.
Method public void show(String str) is an overloaded method in class
6406531153329. ❌ Sub.

Method public void show(int a) is an overloaded method in class Base.
6406531153330. ✓ Method public void show() is an overriding method in class Sub.

AppDev-2

Section Id :	64065321953
Section Number :	10
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	17
Number of Questions to be attempted :	17
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349227

Question Shuffling Allowed :

No

Question Number : 153 Question Id : 640653346950 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "MODERN APPLICATION DEVELOPMENT 2"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153343. ✓ YES

6406531153344. ✗ NO

Sub-Section Number : 2

Sub-Section Id : 64065349228

Question Shuffling Allowed : Yes

Question Number : 154 Question Id : 640653346952 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following is the correct way to define immediately invoked function expressions in javascript language?

Options :

6406531153349. ✗ (function () { return value; });

6406531153350. ✓ (function () { return value; })();

6406531153351. ✗ function () { return value; } ();

6406531153352. ✗ All of these

Question Number : 155 Question Id : 640653346966 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Say you are trying to make an app where users can play “bullet” chess with each other - the entire game has to be completed within 40 seconds. Which one of the following design considerations is most important here?

Options :

6406531153405. ❌ The size of the images used for the chess board should be kept small.

6406531153406. ❌ The UI should be completely ephemeral and hold all state only locally.

6406531153407. ✓ Every move should be transmitted back to the server with as little latency as possible.

6406531153408. ❌ The app requires a powerful desktop browser with GPU.

Sub-Section Number : 3

Sub-Section Id : 64065349229

Question Shuffling Allowed : Yes

Question Number : 156 Question Id : 640653346953 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statement(s) is/are true regarding javascript language?

Options :

6406531153353. ❌ The variables declared using “let” keyword are not hoisted.

6406531153354. ✓ The variables declared using “let” keyword are not accessible until the code execution reaches the declaration / initialization for that particular variable.

6406531153355. ✓ JavaScript is a weakly typed and dynamically typed language.

6406531153356. ❌ All of these

Question Number : 157 Question Id : 640653346954 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following statement(s) is/are true regarding Vue framework?

Options :

6406531153357. ✓ In general, props are used to send data from the parent to the child.

6406531153358. ✗ In general, custom events are used to send data from the parent to the child.

6406531153359. ✓ The lifecycle hooks in Vue framework are invoked implicitly.

6406531153360. ✗ All of these

Sub-Section Number : 4

Sub-Section Id : 64065349230

Question Shuffling Allowed : Yes

Question Number : 158 Question Id : 640653346955 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup index.html and javascript file app.js.

index.html:

```
<div id = "app">
  Main App Data
  <some>Slot Data</some>
</div>
<script src = "app.js"> </script>
```

app.js:

```
Vue.component('some', {
  template : `<div>
    <slot></slot>
    <h1>Component Data</h1>

  </div>
`,

});

new Vue({
  el : "#app",
})
```

What will be rendered on the browser screen (ignore the formatting and styling)?

Options :

6406531153361. ✓ Main App Data

Slot Data

Component Data

6406531153362. ✗ A warning will be issued for using an undefined tag

6406531153363. ✗ Main App Data

Component Data

6406531153364. ✗ Main App Data

Component Data

Slot Data

Question Number : 159 Question Id : 640653346956 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following javascript program and predict the output if executed.

```
let x = 5;
let obj = {
    'x' : 10,
    func : (x) => {
        this.x = x;
    }
}
obj.func(20);
console.log(this.x, "and", obj.x);
```

Options :

6406531153365. ✓ 20 and 10

6406531153366. ✗ 5 and 10

6406531153367. ✗ 5 and 20

6406531153368. ✗ Reference Error

Question Number : 160 Question Id : 640653346957 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following program. What will be logged on the console?

```
function Player(name, run) {  
    this.name = name  
    this.run = run  
}  
  
Player.prototype.changeRun = function (run) {  
    this.run = this.run + run  
}  
  
player1 = new Player('Rohit', 5000)  
player1.changeRun(400)  
console.log(player1.run)
```

Options :

6406531153369. ✘ 5000

6406531153370. ✓ 5400

6406531153371. ✘ 400

6406531153372. ✘ None of these

Question Number : 161 Question Id : 640653346958 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following javascript program.

```
setTimeout(() => console.log(1), 100)  
console.log(2);  
setTimeout(() => console.log(3), 0)  
console.log(4);  
setTimeout(() => console.log(5), 100)
```

What will be logged on to the console?

Options :

6406531153373. ✘

1
2
3
4
5

2
4
3
5

6406531153374. ✘ 1

2
4
3
1

6406531153375. ✓ 5

3
1
5
2

6406531153376. ✘ 4

Question Number : 162 Question Id : 640653346959 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following javascript program.

```
const cars = [
  { name: 'Ford', color: 'green' },
  { name: 'Sedan', color: 'yellow' },
  { name: 'Swift', color: 'green' },
]

const myCars = cars.filter((car) => {
  return car.color != 'green'
})

const myCarsList = []

for (let car of myCars) {
  myCarsList.push(car.name)
}

console.log(myCarsList)
```

What will be logged on to the console?

Options :

6406531153377. ❌ 'Sedan'

6406531153378. ✓ ['Sedan']

6406531153379. ❌ 'Ford'

6406531153380. ❌ 'Swift'

Question Number : 163 Question Id : 640653346960 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup index.html and javascript file app.js.

index.html:

```

<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
    <style>
      .danger {
        color: red;
      }
    </style>
  </head>
  <body>
    <div id="app" :class="{danger:isDanger}">
      Welcome to MAD2 Quiz <br />
      <button @click="changeStyle">Danger</button>
    </div>
  </body>
  <script src="app.js"></script>
</html>

```

app.js:

```

const vm = new Vue({
  el: '#app',
  data: {
    isDanger: false,
  },
  methods: {
    changeStyle() {
      this.isDanger = !this.isDanger
    },
  },
})

```

What will be the color of the text “Welcome to the MAD2 Quiz”, after clicking the button “Danger” 6 times (for a normal browser which shows black colored text on a white background)?

Options :

6406531153381. ✓ Black

6406531153382. ❌ Red

6406531153383. ✘ White

6406531153384. ✘ None of these

Question Number : 164 Question Id : 640653346964 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following Vue application with markup index.html and javascript file app.js.

index.html:

```
<body>
  <div id="app">
    <run-comp :run="run" v-on:increaserun="run+=5"></run-comp>
  </div>
  <script src="app.js"></script>
</body>
```

app.js:

```
const runComp = {
  template: `<div id="total-run">{{run}}
    <div>
      <button @click="$emit('increaserun')">click me</button>
    </div>
  </div>`,
  props: {
    run: Number,
  },
}

const vm = new Vue({
  el: '#app',
  data: {
    run: 10,
  },
  components: {
    'run-comp': runComp,
  },
})
```

If the user clicks on the button “click me” 5 times, what will be rendered inside the div with ID “total-run”?

Options :

6406531153397. ✘ 10

6406531153398. ✘ 25

6406531153399. ✓ 35

6406531153400. ✘ None of these

Question Number : 165 Question Id : 640653346965 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following HTML document.

```
<body>
  <div>
    <section id="section-one" style="color: red">
      Hello from section 1
    </section>
  </div>
  <script>
    const sec1 = document.querySelector('#section-one')
    const sec2 = document.createElement('section')
    sec2.innerHTML = 'Hello from section 2'
    sec1.parentNode.appendChild(sec2)
  </script>
</body>
```

What will be rendered inside the div element along with the color of the text (for a normal browser which shows black colored text on a white background)?

Options :

6406531153401. ❌ Hello from section 1 (color: red)

Hello from section 2 (color: red)

6406531153402. ✓ Hello from section 1 (color: red)

Hello from section 2 (color: black)

6406531153403. ❌ Hello from section 1 (color: black)

Hello from section 2 (color: black)

6406531153404. ❌ Hello from section 1 (color: black)

Hello from section 2 (color: red)

Sub-Section Number :

5

Sub-Section Id :

64065349231

Question Shuffling Allowed :

Yes

Question Number : 166 Question Id : 640653346951 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following javascript program.

```
for (var i = 1; i<=3; i++) {  
    setTimeout(() => console.log(i), i*1000)  
}
```

What will be the output of the above program after 10 seconds?

Options :

1

2

6406531153345. ✘ 3

3

3

6406531153346. ✘ 3

3

3

6406531153347. ✓ 4

4

4

6406531153348. ✘ Error

Question Number : 167 Question Id : 640653346961 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following Vue application with markup index.html and javascript file app.js.

index.html:

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
    <style>
      .dark {
        color: white;
        background-color: black;
      }
    </style>
  </head>
  <body>
    <div id="app">
      <form @change="changeRadio">
        <input type="radio" name="theme" id="dark" value="dark" />
        <label for="dark">Dark</label>
        <input type="radio" name="theme" id="light" value="light" />
        <label for="light">Light</label>
      </form>
      <div :class="{dark:isDark}">Welcome to MAD2 Quiz</div>
    </div>
  </body>
  <script src="app.js"></script>
</html>
```

app.js:

```
const vm = new Vue({
  el: '#app',
  data: {
    isDark: true,
  },
  methods: {
    changeRadio(event) {
      if (event.target.value == 'dark') {
        this.isDark = false
      } else {
        this.isDark = true
      }
    },
  },
})
```

What will be the color and background color of the text “Welcome to the MAD2 Quiz” respectively, if the user selects the radio button “Light” (for a normal browser which shows black colored text on a white background)?

Options :

6406531153385. ✓ White, Black

6406531153386. ✗ Black, White

6406531153387. ✗ White, White

6406531153388. ✗ Black, Black

Question Number : 168 Question Id : 640653346962 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following Vue application with markup index.html and javascript file app.js.

index.html:

```
<body>
  <div id="app">
    <div id="current-position">{{position}}</div>
    <button @click="move">Next Move</button>
  </div>
  <script src="app.js"></script>
</body>
```

app.js:

```
const vm = new Vue({
  el: '#app',
  data: {
    rollArray: [
      { result: 'snake', init: 0, final: 10 },
      { result: 'ladder', init: 0, final: 10 },
      { result: null, point: 10 },
    ],
    position: 0,
  },
  methods: {
    move() {
      obj = this.rollArray.pop()
      if (obj.result == 'ladder') {
        this.position = obj.final
      }
      if (obj.result == 'snake') {
        this.position = obj.init
      }
    },
  },
})
```

What will be rendered inside the div with ID “current-position”, if the user clicks on the button “Next Move” thrice?

Options :

6406531153389. ✘ 10

6406531153390. ✘ 30

6406531153391. ✓ 0

6406531153392. ✘ None of these

Question Number : 169 Question Id : 640653346963 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4.5

Question Label : Multiple Choice Question

Consider the following Vue application with markup index.html and javascript file app.js.

index.html:

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <script
src="https://cdn.jsdelivr.net/npm/vue@2/dist/vue.js"></script>
    <style>
      .light {
        height: 50px;
        width: 50px;
        border-radius: 50px;
      }
      .red-light {
        background-color: red;
      }
      .green-light {
        background-color: green;
      }
    </style>
  </head>
  <body>
    <div id="app">
      <div
        class="light"
        :class="{'red-light':isRed, 'green-light':!isRed}"
      ></div>
      <br />
      <button @click="peopleCount++>New Person</button>
    </div>
  </body>
  <script src="app.js"></script>
</html>
```

app.js:

```
const vm = new Vue({
  el: '#app',
  data: {
    isRed: false,
    peopleCount: 0,
  },
  watch: {
    peopleCount(newValue, oldValue) {
      if (newValue > oldValue && newValue > 2) {
        this.isRed = true
      }
    },
  },
})
```

If the user clicks on the button “New Person” 7 times. What will be the background color of div with class “light”?

Options :

6406531153393. ❌ Green

6406531153394. ✓ Red

6406531153395. ✘ Black

6406531153396. ✘ None of these

MLT

Section Id :	64065321954
Section Number :	11
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	19
Number of Questions to be attempted :	19
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349232
Question Shuffling Allowed :	No

Question Number : 170 Question Id : 640653346967 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT " MACHINE LEARNING TECHNIQUES "

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153409. ✓ YES

6406531153410. ✗ NO

Question Number : 171 Question Id : 640653346968 Question Type : MCQ Is Question**Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction****Time : 0****Correct Marks : 0**

Question Label : Multiple Choice Question

Note:

Do not write your answer as percentage. Always enter fractions as they are. e.g. if your answer is 0.245, enter the same, do not enter 24.5 %.

Options :

6406531153411. ✓ Useful Data has been mentioned above.

6406531153412. ✗ This data attachment is just for a reference & not for an evaluation.

Sub-Section Number : 2**Sub-Section Id :** 64065349233**Question Shuffling Allowed :** Yes**Question Number : 172 Question Id : 640653346969 Question Type : SA Calculator : None****Response Time : N.A Think Time : N.A Minimum Instruction Time : 0****Correct Marks : 2**

Question Label : Short Answer Question

For the given data set

x	y
1	3
2	4
3	8
4	11
5	12

What is the mean squared error if the predicted model is given by $\hat{y} = 2x + 1$? Write your answer correct upto 2 decimal places, do not round up or off.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

1.38 to 1.42

Sub-Section Number : 3

Sub-Section Id : 64065349234

Question Shuffling Allowed : No

Question Id : 640653346970 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (173 to 176)

Question Label : Comprehension

Consider the following confusion matrix. Positive class is represented by 'True' and negative class is represented by 'False'.

		Predicted	
		False	True
Actual	False	187	133
	True	95	105

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 173 Question Id : 640653346971 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Find the value of the accuracy. Write your answer correct upto 2 decimal places, do not round up or off.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.55 to 0.57

Question Number : 174 Question Id : 640653346972 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Find the value of the precision. Write your answer correct upto 2 decimal places, do not round up or off.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.43 to 0.45

Question Number : 175 Question Id : 640653346973 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

Find the value of the recall. Write your answer correct upto 2 decimal places, do not round up or off.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.515 to 0.535

Question Number : 176 **Question Id :** 640653346974 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Short Answer Question

Find the value of the F-1 score. Write your answer correct upto 2 decimal places, do not round up or off.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.460 to 0.485

Question Id : 640653346985 **Question Type :** COMPREHENSION **Sub Question Shuffling**

Allowed : No **Group Comprehension Questions :** No **Calculator :** None **Response Time :** N.A

Think Time : N.A **Minimum Instruction Time :** 0

Question Numbers : (177 to 178)

Question Label : Comprehension

Ajay has a dataset that has a non-linear relationship between the features and the label. The dimension of training samples is 4×2 (excluding the additional all-ones feature for the bias term, which you should add), label vector is 4×1 and weight vector is 3×1 .

X	y
[1 , 1]	1
[2 , 2]	1
[3 , 2]	2
[4 , 3]	2

w
0.1
0.2
0.3

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 177 Question Id : 640653346986 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

Suppose Ajay has to compute the ridge loss value for this data with regularization parameter value as 0.2 for performing ridge regression. What will be the value of ridge loss correct up to 2 decimal places?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.35 to 0.37

Question Number : 178 Question Id : 640653346987 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

For the same dataset, suppose Ajay has to compute the lasso loss value with regularization

parameter value as 0.2 for performing lasso regression. What will be the value of lasso loss correct up to 2 decimal places?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.39 to 0.43

Question Id : 640653346993 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (179 to 180)

Question Label : Comprehension

A perceptron model is trained on linearly separable binary classification data-set. Consider that the data-set has two features (x_1, x_2) excluding dummy feature. The learnt weight vector is

$$\mathbf{W} = \begin{bmatrix} -1 \\ 0.2 \\ 0.5 \end{bmatrix}$$

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 179 Question Id : 640653346994 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What will be the prediction for an example having the features vector as $(2, 1)$? Assume the classes are 1 and -1.

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

-1

Question Number : 180 **Question Id :** 640653346995 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 3

Question Label : Short Answer Question

Find the accuracy for the given test data-set. Write your answer correct to two decimal places.

x_1	x_2	True label (y)
1	-2	-1
-2	-2	-1
1	2	1
3	2	1

Test data-set

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.73 to 0.77

Sub-Section Number : 4

Sub-Section Id : 64065349235

Question Shuffling Allowed : No

Question Id : 640653346975 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (181 to 182)

Question Label : Comprehension

Consider the following code snippet

```
1 import numpy as np
2 a=[[1,2,3],[0,2,1],[0,2,1]]
3 b=[[1,1,0],[1,2,3],[0,1,3]]
4 A=np.array(a)
5 B=np.array(b)
6 C=A@B
7 D=A*B
```

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 181 Question Id : 640653346976 Question Type : SA Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is the output of following code snippet?

```
1 print(C[1][0]+D[1][2])
```

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

Question Number : 182 Question Id : 640653346977 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is the output of following code snippet?

```
1 print(C.sum().sum())
```

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

58

Question Id : 640653346988 Question Type : COMPREHENSION Sub Question Shuffling


Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (183 to 184)

Question Label : Comprehension

Abhishek trains a polynomial regression model on a dataset. He tries with different degree of polynomial transformation and gets following learning curve:

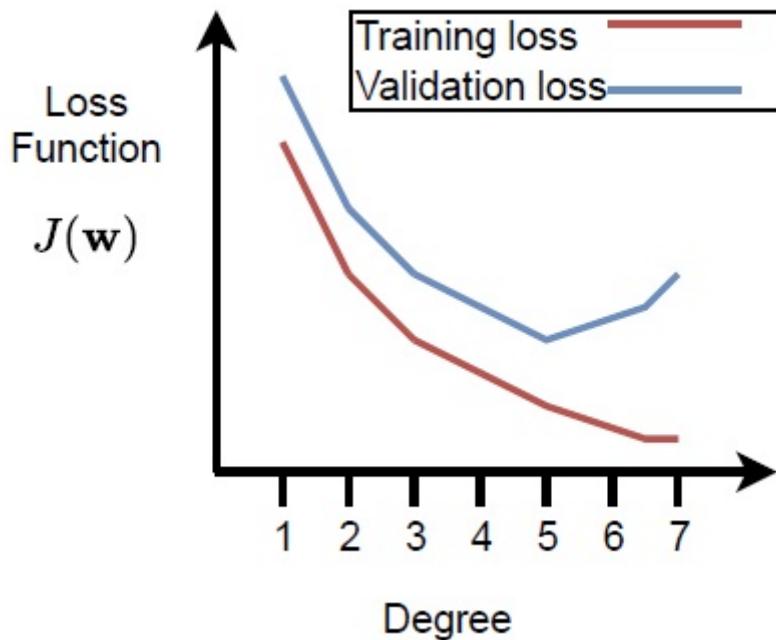

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 183 Question Id : 640653346989 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What value of degree of polynomial transformation should Abhishek choose for the given dataset?

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

5

Question Number : 184 Question Id : 640653346990 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What do you think will happen if Abhishek tries to fit a linear regression model with polynomial transformation of degree 20?

Options :

6406531153447. ✘ High validation loss and high training loss.

6406531153448. ✓ High validation loss and low training loss.

6406531153449. ✘ Low validation loss and high training loss.

6406531153450. ✘ Low validation loss and low training loss.

Sub-Section Number : 5

Sub-Section Id : 64065349236

Question Shuffling Allowed : Yes

Question Number : 185 Question Id : 640653346978 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider following label vector for a movie data $D = (X, y)$

$$X = \begin{bmatrix} 2019 & \text{'Uri: The Surgical Strike'} & 8.3 \\ 2009 & \text{'3 Idiots'} & 8.4 \end{bmatrix}$$

$$y = \begin{bmatrix} \text{'Drama', 'Action', 'War'} \\ \text{'Comedy', 'Drama'} \end{bmatrix}$$

X has year of release, name of the movie and IMDb rating as features. And y has corresponding genres. Predicting genres of a movie is following type of problem:

Options :

6406531153420. ✓ Multi-label, multi-class classification problem

6406531153421. ✘ Single-label, multi-class classification problem

6406531153422. ✘ Single-label, binary class classification problem

6406531153423. ✘ Multi-label, binary class classification problem

Question Number : 186 Question Id : 640653346979 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

The gradient of function $f(x_1, x_2) = x_1^2 + x_1x_2 + x_2^2$ at point $(x_1, x_2) = (1, 2)$ is:

Options :

6406531153424. ✓ $[4, 5]^T$

6406531153425. ✗ $[5, 4]^T$

6406531153426. ✗ $[2, 3]^T$

6406531153427. ✗ $[4, 6]^T$


Question Number : 187 Question Id : 640653346983 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Brijmohan trains his linear regression model with three different values of learning rate, i.e. α_1 , α_2 and α_3 , for the same training set. He gets learning curves as displayed in the following chart.

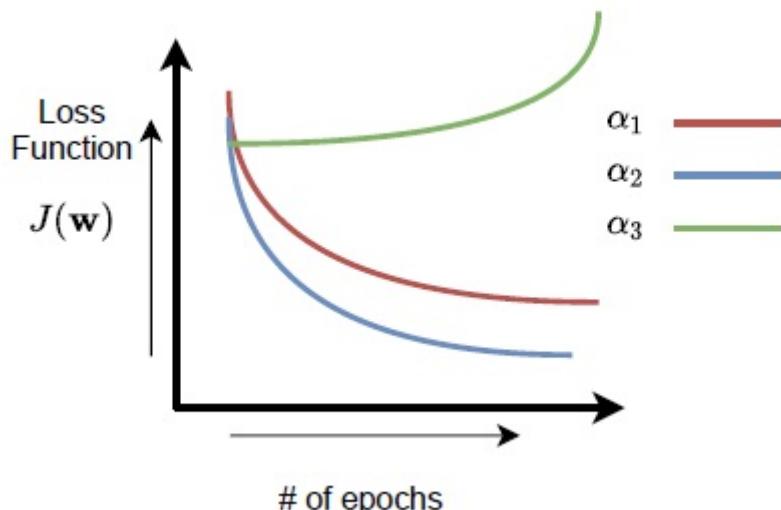

Which of the following correctly explains relationship among α_1 , α_2 and α_3 ?

Options :

6406531153438. ✘ $a_1 > a_2 > a_3$

6406531153439. ✓ $a_1 < a_2 < a_3$

6406531153440. ✘ $a_2 > a_1 > a_3$

6406531153441. ✘ $a_3 > a_2 > a_1$

6406531153442. ✘ $a_1 > a_3 > a_2$

Sub-Section Number : 6

Sub-Section Id : 64065349237

Question Shuffling Allowed : Yes

Question Number : 188 Question Id : 640653346980 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following can NOT be a linear regression model?

Options :

6406531153428. ✘ $y = \sum_{i=0}^m w_i x_i$

6406531153429. ✓ $y = \prod_{i=0}^m w_i x_i$

6406531153430. ✓ $y = \sum_{i=0}^m w_i^{x_i} x_i$

6406531153431. ✓ $y^2 = \sum_{i=0}^m w_i^2 x_i$

Question Number : 189 Question Id : 640653346981 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Which of the following correctly computes the solution of linear regression problem via normal equation method? Assume necessary imports.

Options :

6406531153432. ✓ `w = np.linalg.pinv(X)@y`

6406531153433. ✗ `w = X@X.T@y`

6406531153434. ✗ `w = X.T@np.linalg.inv(X)@y`

6406531153435. ✗ `w = X.T@np.linalg.pinv(X@y)@y`

6406531153436. ✗ `w = np.linalg.inv(X.T@X)(X.T@y)`

Question Number : 190 Question Id : 640653346991 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

In ridge regression, the loss function is computed as $J(\mathbf{w}) = L + \lambda P$ Where P is penalty term for ridge regularization, λ is rate of regularization and L is plain loss function without any regularization.

Choose the correct statements from the following:

Options :

6406531153451. ✓ As λ tends to infinite, the solution of ridge regularization tends towards origin.

6406531153452. ✗ As λ tends to zero, the solution of ridge regularization tends towards origin.

6406531153453. ✗ As λ tends to infinite, the solution of ridge regularization tends towards the solution of least squares.

6406531153454. ✓ As λ tends to zero, the solution of ridge regularization tends towards the solution of least squares.

6406531153455. ✓ The penalty term P represents circles if we draw the contour plot of ridge loss function.

6406531153456. ✎ The penalty term P represents squares if we draw the contour plot of ridge loss function.

Sub-Section Number : 7

Sub-Section Id : 64065349238

Question Shuffling Allowed : Yes

Question Number : 191 Question Id : 640653346982 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

For the given dataset:

x	y
1	5
2	7
3	6

Assume the initial weight vector is $w = [1, 2]$ and learning rate $\alpha = 0.20$. Compute the weight vector after one iteration, let's call it w_1 . Compute prediction for $x = 5$ correct upto two decimal points with new weight vector (i.e. w_1). Do not round up or off.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

15.4 to 15.80

Question Number : 192 Question Id : 640653346984 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

Ankita had a feature vector \mathbf{x} and she wanted to apply polynomial transformation on \mathbf{x} . She had written a code snippet as follows:

```

1 import itertools, functools
2 import numpy as np
3 x = np.array([[2, 3]])
4 degree= 3
5 x_t = x.transpose()
6 features = [np.ones(len(x))]
7 for degree in range(1, degree + 1):
8     for items in itertools.combinations_with_replacement(x_t, degree):
9         features.append(functools.reduce(lambda x, y: x * y, items))
10 output = np.sum(np.asarray(features).transpose())
11 print(int(output))

```

What is the output of the code snippet?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

90

Question Number : 193 Question Id : 640653346997 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Short Answer Question

A classification model was trained on some training examples with two features and three classes (0, 1 and 2) using least square algorithm. The learnt weight matrix is

$$W = \begin{bmatrix} -1.2 & 0.6 & 0.5 \\ 0.3 & 0.8 & -1.5 \\ 0.4 & 1.3 & 1 \end{bmatrix}$$

(Remember for k class classification problem with m features, shape of weight matrix is $(m + 1) \times k$)

Which class will the sample (-1, 1) be classified to?

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Sub-Section Number : 8

Sub-Section Id : 64065349239

Question Shuffling Allowed : Yes

Question Number : 194 **Question Id :** 640653346992 **Question Type :** SA **Calculator :** None


Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Short Answer Question

Consider the decision boundary learnt using a perceptron algorithm as shown in the figure. Find the loss associated with this model.

Note: Since, perceptron model doesn't converge for non linearly separable data, we have terminated the learning process after a fixed numbers of iterations.

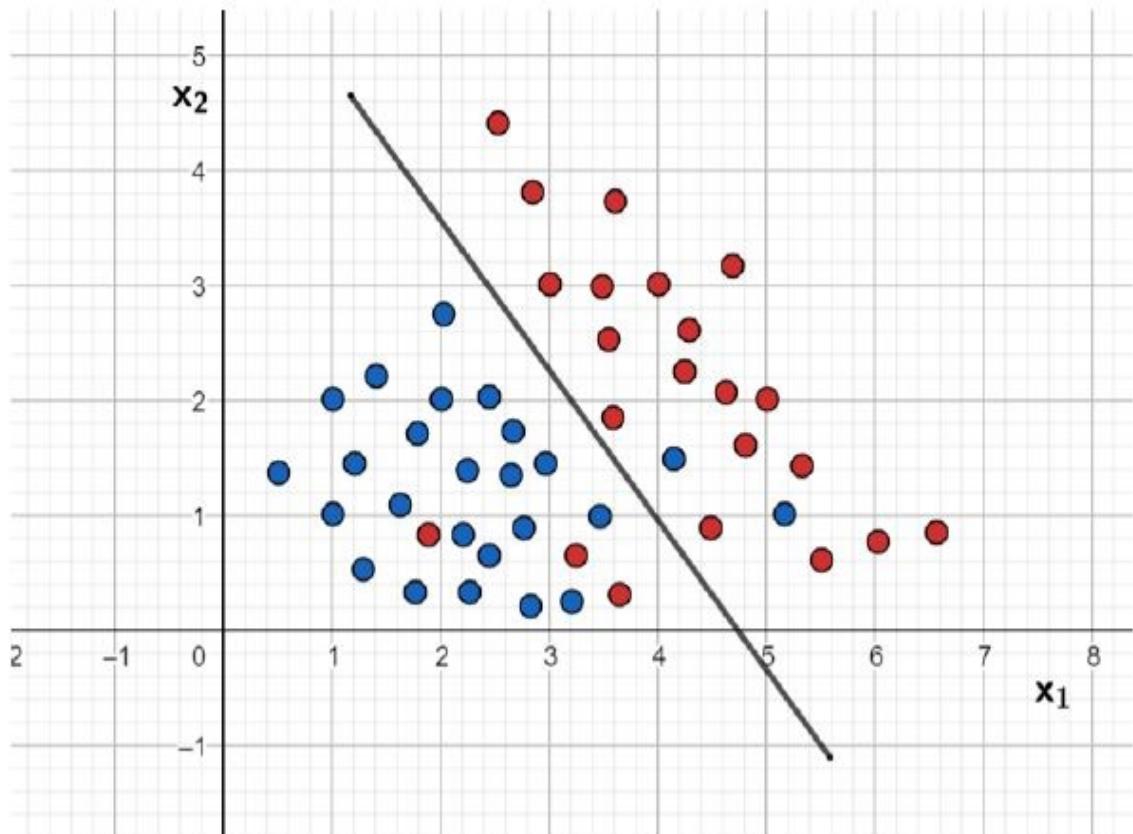

Perceptron model

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

5

Question Number : 195 **Question Id :** 640653346996 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 2

Question Label : Short Answer Question

Decision boundary for binary classification data-set is given by

$$0.3x_1 + 2.3x_2 + 1.8x_3 + 3 = 0$$

where x_1, x_2 and x_3 are features. What will be the distance of the decision boundary from the origin?

NOTE: Enter your answer in two decimal places.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

1.00 to 1.05

MLP

Section Id :	64065321955
Section Number :	12
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	23
Number of Questions to be attempted :	23
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349240

Question Shuffling Allowed :

No

Question Number : 196 Question Id : 640653346998 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "MACHINE LEARNING PRACTICES"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153462. ✓ YES

6406531153463. ✗ NO

Sub-Section Number : 2

Sub-Section Id : 64065349241

Question Shuffling Allowed : Yes

Question Number : 197 Question Id : 640653346999 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Consider the following code snippet:

```
from sklearn.datasets import load_iris
from sklearn.model_selection import train_test_split
X, y = load_iris(return_X_y = True)
```

The size of X and y is (150, 4) and (150,) respectively.

Which of the following option(s) split X and y into training and test data such that test data has 30 samples?

Options :

```
train_X, test_X, train_y, test_y = train_test_split(X, y,  
6406531153464. ✘ test_size=20, random_state=42)
```

```
train_X, test_X, train_y, test_y = train_test_split(X, y,  
6406531153465. ✓ test_size=30, random_state=42)
```

```
train_X, test_X, train_y, test_y = train_test_split(X, y,  
6406531153466. ✓ test_size=0.2, random_state=42)
```

```
train_X, test_X, train_y, test_y = train_test_split(X, y,  
6406531153467. ✘ test_size=0.3, random_state=42)
```

Question Number : 198 Question Id : 640653347001 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

We wish to load iris data from sklearn. Which of the following will result in an error?

Options :

```
from sklearn.datasets import load_iris  
6406531153472. ✓ data = load_iris(load_X_y = True)
```

```
from sklearn.datasets import load_iris  
6406531153473. ✘ data = load_iris(return_X_y = True)
```

```
from sklearn.datasets import load_iris  
6406531153474. ✓ X, y = load_iris(load_X_y = True)
```

```
from sklearn.datasets import load_iris  
6406531153475. ✘ X, y = load_iris(return_X_y = True)
```

Question Number : 199 Question Id : 640653347007 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

The output of the following code block based on the 'Iris' dataset is shown in Figure 1.

```
import seaborn as sns
from matplotlib import pyplot as plt
iris= sns.load_dataset("iris")
sns.set(font_scale=1.5)
plt.figure(figsize=(8,6))
sns.boxplot(data=iris)
sns.swarmplot(data=iris,size=2,color='k')
plt.grid()
plt.title('Box Plot')
plt.ylabel('Range')
plt.show()
```

Based on the Figure 1, mark the correct statements from below options.

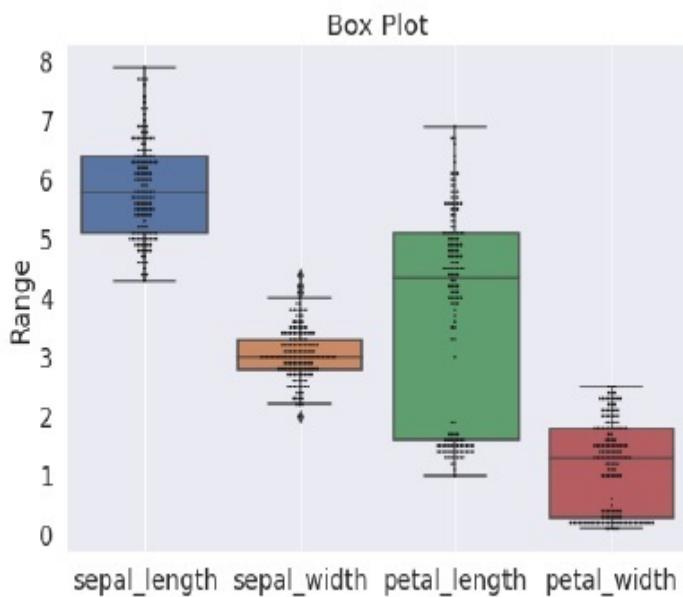


Figure 1

Options :

6406531153498. ✓ Median petal_length value is greater than median petal_width.

6406531153499. ✗ Median sepal_length value is smaller than the value of median petal_width.

6406531153500. ✓ The range of petal_length values is larger than the ranges of all three other

features.

6406531153501. ✘ Only the feature sepal_length has outliers.

Question Number : 200 Question Id : 640653347012 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

The correct code block or blocks to set adaptive learning rate while using SGDRegressor will be-

Options :

6406531153515. ✘

```
from sklearn.model_selection import SGDRegressor
linear_regressor = SGDRegressor(learning_rate='log2', eta0=1e-2)
```

6406531153516. ✓

```
from sklearn.linear_model import SGDRegressor
linear_regressor = SGDRegressor(learning_rate='adaptive', eta0=1e-2)
```

6406531153517. ✓

```
from sklearn.linear_model import SGDRegressor
linear_regressor = SGDRegressor(learning_rate='adaptive')
```

6406531153518. ✘

```
from sklearn.model_selection import SGDRegressor
SGD_regressor = LinearRegressor(learning_rate='adaptive', eta0=1e-2)
```

Sub-Section Number : 3

Sub-Section Id : 64065349242

Question Shuffling Allowed : Yes

Question Number : 201 Question Id : 640653347000 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

We wish to download a data set available online. Assume that the url of the csv containing the data is 'url_1'. Which of the following is the correct code to load the data?

Options :

6406531153468. ✗ `import pandas as pd
data = pd.fetch_csv(url_1)`

6406531153469. ✗ `import pandas as pd
data = pd.fetch_data(url_1)`

6406531153470. ✗ `import pandas as pd
data = pd.load_data(url_1)`

6406531153471. ✓ `import pandas as pd
data = pd.read_csv(url_1)`

Question Number : 202 Question Id : 640653347003 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What will be the shapes of X and y?

```
from sklearn.datasets import make_classification  
X, y = make_classification(n_features=20,  
                           n_informative=10,  
                           n_redundant = 1,  
                           n_classes=2,  
                           n_clusters_per_class=1,  
                           random_state=20,  
                           n_samples=30)
```

Options :

6406531153482. ✗ (30,10) and (30,)

6406531153483. ✓ (30,20) and (30,)

6406531153484. ✗ (20,30) and (20,)

6406531153485. ✘ (20,10) and (20,)

Question Number : 203 Question Id : 640653347004 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the output of the following block of the code?

```
data = [ {'plot number': 51, 'Carpet area':251.8},  
        {'Plot number': 69, 'Carpet area':611.9} ]  
from sklearn.feature_extraction import DictVectorizer  
dv = DictVectorizer(sparse=False)  
data_transformed = dv.fit_transform(data)  
data_transformed
```

Options :

6406531153486. ✘ array([[610.9, 0., 77.], [51., 251.8, 0.]])

6406531153487. ✘ array([[611.9, 0., 69.], [251.8, 51., 0.]])

6406531153488. ✘ array([[251.8, 0., 69.], [611.9, 51., 0.]])

6406531153489. ✓ array([[251.8, 0., 51.], [611.9, 69., 0.]])

Question Number : 204 Question Id : 640653347006 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the output of the following block of the code?

```
from sklearn.feature_selection import RFE
from sklearn.linear_model import LinearRegression
from sklearn.datasets import fetch_california_housing
from sklearn.model_selection import train_test_split
X_california, y_california = fetch_california_housing(return_X_y=True)
# select a subset of data
X, y = X_california[:2000, :], y_california[:2000]
estimator = LinearRegression()
selector = RFE(estimator, n_features_to_select = 3, step=1)
selector = selector.fit(X, y)
print(selector.support_)
```

Options :

6406531153494. ✘ [True False False True False True True True]

6406531153495. ✓ [True False False False False False True True]

6406531153496. ✘ [True False False False False True True True]

6406531153497. ✘ [True False False False False False True False]

Question Number : 205 Question Id : 640653347008 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Output of the following code is-

```
movie_genres =[{'action', 'comedy' },
                {'comedy'},
                {'action', 'thriller'},
                {'science-fiction', 'action', 'thriller'}]
from sklearn.preprocessing import MultiLabelBinarizer
mlb = MultiLabelBinarizer()
mlb.fit_transform(movie_genres)
```

Options :

6406531153502. ✓ array([[1, 1, 0, 0], [0, 1, 0, 0], [1, 0, 0, 1], [1, 0, 1, 1]])

6406531153503. ✘ array([[1, 0, 0, 0], [0, 1, 0, 0], [1, 0, 0, 1], [1, 0, 1, 1]])

6406531153504. ✘ array([[1, 0, 0, 0], [0, 1, 0, 0], [1, 0, 0, 0], [1, 0, 1, 1]])

6406531153505. ✘ array([[1, 0, 0], [0, 1, 0], [1, 0, 0], [1, 0, 1]])

Question Number : 206 Question Id : 640653347009 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Output of the following block of code is -

```
import numpy as np
from sklearn.datasets import fetch_california_housing
from sklearn.model_selection import train_test_split
from sklearn.feature_selection import SelectKBest, mutual_info_regression
# download data
X_california, y_california = fetch_california_housing(return_X_y=True)
# select a subset of data
X, y = X_california[:2000, :], y_california[:2000]
skb = SelectKBest(mutual_info_regression, k = 3)
X_new = skb.fit_transform(X,y)
print(X_new.shape)
```

Options :

6406531153506. ✘ (2000,8)

6406531153507. ✓ (2000,3)

6406531153508. ✘ (3, 2000)

6406531153509. ✘ (2000, 5)

Question Number : 207 Question Id : 640653347010 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the 'explained variance score' for the following code?

```
from sklearn.metrics import explained_variance_score
y_true = [1, 2, 3]
y_pred = [2, 5, 8]
explained_variance_score(y_true, y_pred)
```

Options :

6406531153510. ✓ -3

6406531153511. ✗ 3

6406531153512. ✗ -2

6406531153513. ✗ 2

Question Number : 208 Question Id : 640653347013 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Calculate the coefficient of determination (R^2) from the following block of code?

```
from sklearn.metrics import r2_score
y_true = [3, -0.5, 2, 7]
y_pred = [2.5, 0.0, 2, 8]
print(r2_score(y_true, y_pred))
```

Options :

6406531153519. ✗ 0.789

6406531153520. ✓ 0.948

6406531153521. ✗ 0.922

6406531153522. ✗ 0.824

Question Number : 209 Question Id : 640653347015 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the output of the following block of code?

```
import numpy as np
from sklearn.model_selection import RepeatedKFold

X = np.array([[1, 2], [3, 4], [1, 2], [3, 4]])
rkf = RepeatedKFold(n_splits=2,
                     n_repeats=2,
                     random_state=1)
for train, test in rkf.split(X):
    print("%s %s" % (train, test))
```

Options :

6406531153527. ✖ [0 1] [2 3] [2 3] [NaN 1] [1 3] [2 2] [0 2] [1 3]

6406531153528. ✖ [0 1] [NaN 3] [2 3] [0 1] [1 3] [0 2] [0 2] [1 3]

6406531153529. * [0 1] [1 3] [2 3] [2 1] [1 3] [3 2] [0 2] [1 3]

6406531153530. ✓ [0 1] [2 3] [2 3] [0 1] [1 3] [0 2] [0 2] [1 3]

Question Number : 210 Question Id : 640653347018 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Which of the following is likely to be the correct output of the following code snippet?

Options :

6406531153539. ✘ [0.85,0.1,0.05]

6406531153540. ✘ [3,2,1]

6406531153541. ✓ [0.85,0]

6406531153542. ✘ There are some mistakes in the 3rd /4th line of code, hence it will produce an error.

Question Number : 211 Question Id : 640653347022 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

Consider the following code snippet:

```
from sklearn import linear_model
clf = linear_model.Ridge(alpha=0.01)
X= [[1,0], [2, 1], [3, 2]]
y= [1, 2, 3]
clf.fit(X, y)
linear_model.Ridge(alpha=0.01, max_iter=1000,
                    tol=0.0001, fit_intercept=True)
clf.score(X,y)
```

Which of the following is likely to be the correct output of the code above?

Options :

6406531153551. ✘ 5

6406531153552. ✘ 99

6406531153553. ✓ 0.999

6406531153554. ✘ No evaluation metrics is mentioned, hence it will produce an error.

Sub-Section Number : 4

Sub-Section Id : 64065349243

Question Shuffling Allowed : Yes

Question Number : 212 Question Id : 640653347002 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Consider the following code snippet.

```
from sklearn.datasets import load_iris  
one = load_iris()  
two = load_iris(return_X_y = True)  
three = load_iris(as_frame = True)  
four = load_iris(as_frame = True, return_X_y = True)
```

What will be the data types of one, two, three and four?

Options :

6406531153476. ❌ Bunch, Tuple, DataFrame, DataFrame

6406531153477. ❌ Bunch, Tuple, DataFrame, Tuple

6406531153478. ❌ Bunch, Ndarray, Bunch, Ndarray

6406531153479. ❌ Ndarray, Tuple, Ndarray, Tuple

6406531153480. ✓ Bunch, Tuple, Bunch, Tuple

6406531153481. ❌ It will result in an error.

Sub-Section Number : 5

Sub-Section Id : 64065349244

Question Shuffling Allowed : Yes

Question Number : 213 Question Id : 640653347005 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

What is the output of the following block of the code?

```
from sklearn.pipeline import Pipeline
from sklearn.impute import SimpleImputer
from sklearn.preprocessing import StandardScaler
estimators = [('simpleImputer', SimpleImputer()),
              ('standardScaler', StandardScaler())]
pipe = Pipeline(steps=estimators)
print(len(pipe.steps))
```

Options :

6406531153490. ✓ 2

6406531153491. ✗ 3

6406531153492. ✗ 4

6406531153493. ✗ 1

Sub-Section Number : 6

Sub-Section Id : 64065349245

Question Shuffling Allowed : Yes

Question Number : 214 Question Id : 640653347011 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What will be the output of following block of code?

```
from sklearn.model_selection import ShuffleSplit
rs = ShuffleSplit(n_splits=3, random_state=0)
rs.get_n_splits(X)
```

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

Sub-Section Number :

7

Sub-Section Id :

64065349246

Question Shuffling Allowed :

Yes

Question Number : 215 Question Id : 640653347014 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Which of the following code snippets represent correct methods to obtain cross validated performance measure using LeaveOneOut?

Options :

```
from sklearn.model_selection import cross_val_score
from sklearn.model_selection import LeaveOneOut
from sklearn.linear_model import linear_regression

lin_reg = linear_regression()
loocv = LeaveOneOut()
6406531153523. ✓ score = cross_val_score(lin_reg, X, y, cv=loocv)
```

```
from sklearn.linear_model import SGDRegressor
linear_regressor = SGDRegressor(loss='squared_error',
                                 early_stopping=True
                                 max_iter=500,
                                 tol=1e-3,
                                 validation_fraction=0.2,
                                 n_iter_no_change=5)
6406531153524. ✗
```

```
from sklearn.linear_model import linear_regression
from sklearn.model_selection import cross_val_score
from sklearn.model_selection import ShuffleSplit
from sklearn.model_selection import LeaveOneOut
lin_reg = linear_regression()
shuffle_split = ShuffleSplit(n_splits=5, test_size=0.2,
                             random_state=42)
6406531153525. ✗ score = cross_val_score(lin_reg, X, y, cv=loocv)
```

```
from sklearn.model_selection import cross_validate
from sklearn.model_selection import ShuffleSplit
from sklearn.model_implementation import LeaveOneOut
cv = ShuffleSplit(n_splits=40, test_size=0.3, random_state=0)
cv_results = cross_validate(regressor, data,
                             target, cv=cv,
                             scoring="loocv_neg_mean_absolute_error")
```

6406531153526. ✘

Question Number : 216 Question Id : 640653347016 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

What is the recall value for the class “2” for the following block of code?

```
from sklearn.metrics import confusion_matrix
y_true = [2, 0, 2, 2]
y_pred = [0, 0, 2, 2]
confusion_matrix(y_true, y_pred)
from sklearn.metrics import classification_report
print(classification_report(y_true, y_pred))
```

Options :

6406531153531. ✘ 1.00

6406531153532. ✓ 0.67

6406531153533. ✘ 0.50

6406531153534. ✘ 0.81

Question Number : 217 Question Id : 640653347017 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

Consider the following code snippet:

```
data=np.array([ 1, 2, 3, 4])
from sklearn.preprocessing import PolynomialFeatures
poly= PolynomialFeatures(degree=3, interaction_only=True)
data = data.reshape(2,2)
print(poly.fit_transform(data))
```

Which of the following is the correct output?

Options :

- 6406531153535. ❌ array([[1., 1., 2., 2.], [1., 5., 10., 50.], [1., 3., 4., 12.]])
- 6406531153536. ❌ array([[1., 1., 2., 3., 2., 3., 6.], [1., 4., 5., 10., 20., 40., 50.]])
- 6406531153537. ❌ array([[1., 4., 5., 10., 20., 40., 50.], [1., 1., 2., 3., 2., 3., 6.]])
- 6406531153538. ✓ array([[1., 1., 2., 2.], [1., 3., 4., 12.]])

Sub-Section Number : 8

Sub-Section Id : 64065349247

Question Shuffling Allowed : No

Question Id : 64065347019 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (218 to 219)

Question Label : Comprehension

Consider the following code snippet, and answer the given subquestions.

```
from sklearn.preprocessing import PolynomialFeatures
from sklearn.pipeline import Pipeline
from sklearn.preprocessing import StandardScaler
from sklearn.linear_model import RidgeCV
from sklearn.datasets import fetch_california_housing
california_housing = fetch_california_housing(as_frame=True)
com_train_features=california_housing.data
com_train_labels=california_housing.target

lf= np.logspace(-3, 0, num=4)

ridge_reg_pipeline = Pipeline([('poly', PolynomialFeatures(degree=2)),
                               ('feature_scaling', StandardScaler())
                               ])

ridge= RidgeCV(alphas=lf,
               scoring="neg_mean_squared_error",
               fit_intercept = False)
results = ridge.fit(com_train_features, com_train_labels)
```

Sub questions

Question Number : 218 Question Id : 640653347020 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What will be the output of the following code?

```
print(results.intercept_)
```

Options :

6406531153543. ✘ 0.0001

6406531153544. ✘ 0.001

6406531153545. ✘ 0.1

6406531153546. ✓ 0.0

Question Number : 219 Question Id : 640653347021 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

What will be the output of the following code?

```
print(results.best_score_)
```

Options :

6406531153547. ✘ 0.32

6406531153548. ✘ 0.528

6406531153549. ✘ 0.681

6406531153550. ✓ -0.609

BDM

Section Id :	64065321956
Section Number :	13
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	13
Number of Questions to be attempted :	13
Section Marks :	20
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349248
Question Shuffling Allowed :	No

Question Number : 220 Question Id : 640653347023 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT " BUSINESS DATA MANAGEMENT"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?

CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153555. ✓ YES

6406531153556. ✗ NO

Sub-Section Number : 2

Sub-Section Id : 64065349249

Question Shuffling Allowed : Yes

Question Number : 221 Question Id : 640653347025 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

A product is likely to have a price elasticity of demand that exceeds 1 when.

Options :

6406531153561. ✗ Its price falls

6406531153562. ✗ It is a necessity

6406531153563. ✓ It has close substitutes

6406531153564. ✗ The percentage of income spent on it decreases

Question Number : 222 Question Id : 640653347029 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Match the “Definition” in Column-X to its appropriate “Ratio” in Column-Y.

Column-X	Column-Y
1. The ability of the firm to pay its way	A. Profitability Ratio
2. Information to enable decisions to be made on the extent of risk and earning potential of a business investment	B. Gearing Ratio
3. Information on relationship between the exposure of the business to loans as opposed to share capital	C. Investment Ratio
4. How effective the firm is at generating profits given sales	D. Financial Ratio
	E. Liquidity Ratio

Options :

6406531153575. ✓ 1-E, 2-C, 3-B, 4-A

6406531153576. ✗ 1-E, 2-C, 3-B, 4-D

6406531153577. ✗ 1-B, 2-C, 3-E, 4-A

6406531153578. ✗ 1-B, 2-C, 3-E, 4-D

Question Number : 223 Question Id : 640653347031 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The strength of the five forces in the “Five Forces Model” helps determine _____ within an industry that a competitor can expect.

Options :

6406531153583. ✓ Level of profit

6406531153584. ✗ Level of competitiveness

6406531153585. ✗ Level of mark share

6406531153586. ✗ Level of monopoly

Question Number : 224 Question Id : 640653347043 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Which of the following is not one of the five key indicators in Purchasing Manager's Index (PMI)?.

Options :

6406531153607. ❌ New orders

6406531153608. ❌ Employment environment

6406531153609. ❌ Supplier Deliveries

6406531153610. ✓ Competitor Analysis

Sub-Section Number : 3

Sub-Section Id : 64065349250

Question Shuffling Allowed : Yes

Question Number : 225 Question Id : 640653347024 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

If gross profit = net profit + x, which of the following statements is/ are true? (select all that is applicable).

Options :

6406531153557. ❌ "X" includes variable cost

6406531153558. ❌ "X" includes the cost of goods sold (e.g.: building, equipment, etc.)

6406531153559. ✓ "X" includes the indirect expenses (e.g.: operating, interest, taxes, etc.)

6406531153560. ❌ None of these

Question Number : 226 Question Id : 640653347030 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Which of the following is not a source of survey data? (select all that is applicable).

Options :

6406531153579. ✓ Stock market data

6406531153580. ✗ Market research data

6406531153581. ✗ Consumer pyramid data

6406531153582. ✗ None of these

Question Number : 227 Question Id : 640653347032 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

When a company operates in a monopolistic market (assume it is 100% monopolistic), which of the following forces in the “Five Forces Model” becomes unimportant for the company (*choose all that are applicable*)?.

Options :

6406531153587. ✗ Bargaining power of suppliers

6406531153588. ✓ Bargaining power of customers

6406531153589. ✓ Threat of substitutes

6406531153590. ✗ Threat of new entrants

6406531153591. ✗ None of these

Question Number : 228 Question Id : 640653347042 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

The Board of Directors of Company-X have met and a discussion on acquiring another company-Y is underway. A competitor firm wants to stop this merger due to fears that the market will become monopolistic. So, the competitor has approached the justice department. Then which of the

following statements **will assist** the competitor's claim?.

Options :

6406531153603. ✓ As the acquisition will cause the Herfindahl Index of the industry to change from 2000 to 8000 it should not be permitted

6406531153604. ✗ As the acquisition will cause the Herfindahl Index of the industry to change from 8000 to 2000 it should not be permitted

6406531153605. ✓ The 4-firm concentration ratio will change from 52% to 84% and hence must not be permitted

6406531153606. ✗ The 4-firm concentration ratio will change from 84% to 52% and hence must not be permitted

Sub-Section Number : 4

Sub-Section Id : 64065349251

Question Shuffling Allowed : No

Question Id : 640653347026 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (229 to 230)

Question Label : Comprehension

The table provides data on rice sold (25Kg Bags) and price (Rs./ 25Kg Bag) at a rice wholesaler for the first 5 months of the year. Then answer the given subquestions.

Month	Price Per 25 Kg Bag of Rice	Number of 25Kg Bags of Rice Sold
1	40	350
2	45	300
3	47	270
4	55	240
5	60	200

Sub questions

Question Number : 229 Question Id : 640653347027 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Based on price elasticity, which of the following pairs of Months indicate that Rice is an **elastic** item?.

Options :

6406531153565. ✓ Month 1 to Month 2

6406531153566. ✓ Month 2 to Month 3

6406531153567. ✗ Month 3 to Month 4

6406531153568. ✓ Month 4 to Month 5

6406531153569. ✗ None of these

Question Number : 230 Question Id : 640653347028 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Based on price elasticity, which of the following pairs of Months indicate that Rice is an **inelastic** item?.

Options :

6406531153570. ✗ Month 1 to Month 2

6406531153571. ✗ Month 2 to Month 3

6406531153572. ✓ Month 3 to Month 4

6406531153573. ✗ Month 4 to Month 5

6406531153574. ✗ None of these

Sub-Section Number : 5

Sub-Section Id : 64065349252

Question Shuffling Allowed : No

Question Id : 640653347033 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (231 to 233)

Question Label : Comprehension

The table below provides information on the number of items sold by different firms in a month.

With this information, answer the given subquestions.

Firm	Number of units sold
A	1200
B	3000
C	1500
D	1000
E	2600
F	4500
G	1100
H, I, J, K, L, M	5100

Sub questions

Question Number : 231 Question Id : 640653347034 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What is the 5-firm Concentration ratio (round your answer to 2 decimal places)?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

64 to 65

Question Number : 232 Question Id : 640653347035 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What is the HHI for the industry (round your answer to 2 decimal places)?.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

1047 to 1048

Question Number : 233 Question Id : 640653347036 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

How is the industry based on the HHI?.

Options :

6406531153594. ✘ Monopolistic

6406531153595. ✘ Acute concentration

6406531153596. ✓ Moderately concentration

6406531153597. ✘ Oligopolistic

6406531153598. ✘ Cannot say

Question Id : 640653347044 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (234 to 236)

Question Label : Comprehension

The following table gives the sales and purchases of eggs at a Kirana store. With this information, answer the given subquestions assuming a linear relationship between price and quantities.

Price (Rs.)	Quantity purchased	Quantity sold
2	16	11
3	14	14
4	12	17
5	10	20
6	8	23

Sub questions

Question Number : 234 Question Id : 640653347045 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What is the market-clearing price for eggs?

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

3

Question Number : 235 Question Id : 640653347046 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

How many eggs will be purchased at the market-clearing price?

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

14

Question Number : 236 Question Id : 640653347047 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Any price **higher than** the market-clearing price will lead to (choose all that is applicable)?

Options :

6406531153613. ❌ More eggs being purchased

6406531153614. ✓ More eggs being sold

6406531153615. ✓ Less eggs being purchased

6406531153616. ❌ Less eggs being sold

6406531153617. ❌ Will have no impact on the eggs being purchased or sold

Sub-Section Number : 6

Sub-Section Id : 64065349253

Question Shuffling Allowed : No

Question Id : 640653347037 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (237 to 240)

Question Label : Comprehension

A company wants to start manufacturing a product that will be sold in a competitive market at a price of Rs.15 each. Estimates indicate that a fixed cost of Rs. 10 will be incurred every day. The total variable cost (in Rs.) and the corresponding number of units that can be produced in a day (at the specified total variable cost) are provided in the table below. With this information, answer the given subquestions.

Total Variable Cost (Rs.)	Number of Units Produced (units/day)
0	0
8	13
10	15
12	20
15	22
17	25
20	27

Sub questions

Question Number : 237 Question Id : 640653347038 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

How many items should the company be recommended to produce?.

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

13

Question Number : 238 Question Id : 640653347039 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What is the total profit that the company makes if the recommended number of products (identified in the previous question) are produced?.

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

80 to 82

Question Number : 239 **Question Id :** 640653347040 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 1

Question Label : Short Answer Question

What is the average total cost if the recommended number of products (identified in the previous question) is produced *[Note: Round your answer to two decimal places]*?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

8.7 to 8.8

Question Number : 240 **Question Id :** 640653347041 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 1

Question Label : Short Answer Question

What is the marginal cost if the recommended number of products (identified in the previous question) is produced *[Note: Round your answer to two decimal places]*?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

7.8 to 8.1

Business Analytics

Section Id :	64065321957
Section Number :	14
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	11
Number of Questions to be attempted :	11
Section Marks :	20
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349254
Question Shuffling Allowed :	No

Question Number : 241 Question Id : 640653347048 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "BUSINESS ANALYTICS"

ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153618. ✓ YES

6406531153619. ✗ NO

Sub-Section Number : 2

Sub-Section Id : 64065349255

Question Shuffling Allowed : No

Question Id : 640653347049 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (242 to 243)

Question Label : Comprehension

The linear demand response for a product-A is modelled as a simple linear regression represented as $D(P) = 1500 - 20*P$, where $D(P)$ is the demand at price-P. Then, answer the given subquestions.

Sub questions

Question Number : 242 Question Id : 640653347050 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What is the elasticity of this curve when the price is Rs.50?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 243 Question Id : 640653347051 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What is the satiating price for this curve?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

750

Sub-Section Number : 3

Sub-Section Id : 64065349256

Question Shuffling Allowed : Yes

Question Number : 244 Question Id : 640653347052 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Which of the following distributions is/are not symmetric in nature (select all that are applicable)?

Options :

6406531153622. ❌ Standard normal distribution

6406531153623. ✓ Exponential distribution

6406531153624. ❌ Uniform distribution between [-1 to +1]

6406531153625. ✓ Poisson distribution

Question Number : 245 Question Id : 640653347053 Question Type : MSQ Is Question


Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

From the given figure, which of the below statements are true?

Global Average Temperature Vs. Number of Pirates

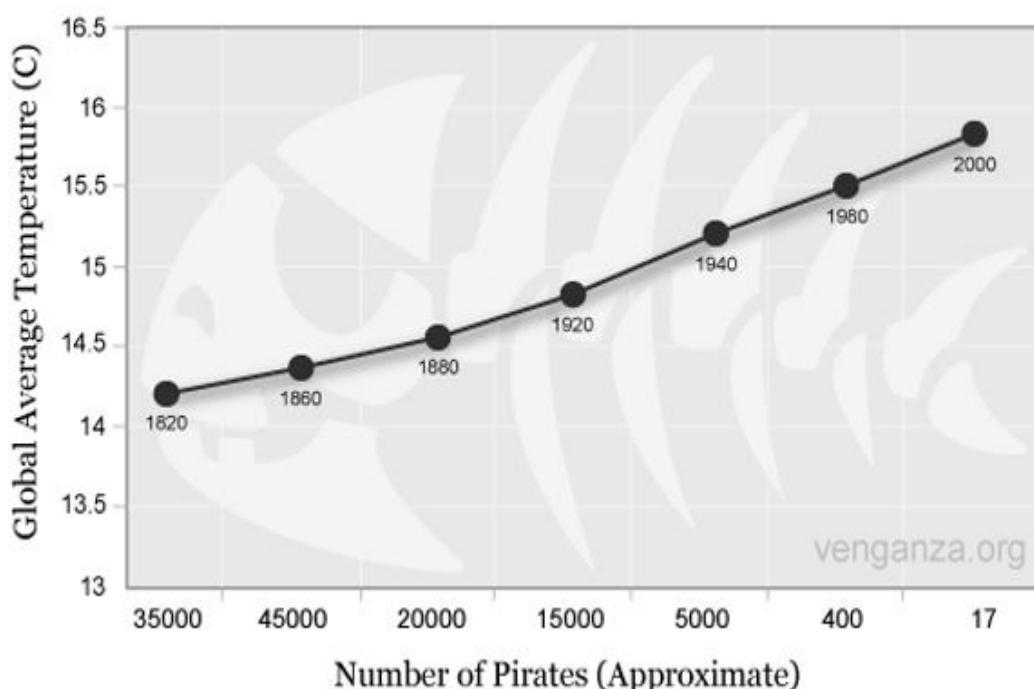

Options :

6406531153626. ❌ The number of pirates does not increase with the global average temperature increase

6406531153627. ✓ There is a positive correlation between the number of pirates and the global average temperature increase

6406531153628. ❌ There is no correlation between the number of pirates and the global average temperature increase

6406531153629. ❌ More data is required to come to a conclusion

Sub-Section Number :

4

Sub-Section Id :

64065349257

Question Shuffling Allowed :

Yes

Question Number : 246 Question Id : 640653347054 Question Type : MCQ Is Question





Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Among the following graphs, which are **not recommended/correct** for use?

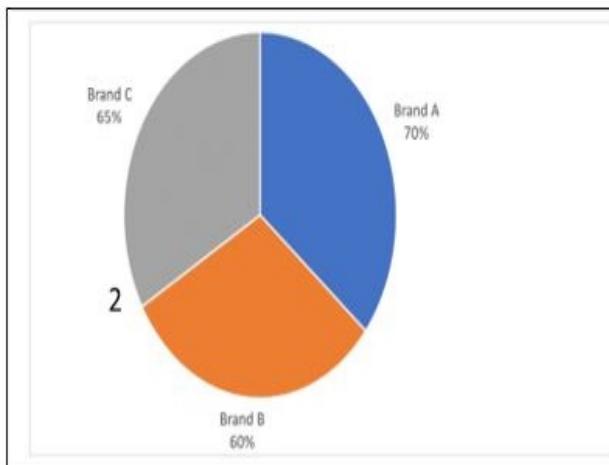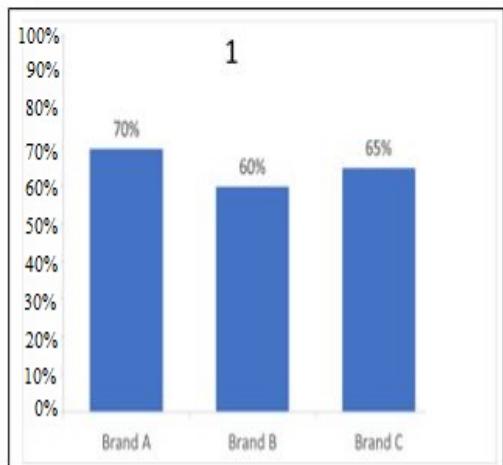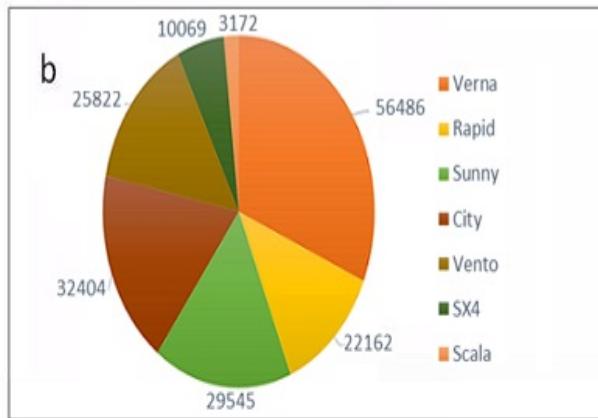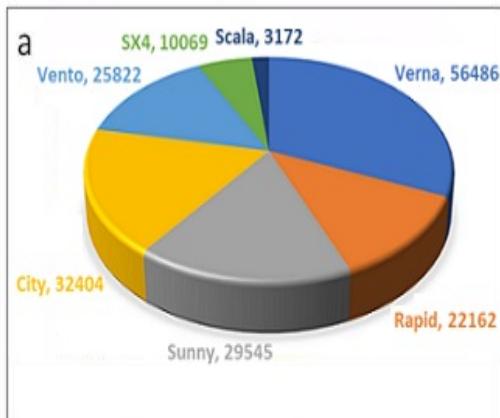

Options :

6406531153630. ❌ (a) & (1)

6406531153631. ✓ (a) & (2)

6406531153632. ❌ (b) & (2)

6406531153633. ❌ (b) & (1)

Question Number : 247 Question Id : 640653347068 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

The p-value of the chi-square goodness of fit test represents _____

Options :

6406531153656. ✘ The chance of observing the sample when the null hypothesis is false

6406531153657. ✘ The chance of observing the sample when the alternative hypothesis is true

6406531153658. ✘ The chance of observing the sample at the specified level of significance

6406531153659. ✓ None of these

Sub-Section Number : 5

Sub-Section Id : 64065349258

Question Shuffling Allowed : No

Question Id : 640653347060 Question Type : COMPREHENSION Sub Question Shuffling


Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (248 to 250)

Question Label : Comprehension

Given the imaginary demand response curve in the below figure, answer the given subquestions.

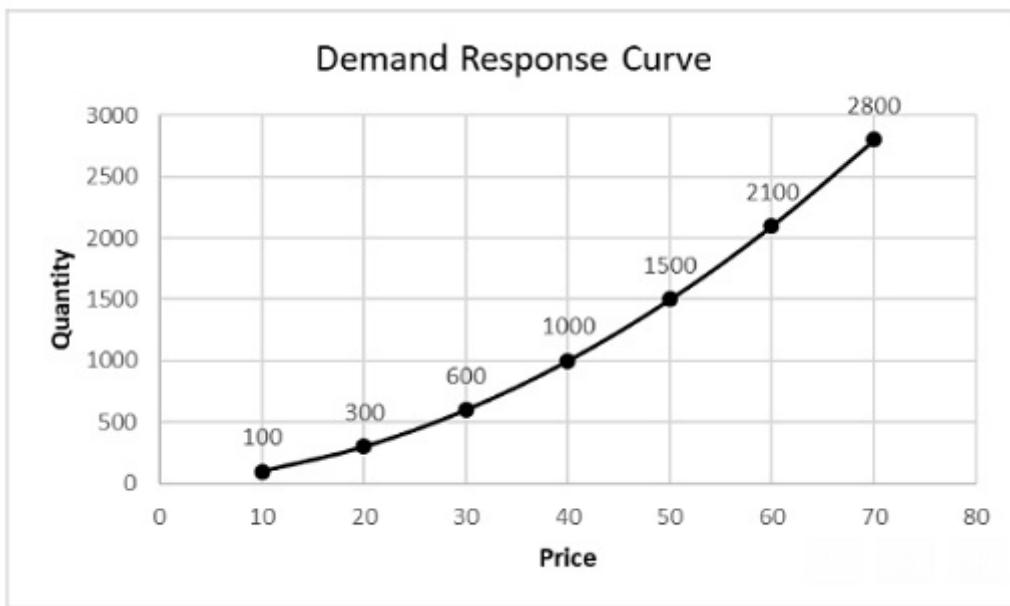

Sub questions

Question Number : 248 Question Id : 640653347061 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Select Question

Which of the following statements are true? (choose all that is applicable)

Options :

6406531153644. ✓ As price increases, latent demand increases

6406531153645. ✗ As price increases, latent demand decreases

6406531153646. ✗ As it is a linear curve, there is no impact of price on latent demand

6406531153647. ✗ None of these

Question Number : 249 Question Id : 640653347062 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What is the elasticity between any two points of the given demand response curve (Note: **Do not assume** that it is linear and **do not assume** that it is a constant elasticity curve)?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

2

Question Number : 250 Question Id : 640653347063 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

Based on the computed elasticity, what kind of demand is being exhibited by the product?

Options :

6406531153649. ✓ Elastic demand

6406531153650. ✗ Inelastic demand

6406531153651. ✗ Demand for an inferior good

6406531153652. ✗ Demand for a normal good

Question Id : 640653347064 Question Type : COMPREHENSION Sub Question Shuffling

Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A

Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (251 to 252)

Question Label : Comprehension

If the demand response curve for the data given in the following table is modelled by a constant elasticity curve, then answer the given subquestions

Demand (number of units)	Price (Rs.)
1.0	10
0.50	20
0.33	30
0.25	40
0.20	50

Sub questions

Question Number : 251 Question Id : 640653347065 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Short Answer Question

What is the demand when the price is Rs.1?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

10

Question Number : 252 Question Id : 640653347066 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

What is the price elasticity for the demand response curve?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1

Sub-Section Number : 6

Sub-Section Id : 64065349259

Question Shuffling Allowed : No

Question Id : 640653347055 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (253 to 255)

Question Label : Comprehension

You are given the following contingency table based on sample data where different cities and their brand preferences are provided. You perform a chi-squared test of independence to make inferences about the population from this sample.

	Brand A	Brand B	Total
Chennai	288	220	508
Mumbai	353	204	557
Total	641	424	1065

Sub questions

Question Number : 253 Question Id : 640653347056 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

From the given contingency table, find the expected frequency of Chennai people preferring brand B?

Note: Do not round off the values in the intermediate iterations. Round off to two decimal values only at the last step.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

200 to 204

Question Number : 254 Question Id : 640653347057 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What is the calculated value of chi-squared?

Note: Do not round off the values in the intermediate iterations. Round off to two decimal values

only at the last step.

Options :

6406531153635. ✘ 8.24

6406531153636. ✓ 4.95

6406531153637. ✘ 3.12

6406531153638. ✘ 6.24

Question Number : 255 Question Id : 640653347058 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 1

Question Label : Multiple Choice Question

At the significance level 0.01, chi-squared tabular value is 6.63. What do you conclude?

Options :

6406531153639. ✘ Reject the null hypothesis and conclude that the categorical variables are not independent

6406531153640. ✘ Fail to reject the null hypothesis and conclude that the categorical variables are not independent

6406531153641. ✓ Fail to reject the null hypothesis and conclude that the categorical variables are independent

6406531153642. ✘ Reject the null hypothesis and conclude that the categorical variables are independent

Sub-Section Number : 7

Sub-Section Id : 64065349260

Question Shuffling Allowed : Yes

Question Number : 256 Question Id : 640653347059 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Suppose a factory manufactures products on three machines A, B and C. Suppose 65% of total

output comes from machine A, 30% of total output comes from machine B and 5% of total output comes from machine C. From the past data, it is known that 1% of products by machine A are defectives, 2% of products by machine B are defectives and 10% of products by machine C are defectives. What is the probability that the product has come from machine C given that it is a defective?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Range

Text Areas : PlainText

Possible Answers :

0.24 to 0.34

Sub-Section Number : 8

Sub-Section Id : 64065349261

Question Shuffling Allowed : Yes

Question Number : 257 **Question Id :** 640653347067 **Question Type :** SA **Calculator :** None

Response Time : N.A **Think Time :** N.A **Minimum Instruction Time :** 0

Correct Marks : 1

Question Label : Short Answer Question

A data set with 200 data points on 15 variables is provided. Chi-square goodness of fit test is conducted on a variable in the data-set, to see if it follows an exponential distribution. If the dataset is binned into 10 bins, then how many degrees of freedom does the chi-square statistic have?

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

System Commands

Section Id :	64065321958
Section Number :	15
Section type :	Online
Mandatory or Optional :	Mandatory
Number of Questions :	20
Number of Questions to be attempted :	20
Section Marks :	50
Display Number Panel :	Yes
Group All Questions :	No
Enable Mark as Answered Mark for Review and Clear Response :	Yes
Maximum Instruction Time :	0
Sub-Section Number :	1
Sub-Section Id :	64065349262
Question Shuffling Allowed :	No

Question Number : 258 Question Id : 640653347069 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 0

Question Label : Multiple Choice Question

THIS IS QUESTION PAPER FOR THE SUBJECT "SYSTEM COMMANDS"

**ARE YOU SURE YOU HAVE TO WRITE EXAM FOR THIS SUBJECT?
CROSS CHECK YOUR HALL TICKET TO CONFIRM THE SUBJECTS TO BE WRITTEN.**

(IF IT IS NOT THE CORRECT SUBJECT, PLS CHECK THE SECTION AT THE TOP FOR THE SUBJECTS REGISTERED BY YOU)

Options :

6406531153660. ✓ YES

6406531153661. ✘ NO

Sub-Section Number : 2

Sub-Section Id : 64065349263

Question Shuffling Allowed : Yes

Question Number : 259 Question Id : 640653347070 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Initially, four files named `a`, `b`, `c` and `d` are present in the current working directory, every file has some text in it. Select the file(s) whose contents are not modified at the end of executing the below set of commands in the same sequence.

Hint: Description of option with `echo` command.

-n: do not output the trailing newline

```
touch a
echo -n ""> b #There is no space between quotes.
echo -n "">> c #There is no space between quotes.
cat a > d
```

Options :

6406531153662. ✓ a

6406531153663. ✘ b

6406531153664. ✓ c

6406531153665. ✘ d

Question Number : 260 Question Id : 640653347073 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

```
$ cat file1.txt  
1  
2  
3  
4  
5  
6  
7  
8
```

Which of the following commands will give the output as.

```
6  
7
```

Options :

6406531153671. ✓ `cat file1.txt | head -7 | tail -2`

6406531153672. ✗ `cat file1.txt | head -6 | tail -7`

6406531153673. ✗ `cat file1.txt | tail -6 | head -3`

6406531153674. ✓ `cat file1.txt | tail -3 | head -2`

Question Number : 261 Question Id : 640653347078 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

```
echo 'Hello, World' >out 1>&2
```

Which of the following statement(s) will be true after executing the above command.

Options :

6406531153692. ✘ The file `out` contains the text `Hello, World.`

6406531153693. ✓ The text `Hello, World` will be printed on the terminal.

6406531153694. ✓ The file `out` contains no text (i.e. will be an empty file).

6406531153695. ✘ No text will be printed on the terminal.

Sub-Section Number : 3

Sub-Section Id : 64065349264

Question Shuffling Allowed : Yes

Question Number : 262 Question Id : 640653347072 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

```
! (ls global_config || ls local_config) && touch default_config
```

The file `default_config` does not exist in the current working directory. All the statements below are with respect to the current working directory.

After running the above command the file `default_config` will be created iff,

Note: `&&` and `||` have same precedence.

Options :

6406531153667. ✘ The files `global_config` and `local_config` both exist.

6406531153668. ✘ The file `local_config` exists but `global_config` does not exist.

6406531153669. ✘ The file `global_config` exists but `local_config` does not exist.

6406531153670. ✓ The files `global_config` and `local_config` both do not exist.

Question Number : 263 Question Id : 640653347088 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Choice Question

What does the output of the command `ls -lR ./ | grep -e "^[d]" | wc -l` represents?

Hint: Command `ls -lR` will recursively list all the files and subdirectories in the long listing format.

Options :

6406531153732. ❌ Number of files in the current directory.

6406531153733. ❌ Number of directories in the current directory.

6406531153734. ❌ Number of directories and all sub-directories in the parent directory.

6406531153735. ✓ Number of directories and all sub-directories in the current directory.

6406531153736. ❌ Number of directories in the parent directory.

Sub-Section Number : 4

Sub-Section Id : 64065349265

Question Shuffling Allowed : Yes

Question Number : 264 Question Id : 640653347076 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Choice Question

Below are three date-time formats according to ISO 8601 in UTC

2022-05-06T13:00:56+00:00

2022-05-06T13:00:56Z

20220506T130056Z

Select the extended regular expression that matches only with one of the above date-time formats.

Options :

6406531153684. ❌ `^[0-9]{4}-*[0-9]{2}-*[0-9]{2}T[0-9]{2}:[*[0-9]{2}:*[0-9]{2}(Z|\+00:00)$`

6406531153685. ❌ `^[0-9]{4}-+[0-9]{2}-+[0-9]{2}T[0-9]{2}:+[0-9]{2}:+[0-9]{2}(Z|\+00:00)$`

6406531153686. ✓ `^[0-9]{4}-?[0-9]{2}-?[0-9]{2}T[0-9]{2}:[?[0-9]{2}:?[0-9]{2}(Z|\+00:00)$`

6406531153687. ❌ `^[0-9]{4}-[0-9]{2}-[0-9]{2}T[0-9]{2}:[0-9]{2}:[0-9]{2}(Z|\+00:00)$`

Sub-Section Number : 5

Sub-Section Id : 64065349266

Question Shuffling Allowed : Yes

Question Number : 265 Question Id : 640653347075 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 4

Question Label : Multiple Select Question

Consider the file hierarchy structure given below to answer the question. All the file names have an extension e.g. `.sh`, `.txt` etc, and the rest are directories. The top-most directory is `/home`.

```
/home
└── classA
    └── attendance
        ├── feb.csv
        ├── jan.csv
        └── mar.csv
└── classB
    └── attendance
        ├── feb.csv
        ├── jan.csv
        └── mar.csv
└── classC
    └── attendance
        ├── feb.csv
        ├── jan.csv
        └── mar.csv
├── aprClassB.csv
└── script.sh
```

6 directories, 10 files

Which of the following commands can be used to rename the file `aprClassB.csv` to `apr.csv` and move it to the directory `attendance` in the directory `classB`. Consider that the current working directory is `/home/classB`.

Options :

```
cp aprClassB.csv apr.csv
```

6406531153679. ❌

```
cp ../aprClassB.csv attendance/apr.csv
```

6406531153680. ❌

```
mv ../aprClassB.csv attendance/apr.csv
```

6406531153681. ✓

```
mv /home/aprClassB.csv /home/classB/attendance/apr.csv
```

6406531153682. ✓

```
cp ..../aprClassB.csv attendance/
mv attendance/aprClassB.csv attendance/apr.csv
rm ..../aprClassB.csv
```

6406531153683. ✓

Sub-Section Number : 6

Sub-Section Id : 64065349267

Question Shuffling Allowed : Yes

Question Number : 266 Question Id : 640653347074 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

```
ls | grep "^[^a-z]"
```

The above command will print the filenames in the current working directory that,

Options :

6406531153675. ❌ Starts with an uppercase letter.

6406531153676. ❌ Starts with a lowercase letter.

6406531153677. ❌ Does not start with an uppercase letter.

6406531153678. ✓ Does not start with a lowercase letter.

Question Number : 267 Question Id : 640653347077 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

```
$ ps
  PID TTY      TIME CMD
 64754 pts/3    00:00:00 bash
 65657 pts/3    00:00:00 sleep
 65671 pts/3    00:00:00 sleep
 65718 pts/3    00:00:00 python3
 65774 pts/3    00:00:00 ps
```

```
$ ps | grep " $$"
```

What will be the output of the last command in the above sequence of commands?

Options :

6406531153688. ✘ PID TTY TIME CMD

6406531153689. ✓ 64754 pts/3 00:00:00 bash

6406531153690. ✘ 65718 pts/3 00:00:00 python3

6406531153691. ✘ 65774 pts/3 00:00:00 ps

Question Number : 268 Question Id : 640653347083 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

What will the contents of the file notes.txt be after executing the below commands?

```
$ echo note > notes.txt
$ echo memo > memos.txt
$ echo list > lists.txt
$ cat lists.txt memos.txt >> notes.txt
```

Options :

note

6406531153707. *

memo

list

note

6406531153708. *

list

memo

note

6406531153709. *

note

list

memo

6406531153710. ✓

note

memo

list

6406531153711. *

Question Number : 269 Question Id : 640653347084 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

```
$ pwd  
/home/runner  
$ ls -l  
total 8  
-rw-r--r-- 1 runner runner 105 May 19 10:52 main.sh  
-rw-r--r-- 1 runner runner 62 Nov 11 2021 replit.nix  
  
$ cd /  
$ cd home/runner  
$ COMMAND1 # Find correct command for this.  
$ long_listing  
total 8  
-rw-r--r-- 1 runner runner 105 May 19 10:52 main.sh  
-rw-r--r-- 1 runner runner 62 Nov 11 2021 replit.nix
```

There is a command which is missing in the command sequence above, it is marked as `COMMAND1`. Analyze the outputs of the commands and select the command from the below options that is the correct replacement for `COMMAND1`.

Options :

`long_listing="ls -l"`

6406531153712. ❌

`alias long_listing="ls -l"`

6406531153713. ✓

`alias long_listing "ls -l"`

6406531153714. ❌

`apropos long_listing "ls -l"`

6406531153715. ❌

6406531153716. ❌ None of these.

Question Number : 270 Question Id : 640653347085 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

```
#!/usr/bin/bash
```

```
sleep 10 &
sleep 10 &
sleep 10 &
echo Good Morning
```

After how many seconds the text `Good Morning` will be displayed?

Options :

6406531153717. ✘ After 10 seconds.

6406531153718. ✘ After 20 seconds.

6406531153719. ✘ After 30 seconds.

6406531153720. ✓ Immediately.

Question Number : 271 Question Id : 640653347090 Question Type : MCQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction

Time : 0

Correct Marks : 2

Question Label : Multiple Choice Question

```
$ var="IIT Madras"
```

The above command is executed before running any of the commands below. Match the commands below to their outputs.

Commands	Output
1. echo \${var:-"value"}	a. value
2. echo \${var:+ "value"}	b. IIT Madras
3. echo \${var:="value"}	c. T Ma
4. echo \${var:2:4}	d. stem

Options :

6406531153741. ✘ 1—>b; 2—>a; 3—>a; 4—>c;

6406531153742. ✘ 1—>a; 2—>b; 3—>b; 4—>d;

6406531153743. ✘ 1—>a; 2—>b; 3—>b; 4—>c;

6406531153744. ✓ 1—>b; 2—>a; 3—>b; 4—>c;

Sub-Section Number : 7

Sub-Section Id : 64065349268

Question Shuffling Allowed : Yes

Question Number : 272 Question Id : 640653347071 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Below are the commands executed in the given sequence in an empty directory(containing no files or directories). Enter the number of files that will be created at the end of the execution of the below commands.

```
# Format Strings
# %H    hour (00..23)
# %M    minute (00..59)

fileName=$(date +'%M')
touch $fileName; sleep 3600; touch $fileName; sleep 3600
```

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

Sub-Section Number :

8

Sub-Section Id :

64065349269

Question Shuffling Allowed :

Yes

Question Number : 273 Question Id : 640653347082 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Select the command(s) that prints the file/directory names, that start with the letter "a" and end with the letter "e" (case-sensitive) present in the current working directory.

Options :

6406531153703. ✓ `ls | grep '^a.*e$'`

6406531153704. ✗ `ls | grep 'a.*e'`

6406531153705. ✓ `echo a*e`

6406531153706. ✗ `echo *a*e*`

Question Number : 274 Question Id : 640653347086 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Consider the long listing output of the present working directory below.

```
$ ls -l
total 5
-rw-r--r-- 1 ram      teacher        315 May 17 17:18 Quiz1.md
-rw-r--r-- 1 megha    studentsDiploma 10 May 17 17:18 assignment1.txt
-rw-r--rw- 1 ravi     teacher        24 May 17 17:07 assignment2.txt
drwxr-xr-x 1 guest    guest          0 Dec 20 09:37 abc.ab
```

Which of the following statement(s) are true?

Options :

6406531153721. ✓ The owner of the file `Quiz1.md` is `ram`.

6406531153722. ✗ The owner of the file `Quiz1.md` is `teacher`.

6406531153723. ✓ `ram` does not have write permissions on the file `assignment1.txt`.

6406531153724. ✗ `ram` does not have read permissions on the file `assignment1.txt`.

6406531153725. ✗ If `ram` is in the group named `teacher`, then he has execute permission on the file `assignment2.txt`.

6406531153726. ✗ If `ram` is in the group named `teacher`, then he has write permission on the file `assignment2.txt`.

Question Number : 275 Question Id : 640653347087 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Consider the contents of the file `employee_details.txt` below. The employees are ordered in the increasing order of their age in the file from top to bottom.

```
$ cat employee_details.txt
A1998001,Ram Kumar,7,Male
B2000002,Sanjay Narayan,10,Male
B2000003,Srishti Rai,12,Female
E1997001,Manoj Pillai,14,Male
G1998001,Preeti Suresh,18,Female
G1999001,Leela L G,21,Female
```

Which of the following command will output the full names of the 3 youngest employees, one name on each line.

Options :

6406531153727. ✓ `cat employee_details.txt | head -3 | cut -d "," -f 2`

6406531153728. ✓ `cat employee_details.txt | cut -d "," -f 2 | head -3`

6406531153729. ✗ `cat employee_details.txt | tail -3 | cut -d "," -f 2`

6406531153730. ✗ `cat employee_details.txt | head -3 | cut -f 3`

6406531153731. ✗ `cat employee_details.txt | cut -d "," -f 3 | tail -3`

Question Number : 276 Question Id : 640653347089 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 3

Question Label : Multiple Select Question

Which of the following statements for hard and soft(symbolic) links are true.

Options :

6406531153737. ✓ Inode of a file and its hard link will be the same.

6406531153738. ✘ Inode of a file and its soft link will be the same.

6406531153739. ✘ Hard links become inaccessible after the file it links to is deleted.

6406531153740. ✓ Soft links become inaccessible after the file it links to is deleted.

Sub-Section Number : 9

Sub-Section Id : 64065349270

Question Shuffling Allowed : No

Question Id : 640653347079 Question Type : COMPREHENSION Sub Question Shuffling Allowed : No Group Comprehension Questions : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Question Numbers : (277 to 278)

Question Label : Comprehension

```
cp a b # Command 1
mv b c # Command 2
mv c d # Command 3
mv a d # Command 4
cp a b # Command 5
mv b d # Command 6
```

Based on the above data, answer the given subquestions.

Sub questions

Question Number : 277 Question Id : 640653347080 Question Type : SA Calculator : None

Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Short Answer Question

Initially, file `a` exists in the current working directory. How many files will be present in the current working directory after executing the given commands in the same sequence?

NOTE: Enter your answer to the nearest integer.

Response Type : Numeric

Evaluation Required For SA : Yes

Show Word Count : Yes

Answers Type : Equal

Text Areas : PlainText

Possible Answers :

1

Question Number : 278 Question Id : 640653347081 Question Type : MSQ Is Question

Mandatory : No Calculator : None Response Time : N.A Think Time : N.A Minimum Instruction Time : 0

Correct Marks : 2

Question Label : Multiple Select Question

Select the command(s) that will return with an error, given that only file `a` is present initially in the current working directory.

Options :

6406531153697. ✘ `cp a b # Command 1`

6406531153698. ✘ `mv b c # Command 2`

6406531153699. ✘ `mv c d # Command 3`

6406531153700. ✘ `mv a d # Command 4`

6406531153701. ✓ `cp a b # Command 5`

6406531153702. ✓ `mv b d # Command 6`