

The image shows a screenshot of the Visual Studio Code (VS Code) editor interface. The top menu bar includes File, Edit, Selection, View, Go, Run, Terminal, and Help. The Explorer panel on the left shows the project structure for a MERN2 application. The Explorer is expanded to show the 'routes/api' directory, which contains several JavaScript files: user.js, post.js, profile.js, user.js, auth.js, and server.js. The 'server.js' file is selected and its content is displayed in the main editor area. The code in 'server.js' is as follows:

```
1 //Import EXPRESS
2 const express = require("express");
3
4 //Import logic to CONNECT to a DATABASE
5 const connectDB = require("../config/db");
6
7 //Initialize a main APP variable
8 const app = express();
9
10 //Create a CONNECTION to DATABASE
11 connectDB();
12
13 //Create MAIN routes
14 app.use("/api/user", require("../routes/api/user"));
15 app.use("/api/profile", require("../routes/api/profile"));
16 app.use("/api/post", require("../routes/api/post"));
17 app.use("/api/auth", require("../routes/api/auth"));
18
19 //Create a variable to store port for server
20 const PORT = process.env.PORT || 5000;
21
22 //Create an APP LISTENER.
23 app.listen(PORT, () => {
24   console.log(`Server was started on port ${PORT}`);
25 });
26
```

MERN STACK

Social network

DevConnector

Table of Contents

1. Introduction.....	3
1.x VSCode.....	3
1.x.1 Prettier set up.....	3
2. Express & MongoDB Setup.....	4
2.1. MongoDB Atlas Setup.....	4
2.1.1 Create an account at MongoDB.com.....	4
2.1.2 Log in at MongoDB.com.....	4
2.1.3 Create a new project at mongoDB.com.....	4
2.1.4 Create a new cluster.....	4
2.1.5 Create a new user.....	4
2.1.6 Change whitelist of IP addresses.....	4
2.2 Install Dependencies & Basic Express Setup.....	4
2.2.1 Create a file .gitignore. Add to that file folder node_modules/.....	4
2.2.2 Create GIT repository with [CLI=> git init].....	4
2.2.3 Create NPM with [CLI=> npm init].....	4
2.2.4 Install all the regular dependencies.....	5
2.2.5 Install all the developer dependencies.....	5
2.2.6 Create a main entry file – server.js.....	5
2.2.7 Change start scripts at package.json.....	5
2.2.8 Create a SERVER with simple test route.....	5
2.3 Connecting To MongoDB With Mongoose.....	6
2.3.1 Create a connection to database.....	6
2.3.2 Create a connection logic on server.....	6
2.4 Create route files with Express Router.....	7
3. User API Routes & JWT Authentication.....	8
3.1 Create USER MODEL (SCHEMA).....	8
3.2 Request & Body Validation.....	8
3.3 User registration logic.....	9
3.4 JWT implementing (jwt.io).....	10
14. Basic GIT commands.....	11
14.1 Work with commit.....	11
14.1.1 Add all the changes from local work directory to a work tree.....	11
14.1.2 Create a new commit.....	11
14.1.3 Create a new branch and switch to it.....	11

1. Introduction.

There will be a general information about project, MERN stack and all side technologies

1.x VSCode

1.x.1 Prettier set up

<https://glebbahmutov.com/blog/configure-prettier-in-vscode/#settings>

VSCode setup

To use the Prettier we have just installed from VSCode we need to install the [Prettier VSCode extension](#):

1. Launch VS Code Quick Open (Ctrl+P)
2. Run the following command

```
1 ext install esbenp.prettier-vscode
```

Because you might have global settings related to code formatting, I prefer having in each repository a file with local workspace VSCode settings. I commit this file `.vscode/settings.json` to source control to make sure everyone uses the same extension to format the code.

```
.vscode/settings.json
1 {
2   "editor.defaultFormatter": "esbenp.prettier-vscode",
3   "editor.formatOnSave": true
4 }
```

Now every time we save a JavaScript file, it will be formatted using Prettier automatically. Here is me formatting `projectA/index.js`

2. Express & MongoDB Setup

2.1. MongoDB Atlas Setup

2.1.1 Create an account at MongoDB.com

2.1.2 Log in at MongoDB.com

2.1.3 Create a new project at mongoDB.com


2.1.4 Create a new cluster

2.1.5 Create a new user

2.1.6 Change whitelist of IP addresses

2.2 Install Dependencies & Basic Express Setup

2.2.1 Create a file .gitignore. Add to that file folder node_modules/

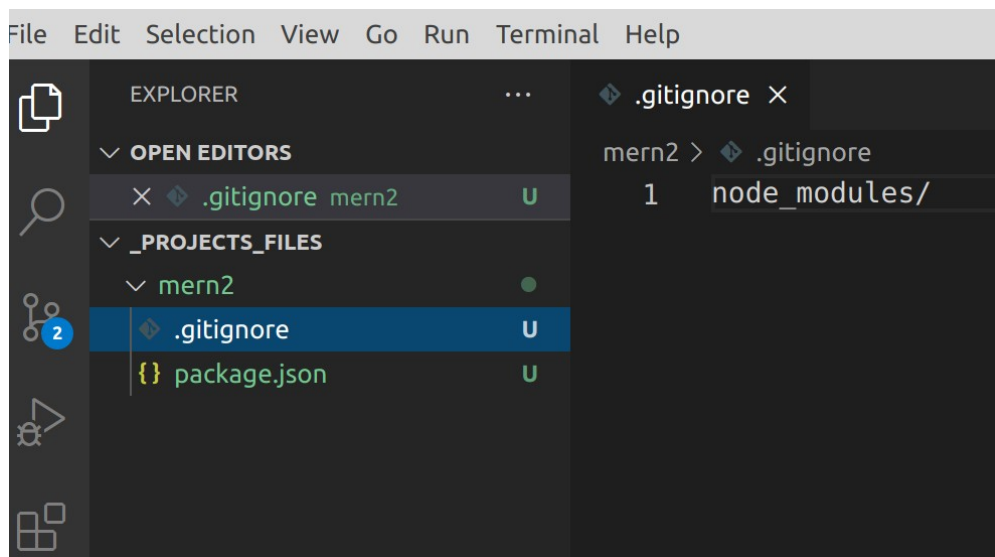

2.2.2 Create GIT repository with [CLI=> git init]

2.2.3 Create NPM with [CLI=> npm init]

2.2.4 Install all the regular dependencies

[CLI=> npm i express express-validator bcryptjs config gravatar jsonwebtoken mongoose request]

2.2.5 Install all the developer dependencies

[CLI=> npm i -D nodemon concurrently]

2.2.6 Create a main entry file – server.js

[CLI=> touch server.js]



2.2.7 Change start scripts at package.json

```
{ } package.json X
{ } package.json > ...
1  {
2    "name": "mern-devconnector",
3    "version": "1.0.0",
4    "description": "social network MERN stack",
5    "main": "server.js",
   ▶ Debug
6    "scripts": {
7      "start": "node server",
8      "server": "nodemon server.js"
9    },
```

Now to start server: [CLI=> npm run server]. It will start SERVER.JS file with NODEMON


2.2.8 Create a SERVER with simple test route

```
JS server.js X
JS server.js > ...
1  //Import EXPRESS
2  const express = require("express");
3
4  //Initialize a main APP variable
5  const app = express();
6
7  //Create a TEST ROUTE (for GET request to root folder '/')
8  app.get("/", (req, res) => res.send("Hello from TEST ROUTE of our API!"));
9
10 //Create a variable to store port for server
11 const PORT = process.env.PORT || 5000;
12
13 //Create an APP LISTENER.
14 app.listen(PORT, () => {
15   console.log(`Server was started on port ${PORT}`);
16 });
```

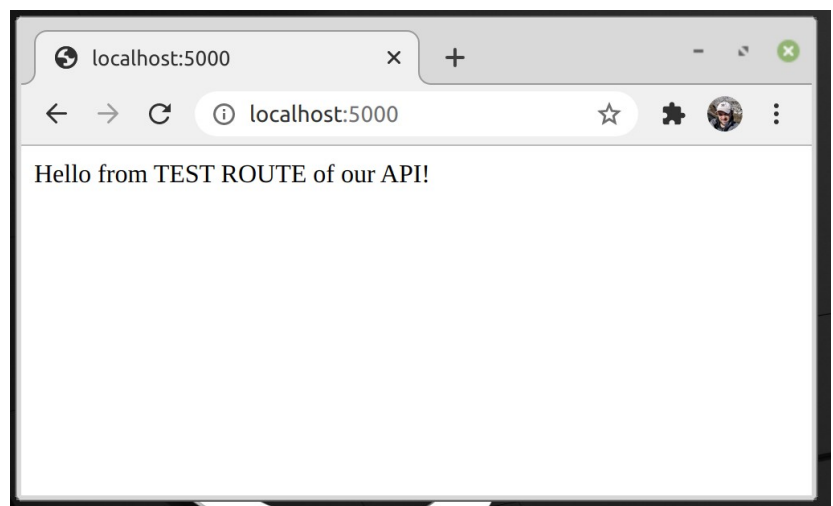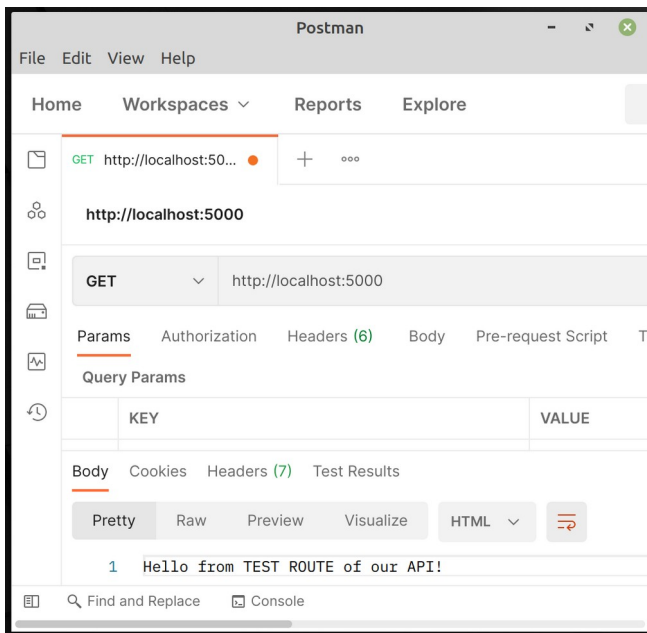

2.3 Connecting To MongoDB With Mongoose

2.3.1 Create a connection to database

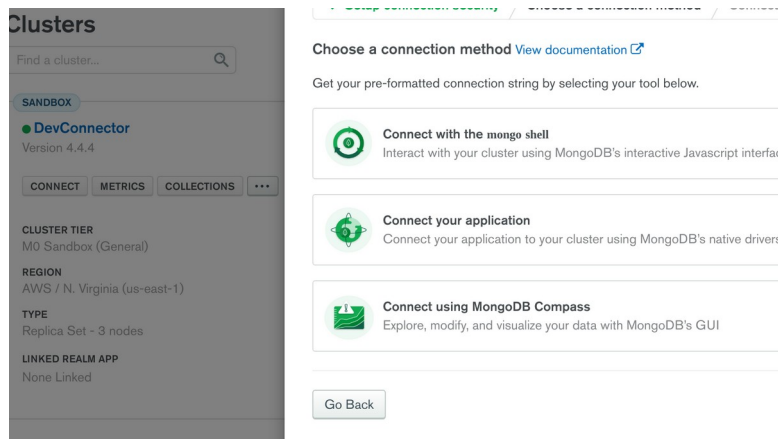

2.3.2 Create a connection logic on server

```
1  const mongoose = require("mongoose");
2
3  //Import CONFIG
4  const config = require("config");
5
6  //Import mongoURI from default.json in folder config
7  const db = config.get("mongoURI");
8
9  //Create a connection
10 const connectDB = async () => {
11   try {
12     //TRY to connect
13     await mongoose.connect(db, {
14       useNewUrlParser: true,
15       useUnifiedTopology: true,
16     });
17     // If DB was connected - log a message
18     console.log("MongoDB was connected ...");
19   } catch (error) {
20     //If ERROR log error and exit process with a failure
21     console.error(error.message);
22     process.exit(1);
23   }
24 };
25
26 module.exports = connectDB;
```

```

JS server.js X
JS server.js > ...
1 //Import EXPRESS
2 const express = require("express");
3
4 //Import logic to CONNECT to a DATABASE
5 const connectDB = require("./config/db");
6
7 //Initialize a main APP variable
8 const app = express();
9
10 //Create a CONNECTION to DATABASE
11 connectDB();
12
13 //Create a TEST ROUTE (for GET request to root folder '/')
14 app.get("/", (req, res) => res.send("Hello from TEST ROUTE of our API!"));
15
16 //Create a variable to store port for server
17 const PORT = process.env.PORT || 5000;
18
19 //Create an APP LISTENER.
20 app.listen(PORT, () => {
21   console.log(`Server was started on port ${PORT}`);
22 });
23

```

```

stslon@stslon-System-Product-Name:/media/stslon/8CB04F45B04F354C/
> mern-devconnector@1.0.0 server
> nodemon server

[nodemon] 2.0.7
[nodemon] to restart at any time, enter `rs`
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,json
[nodemon] starting `node server.js`
(node:24960) Warning: Accessing non-existent property 'MongoError'
(Use `node --trace-warnings ...` to show where the warning was created)
Server was started on port 5000
(node:24960) DeprecationWarning: Listening to events on the Db class
MongoDB was connected ...

```

2.4 Create route files with Express Router

```

JS server.js X
JS server.js > ...
1 //Import EXPRESS
2 const express = require("express");
3
4 //Import logic to CONNECT to a DATABASE
5 const connectDB = require("./config/db");
6
7 //Initialize a main APP variable
8 const app = express();
9
10 //Create a CONNECTION to DATABASE
11 connectDB();
12
13 //Create MAIN routes
14 app.use("/api/user", require("./routes/api/user"));
15 app.use("/api/profile", require("./routes/api/profile"));
16 app.use("/api/post", require("./routes/api/post"));
17 app.use("/api/auth", require("./routes/api/auth"));
18
19 //Create a variable to store port for server
20 const PORT = process.env.PORT || 5000;
21
22 //Create an APP LISTENER.
23 app.listen(PORT, () => {
24   console.log(`Server was started on port ${PORT}`);
25 });
26

```

```

EXPLORER
...
JS user.js X
routes > api > JS user.js > ...
1 //Import EXPRESS
2 const express = require("express");
3
4 //Import EXPRESS ROUTER
5 const router = express.Router();
6
7 router.get("/login", (req, res) => {
8   res.send("hello from api/user/login");
9 });
10
11 router.get("/", (req, res) => {
12   res.send("hello from api/user");
13 });
14
15 module.exports = router;
16

```


3. User API Routes & JWT Authentication

3.1 Create USER MODEL (SCHEMA)

```
JS User.js x
models > JS User.js > ...
1 //Import mongoose mongoose
2 const mongoose = require("mongoose");
3
4 const UserSchema = new mongoose.Schema({
5   name: {
6     type: String,
7     required: true,
8   },
9   email: {
10    type: String,
11    unique: true,
12    required: true,
13  },
14  password: {
15    type: String,
16    required: true,
17  },
18  avatar: {
19    type: String,
20  },
21  date: {
22    type: Date,
23    default: Date.now,
24  },
25 });
26
27 module.exports = User = mongoose.model("user", UserSchema);
28
```

3.2 Request & Body Validation

```
JS server.js x
JS server.js > ...
1 //Import EXPRESS
2 const express = require("express");
3
4 //Import logic to CONNECT to a DATABASE
5 const connectDB = require("./config/db");
6
7 //Initialize a main APP variable
8 const app = express();
9
10 //Create a CONNECTION to DATABASE
11 connectDB();
12
13 //Import MIDDLEWARE for work with body of REQUEST (bodyparser)
14 app.use(express.json({ extended: false }));
15
16 //Create MAIN routes
17 app.use("/api/user", require("./routes/api/user"));
18 app.use("/api/profile", require("./routes/api/profile"));
19 app.use("/api/post", require("./routes/api/post"));
20 app.use("/api/auth", require("./routes/api/auth"));
21
22 //Create a variable to store port for server
23 const PORT = process.env.PORT || 5000;
24
25 //Create an APP LISTENER.
26 app.listen(PORT, () => {
27   console.log(`Server was started on port ${PORT}`);
28 });
29
```

```
JS registration.js •
routes > api > user > JS registration.js > ...
1 //Import EXPRESS
2 const express = require("express");
3 //Import EXPRESS ROUTER
4 const router = express.Router();
5 //Import check and validationResult to work with data from REQUEST
6 const { check, validationResult } = require("express-validator");
7 router.post("/", [
8   check("name", "Check NAME and try again").trim().not().isBoolean().isLength({ min: 6 }),
9   check("email", "Check EMAIL and try again").trim().isEmail(),
10  check("password", "Check PASSWORD and try again").trim().isLength({ min: 6 }),
11 ], (req, res) => {
12   const errors = validationResult(req);
13   if (!errors.isEmpty()) return res.status(400).json({ errors: errors.array() });
14   res.send(req.body);
15 });
16
17 module.exports = router;
```



```
JS user.js x
routes > api > JS user.js > ...
1 //Import EXPRESS
2 const express = require("express");
3
4 //Import EXPRESS ROUTER
5 const router = express.Router();
6
7 //START_ROUT
8
9 router.use("/registration", require("./user/registration"));
10 router.use("/login", require("./user/login"));
11 //END_ROUT
12
13 module.exports = router;
```


3.3 User registration logic

```

JS registration.js
routes > api > user > JS registration.js > ...
1 //Import EXPRESS
2 const express = require("express");
3 //Import EXPRESS ROUTER
4 const router = express.Router();
5 //Import check and validationResult to work with data from REQUEST
6 const { check, validationResult } = require("express-validator");
7 //Import User model
8 const User = require("../models/User");
9 //Import gravatar
10 const gravatar = require("gravatar");
11 //Import BCRYPT
12 const bcrypt = require("bcryptjs");
13 router.post("/",
14 > [ ...
24 ],
25 async (req, res) => {
26   const errors = validationResult(req);
27   if (!errors.isEmpty()) {return res.status(400).json({ errors: errors.array() });}
28   //REGISTRATION ROUTE LOGIC
29   //Check if user (with email from req.body.email) exists in DATABASE
30   //(if exists - send status code and message if does not - create a new USER)
31   //DESTRUCTURING NAME, EMAIL and PASSWORD from request (req.body.name, req.body.em
32   const { name, email, password } = req.body;
33   try {
34     //Try to find USER with email from request in DATABASE
35     let user = await User.findOne({ email });
36     //If USER was found - return status code 400 with a message
37     if (user) {return res.status(400).json({ errors: [{ msg: "User already exists!" }] });}
38     //If USER was not found in DATABASE - create a new USER
39     //Create an avatar for new USER with GRAVATAR
40     const avatar = gravatar.url(email, {s: "200", r: "pg", d: "mm"});
41     //Create a new instance of USER
42     user = new User({ name, email, password, avatar });
43     //Create SALT for making a HASH of PASSWORD
44     const salt = await bcrypt.genSalt(10);
45     //Change USER.PASSWORD from direct PASSWORD to a HASH of PASSWORD
46     user.password = await bcrypt.hash(password, salt);
47     //SAVE new USER
48     await user.save();
49     //Return a message
50     res.send("User was registered");
51   } catch (error) {
52     console.error(error.message);
53     res.status(500).send("Server error!");
54   }
55 }
56 );
57 module.exports = router;

```

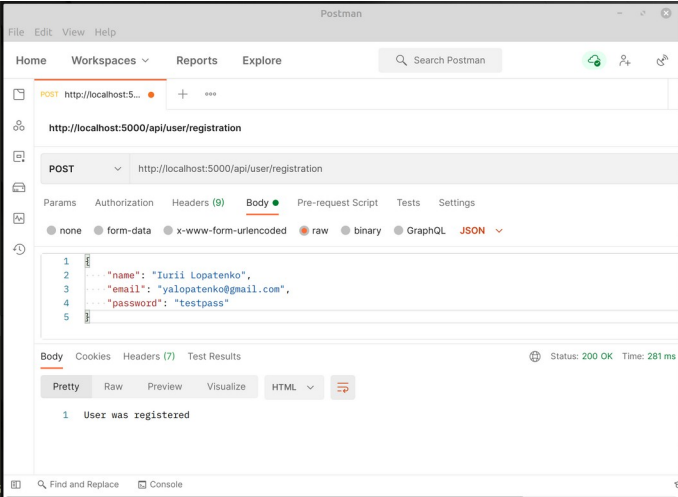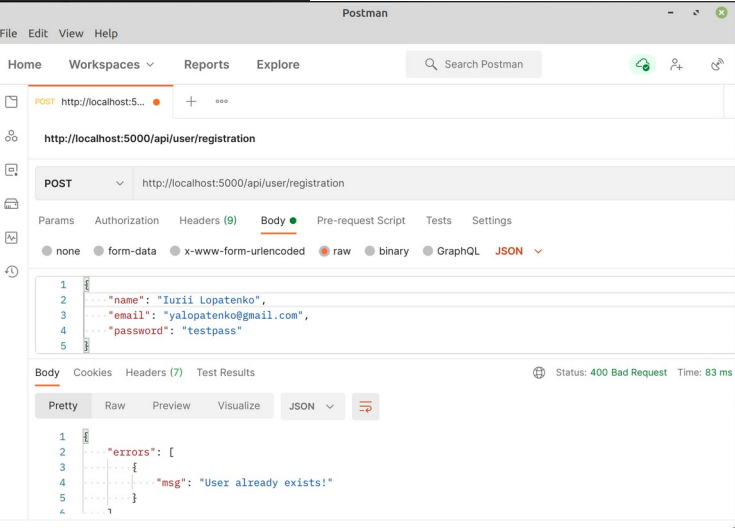myFirstDatabase.users

COLLECTION SIZE: 266B TOTAL DOCUMENTS: 1 INDEXES TOTAL SIZE: 20KB

Find Indexes Schema Anti-Patterns 0 Aggregation Search Indexes

FILTER {"filter": "example"}

QUERY RESULTS 1-1 OF 1

```

_id: ObjectId("603823894e5f00189c1a843e")
name: "Iurii Lopatenko"
email: "yalopatenko@gmail.com"
password: "$2a$10$6RgBg23Ps3NnAjzeJulGuebkJfNm5Vf6jWwoUR20P2vBW7KpKp."
avatar: "http://www.gravatar.com/avatar/29b33c4fbaf493f11e03469325fa5900?s=200&r=pg&..."
date: 2021-02-25T22:24:09.841+00:00
__v: 0

```

3.4 JWT implementing (jwt.io)

JSON Web Tokens are an open, industry standard RFC 7519 method for representing data securely between two parties.

Encoded

PASTE A TOKEN HERE

```
eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiIxMjM0NTY3ODkwIiwibmFtZSI6IkpvaG4gRG9lIiwiaWF0IjoxNTE2MjM5MDIyfQ.SflKxwRJSMeKKF2QT4fwpMeJf36P0k6yJV_adQssw5c
```

Decoded

EDIT THE PAYLOAD AND SECRET

HEADER: ALGORITHM & TOKEN TYPE

```
{
  "alg": "HS256",
  "typ": "JWT"
}
```

PAYLOAD: DATA

```
{
  "sub": "1234567890",
  "name": "John Doe",
  "iat": 1516239822
}
```

VERIFY SIGNATURE

```
HMACSHA256(
  base64UrlEncode(header) + ".",
  base64UrlEncode(payload),
  your-256-bit-secret
)
☐ secret base64 encoded
```

```
await user.save();
//Create a payload for generate a JWT
const payload = {
  user: { id: user.id },
};
//Generate a TOKEN
jwt.sign(
  payload,
  config.get("secretForJWT"),
  { expiresIn: 360000 },
  (err, token) => {
    if (err) throw err;
    res.json({ token });
  }
);
```

Postman interface showing a POST request to `http://localhost:5000/api/user/registration`. The request body is a JSON object:

```
{
  "name": "Iurii Lopatenko",
  "email": "yalopatenko@gmail.com",
  "password": "testpass"
}
```

The response status is 200 OK, Time: 260 ms, Size: 43.

JWT.io interface showing a decoded JWT token. The token is:

```
eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiIxMjM0NTY3ODkwIiwibmFtZSI6IkpvaG4gRG9lIiwiaWF0IjoxNTE2MjM5MDIyfQ.SflKxwRJSMeKKF2QT4fwpMeJf36P0k6yJV_adQssw5c
```

The decoded token structure is:

```
{
  "alg": "HS256",
  "typ": "JWT"
}
```

```
{
  "user": {
    "id": "603831562564d61db69b88ba"
  },
  "iat": 1614295382,
  "exp": 1614655382
}
```

The signature is verified using HMACSHA256.

FILTER `{"filter": "example"}`

QUERY RESULTS 1-1 OF 1

```
{
  "_id": ObjectId("603831562564d61db69b88ba"),
  "name": "Iurii Lopatenko",
  "email": "yalopatenko@gmail.com",
  "password": "$2a$10$NxEbW3sCgbyJhL5RZ9V3028iqB",
  "avatar": "http://www.gravatar.com/avatar/29b33c4fba",
  "date": "2021-02-25T23:23:02.076+00:00",
  "__v": 0
}
```

14. Basic GIT commands

14.1 Work with commit

14.1.1 Add all the changes from local work directory to a work tree

[CLI=> **git add .**] - will add all the changes

[CLI=> **git add [fileName.extension]**] – will add only a single file (fileName.extension) – **git add index.html**

14.1.2 Create a new commit

[CLI=> **git commit -[branch_name] '[commit message with meaningful description of changes]'**] – will create a new commit on branch (branch_name) with message (commit message with meaningful description of changes)
– **git commit -main 'Create a user login functionality'**

14.1.3 Create a new branch and switch to it

[CLI=> **git switch -C [name_for_a_new_branch]**] - will create a new branch and then switch to a new branch - **git switch -C User-API-Routes-and-JWT-Authentication**