

REACT

#1 - Indecision APP


Table of Contents

| | |
|--|---|
| 3 Start with REACT..... | 3 |
| 3.1 Basic setup (before REACT) - 007..... | 3 |
| 3.2 Create a React APP (scripts) - 008..... | 4 |
| 3.3 Using BABEL to compile JSX to ES5 - 009..... | 5 |
| 3.4 Exploring JSX - 011..... | 6 |
| 3.5 JS expressions inside JSX..... | 6 |
| 3.5 Conditional Rendering in JSX – 012..... | 6 |
| | 6 |

3 Start with REACT

3.1 Basic setup (before REACT) - 007

Create a new repository on GitHub. Clone it to a local folder. Create a simple HTML file.

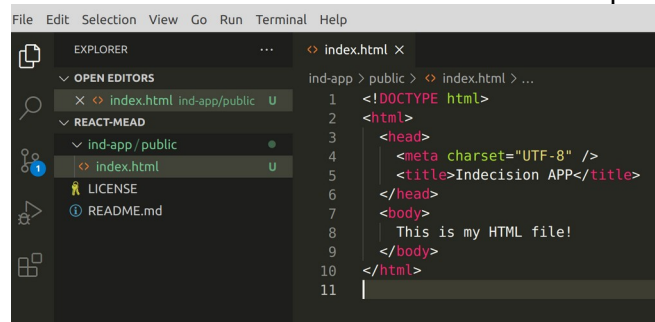


```
1 <!DOCTYPE html>
2 <html>
3   <head>
4     <meta charset="UTF-8" />
5     <title>Indecision APP</title>
6   </head>
7   <body>
8     This is my HTML file!
9   </body>
10 </html>
```

Npm init [CLI=> **npm init -y**]


Install live server [CLI=> **sudo npm install -g live-server**]

Go to a folder ind-app/public [CLI=> **cd ind-app/public**]

Start a server [CLI=> **live-server**]

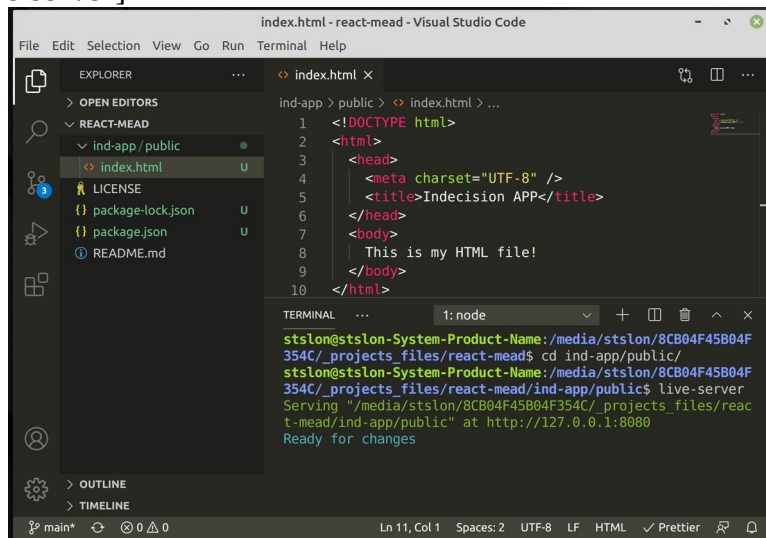

```
stslon@stslon-System-Product-Name:/media/stslon/8CB04F45B04F354C/_projects_files/react-mead$ cd ind-app/public/
stslon@stslon-System-Product-Name:/media/stslon/8CB04F45B04F354C/_projects_files/react-mead/ind-app/public$ live-server
Serving "/media/stslon/8CB04F45B04F354C/_projects_files/react-mead/ind-app/public" at http://127.0.0.1:8080
Ready for changes
```

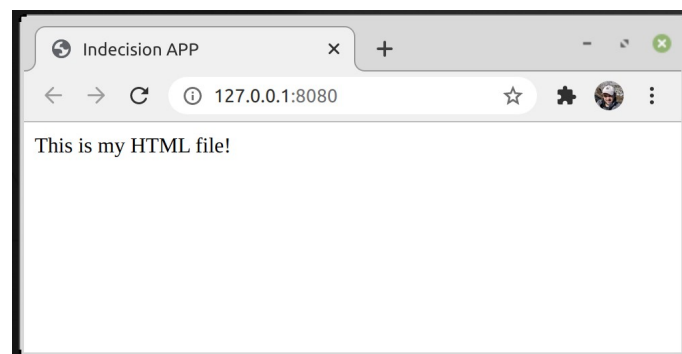

3.2 Create a React APP (scripts) - 008

Add div 'app' and 3 scripts to index.html and create **public/scripts/app.js**

```

1 <!DOCTYPE html>
2 <html>
3   <head>
4     <meta charset="UTF-8" />
5     <title>Indecision APP</title>
6   </head>
7   <body>
8     <div id="app"></div>
9     <script src="http://unpkg.com/react@16.0.0/umd/react.development.js"></script>
10    <script src="http://unpkg.com/react-dom@16.0.0/umd/react-dom.development.js"></script>
11    <script src="/scripts/app.js"></script>
12  </body>
13 </html>
14

```

JSX is a JavaScript XML. BABEL is a JavaScript compiler (it convert modern simple ES6 or ES7 to ES5)

```


1 const template = <h1 id='someID'>This
  is JSX from app.js</h1>
2
3 const template =
4   /* _PURE */ React.createElement("h1",
5     { id: "someID" }, "This is JSX from app.js");

```

```

1 console.log('App.js is running ...');
2
3 //JSX - JavaScript XML
4 const template = React.createElement(
5   'h1',
6   {
7     id: 'someID',
8   },
9   'This is JSX from app.js'
10 );
11
12 let appRoot = document.getElementById('app');
13
14 ReactDOM.render(template, appRoot);

```

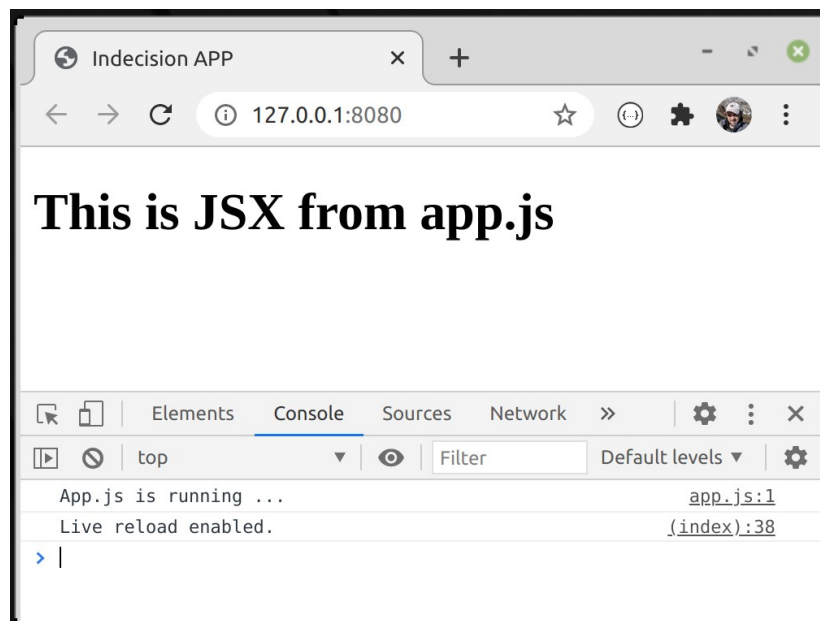


3.3 Using BABEL to compile JSX to ES5 - 009

Install babel v.6.24.1 [CLI=> **npm i -g babel-cli@6.24.1**]

Install babel-preset-react v.6.24.1 and babel-preset-env v.1.5.2 [CLI=> **sudo npm i babel-preset-react@6.24.1 babel-preset-env@1.5.2**]

Now we are able to use JSX.

Create a file **src/app.js** with JSX

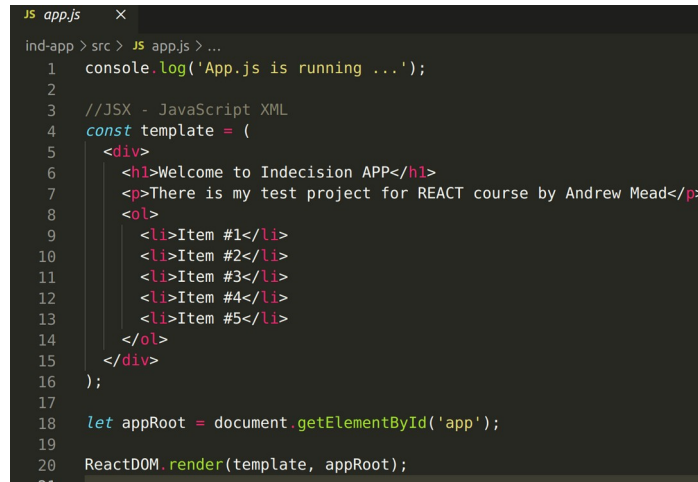


```

1  console.log('App.js is running ...');
2
3  //JSX - JavaScript XML
4  const template = (
5    <div>
6      <h1>Welcome to Indecision APP</h1>
7      <p>There is my test project for REACT course by Andrew Mead</p>
8      <ol>
9        <li>Item #1</li>
10       <li>Item #2</li>
11       <li>Item #3</li>
12       <li>Item #4</li>
13       <li>Item #5</li>
14     </ol>
15   </div>
16 );
17
18 let appRoot = document.getElementById('app');
19
20 ReactDOM.render(template, appRoot);
21

```

USE BABEL with CLI: [CLI=> **babel src/app.js --out-file=public/scripts/app.js --presets=env,react --watch**]

This command will create **public/scripts/app.js** with ES5 syntax of **src/app.js** and will track all the changes on **src/app.js** and immediately change **public/scripts/app.js**

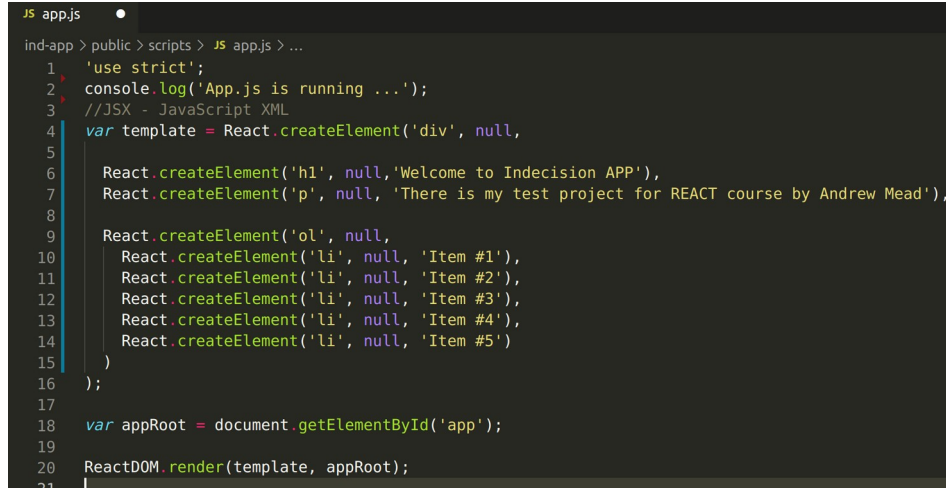

```

1  'use strict';
2  console.log('App.js is running ...');
3  //JSX - JavaScript XML
4  var template = React.createElement('div', null,
5
6    React.createElement('h1', null, 'Welcome to Indecision APP'),
7    React.createElement('p', null, 'There is my test project for REACT course by Andrew Mead'),
8
9    React.createElement('ol', null,
10     React.createElement('li', null, 'Item #1'),
11     React.createElement('li', null, 'Item #2'),
12     React.createElement('li', null, 'Item #3'),
13     React.createElement('li', null, 'Item #4'),
14     React.createElement('li', null, 'Item #5')
15   )
16 );
17
18 var appRoot = document.getElementById('app');
19
20 ReactDOM.render(template, appRoot);
21

```


3.4 Exploring JSX - 011

Install VSCode extension BABEL ES6/ES7.

We have to pass to a RENDER all the information in **1 root tag**.

3.5 JS expressions inside JSX

```
JS app.js x
ind-app > src > JS app.js > ...
1 console.log('App.js is running ...');
2
3 //JSX - JavaScript XML
4
5 let userName = 'Iurii Lopatenko';
6 let userAge = 34;
7 let userLocation = 'Los Angeles, CA';
8
9 let user = {
10   name: 'John Doe',
11   age: 41,
12   location: 'Dallas, TX',
13 };
14 const templateTwo = (
15   <div>
16     <h1>JSX template #1</h1>
17     <h2>{userName.toUpperCase()}</h2>
18     <p>Age: {userAge + 5}</p>
19     <p>Location: {userLocation}</p>
20
21     <h1>JSX template #2</h1>
22     <h2>{user.name.toLowerCase()}</h2>
23     <p>Age: {user.age * 2}</p>
24     <p>Location: {user.location}</p>
25   </div>
26 );
27
28 let appRoot = document.getElementById('app');
29
30 ReactDOM.render(templateTwo, appRoot);
31
```

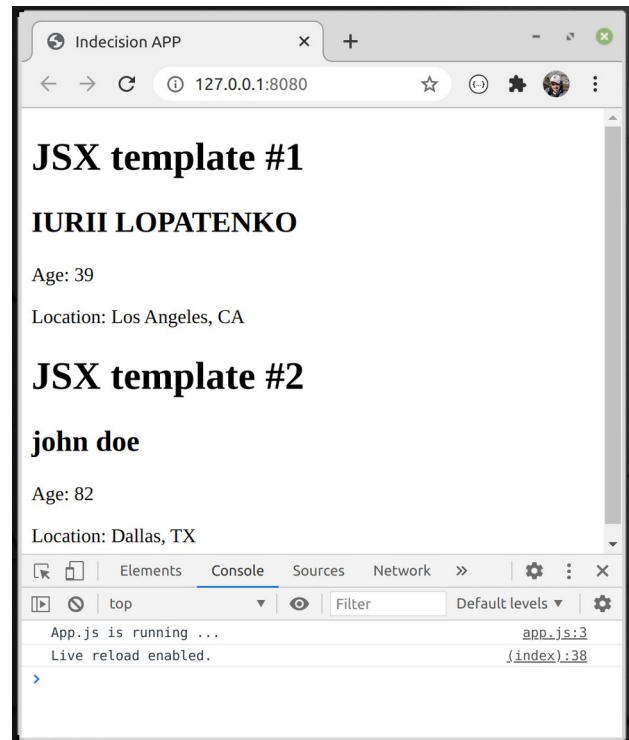

3.5 Conditional Rendering in JSX – 012

```
JS app.js x
ind-app > src > JS app.js > ...
1 //JSX - JavaScript XML
2 //012 - THEORY
3 let user = {
4   name: 'Iurii Lopatenko',
5   age: 34,
6   location: 'Los Angeles, CA, USA',
7 };
8
9 //Ternary operator
10 const getLocation = user.location ? (
11   <p>Location: {user.location}</p>
12 ) : undefined;
13
14 //IF
15 const checkUserName = (nameToCheck) => {
16   if (nameToCheck) {
17     return nameToCheck;
18   } else {
19     return 'ANONYMOUS';
20   }
21 };
22
23 const templateTheory = (
24   <div>
25     <h1>JSX template</h1>
26     <h2>{checkUserName(user.name)}</h2>
27     { /*Logical compare*/ }
28     {user.age && user.age >= 18 && <p>Age: {user.age}</p>}
29     {getLocation}
30   </div>
31 );
32
```

```
JS app.js x
ind-app > src > JS app.js > ...
33 //012 PRACTICE
34 const app = {
35   title: 'Indecision App',
36   subtitle: 'There is something subtitle for an APP ...',
37   options: ['One', 'Two', 'Three'],
38 };
39
40 let templatePractice = (
41   <div>
42     <h1>{app.title}</h1>
43     {app.subtitle && <p>{app.subtitle}</p>}
44     {app.options.length > 0 ? 'Here are your options:' : 'No any options'}
45     {app.options.map((element, index) => (
46       <p key={index}>
47         Option #{index + 1} is: {element}
48       </p>
49     ))}
50   </div>
51 );
52 let appRoot = document.getElementById('app');
53 ReactDOM.render(templatePractice, appRoot);
54
```

