



	LocalStack
0.0 _request_ctx_stack = LocalStack() 0.3 request = LocalProxy(函数)	0.1init
3.4 def _lookup_req_object(name): # name = request # requestContext对象(ctx) top = _request_ctx_stack.top	2.2 push(requestContext)
if top is None:     raise RuntimeError(_request_ctx_err_msg)  # 去 requestContext对象(ctx) 中获取 request 的值。 return getattr(top, name)	3.5 top
	9.3 pop
	I

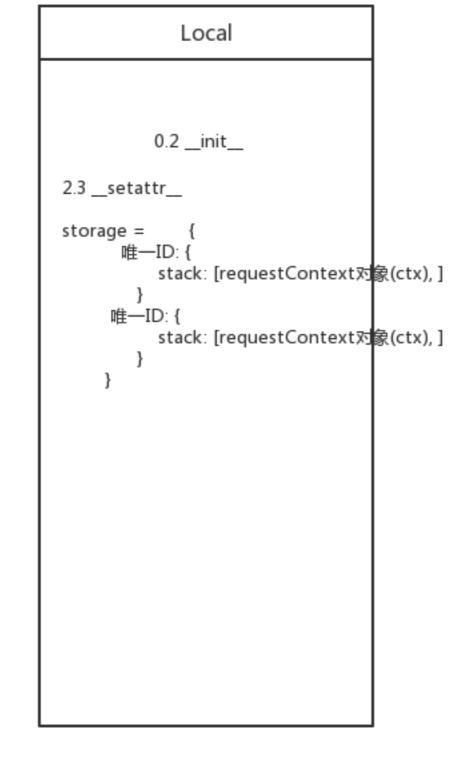

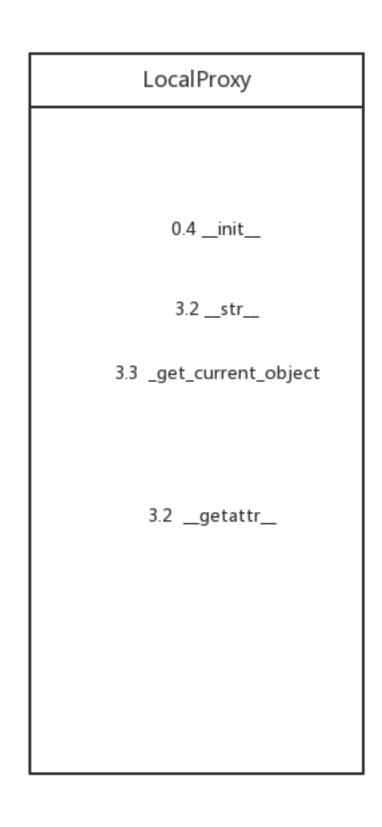

Flask	
call	
1. ctx = self.request_context(environ) 2. ctx.push()	
3. 找到视图函数并执行	
9. ctx.auto_pop	

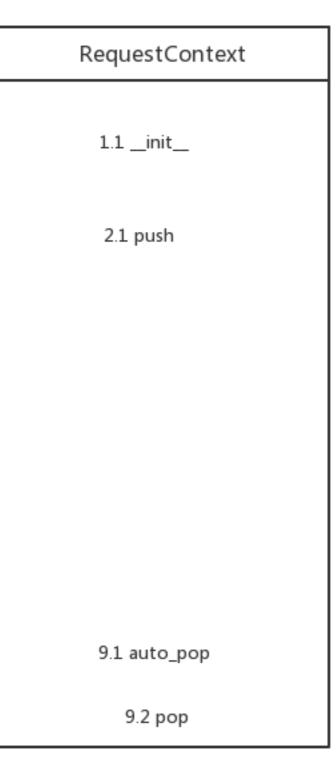

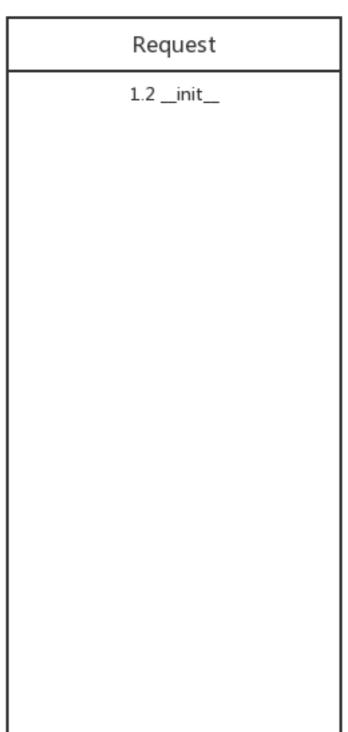

视图函数

3.1 def hello():
 request.method
 return "Hello World"