


User guide - Project Skypattern

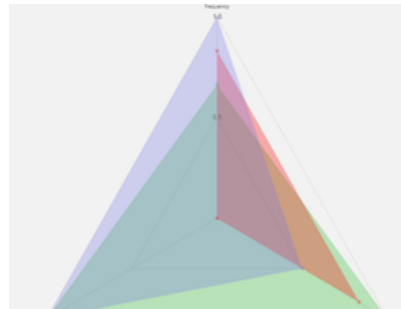

Installation	2
Requirements	2
Run project locally	2
Run with source code	2
Run as desktop application	2
Install the compiled app	2
Compile the Electron app	3
Project files	4
Source code	4
Webapp	4
Api	4
Compiled app	4
Display a result	5
Access to the page with the analysis list	5
List the analysis	6
Visualize an analysis	7
Create a new analysis	10
Access to the creation page	10
Selection of the parameters	11
Dataset parameters	11
Pattern parameters	12
Validation	15

Installation

Requirements

- Java v12 or greater
- NodeJS v14 or greater (for build or server deployment, included in the .exe)

Run project locally

Use this part to install the dependencies and the project on a server to use it.

```
npm install # Fetch dependencies
```

Run with source code

Webapp (from the project root)

```
npm run serve # Compiles and hot-reloads for development
```

or

```
npm run build # Compiles and hot-reloads for development
```

Api (from project root/src/api)

```
node index.js
```

Run as desktop application

Install the compiled Electron app as and .exe or compile it yourself

Install the compiled app

Browse at <https://sourceforge.net/projects/skypatterns/>

Compile the Electron app

```
npm install # Fetch dependencies
```

then

```
npm run electron:serve # Compiles electron app for development
```

or

```
npm run electron:build # Compiles electron app for production
```

Project files

Source code

Webapp

```

.
├── dist_electron      # Electron build
├── node_modules       # Installed dependencies
├── public             # Global ressources
├── src
│   ├── api            # See [Api] below
│   ├── assets         # Project ressources
│   ├── plugins
│   ├── components    # |
│   ├── router         # |
│   ├── services       # | Webapp code
│   ├── store          # |
│   └── views          # |

```

Api

```

api
├── data
│   └── status.json    # Projects infos
├── config
│   ├── noclasses.json # Datasets noclass
│   └── colors.json     # Colors for the graphs display
├── datasets           # Input datasets
├── results            # Outputs from skypattern.jar
├── routes             # Api code
├── index.js           # Entry point (run with: node index.js)
└── skypattern.jar     # Data mining program

```

Compiled app

```

.
├── locales
├── ressources
│   └── api            # See [Api] above
└── skypattern.exe    # App launcher

```

If you downloaded the compiled app with an installer, you can access this folder in:

- Windows: *C:\Users\Username\AppData\Local\Programs\skypatterns*
- Mac: TODO
- Linux: TODO


Display a result

Access to the page with the analysis list

The page with the analysis list is the main page of the application. You can go there by clicking on the main title:



... or by the menu with the link "Analysis list".

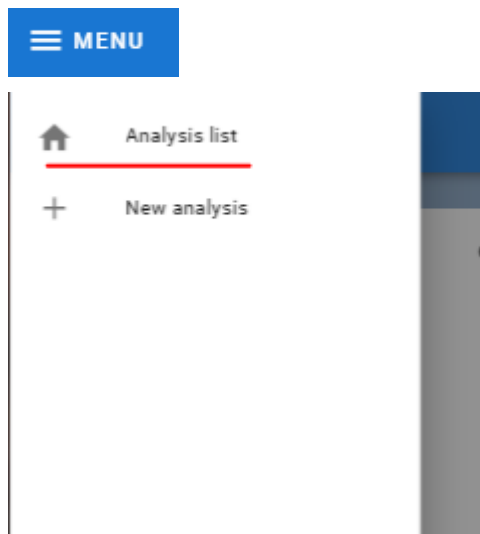

List the analysis

The main page contains the analysis list and some parameters for sorting. You can slide with the two panels to adapt the size.

Filters	Name	Status	Date	Visualize	Remove
<input type="text" value="Name filter"/> <input type="button" value="Status filter"/>	chess_closedsky[lfa]_tl86400000_ptclosedsky_strmincov	COMPLETE	2021-6-16	OPEN	REMOVE
	aij_cpsky[fj]_tl86400000_ptsky	COMPLETE	2021-6-16	OPEN	REMOVE
	aij_cpsky[fag]_tl86400000_ptsky	COMPLETE	2021-6-16	OPEN	REMOVE
	hepatitis_cpsky[fag]_tl86400000_ptsky_strmincov	COMPLETE	2021-6-16	OPEN	REMOVE
	chess_closedsky[fag]_tl86400000_ptclosedsky_strmincov	COMPLETE	2021-6-16	OPEN	REMOVE
	BMS1_closedsky[lfa]_tl86400000_ptclosedsky_strmincov_fmin5960	COMPLETE	2021-6-16	OPEN	REMOVE
	aij_cpsky[lfam]_tl86400000_ptsky_strmincov	COMPLETE	2021-6-16	OPEN	REMOVE
	chess_closedsky[fag]_dat_tl86400_ptclosedsky_strmincov	COMPLETE	2021-6-17	OPEN	REMOVE
	chess_closedsky[fag]_tl86400_ptclosedsky	COMPLETE	2021-6-17	OPEN	REMOVE
	chess_closedsky[fag]_dat_tl86400_ptclosed	STOPPED	2021-6-17	OPEN	REMOVE
	chess_closedsky[fag]_dat_tl86400_ptclosedsky	COMPLETE	2021-6-17	OPEN	REMOVE
	aij_closedsky[fj]_dat_tl86400_ptclosed	COMPLETE	2021-6-19	OPEN	REMOVE
+ NEW ANALYSIS					

For the list, each line contains :

- the name of the calcul with the parameters
- the status of the calcul ("COMPLETE" if it is complete, "STOPPED" if the calcul run out because of the limit time, "ONGOING" if the process is still working)
- the date of the analysis
- a column with the possibility of removing the analysis of the list and of the stockage
- for the analysis completed, a button for access to the display

You can use two filters with that :

- one on the name of the analysis
- one with the selection of one or more status

Filters


ONGOING

COMPLETE


STOPPED

Visualize an analysis

For the analysis completed, you can click on the button “OPEN” to access the Visualization page.



On this page there are also two panels, one for the list of patterns for one analysis and the other for the display.

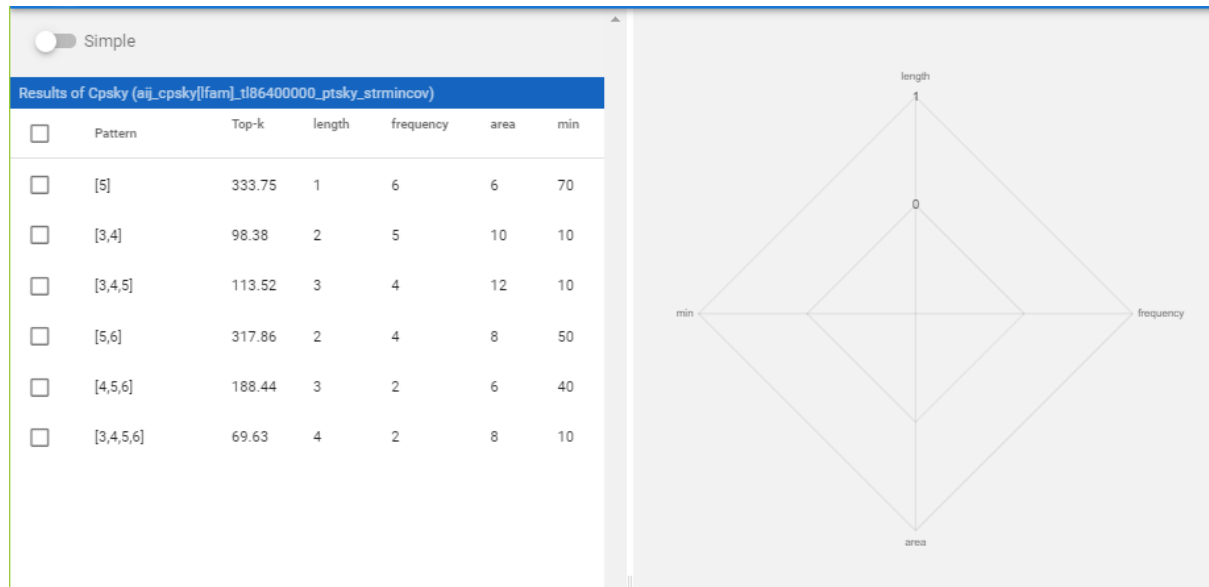

For the panel with the patterns list; each line is composed of :

- a square to indicate if it is selected or not (you can select by clicking on the line)
- the name of the pattern or the group of pattern
- the top-k, which is the area calculated (with absolute value)

... and also each selected metric for the analysis:


- length
- frequency
- area
- growth-rate


<input checked="" type="checkbox"/> Pattern	Top-k ↑
<input checked="" type="checkbox"/> [3,4,5,6]	69.63
<input checked="" type="checkbox"/> [3,4]	98.38
<input checked="" type="checkbox"/> [3,4,5]	113.52
<input checked="" type="checkbox"/> [4,5,6]	188.44
<input checked="" type="checkbox"/> [5,6]	317.86
<input checked="" type="checkbox"/> [5]	333.75

You can select all the lines with the square icon on the top.


You can use some of the parameters to sort on the value, by using the different column titles. You also can change the number of lines displayed with the selector on the bottom.

When you select one pattern by clicking on the line, it is displayed at the right on a radar chart. You can select one or more patterns to be displayed, and they will be superimposed on the chart.

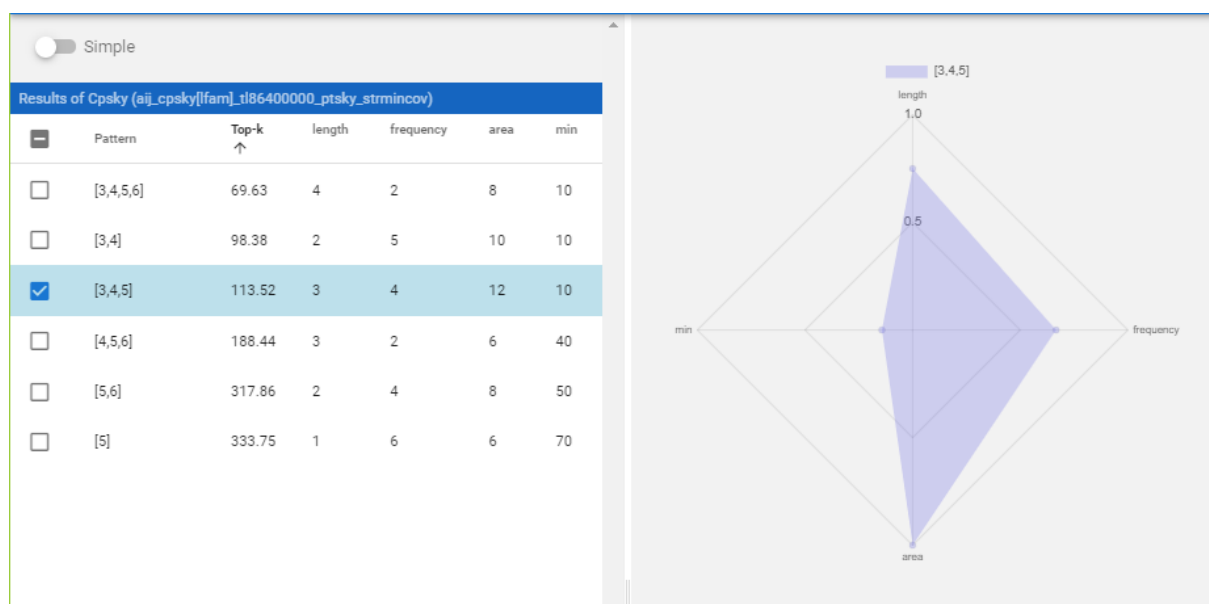

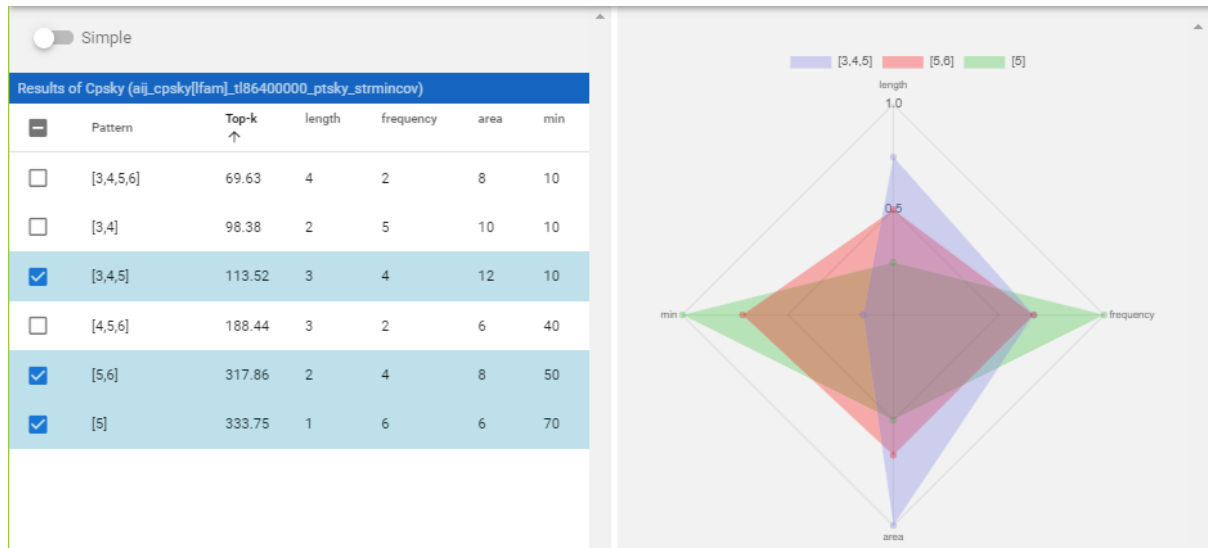

You can split the selection with one chart by pattern, by using the slider and passing from “Simple” to “Multiple”.

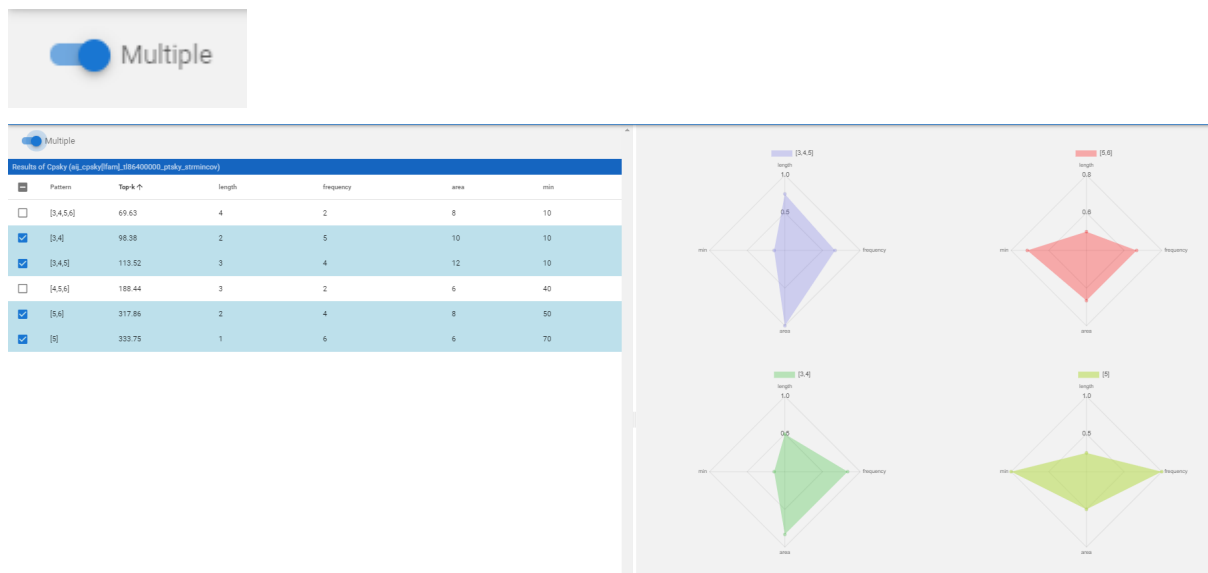


Create a new analysis

You can create a new analysis by choosing some parameters before launching a calcul and saving the results.


Access to the creation page

There are two access points to the creation page.

You can pass by the main menu by clicking on “New analysis”.

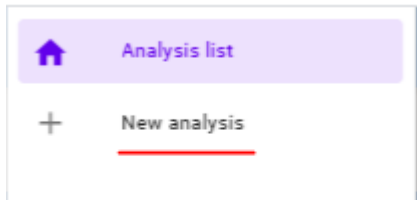

Or you can pass by the main page with an analysis list, and click on the button “New analysis” at the bottom of the page.

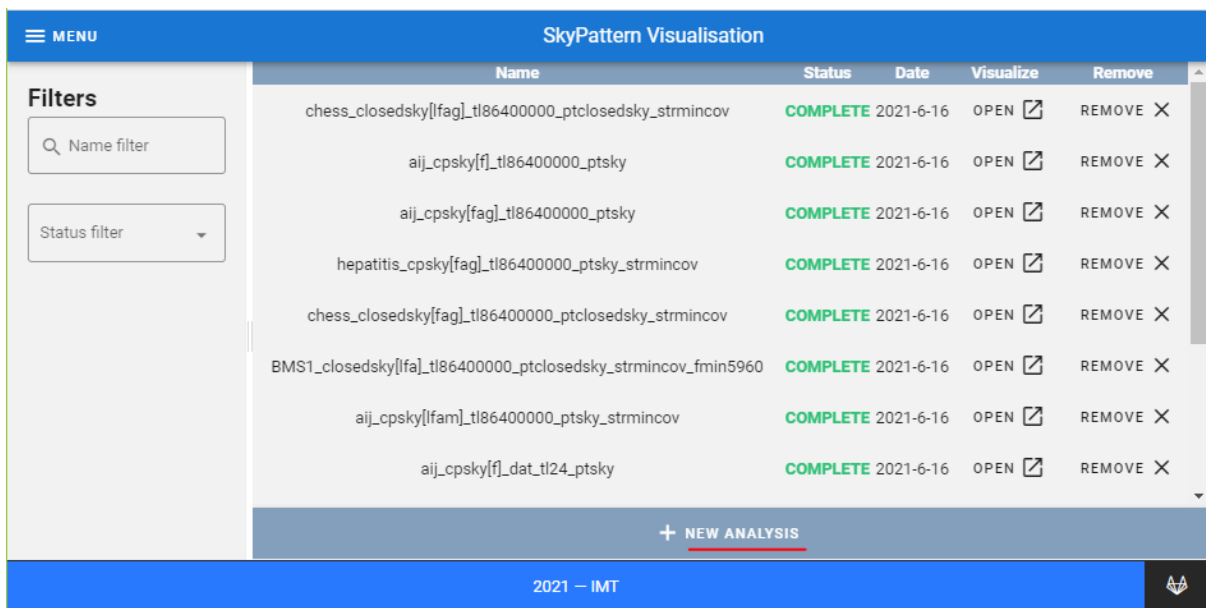
 A screenshot of the 'SkyPattern Visualisation' web application. The interface has a blue header with a 'MENU' icon and the title 'SkyPattern Visualisation'. On the left, there is a 'Filters' sidebar with a 'Name filter' search box and a 'Status filter' dropdown. The main area contains a table with the following columns: 'Name', 'Status', 'Date', 'Visualize', and 'Remove'. The table lists several analyses, all with a status of 'COMPLETE' and a date of '2021-6-16'. At the bottom of the table, there is a button labeled '+ NEW ANALYSIS'. The footer of the page shows '2021 — IMT' and a small icon.

Name	Status	Date	Visualize	Remove
chess_closedsky[lfag]_tl86400000_ptclosedsky_strmincov	COMPLETE	2021-6-16	OPEN	REMOVE
aij_cpsky[f]_tl86400000_ptsky	COMPLETE	2021-6-16	OPEN	REMOVE
aij_cpsky[fag]_tl86400000_ptsky	COMPLETE	2021-6-16	OPEN	REMOVE
hepatitis_cpsky[fag]_tl86400000_ptsky_strmincov	COMPLETE	2021-6-16	OPEN	REMOVE
chess_closedsky[fag]_tl86400000_ptclosedsky_strmincov	COMPLETE	2021-6-16	OPEN	REMOVE
BMS1_closedsky[lfa]_tl86400000_ptclosedsky_strmincov_fmin5960	COMPLETE	2021-6-16	OPEN	REMOVE
aij_cpsky[lfam]_tl86400000_ptsky_strmincov	COMPLETE	2021-6-16	OPEN	REMOVE
aij_cpsky[f]_dat_tl24_ptsky	COMPLETE	2021-6-16	OPEN	REMOVE

Selection of the parameters

The page is composed of different blocks of parameters to select to create the analysis. Some of them are locked, because they are always needed or they are incompatible with other previous parameters.

DataSet Search path (-d)	
Choose dataset format (--dat) <input checked="" type="radio"/> Binary <input type="radio"/> Transactional <input type="checkbox"/> No classes (-nc)	
Parameters	
Method <input checked="" type="radio"/> greedy <input type="radio"/> hillclimb	
Type of patterns (-pt) <input type="radio"/> Closed subpatterns <input checked="" type="radio"/> Subpatterns <input type="radio"/> Closed patterns	
Pattern measures (-m) <input checked="" type="checkbox"/> Frequency (f) <input type="checkbox"/> Length (l) <input type="checkbox"/> Area (a) <input type="checkbox"/> Smoothness (s)	
Absolute measures (-x) <input type="checkbox"/> Min (m) <input type="checkbox"/> Max (M) <input type="checkbox"/> Mean (x) <input type="checkbox"/> Sum (s)	
Constraints (-cst) Minimum frequency (m-f)	
Minimum length	
Type of bitset (-bst) <input type="checkbox"/> Sparse bitset <input type="checkbox"/> Dense bitset <input type="checkbox"/> None	
Strategy to branch on item (-str) Strategy branch	
Other filters <input checked="" type="checkbox"/> Search tree (-tree) <input checked="" type="checkbox"/> Statistics about the search (-s)	

Dataset parameters

Dataset's path (-d)

List of the dataset availables for the analysis.

DataSet Dataset's path (-d)
<div> <div> <div>aij</div> <div>BMS1</div> <div>chess</div> <div>connect</div> <div>cp16-class</div> <div>cp16</div> </div> </div>

Dataset format (--dat)

By default, the dataset is in binary format.

Choose dataSet format (--dat)

- ☒ Binary
☐ Transactionnal

No classes (--nc)

If classes of transactions should not be taken into account, you can specify the option.

- ☐ No classes (--nc)

Pattern parameters

Method

Choose *cpsky* to use CP+SKY or *closedsky* to use ClosedSky global constraint

If you choose *closedsky*, you can modify the *--bst* but you can't select Skypattern for *--pt*.

Parameters

Method

- ☒ cpsky
☐ closedsky

Type of patterns (--pt)

You can choose 3 types of patterns :

- closed skypatterns : ****closedsky**** (default)
- skypatterns : ****sky**** (not available with closedsky subcommand)
- closed patterns : ****closed****

Option skypatterns is blocked if you use the closedsky method.

Type of patterns (--pt)

- ☐ Closed skypatterns
☒ Skypatterns
☐ Closed patterns

If you use closedpattern, you can't choose pattern measure (-m) other than frequency and only Min and Max are available for the attribute measures (-v).

Method

☐ cpsky

☒ closedsky

Type of patterns (--pt)

☐ Closed skypatterns

☐ Skypatterns

☒ Closed patterns

Pattern measures (-m)

Frequency is forced to be selected. Otherwise, you can add the area, the length and the growth-rate as attributes.

If you choose length, you can change the value in the parameter --bst. If you choose area or growth-rate, attribute value will be calculated with the frequency.

Pattern measures (-m)

☒ Frequency (f)
 ☐ Length (l)
 ☐ Area (a)
 ☐ Growth-rate (g)

Attribute measures (-v)

The following ones are available : m (min), M (max), n (mean), u (sum).

Attribute measures (-v)

☐ Min (m)
 ☐ Max (M)
 ☐ Mean (n)
 ☐ Sum (u)

If a closed pattern is selected as --pt, you can't select n or u. If you select Mean or Sum, and next you change the --pt to Closed pattern, the two options are unselected.

Constraints (--cst)

You can specify a constraint for the minimum frequency (in percentage) or the minimum length (in absolute value). If you don't choose a value, it is set at 1 by default.

Constraints (--cst)

Minimum frequency (in %)

15

Minimum lenght

For the length, you can modify the value if you Length is selected in pattern measures (-m). If you use a Closed skypattern as --pt, you can't use this attribute.

Type of bitset (--bst)

If you use a closedsky command, you can choose a type of bitset or not. 2 options are available, a sparse or a classic bitset; if you don't want to use this option, you can choose None as a value. If you change the command to cpsky, the value is changed at None.

Type of bitset (--bst)

- ☐ Sparse bitset
- ☐ Classic bitset
- ☒ None

Strategy to branch on item (--str)

You can choose a strategy in the list :

- occ : it chooses the not instantiated variable with the greatest number of not-entailed propagators (default for CP+SKY)
- (min|max)freq : it chooses the not instanciaded variable with the lowest (resp. greatest) frequency (minfreq is the default for ClosedSky)
- (min|max)val : it chooses the not instantiated variable with the lowest (resp. greatest) val0
- (min|max)norm : it normalises item frequency and values between 0 and 1, computes average between them and chooses the not instantiated variable with the lowest (resp. greatest) average value
- inport : it chooses variable with respect to their order

Time limit (--tl)

You can specify a time limit between 0 and 24h. If you write a wrong value, this will be corrected directly.

If the operation is not achieved when the time is down, the analysis will be stopped and displayed with the state "UNCOMPLETED"

Other filters

☒ Search tree (--trace)

☒ Statistics about the search (-s)

☒ JSON search (--json)

☒ Print the skypattern (-p --fp)

Time limit of searching (--tl) in hours [0 to 24h]

24

Validation

You can complete the creation with the button at the bottom of the page.

You will be redirected to the main page and the new analysis is added to the list, with the state "ONGOING" or "COMPLETE" if it is quick.

+ NEW ANALYSIS

aij_cpsky[fmM]_tl86400_ptsky_strminfreq

ONGOING

2021-
6-20



REMOVE X