



Overview of Web Applications with Flask

Quick guide on how to install Flask

- ▶ Make sure you have python and MySQL installed
- ▶ Go to the terminal or command prompt (for windows, make sure python is added to your path environment variables) and run:
 - ▶ `pip install flask`
 - ▶ `pip install pymysql` (used to connect to database)
- ▶ If you don't have pip you can get it in the following link:
 - ▶ <https://pypi.python.org/pypi/pip>
 - ▶ Run: `python get-pip.py`
- ▶ More information:
 - ▶ <http://flask.pocoo.org/>


Flask

- ▶ Flask is a micro-framework for python
- ▶ Easy to code
- ▶ Flexible
- ▶ Good documentation
- ▶ RESTful

Design

1. Routing: letting http request trigger corresponding functions

2. CRUD Operations to the data store

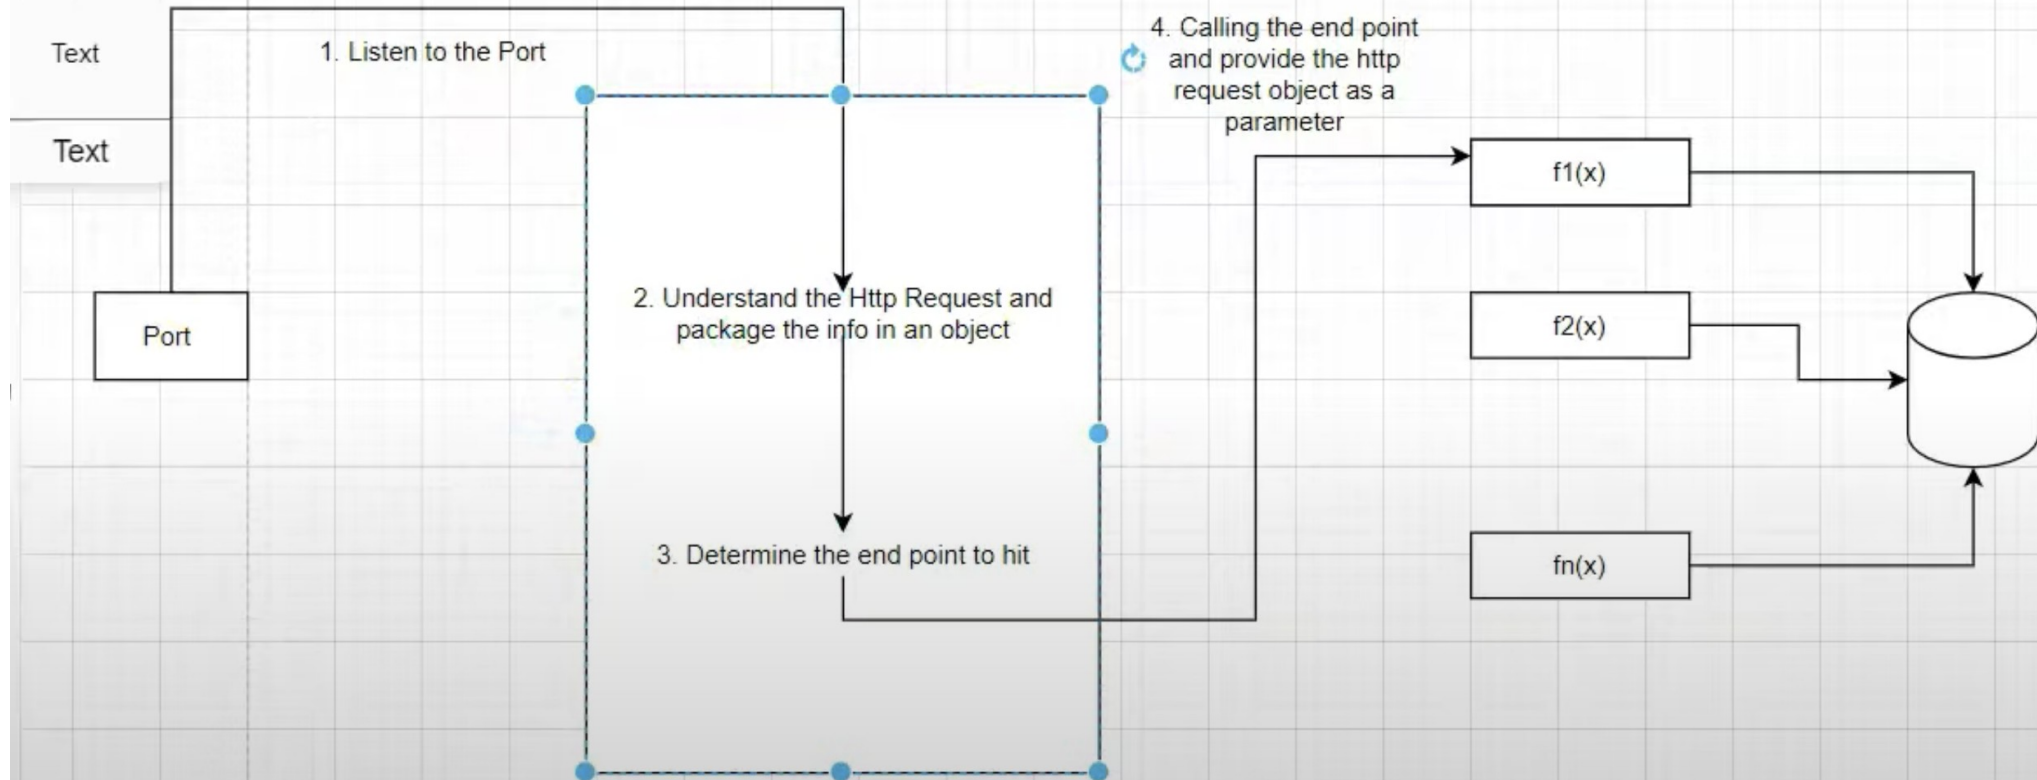

Basic Flask App

```
1  #Import Flask Library
2  from flask import Flask
3  import pymysql.cursor
4
5  #Initialize the app from Flask
6  app = Flask(__name__)
7
8  #Define a route to hello function
9  @app.route('/')
10 def hello():
11     return 'Hello World'
12
13 #Run the app on localhost port 5000
14 #debug = True -> you don't have to restart flask
15 #for changes to go through, TURN OFF FOR PRODUCTION
16 if __name__ == "__main__":
17     app.run('127.0.0.1', 5000, debug = True)
```

@app.route('/') is saying that if the user goes to the root level of your application (e.g 127.0.0.1:5000/) the hello function will be called

If you go to localhost:5000
You should see Hello World being printed out

Creating flask code to serve the files

```
20 #Define route for login
21 @app.route('/login')
22 def login():
23     return render_template('login.html')
24
25 #Define route for register
26 @app.route('/register')
27 def register():
28     return render_template('register.html')
29
```

Configuring to connect to MySQL

```
6 app = Flask(__name__)
7
8 #Configure MySQL
9 ▼ conn = pymysql.connect(host='localhost',
10                          user='root',
11                          password='root',
12                          db='meetup',
13                          charset='utf8mb4',
14                          cursorclass=pymysql.cursors.DictCursor)
```

This sets the configuration to connect to your MySQL database

```
2 from flask import Flask, render_template, request, session, url_for, redirect
```

Import session, requests, url_for, and redirect for the next part

```
120 app.secret_key = 'some key that you will never guess'
121 #Run the app on localhost port 5000
122 #debug = True -> you don't have to restart flask
123 #for changes to go through, TURN OFF FOR PRODUCTION
124 if __name__ == "__main__":
125     app.run('127.0.0.1', 5000, debug = True)
126
```

In order to use session, you must create a secret key

Authenticating the login

```
31 #Authenticates the login
32 @app.route('/loginAuth', methods=['GET', 'POST'])
33 def loginAuth():
34     #grabs information from the forms
35     username = request.form['username']
36     password = request.form['password']
37
38     #cursor used to send queries
39     cursor = conn.cursor()
40     #executes query
41     query = 'SELECT * FROM user WHERE username = %s and password = %s'
42     cursor.execute(query, (username, password))
43
44     #stores the results in a variable
45     #use fetchall() if you are expecting more than 1 data row
46     data = cursor.fetchone()
47
48     #close the cursor once complete
49     cursor.close()
50     if(data):
51         #creates a session for the the user
52         #session is a built in
53         session['username'] = username
54         #use redirect and url_for to redirect to path without rendering html
55         return redirect(url_for('home'))
56     else:
57         #returns an error message to the html page
58         error = 'Invalid login or username'
59         return render_template('login.html', error=error)
```

Need to add this for GET
and POST requests to work

We can send a query to the database by
calling the execute method of cursor.

- Cursor is just an object that is used to interface with the database.
- If the query is successful, call fetchone() to get a single data row
- or fetchall() to get multiple rows.

If the login is successful, it will redirect to the
home page

Flask HTTP Methods

- ▶ GET: a GET message is send and the server returns data
 - ▶ By default, the Flask route responds to GET requests.
- ▶ POST: used to send HTML form data to the server

```
#Define route for register
@app.route('/register')
def register():
    return render_template('register.html')

#Authenticates the login
@app.route('/loginAuth', methods=['GET', 'POST'])
def loginAuth():
    #grabs information from the forms
    username = request.form['username']
    password = request.form['password']

    #cursor used to send queries
    cursor = conn.cursor()
    #executes query
    query = 'SELECT * FROM user WHERE username = %s and password = %s'
    cursor.execute(query, (username, password))
    #stores the results in a variable
    data = cursor.fetchone()
    #use fetchall() if you are expecting more than 1 data row
    cursor.close()
    error = None
    if(data):
        #creates a session for the the user
        #session is a built in
        session['username'] = username
        return redirect(url_for('home'))
    else:
        #returns an error message to the html page
        error = 'Invalid login or username'
        return render_template('login.html', error=error)
```

Creating a simple login/register form

```
5 ▼ <form action="/loginAuth" method="POST">
6     <input type="text" name = "username" placeholder="username" required/> </br>
7     <input type="password" name = "password" placeholder="password" required/></br>
8     <input type="submit" value = Login />
9 </form>
```

This would be in a login.html file, this makes a POST request to /loginAuth, we'll talk more about /loginAuth later

```
5 <form action="/registerAuth" method="POST">
6     <input type="text" name = "username" placeholder="username"/> </br>
7     <input type="password" name = "password" placeholder="password"/></br>
8     <input type="submit" value = Register />
9 </form>
```

This would be in a register.html file, this makes a POST request to /registerAuth, we'll talk more about /registerAuth later

Rendering html files

```
1  #Import Flask Library
2  from flask import Flask, render_template
3  import pymysql.cursor
4
5  #Initialize the app from Flask
6  app = Flask(__name__)
7
8  #Define a route to hello function
9  @app.route('/')
10 def hello():
11     return render_template('index.html')
12
13 #Run the app on localhost port 5000
14 #debug = True -> you don't have to restart flask
15 #for changes to go through, TURN OFF FOR PRODUCTION
16 ▼ if __name__ == "__main__":
17     app.run('127.0.0.1', 5000, debug = True)
```

If you want to send back hml files, import `render_template` and use it to send back html files.

***The html files should be in a directory called templates

 templates

 init.py

Updating the login form

```
5 <form action="/loginAuth" method="POST">
6   <input type="text" name = "username" placeholder="username" required/> </br>
7   <input type="password" name = "password" placeholder="password" required/></br>
8   <input type="submit" value = Login />
9   {% if error %}
10    <p class="error"><strong>Error:</strong> {{error}}</p>
11  {% endif %}
12 </form>
```

In the previous slide, we passed in an extra argument to `render_template`: `error = error`. Error corresponds to the error that was passed in by the `render_template` call. Flask uses jinja templating and we can pass variables from flask to the html page using this. If there was an error message, we passed it in and the message is displayed. `{{}}` denotes a variable.

Authenticating register

```
61 #Authenticates the register
62 @app.route('/registerAuth', methods=['GET', 'POST'])
63 ▼ def registerAuth():
64     #grabs information from the forms
65     username = request.form['username']
66     password = request.form['password']
67
68     #cursor used to send queries
69     cursor = conn.cursor()
70     #executes query
71     query = 'SELECT * FROM user WHERE username = %s'
72     cursor.execute(query, (username))
73
74     #stores the results in a variable
75     #use fetchall() if you are expecting more than 1 data row
76     data = cursor.fetchone()
77
78 ▼ if(data):
79     #If the previous query returns data, then user exists
80     error = "This user already exists"
81     cursor.close()
82     return render_template('register.html', error = error)
83 ▼ else:
84     ins = 'INSERT INTO user VALUES(%s, %s)'
85     cursor.execute(ins, (username, password))
86     #commit changes for insert to go through
87     conn.commit()
88     cursor.close()
89     return render_template('index.html')
```

NOTE: You don't want to store your passwords in your database as plain text, you probably want to hash it

Notice in line 87, we have to commit if the query modifies the database

Updating register form

```
5  <form action="/registerAuth" method="POST">
6      <input type="text" name = "username" placeholder="username"/> </br>
7      <input type="password" name = "password" placeholder="password"/></br>
8      <input type="submit" value = Register />
9      {% if error %}
10         <p class="error"><strong>Error:</strong> {{error}}</p>
11     {% endif %}
12 </form>
```

The home page

```
5 <h1>Welcome {{username}}</h1>
6 ▼ <form action="/post" method="POST">
7     <input type="text" name = "blog" placeholder="post" required/> </br>
8     <input type="submit" value = Post />
9 </form>
```

In our home page, we want to display a welcome message to the user and allow the user to post something.

Posting

```
96  @app.route('/post', methods=['GET', 'POST'])
97  def post():
98      username = session['username']
99      cursor = conn.cursor();
100     blog = request.form['blog']
101     query = 'INSERT INTO blog (blog_post, username) VALUES(%s, %s)'
102     cursor.execute(query, (blog, username))
103     conn.commit()
104     cursor.close()
105     return redirect(url_for('home'))
```

Notice in the insert that we only insert into blog_post, and username. We don't want to insert into the timestamp because MySQL automatically updates it for us.

Home page

```
85 @app.route('/home')
86 def home():
87     username = session['username']
88     cursor = conn.cursor();
89     query = 'SELECT ts, blog_post FROM blog WHERE username = %s ORDER BY ts DESC'
90     cursor.execute(query, (username))
91     data = cursor.fetchall()
92     cursor.close()
93     return render_template('home.html', username=username, posts=data)
```

We want to allow the user to be able to post and see their posts on the front page. We call fetchall() and pass it into the home.html page.

```
5 <form action="/post" method="POST">
6     <h1>Welcome {{username}}</h1>
7     <input type="text" name = "blog" placeholder="post" required/> </br>
8     <input type="submit" value = Post />
9 </form>
10
11 <style type="text/css">
12     table, th, td{
13         border: 1px solid black;
14     }
15 </style>
16
17 <table>
18     <th>Time</th>
19     <th>Post</th>
20
21 {% for line in posts %}
22     <tr>
23         <td>{{line.ts}}</td>
24         <td>{{line.blog_post}}</td>
25     </tr>
26 {% endfor %}
27 </table>
28
29 <a href="/logout">Logout</a>
```

Update the home.html page and use jinja's for loop to iterate through the data given and display it

Logout

```
@app.route('/logout')
def logout():
    session.pop('username')
    return redirect('/')

```

To log out of the application, simply pop 'username' from the session store. Note that if the user presses the back button on the browser or manually types in a path that requires the user to be logged in, bad things will happen. In all the routes add a check to see if 'username' is in session before doing any other operations.