
UML TXT2MIDI — Diagrama de Classes

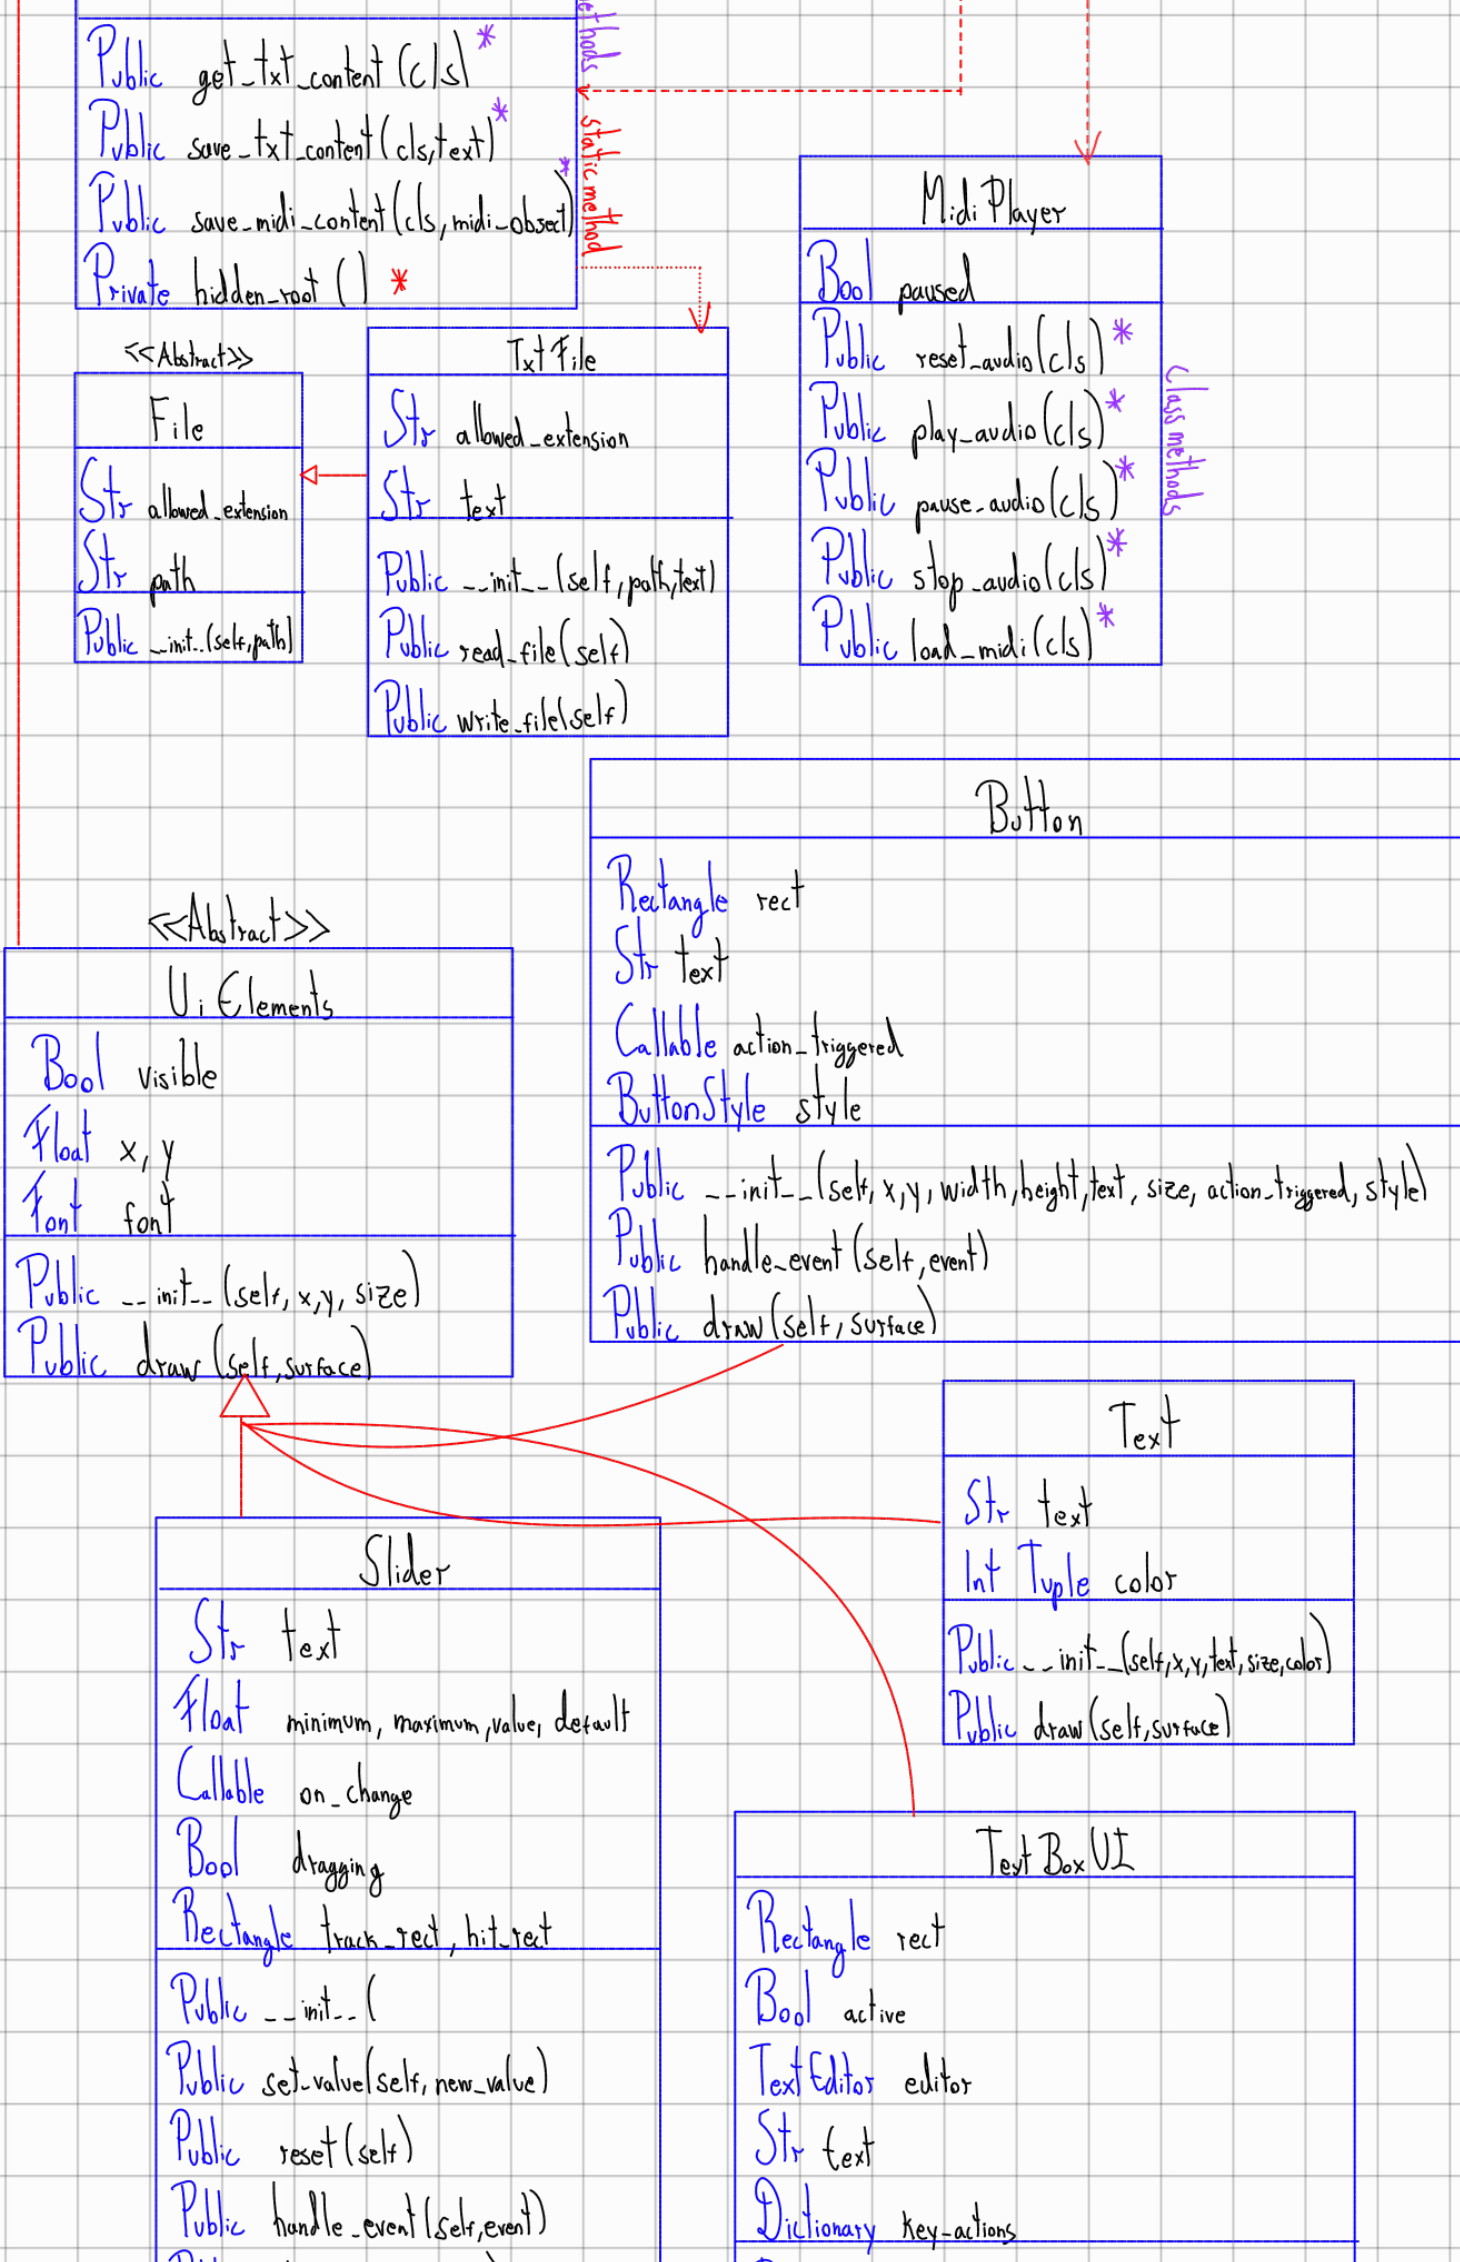


Public get_txt_content(cls) *
Public save_txt_content(cls,text) *
Public save_midi_content(cls, midi_object) *
Private hidden_root() *
Methods
Static method
<<Abstract>>
File
Str allowed_extension
Str path
Public __init__(self,path)
TxtFile
Str allowed_extension
Str text
Public __init__(self,path,text)
Public read_file(self)
Public write_file(self)
MidiPlayer
Bool paused
Public reset_audio(cls) *
Public play_audio(cls) *
Public pause_audio(cls) *
Public stop_audio(cls) *
Public load_midi(cls) *
Class methods
Button
Rectangle rect
Str text
Callable action_triggered
ButtonStyle style
Public __init__(self, x, y, width, height, text, size, action_triggered, style)
Public handle_event(self, event)
Public draw(self, surface)
<<Abstract>>
UiElements
Bool visible
Float x, y
Font font
Public __init__(self, x, y, size)
Public draw(self, surface)
Text
Str text
Int Tuple color
Public __init__(self, x, y, text, size, color)
Public draw(self, surface)
Slider
Str text
Float minimum, maximum, value, default
Callable on_change
Bool dragging
Rectangle track_rect, hit_rect
Public __init__(
Public set_value(self, new_value)
Public reset(self)
Public handle_event(self, event)
TextBoxUI
Rectangle rect
Bool active
TextEditor editor
Str text
Dictionary key_actions

Public draw(self, surface)

GradientBackground
Int Tuple top_color Int Tuple bottom_color Float fade_ratio
Public __init__(self, top_color, bottom_color, fade_ratio) Public draw(self, surface) Private build(self, size)

Public __init__(self, x, y, width, height, size)
Public set_text(self, imported_text)
Public handle_event(self, event)
Public draw(self, surface)
Private draw_background(self, surface)
Private draw_text(self, surface)
Private draw_cursor(self, surface)