
OGC SensorThings API Rest API

Dr. Hylke van der Schaaf
Reinhard Herzog



Fraunhofer
IOSB

Do It Yourself

■ Docker Quick-Start:

- Go to <https://github.com/FraunhoferIOSB/FROST-Server>
- → Wiki
- → Docker-Quick-Start

■ Demo service:

<http://akme-a3.iosb.fraunhofer.de/FROST-Server/v1.0>
(As long as nobody deletes everything)
(Or the server catches fire)

■ Alternative guide:

<https://github.com/phertweck/iscram-hands-on>

Getting to your data

■ Base URL: <http://server.de/FROST-Server/v1.0>

■ Read: GET

- V1.0 → Get collection index
- v1.0/Collection → Get all entities in a collection
- v1.0/Collection(id) → Get one entity from a collection

■ Create: POST

- v1.0/Collection → Create a new entity

■ Update: PATCH

- v1.0/Collection(id) → Update an entity

■ Update: PUT

- v1.0/Collection(id) → Replace an entity

■ Delete: DELETE

- v1.0/Collection(id) → Remove an entity

Query URL patterns: Index

■ GET <http://192.168.11.2/FROST-Server/v1.0>

■ Response:

```
{
  "value" : [
    {
      "name" : "Datastreams",
      "url" : "http://server.de/SensorThingsService/v1.0/Datastreams"
    },
    {
      "name" : "FeaturesOfInterest",
      "url" : "http://server.de/SensorThingsService/v1.0/FeaturesOfInterest"
    },
    {
      ...
    },
    {
      "name" : "Things",
      "url" : "http://server.de/SensorThingsService/v1.0/Things"
    }
  ]
}
```

Query URL patterns: Get Collection

Get All Things

■ GET <http://192.168.11.2/FROST-Server/v1.0/Things>

■ Response:

```
{
  "value" : [
    {
      "name" : "My camping lantern",
      "description" : "camping lantern",
      "properties" : {
        "property1" : "it's waterproof",
        "property2" : "it glows in the dark"
      },
      "Locations@iot.navigationLink" : "Things(1)/Locations",
      "HistoricalLocations@iot.navigationLink": "Things(1)/HistoricalLocations",
      "Datastreams@iot.navigationLink" : "Things(1)/Datastreams",
      "@iot.id" : 1,
      "@iot.selfLink" : "/SensorThingsService/v1.0/Things(1)"
    },
    {
      a second thing...
    }, { ... }, { ... }, { ... }
  ]
}
```

Query URL patterns: Get Entity

Get Specific Thing

■ GET [http://192.168.11.2/FROST-Server/v1.0/Things\(1\)](http://192.168.11.2/FROST-Server/v1.0/Things(1))

■ Response:

```
{
  "name" : "My camping lantern",
  "description" : "camping lantern",
  "properties" : {
    "property1" : "it's waterproof",
    "property2" : "it glows in the dark"
  },
  "Locations@iot.navigationLink" : "Things(1)/Locations",
  "HistoricalLocations@iot.navigationLink" : "Things(1)/HistoricalLocations",
  "Datastreams@iot.navigationLink" : "Things(1)/Datastreams",
  "@iot.id" : 1,
  "@iot.selfLink" : "/SensorThingsService/v1.0/Things(1)"
}
```

Query URL patterns: Get related Entities

Get all Datastreams of a specific Thing

- GET `http://192.168.11.2/FROST-Server/v1.0/Things(1)/Datastreams`

- Response:

```
{
  "value" : [
    {...},
    {...},
    {...}
  ]
}
```

Query URL patterns: Pagination

GET only 4 Observations and the total count of Observations

- GET .../v1.0/Observations?

 - \$top=4&

 - \$count=true

- Response:

```
{
  "@iot.count" : 16,
  "@iot.nextLink" : "/SensorThingsService/v1.0/Observations?$top=4&$skip=4",
  "value" : [
    { ... },
    { ... },
    { ... },
    { ... }
  ]
}
```


Query URL patterns: \$select

Get only description und id for all Things

■ GET .../v1.0/Things?
\$select=@iot.id,description

■ Response:

```
{
  "value" : [
    {
      "description" : "camping lantern",
      "@iot.id" : 1
    },
    {
      "description" : "camping stove",
      "@iot.id" : 2
    }
  ]
}
```

Query URL patterns: Sorting

GET all Observations sorted by phenomenonTime, newest first

- GET .../v1.0/Observations?
\$orderby=phenomenonTime desc

- Functions work for Ordering
GET .../v1.0/Datastreams?
\$orderby=length(name) desc

Query URL patterns: Filtering

GET only Observations with result (value) > 5

■ GET .../v1.0/Observations?
\$filter=result gt 5

■ Response:

```
{
  "@iot.nextLink" : "/v1.0/Observations?$filter=result gt 5&$top=4&$skip=4",
  "value" : [
    {
      "phenomenonTime" : "2016-06-22T13:21:31.144Z",
      "resultTime" : null,
      "result" : 10,
      "@iot.id" : 34,
      "@iot.selfLink" : "/SensorThingsService/v1.0/Observations(34)"
    }, {
      ...
    }, {
      ...
    }, {
      ...
    }
  ]
}
```

Query URL patterns: Functions 1

■ Comparison:

- gt: >
- ge: >=
- eq: =
- le: <=
- lt: <
- ne: !=

■ Logical:

- and
- or
- not

■ Mathematical:

- add
- sub
- mul
- div
- mod

■ String Functions:

- substringof(p0, p1)
- endswith(p0, p1)
- startswith(p0, p1)
- substring(p0, p1)
- indexof(p0, p1)
- length(p0)
- tolower(p0)
- toupper(p0)
- trim(p0)
- concat(p0, p1)

■ Mathematical:

- round(n1)
- floor(n1)
- ceiling(n1)

Query URL patterns: Functions 2

■ Geospatial:

- `geo.intersects(g1, g2)`
- `geo.length(l1)`
- `geo.distance(g1, g2)`
- `st_equals(g1, g2)`
- `st_disjoint(g1, g2)`
- `st_touches(g1, g2)`
- `st_within(g1, g2)`
- `st_overlaps(g1, g2)`
- `st_crosses(g1, g2)`
- `st_intersects(g1, g2)`
- `st_contains(g1, g2)`
- `st_relate(g1, g2)`

■ Date and Time:

- `now()`
- `mindatetime()`
- `maxdatetime()`
- `date(t1)`
- `time(t1)`
- `year(t1)`
- `month(t1)`
- `day(t1)`
- `hour(t1)`
- `minute(t1)`
- `second(t1)`
- `fractionalseconds(t1)`
- `totaloffsetminutes(t1)`

Query URL patterns: Encoding in URLs

■ Strings: in single quotes

- `$filter=name eq 'Living room'`
- Single quotes are doubled: `'Hylke''s Living room'`

■ ISO 8601 DateTimes: not quoted

- `$filter=phenomenonTime gt 2018-03-09T08:14:54+00:00`
- Don't forget to URLEncode:
`2018-03-09T08:14:54%2B00:00`

■ ISO 8601 Durations

- `duration'<...>'`
- `duration'P1WT1H'`

Query URL patterns: Filtering examples

- All observations with an even result
 - `Observations?$filter=result mod 2 eq 0`
- Observations of the last hour
 - `Observations?$filter=phenomenonTime gt now() sub duration'PT1H'`
 - https://en.wikipedia.org/wiki/ISO_8601#Durations
- Datastreams that measure temperature (ObservedProperty id 1)
 - `Datastreams?$filter=ObservedProperty/@iot.id eq 1`
- Filtering on JSON properties
 - `Things?$filter=properties/style eq 'Cozy'`
 - `Observations?$filter=result gt Datastream/Things/properties/max`

Query URL patterns: \$expand

GET the Thing with id=17 and its Datastreams

- GET .../v1.0/Things(17)?
\$expand=Datastreams

- Response:

```
{  
  "name" : "My camping lantern",  
  "description" : "camping lantern",  
  "Datastreams" : [  
    { ... },  
    { ... },  
    { ... }  
  ],  
  "@iot.id" : 17  
}
```


Query URL patterns: \$expand(...)

GET only description, id and Datastreams for Thing 17 and for the Datastreams only id and description:


- GET .../v1.0/Things(17)?
\$select=@iot.id,description&
\$expand=Datastreams(\$select=@iot.id,description)

- Response:

```
{
  "description" : "camping lantern",
  "@iot.id" : 17,
  "Datastreams" : [
    {
      "description" : "Temperature measurement",
      "@iot.id" : 19
    },
    {
      "description" : "Humidity measurement",
      "@iot.id" : 21
    }
  ]
}
```

Query URL patterns: \$expand example

Overview Map (Italy)

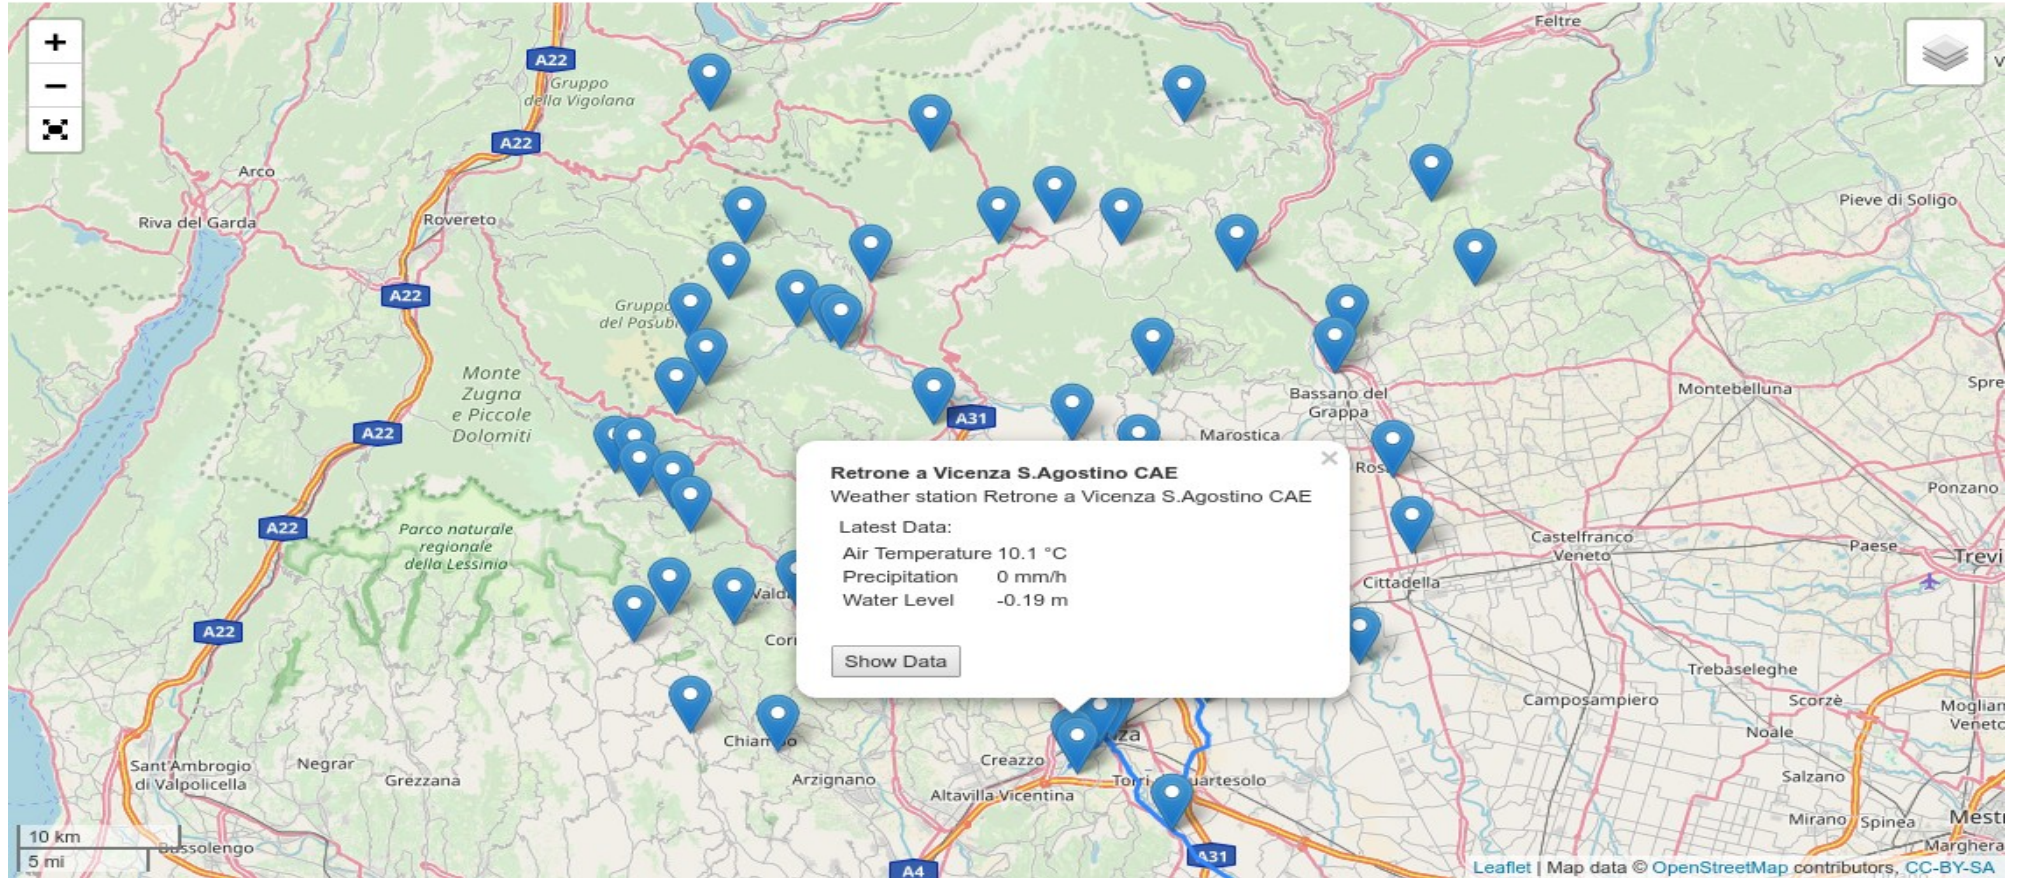

Query URL patterns: \$expand example

```
v1.0/Things?  
  $select=id,name,description,properties  
  &$top=1000  
  &$filter=properties/type eq 'station'  
  &$expand=  
    Locations,  
    Datastreams(  
      $select=id,name,unitOfMeasurement  
      ;$expand=  
        ObservedProperty($select=name),  
        Observations(  
          $select=result,phenomenonTime  
          ;$orderby=phenomenonTime desc  
          ;$top=1)  
        )  
    )
```

Creating new Entities

Create a new Thing

■ POST .../v1.0/Things

Content-Type: application/json; charset=UTF-8

```
{
  "name" : "Office",
  "description" : "My Work Room",
  "properties" : {
    "style" : "Business",
    "balcony" : false
  },
  "Locations" : [
    {
      "@iot.id" : 1
    }
  ]
}
```

■ Response:

Location: [http://localhost:8080/FROST-Server/v1.0/Things\(2\)](http://localhost:8080/FROST-Server/v1.0/Things(2))

Creating new Entities

POST a new Thing with a new Location

■ POST .../v1.0/Things

```
{
  "name" : "Office",
  "description" : "My Work Room",
  "properties" : {
    "style" : "Business",
    "balcony" : false
  },
  "Locations" : [
    {
      "name" : "My Office",
      "description" : "The office room of Fraunhoferstr. 1",
      "encodingType" : "application/vnd.geo+json",
      "location" : {
        "type": "Point",
        "coordinates": [8.425548, 49.015196]
      }
    }
  ]
}
```

■ Response:

Location: [http://localhost:8080/FROST-Server/v1.0/Things\(2\)](http://localhost:8080/FROST-Server/v1.0/Things(2))

Creating new Observations

Create a new Observation

■ POST .../v1.0/Observations

```
{  
  "result" : 123,  
  "DataStream" : {  
    "@iot.id" : 1  
  }  
}
```

■ POST .../v1.0/Datastreams(1)/Observations

```
{  
  "result" : 123  
}
```

- phenomenonTime and FeatureOfInterest are generated automatically if not provided.

Creating new Observations – HTTP vs MQTT

	+	–
MQTT	<ul style="list-style-type: none">• Efficient for subsequent Observations	<ul style="list-style-type: none">• Connection management• Can only create Observations• Persistent connection makes load balancing tricky
HTTP	<ul style="list-style-type: none">• Simple requests• Can create all entities• Works through firewalls & proxies• Simple load balancing	<ul style="list-style-type: none">• New connection per request

Changing Entities

Update an existing Thing

■ PATCH .../v1.0/Things(1)

```
{  
  "description" : "A new description"  
}
```

Changes only the specified fields

■ PUT .../v1.0/Things(1)

```
{  
  "name" : "A new name",  
  "description" : "A new description"  
}
```

Replaces all fields.

Fields that are not set are removed (properties in this case)!

Deleting Entities

Delete a Thing

- DELETE .../v1.0/Things(1)
- Deletes the Thing and all objects depending on the thing
 - Datastreams
 - Observations

Managing your data

- Base URL: <http://server.de/SensorThingsService/v1.0>
- Read: GET
 - v1.0 → Get collection index
 - v1.0/Collection → Get all entities in a collection
 - v1.0/Collection(id) → Get one entity from a collection
- Create: POST
 - v1.0/Collection → Create a new entity
- Update: PATCH
 - v1.0/Collection(id) → Update an entity
- Update: PUT
 - v1.0/Collection(id) → Replace an entity
- Delete: DELETE
 - v1.0/Collection(id) → Remove an entity

Extensions

■ MQTT

- Receive push notification on Entity create or update
 - Subscriptions as in urls
 - v1.0/Datastreams
 - v1.0/Datastreams(1)
 - v1.0/Datastreams(1)/Observations
 - ?\$select to reduce message size
 - For all entity types
- Create Observations using MQTT messages

Extensions

■ MultiDatastream

- Datastream with multiple ObservedProperties

- Observations with multiple result values

 - Observation/result is a JSON Array

- Useful for

 - Wind

 - Speed

 - direction


 - Aggregates

 - Average

 - Minimum

 - Maximum

 - std-deviation

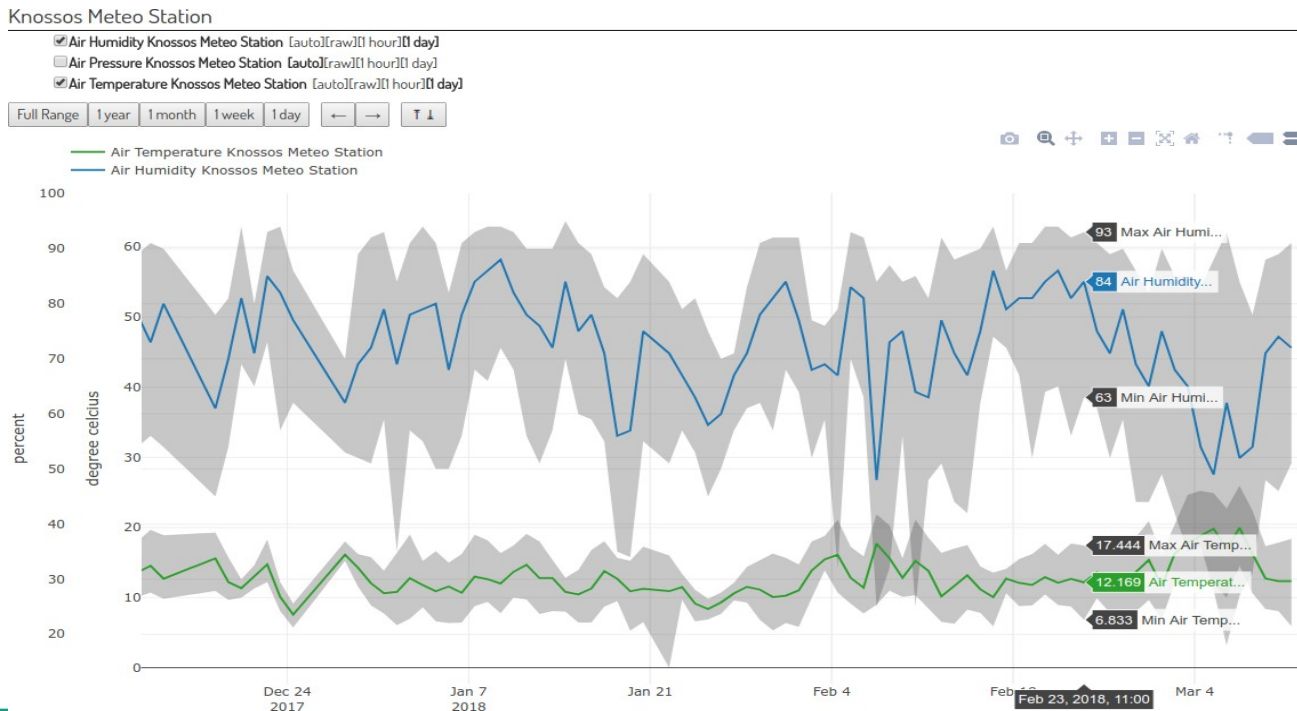

Extensions

■ Data Array

- More efficient Observation encoding
- GET .../v1.0/Observations?&resultFormat=DataArray
- For Get & POST

■ Batch requests

- Multiple actions in 1 request

FROST Extensions

■ Filtered Delete

- If you can GET it, you can DELETE it
- More efficient
- DELETE v1.0/Observations?\$filter=phenomenonTime lt now() sub period'P1D'

■ Time interval functions

- before / after / starts / finishes / overlaps / contains

Client Implementations

- FROST-Client (Fraunhofer IOSB)

- Java

- <https://github.com/FraunhoferIOSB/FROST-Client>

- Sensorthings-net-sdk (Geodan)

- .NET

- <https://github.com/gost/sensorthings-net-sdk>

- GOST Dashboard

- JavaScript

- <https://github.com/gost/dashboard-v2>

- SensorThings-Dashboard (KIT)

- JavaScript

- <https://github.com/SensorThings-Dashboard/SensorThings-Dashboard>