Example



Sizing

Set heights using classes like $% \left(1\right) =\left(1\right) +\left(1\right) =\left(1\right) +\left(1\right) +\left(1\right) =\left(1\right) +\left(1\right) +\left($

```
{{< example >}} .form-control-lg Default input .form-control-sm {{< /example >}}
```

Disabled

Add the disabled boolean attribute on an input to give it a grayed out appearance and remove pointer events.

```
{{< example >}} Disabled input | Disabled readonly input | {{< /example >}}
```

Readonly

Add the readonly boolean attribute on an input to prevent modification of the input's value.

```
{{< example >}} Readonly input here... {{< /example >}}
```

Readonly plain text

If you want to have <input readonly> elements in your form styled as plain text, use the .form-control-plaintext class to remove the default form field styling and preserve the correct margin and padding.

```
{{< example >}}
Email
email@example.com

Password

{{< /example >}}

{{< example >}}

Email email@example.com


Password Password

Confirm identity

{{< /example >}}
```

File input

{{< example >}}

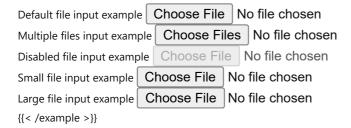

Color

```
{{< example >}} Color picker {{< /example >}}
```

Datalists

Learn more about support for datalist elements.

```
{{< example >}} Datalist example Type to search... {{< /example >}}
```

Sass

Variables

```
$input-* are shared across most of our form controls (and not buttons).

{{< scss-docs name="form-input-variables" file="scss/_variables.scss" >}}

$form-label-* and $form-text-* are for our <label> s and .form-text component.

{{< scss-docs name="form-label-variables" file="scss/_variables.scss" >}}

{{< scss-docs name="form-text-variables" file="scss/_variables.scss" >}}

$form-file-* are for file input.

{{< scss-docs name="form-file-variables" file="scss/_variables.scss" >}}
```