

*This wiki is automatically published from ohmyzsh/wiki. To edit this page, go to ohmyzsh/wiki, make your changes and submit a Pull Request.*

All the current themes can be found in the `themes/` directory in the Oh My Zsh distribution. See list here.

In order to enable a theme, set `ZSH_THEME` to the name of the theme in your `~/.zshrc`, before sourcing Oh My Zsh; for example: `ZSH_THEME=robbyrussell`. If you do not want any theme enabled, just set `ZSH_THEME` to blank or remove the line: `ZSH_THEME=""`

Here is a collection of screenshots and descriptions of themes that have been contributed to Oh My Zsh. There are some missing from this page. If you want to add or edit descriptions, see the format description at the bottom of this page.

## The Themes

### robbyrussell

*the (default) that Robby uses*

```
➔ .oh-my-zsh git:(master) git co -b LH_2039
Switched to a new branch 'LH_2039'
➔ .oh-my-zsh git:(LH_2039) touch x
➔ .oh-my-zsh git:(LH_2039) X
```

---

The rest of the themes, in alphabetical order:

### af-magic

```
[~/code/dotfiles(master*) » ls /
Applications Users      cores      home       sbin       var
Library      Volumes    dev        opt        tmp
System       bin        etc        private    usr
~/code/dotfiles(master*) »
```

### afowler

```
achilles :: ~/code/redcar <master> » ls
bin      Gemfile      lib      plugins  README.md  tasks
CHANGES Gemfile.lock LICENSE  Rakefile  share      vendor
achilles :: ~/code/redcar <master> » pwd
/home/linopolus/code/redcar
achilles :: ~/code/redcar <master> » scrot -s ~/themes/afowler.png
```

agnoster

Official repository

```
~> cd testproject
~/testproject | master gco detached-head-state -q
~/testproject - fdffaf6 touch dirty-working-directory
~/testproject - fdffaf6± cd
~> ssh milly
Welcome to Ubuntu 11.04 (GNU/Linux 2.6.18-308.8.2.el5.028stab101.1 x86_64)
Last login: Wed Sep 26 03:42:49 2012 from 71-215-222-90.mpls.qwest.net
agnoster@milly ~>
Connection to milly.agnoster.net closed.
~> sudo -s
Password:
~> root@Arya ~> top &
[1] 34523
~> root@Arya ~> rm no-such-file
rm: no-such-file: No such file or directory
~> root@Arya ~> kill %%
[1] + 34523 terminated top
~> root@Arya ~>
```

Shown with Solarized Dark colorscheme and Powerline-patched Meslo 14pt in iTerm 2.

Additional setup:

- Install one of the patched fonts from Vim-Powerline or patch your own for the special characters.
- *Optionally* to hide the “user@hostname” info when you’re logged in as yourself on your local machine, add `prompt_context(){}`  at the bottom of your `~/.zshrc`. See here to learn how to only show your username instead.

alanpeabody

```
alan@siurus ~/draker/sentinel$ git add .
alan@siurus ~/draker/sentinel$ git ci -m 'Updated bundler'
[integration d0448e] Updated bundler
2 files changed, 2 insertions(+), 2 deletions(-)
alan@siurus ~/draker/sentinel$
```

amuse

```
~/oh-my-zsh on | master @ 15:00:39
$ git remote -v
my_fork git@github.com:dhruvasagar/oh-my-zsh.git (fetch)
my_fork git@github.com:dhruvasagar/oh-my-zsh.git (push)
origin git@github.com:robbyrussell/oh-my-zsh.git (fetch)
origin git@github.com:robbyrussell/oh-my-zsh.git (push)

~/oh-my-zsh on | master @ 15:00:41
$ git pull
remote: Counting objects: 11, done.
remote: Compressing objects: 100% (6/6), done.
remote: Total 9 (delta 5), reused 7 (delta 3)
Unpacking objects: 100% (9/9), done.
From github.com:robbyrussell/oh-my-zsh
+ branch master -> FETCH_HEAD
Merge made by the 'recursive' strategy:
 themes/nicheleborgna.zsh-theme | 44 +++++
 1 file changed, 44 insertions(+)
create mode 100644 themes/nicheleborgna.zsh-theme

~/oh-my-zsh on | master @ 15:02:42
$
```

Shown in the screenshot with tmux and the powerline plugin (you might need to install one of the patched powerline fonts for it to look the same).


#### arrow

```
redcar > ls
bin      Gemfile      lib      plugins  README.md tasks
CHANGES Gemfile.lock LICENSE Rakefile share    vendor
redcar > pwd
/home/linopolus/code/redcar
redcar > scrot -s ~/themes/arrow.png
```

#### aussiegeek

```
[ 1:22 ] [ linopolus@achilles:~/code/redcar(master✓)(ruby-1.9.2-p180) ]
$ ls
bin      Gemfile      lib      plugins  README.md tasks
CHANGES Gemfile.lock LICENSE Rakefile share    vendor
[ 1:22 ] [ linopolus@achilles:~/code/redcar(master✓)(ruby-1.9.2-p180) ]
$ pwd
/home/linopolus/code/redcar
[ 1:22 ] [ linopolus@achilles:~/code/redcar(master✓)(ruby-1.9.2-p180) ]
$ scrot -s ~/themes/aussiegeek.png
```

#### avit

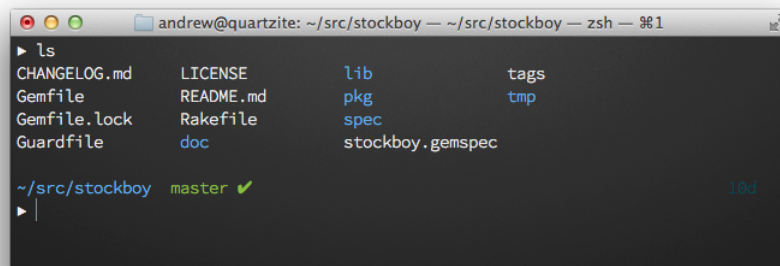

```
andrew@quartzite: ~/src/stockboy -- ~/src/stockboy -- zsh -- 001
> ls
CHANGELOG.md  LICENSE      lib          tags
Gemfile       README.md   pkg          tmp
Gemfile.lock  Rakefile    spec
Guardfile     doc         stockboy.gemspec

~/src/stockboy master ✓
> |
```

## awesomepanda

```
+ scraperdashboard git:(fix-validation) x ls
app bin composer.json composer.lock phpunit.xml phpunit.xml.dist README.rst src tests vendor web
+ scraperdashboard git:(fix-validation) x pwd
/home/samshrestha/personal/www/scraperdashboard
+ scraperdashboard git:(fix-validation) x tail README.rst
*****
'Migrations'
*****
Database migrations are handled through `doctrine:migrations` and `doctrine:fixtures:load` so you will need to have a
ese.

*****
'Tests'
*****
Some test cases can be found under tests folder. These tests are basically functional tests and
verify the routes are functional.
+ scraperdashboard git:(fix-validation) x time
shell 1.82s user 0.81s system 0% cpu 19:41.05 total
children 17.49s user 4.30s system 1% cpu 19:41.05 total
+ scraperdashboard git:(fix-validation) x
```

## bira

```
bira@fuchikoma ~/.oh-my-zsh <ruby-1.8.7@v2> <master> cd ~/.oh-my-zsh
$
```

## blinks

```
blinks@dhcp-172-31-2-114 ~ZSH/themes [master]
± % git st 11137
# On branch master
# Your branch is ahead of 'origin/master' by 1 commit.
#
nothing to commit (working directory clean)

blinks@dhcp-172-31-2-114 ~ZSH/themes [master]
± % git push 11138
Counting objects: 6, done.
Delta compression using up to 2 threads.
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 685 bytes, done.
Total 4 (delta 2), reused 0 (delta 0)
To git@github.com:blinks/oh-my-zsh.git
9e601c2..9308a7d master -> master
```

Additional setup: Set up Solarized.

## bureau

```
exit
isquariel@isquabook ~/Projects/bookmarklet [23:09:23]
> $ 0.10.15 [*time2-style ●●●]
```

To use: In the right prompt you see git status and (if you use nvm) the Node.js version. (I'm using the Solarized color scheme in this screenshot.)

candy

```
ale@PC-Ale [04:35:01] [~]
-> % cd .oh-my-zsh
ale@PC-Ale [04:35:07] [~/oh-my-zsh] [master]
-> % touch test
ale@PC-Ale [04:35:16] [~/oh-my-zsh] [master *]
-> %
```

clean

```
linopolus:redcar/ (master) $ ls [13:18:39]
bin      Gemfile  lib      plugins  README.md  tasks
CHANGELOG Gemfile.lock LICENSE Rakefile  share      vendor
linopolus:redcar/ (master) $ pwd [13:18:41]
/home/linopolus/code/redcar
linopolus:redcar/ (master) $ scrot -s ~/themes/clear.png [13:18:43]
```

cloud

```
• ~ cd Source/some_repo
• some_repo [master] touch Dirtify
• some_repo [master] ✗ git add Dirtify && git commit -m "make repo clean"
[master (root-commit) a406b15] make repo clean
0 files changed, 0 insertions(+), 0 deletions(-)
create mode 100644 Dirtify
• some_repo [master] cd
```

crunch

```
{14:30}[1.9.3]~/bt:master ✓ touch dirty-repo.txt
{14:30}[1.9.3]~/bt:master ✗
```

cypher

```
gargamel-2 :: ~ ➤ cd .oh-my-zsh
gargamel-2 :: ~/.oh-my-zsh ➤
```

## dallas

```
{10-05-12 9:28}[ruby-1.8.7]muscato:~ dallas%  
{10-05-12 9:28}[ruby-1.8.7]muscato:~ dallas% ~aw  
{10-05-12 9:28}[ruby-1.8.7]muscato:~aw@master dallas% mate .  
{10-05-12 9:28}[ruby-1.8.7]muscato:~aw@master dallas% git status --short  
M Capfile  
{10-05-12 9:28}[ruby-1.8.7]muscato:~aw@masterXXX dallas% git checkout Capfile  
{10-05-12 9:29}[ruby-1.8.7]muscato:~aw@master dallas% rvm 1.8.6  
{10-05-12 9:29}[ruby-1.8.6]muscato:~aw@master dallas% rvm 1.8.7  
{10-05-12 9:29}[ruby-1.8.7]muscato:~aw@master dallas% rvm 1.9.1  
{10-05-12 9:29}[ruby-1.9.1]muscato:~aw@master dallas% ~  
{10-05-12 9:29}[ruby-1.9.1]muscato:~ dallas%
```

## darkblood

```
r[robbyrussell@gargamel-2] [/dev/ttys001]  
[~]> cd .oh-my-zsh  
r[robbyrussell@gargamel-2] [/dev/ttys001] [master]  
[~/ .oh-my-zsh]> [
```

## daveverwer

```
achilles:redcar (master) $ ls  
assets  CHANGES  Gemfile      lib      plugins  README.md  
bin     env.rb      javamateview LICENSE  Rakefile  spec  
achilles:redcar (master) $ pwd  
/home/janke/code/redcar  
achilles:redcar (master) $ scrot -u ~/tmp/themes/daveverwer.png
```

## dieter

```
22:36:34 dieter@ws .oh-my-zsh dieter ? # branch named dieter, new files  
22:36:38 dieter@ws .oh-my-zsh dieter ? false # unlike other themes, last exit code indicators vanish after being shown once  
22:36:52 dieter@ws .oh-my-zsh dieter ?  
22:36:55 dieter@ws .oh-my-zsh dieter ? # user colorcoded by privilege, hostnames colorcoded (and shortened) with mappings: 1..  
22:37:12 dieter@ws .oh-my-zsh dieter ? grep "host_repr: themes/dieter.zsh-theme  
host_repr=(dieter-vs' "%($fg_bold[green])%us" 'dieter-p4sci-arch' "%($fg_bold[blue])%p4") 1..  
22:37:19 dieter@ws .oh-my-zsh dieter ?
```

Additional setup: Get this small [\[\[fix|https://github.com/Dieterbe/oh-my-zsh/commit/7ca0afd6861fe0c9e6903a08f0e469746df627e0\]\]](https://github.com/Dieterbe/oh-my-zsh/commit/7ca0afd6861fe0c9e6903a08f0e469746df627e0) if you don't have it yet.

(Fix was [\[\[pulled|https://github.com/ohmyzsh/ohmyzsh/commit/8294cf44d1d348fd1590ee28b5be8483fb012153\]\]](https://github.com/ohmyzsh/ohmyzsh/commit/8294cf44d1d348fd1590ee28b5be8483fb012153) into ohmyzsh/ohmyzsh on 2011-01-08.)

## dogenpunk

```
bebop rome ~/Development/ruby/t:(19d20h39m|git[maste )  
3618 ± touch x  
bebop rome ~/Development/ruby/t:(19d20h39m|git[master! )  
3619 ± gco -b screenshot Library/For ★  
Switched to a new branch 'screenshot'  
bebop rome ~/Development/ruby/t:(19d20h39m|git[screenshot! ) new/tree/master/Library/Formu  
3620 ± Evernote Web Read Later Rails 3 API Ruby RDoc Ruby 1.9.2 STL RSpec ★
```

dpoggi

```
Dan@host-24415:~/Documents/Projects/cse480(master)
» rm Gemfile.lock
Dan@host-24415:~/Documents/Projects/cse480(master)
»
```

eastwood

```
*[master][~/oh-my-zsh]$ rvm:system
```


evan

*a minimal prompt*

```
gargamel :: ~ »
gargamel :: ~ » cd .oh-my-zsh
gargamel :: ~/.oh-my-zsh »
```

fishy

The fish shell prompt with git support

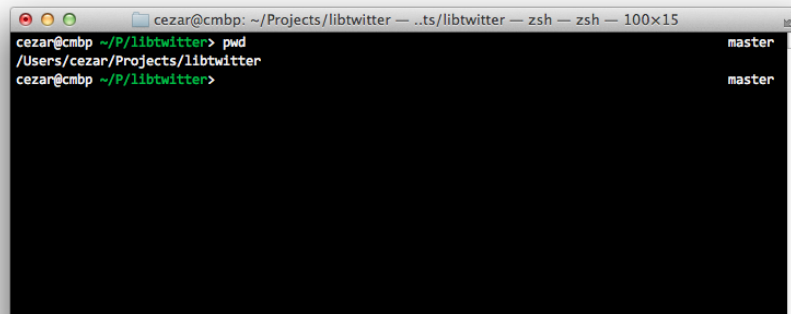

```
cezar@cmbp: ~/Projects/libtwitter — .ts/libtwitter — zsh — zsh — 100x15
cezar@cmbp ~/P/libtwitter> pwd                                     master
/Users/cezar/Projects/libtwitter
cezar@cmbp ~/P/libtwitter>                                       master
```

flazz

Has git and vi-command mode support (when enabled)

```

Koji :: Code/daitss/core <master> % _ -s
Koji :: Code/daitss/core <master> *
Koji :: Code/daitss/core <master> % foo
zsh: command not found: foo
Koji :: Code/daitss/core <master> %
Koji :: Code/daitss/core <master> % in vi command mode

```

frisk


```

/tmp/example [nobody@myKeyboard] [9:03]
> git init
Initialized empty Git repository in /tmp/example/.git/

/tmp/example [master] [nobody@myKeyboard] [9:03]
> 

```

funky

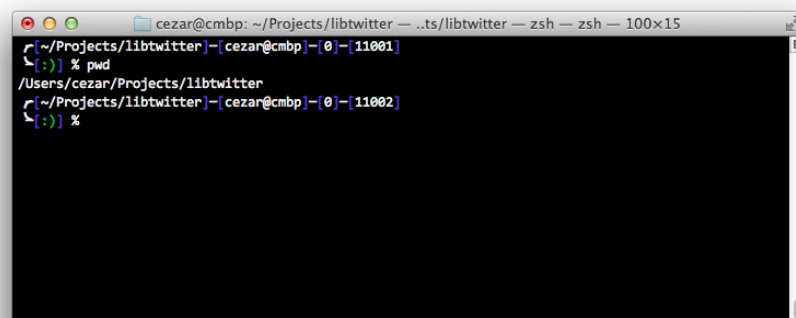

```

cezar@cmbp: ~/Projects/libtwitter -- ts/libtwitter -- zsh -- zsh -- 100x15
[~/Projects/libtwitter]~[cezar@cmbp]~[0]~[11001]
[~] % pwd
/Users/cezar/Projects/libtwitter
[~/Projects/libtwitter]~[cezar@cmbp]~[0]~[11002]
[~] %

```

it's funky...

gallifrey

```

gallifrey ~ > cd .oh-my-zsh
gallifrey ~/.oh-my-zsh <master*> > nocorrect this-comment-will-fail
zsh: command not found: this-comment-will-fail
gallifrey ~/.oh-my-zsh <master*> >

```

gallois

```

[~]$ cd .oh-my-zsh
[~/~.oh-my-zsh]$ touch file
[~/~.oh-my-zsh]$ false
[~/~.oh-my-zsh]$ 

```




garyblessington

```
~:  
~: cd .oh-my-zsh  
.oh-my-zsh(master): touch XYZ  
.oh-my-zsh(master) X:
```

gentoo

```
igor@funky ~/.oh-my-zsh/themes (master*) % sudo -s  
funky themes (master*) #
```

geoffgarside

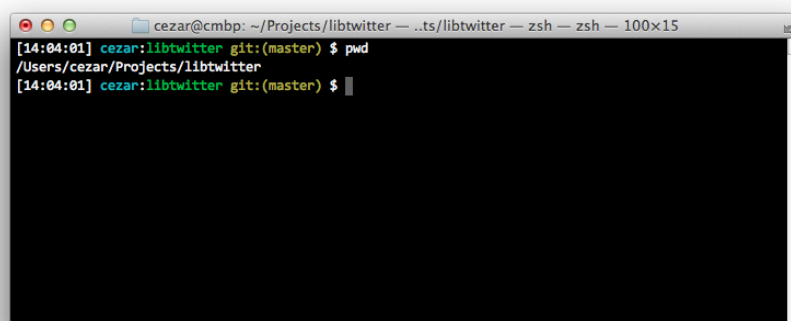

A terminal window titled 'cezar@cmbp: ~/Projects/libtwitter — .ts/libtwitter — zsh — zsh — 100x15'. The terminal shows the following commands and output:

```
[14:04:01] cezar:libtwitter git:(master) $ pwd  
/Users/cezar/Projects/libtwitter  
[14:04:01] cezar:libtwitter git:(master) $
```

gianu

```
[gianu@madariaga oh-my-zsh (master)]$ ls  
MIT-LICENSE.txt README.textile custom lib log oh-my-zsh.sh plugins templates themes tools  
[gianu@madariaga oh-my-zsh (master)]$ echo " " >> README.textile  
[gianu@madariaga oh-my-zsh (master)]$ git co -- README.textile  
[gianu@madariaga oh-my-zsh (master)]$ pwd  
/Users/gianu/workspace/oh-my-zsh  
[gianu@madariaga oh-my-zsh (master)]$
```

gnzh

```
gnzh@arch ~ <ruby-1.9.2> <master*>
└─> sudo -s
root@arch /home/gnzh <ruby-1.9.2> <master*>
└─> exit
gnzh@arch ~ <ruby-1.9.2> <master*>
└─> ssh [redacted]
Last login: T[redacted]
gnzh@gnzhbook ~ <ruby-1.9.2> <master*>
└─> exit
Connection to [redacted] closed.
gnzh@arch ~ <ruby-1.9.2> <master*>
└─>
gnzh@arch ~ <ruby-1.9.2> <master*>
└─> exit
```

imajes

```
% cd .oh-my-zsh
%
_
```

jnrowe

```
~ git:(master) ▶ date
Wed Dec 30 21:41:31 GMT 2009
~ git:(master) ▶ { return 255 ; }
255 ~ git:(master) ▶
```

jreese

```
jreese@mach ~ »
jreese@mach ~ » false
jreese@mach ~ » cd .oh-my-zsh
jreese@mach ~/.oh-my-zsh ±master » touch foo
jreese@mach ~/.oh-my-zsh ±master$ »
```

```
jreese@mach ~ »
jreese@mach ~ » false
jreese@mach ~ » cd .oh-my-zsh
jreese@mach ~/.oh-my-zsh ±master » touch foo
jreese@mach ~/.oh-my-zsh ±master$ »
```

jtriley

```
2:54 jtriley@hackintosh /Users/jtriley/py-workspace/StarCluster
% ls
COPYING          StarCluster.egg-info/ completion/      starcluster/
COPYING.LESSER  bin/              docs/           utils/
MANIFEST.in     check.sh*         ez_setup.py
README.rst      clean.sh*         setup.py
```

juanghurtado

```
git_prompt_ahead() git_prompt_short_sha() git_prompt_status()
jghurtado@macbook:~/Dropbox/Web/git-test (*) (!)
> git st
D test3
A test4
?? test5
master [fd04122] deleted added untracked
current_branch()
parse_git_dirty()
to the BODY element */
$.addClass('is');
```

junkfood

Totally ripped off Dallas theme

```
Watson: ~/dotfiles
#( 09/02/15@10:24 )( Marc@Watson ):~/dotfiles
git init -q
#( 09/02/15@10:25 )( Marc@Watson ):~/dotfiles@master✓
touch dirty
#( 09/02/15@10:25 )( Marc@Watson ):~/dotfiles@masterXXX
rm dirty
#( 09/02/15@10:25 )( Marc@Watson ):~/dotfiles@master✓
—
```

+info

kafeitu

```
henryyan@hy-hp: ~/.oh-my-zsh
henryyan@hy-hp: ~/.oh-my-zsh 90x21
→ henryyan@hy-hp ~/.oh-my-zsh git:(master) ✕ gst
# On branch master
# Changes not staged for commit:
#   (use "git add <file>..." to update what will be committed)
#   (use "git checkout -- <file>..." to discard changes in working directory)
#
#       modified:   themes/kafeitu.zsh-theme
#
no changes added to commit (use "git add" and/or "git commit -a")
```

## kardan

```
sagan@galaxy: ~/screen-capture-theme/preview/git-repo — view/git-repo — zsh — 100x35
> echo "Theme: kardan" ~/screen-capture-theme/preview/git-repo(master))@galaxy.local
Theme: kardan
> echo "Testing return value." ~/screen-capture-theme/preview/git-repo(master))@galaxy.local
Testing return value.
> false ~/screen-capture-theme/preview/git-repo(master))@galaxy.local
> echo Hello World >> file ~/screen-capture-theme/preview/git-repo(master))@galaxy.local
> touch fkhfhettgkkmzudjduz ~/screen-capture-theme/preview/git-repo(masterx))@galaxy.local
> git add fkhfhettgkkmzudjduz ~/screen-capture-theme/preview/git-repo(masterx))@galaxy.local
> git commit -m 'Showcasing kardan' &> /dev/null ~/screen-capture-theme/preview/git-repo(masterx))@galaxy.local
> git checkout other-branch ~/screen-capture-theme/preview/git-repo(master))@galaxy.local
Switched to branch 'other-branch'
> git checkout master ~/screen-capture-theme/preview/git-repo(other-branch))@galaxy.local
Switched to branch 'master'
> ~/screen-capture-theme/preview/git-repo(master))@galaxy.local
```

## kennethreitz

```
λ ~/code/redcar/ master* ls
bin      Gemfile      lib      plugins      Rakefile  share  vendor
CHANGES Gemfile.lock  LICENSE  possible_themes  README.md tasks
λ ~/code/redcar/ master* pwd
/home/linopolus/code/redcar
λ ~/code/redcar/ master* scrot -s ~/themes/kennethreitz.png
```

## kolo

```
~ % cd code/builds
Using /home/kolo/.rvm/gems/ruby-1.9.2-p180 with gemset builds
builds [master●●] % touch README.md
builds [master●●●] %
```

## kphoen

```
[Kevin@kamikaze:~/Python/wlppr on master]
% git add git.test
[Kevin@kamikaze:~/Python/wlppr on master]
% touch other_test
[Kevin@kamikaze:~/Python/wlppr on master]
% false
[Kevin@kamikaze:~/Python/wlppr on master]
%
```

lambda

```
λ ~/Development/opensource/oh-my-zsh/ master
```

linuxonly

```
/home/linopolus/.oh-my-zsh/oh-my-zsh.sh:source:18: datei oder Verzeichnis nicht gefunden
: /home/linopolus/.oh-my-zsh/themes/linuxonly.zsh-theme
linopolus@achilles:~/code/redcar% uname -a
Linux achilles 2.6.38-ARCH #1 SMP PREEMPT Wed Mar 30 08:47:36 CEST 2011 x86_64 AMD Pheno
m(tm) II X6 1090T Processor AuthenticAMD GNU/Linux
linopolus@achilles:~/code/redcar% ls
bin      Gemfile      lib      plugins      Rakefile  share  vendor
CHANGES Gemfile.lock LICENSE possible_themes README.md tasks
linopolus@achilles:~/code/redcar% pwd
/home/linopolus/code/redcar
linopolus@achilles:~/code/redcar% scrot -s ~/themes/linuxonly.png
```

(As the name states, this only works on linux.)


lukerandall

```
linopolus@achilles code/redcar (master*) » ls
bin      Gemfile      lib      plugins      Rakefile  share  vendor
CHANGES Gemfile.lock LICENSE possible_themes README.md tasks
linopolus@achilles code/redcar (master*) » pwd
/home/linopolus/code/redcar
linopolus@achilles code/redcar (master*) » scrot -s ~/themes/lukerandall.png
```


macovsky

```
Sa 5 Mär 2011 18:33:06 CET
1.9.2 ~ <ruby-1.9.2> $ Workspace/rails3
1.9.2 ~/Workspace/rails3 <ruby-1.9.2> $ ll
total 0
1160612 0 drwxr-xr-x  4 gregoryigelmund staff 136 1 Mär 08:59 .
1138918 0 drwxr-xr-x 18 gregoryigelmund staff 612 3 Mär 14:01 ..
8640689 0 drwxr-xr-x 22 gregoryigelmund staff 748 1 Mär 09:04 grekko-blog
7965251 0 drwxr-xr-x 21 gregoryigelmund staff 714 16 Feb 06:24 smapponrails
1.9.2 ~/Workspace/rails3 <ruby-1.9.2> $
```


maran

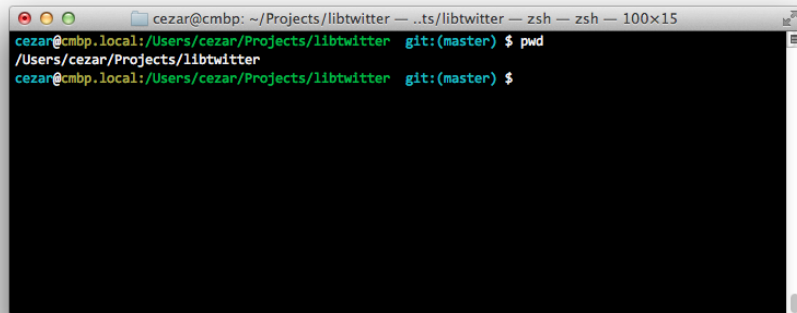A terminal window titled 'cezar@cmbp: ~/Projects/libtwitter — .ts/libtwitter — zsh — zsh — 100x15'. The prompt is 'cezar@cmbp.local:~/Users/cezar/Projects/libtwitter git:(master) \$'. The user enters 'pwd' and the output is '/Users/cezar/Projects/libtwitter'. The prompt then changes to 'cezar@cmbp.local:~/Users/cezar/Projects/libtwitter git:(master) \$'.

mh

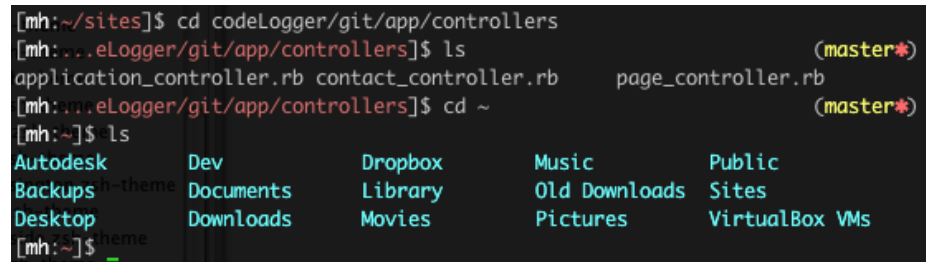A terminal window showing a series of commands and their outputs. The first command is 'cd codeLogger/git/app/controllers' with output '[mh:~/sites]\$ cd codeLogger/git/app/controllers'. The second is 'ls' with output '[mh:~/codeLogger/git/app/controllers]\$ ls' and a list of files: 'application\_controller.rb', 'contact\_controller.rb', and 'page\_controller.rb'. The third is 'cd ~' with output '[mh:~/codeLogger/git/app/controllers]\$ cd ~'. The fourth is 'ls' with output '[mh:~]\$ ls' and a directory listing: 'Autodesk', 'Backups', 'Desktop', 'Downloads', 'Dev', 'Documents', 'Dropbox', 'Library', 'Music', 'Old Downloads', 'Pictures', 'Public', 'Sites', 'VirtualBox', and 'VMs'. The prompt is '[mh:~]\$'.

michelebologna

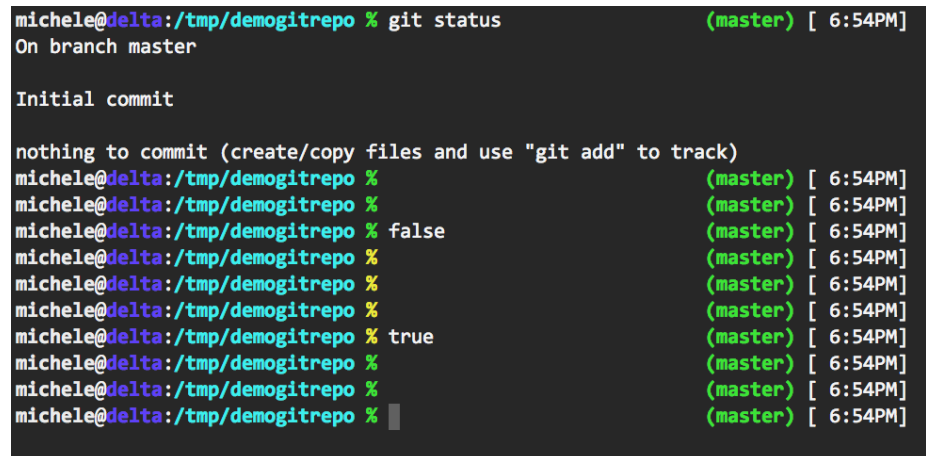A terminal window showing the output of 'git status'. The prompt is 'michele@delta:/tmp/demogitrepo %'. The output is: '(master) [ 6:54PM] On branch master Initial commit nothing to commit (create/copy files and use "git add" to track)'. The prompt then changes to 'michele@delta:/tmp/demogitrepo %'.

miloshadzic

```
fakeproject|⇒ git init
Initialized empty Git repository in /home/milos/play/fakeproject/.git/
fakeproject|master ⇒ touch this
fakeproject|master$ ⇒
```

minimal

```
Development/tmp - [master] » touch test
Development/tmp - [master•] »
```

MTR

mortalscumbag

also tells you when logged in over ssh

```
(ssh) michael@Box < master ●●● > : ~/Web/marrs
% git st --short
M Gemfile
M Gemfile.lock
?? new_file.txt

(ssh) michael@Box < master ●●● > : ~/Web/marrs
% 
```

mrtazz

```
rogue: .oh-my-zsh:%
```

```
<master X>
```

muse

```
/tmp/t (master ✖) ➤ gst
# On branch master
# Changed but not updated:
#   (use "git add <file>..." to update what will be committed)
#   (use "git checkout -- <file>..." to discard changes in working directory)
#
#       modified:   new.txt
#
# Untracked files:
#   (use "git add <file>..." to include in what will be committed)
#
#       newer.txt
no changes added to commit (use "git add" and/or "git commit -a")
/tmp/t (master ✖) ➤ git add new.txt
/tmp/t (master ✖) ➤ git add .
/tmp/t (master ✖) ➤ git commit -m "Committing all the code!"
dquote> "
[master 7844c40] Committing all the code
 1 files changed, 2 insertions(+), 0 deletions(-)
 create mode 100644 newer.txt
/tmp/t (master ✔) ➤
```

nanotech

```
~ [ cd somewhere/far/far/away          master * ] 12:00 am
far/away [                               master ] 12:00 am
```

nebirhos

```
Terminal
@acer → ~ rvm:(system) cd Projects/dovo
Using /home/istvan/.rvm/gems/ree-1.8.7-2011.03 with gemset dovo-britney
@acer → dovo rvm:(ree-1.8.7@dovo-britney) git:(master) x rvm ree@global
@acer → dovo rvm:(ree-1.8.7@global) git:(master) x
```

nicoulaj

```
> cd .oh-my-zsh                                nicoulaj/git/master !
> cd themes                                    .oh-my-zsh/git/nicoulaj-theme !+ (merge)
themes> false                                .oh-my-zsh/git/nicoulaj-theme !+ (merge)
themes> cd /usr/lib/perl/5.10.1/Encode/MIME/Header
..rl/5.10.1/Encode/MIME/Header> _
```

norm

```
λ justin-CT15 ~ → cd .oh-my-zsh
λ justin-CT15 .oh-my-zsh → λ git master* →
```



philips


```
philips:e1000/ (master) $ ls [17:56:47]
e1000_ethtool.c  e1000_la  e1000.patch
e1000.h          e1000_main.c  e1000.so
e1000_hw.c       e1000.o  Makefile
e1000_hw.h       e1000_osdep.h
e1000.ko         e1000_param.c
philips:e1000/ (master) $ [17:56:49]
```

pygmalion

```
dlobraico@galatea:~$ cd sandbox -- INSERT --
dlobraico@galatea:~/sandbox$ cd cudatrace -- INSERT --
dlobraico@galatea:~/sandbox/cudatrace$ touch dirty.txt -- INSERT --
dlobraico@galatea:~/sandbox/cudatrace$ git st -- INSERT --
# On branch master
# Untracked files:
#   (use "git add <file>..." to include in what will be committed)
#
#       dirty.txt
nothing added to commit but untracked files present (use "git add" to track)
dlobraico@galatea:~/sandbox/cudatrace$ -- INSERT --
```

(Shown with Solarized Dark colorscheme.)

risto

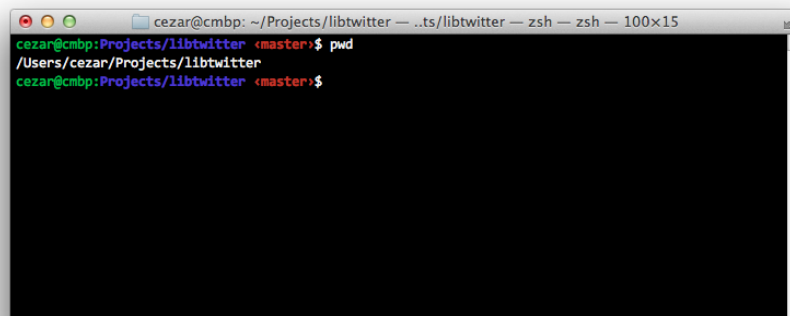

A terminal window titled 'cezar@cmbp: ~/Projects/libtwitter — .ts/libtwitter — zsh — zsh — 100x15'. The prompt is 'cezar@cmbp:Projects/libtwitter <master>\$'. The user enters 'pwd' and the output is '/Users/cezar/Projects/libtwitter'. The prompt then changes to 'cezar@cmbp:Projects/libtwitter <master>\$'.

rixius

```
rixius in ~/.oh-my-zsh on master 1:32
```

## rkj-repos

```
[rkj@rkjunior] - [~/Projects/itiner/server/chef-repo] - [2011-09-20 10:18:47]
[[$] <git:(master)hg:default/tip> ls -ald .git ../.hg
drwxr-xr-x 8 rkj users 4096 Sep 20 10:18 .git
drwxr-xr-x 5 rkj users 4096 Sep 2 16:32 ../.hg
[rkj@rkjunior] - [~/Projects/itiner/server/chef-repo] - [2011-09-20 10:19:23]
[[$] <git:(master)hg:default/tip> █

[rkj@rkjunior] - [~/Games] - [2011-09-20 10:21:42]
[[$] < > ls
```

## sammy

```
~$ ruby --version
ruby 1.9.2p290 (2011-07-09 revision 32553) [x86_64-darwin11.2.0]
~$ git --version
git version 1.7.7.4
~$ cd ~/Code/Remote/translink
translink(master)$ ls
Gemfile      LICENSE      Rakefile     doc          test
Gemfile.lock README.md    bin          lib          tmp
translink(master)$
```

## simple

```
~/oh-my-zsh(master ✓) touch added
~/oh-my-zsh(master ✕) █
```

## smt

```
tichu 福 ~
769 ○ : cd .oh-my-zsh

tichu 福 ~/.oh-my-zsh > 3552423|master✓
770 ± : touch foo [6h26m]

tichu 福 ~/.oh-my-zsh > 3552423|master✕
771 ± : git add foo [6h26m] ★

tichu 福 ~/.oh-my-zsh > 3552423|master✕
772 ± : git commit -m "added foo" [6h26m] +
[master 9d25689] added foo
0 files changed, 0 insertions(+), 0 deletions(-)
create mode 100644 foo

tichu 福 ~/.oh-my-zsh > 9d25689|master✓
773 ± : █ [0m]
```

## sorin

```
oh-my-zsh git:master > <<<< ↻ + * ✕ → = ★
```

sporty\_\_256

```
±|master ✓| test_repo
% touch xyz
±|master ✗| test_repo
% cd ~/Documents/Projects
Projects
% |
```

Figure 1: sporty\_\_256

steef

```
sprice at starch in ~
$ d

sprice at starch in ~/.dotfiles (master)
$ touch stuff

sprice at starch in ~/.dotfiles (master●)
$ |
```

sunaku

```
sagan@galaxy: ~/screen-capture-theme/preview/git-repo — view/git-repo — 1
master ~/screen-capture-theme/preview/git-repo> echo "Theme: sunaku"
Theme: sunaku
master ~/screen-capture-theme/preview/git-repo> echo "Testing return val
Testing return value.
master ~/screen-capture-theme/preview/git-repo> false
exit 1
master ~/screen-capture-theme/preview/git-repo> echo Hello World >> file
!master ~/screen-capture-theme/preview/git-repo> touch liotpcmqpztenxcd
!+master ~/screen-capture-theme/preview/git-repo> git add liotpcmqpztenx
!+master ~/screen-capture-theme/preview/git-repo> git add file
+master ~/screen-capture-theme/preview/git-repo> git commit -m 'Showcasi
master ~/screen-capture-theme/preview/git-repo> git checkout other-branc
Switched to branch 'other-branch'
other-branch ~/screen-capture-theme/preview/git-repo> git checkout maste
Switched to branch 'master'
master ~/screen-capture-theme/preview/git-repo> |
```

exit status if nonzero, status & branch if git, pwd always

## sunrise

Lightweight prompt with exit status and `git status` consistent mode line

```
--- ~ » cd Code/meck
--- Code/meck <master> AMRDMD? » git s
R LICENSE -> LICENSE_new
M Makefile
D NOTICE
D README.md
A new_file
M rebar.config
?? temp
--- Code/meck <master> AMRDMD? » ls
LICENSE_new  ebin      new_file    temp
Makefile    erl_crash.dump rebar.config test
doc          include    src
--- Code/meck <master> AMRDMD? » return 99
--- Code/meck <master> AMRDMD? » 99 ↵

--- ~ » cd Code/meck
--- Code/meck <master> AMRDMD? » git s
R LICENSE -> LICENSE_new
M Makefile
D NOTICE
D README.md
A new_file
M rebar.config
?? temp
--- Code/meck <master> AMRDMD? » ls
LICENSE_new  ebin      new_file    temp
Makefile    erl_crash.dump rebar.config test
doc          include    src
--- Code/meck <master> AMRDMD? » return 99
--- Code/meck <master> AMRDMD? » 99 ↵
```

## superjarin

`git status`, `git branch`, and `ruby`, all in a no muss, no fuss prompt! Works with `RVM`, `chruby`, and `renv` (just activate the corresponding plugin).

```
[ree-1.8.7] ~/projects/jarinudom.com <master> git co -b hello
Switched to a new branch 'hello'
[ree-1.8.7] ~/projects/jarinudom.com <hello> touch yay.txt
[ree-1.8.7] ~/projects/jarinudom.com <hello> X rvm use ruby-1.9.2-p180
Using /Users/jarinudom/.rvm/gems/ruby-1.9.2-p180
[ruby-1.9.2] ~/projects/jarinudom.com <hello> X rm yay.txt
[ruby-1.9.2] ~/projects/jarinudom.com <hello> █
```

## suvash

username, host, directory, `git branch` and `rvm gemset`

```
suvash at chautari in ~ using ruby-1.9.2-p290@blog
o pybrew venv use blog
# Using 'blog' environment (found in /Users/suvash/.pythonbrew/venvs/Python-2.7.2)
# To leave an environment, simply run 'deactivate'
suvash at chautari in ~ using ruby-1.9.2-p290@blog and Python-2.7.2#blog
o █

function virtualenv info {
```

## terminalparty

There is a party every day.

```
% cd .oh-my-zsh
% █

~ Mist
~/ .oh-my-zsh (master ↻) Mist
```

## theunraveler

```
sagan@galaxy: ~/screen-capture-theme/preview/git-repo — ..view/git-repo — zsh — 100x35
[git-repo] echo "Theme: theunraveler"
Theme: theunraveler
[git-repo] echo "Testing return value."
Testing return value.
[git-repo] false
[git-repo] echo Hello World >> file
[git-repo] touch kkhtnuavkzginikdlonk
[git-repo] git add kkhtnuavkzginikdlonk
[git-repo] git add file
[git-repo] git commit -m 'Showcasing theunraveler' &> /dev/null
[git-repo] git checkout other-branch
Switched to branch 'other-branch'
[git-repo] git checkout master
Switched to branch 'master'
[git-repo] █
```

Minimal, informative when it needs to be.

## tjkirch

Based on dst, plus a lightning bolt and return codes.

```
tjkirch@grudge: ~/oh-my-zsh master ⚡
$ █ [19:44:48]
```

## tonotdo

```
robbyrussell➔» [21:48:16]
robbyrussell➔» cd .oh-my-zsh [21:48:18]
robbyrussell➔/.oh-my-zsh(master)» touch X [21:48:20]
robbyrussell➔/.oh-my-zsh(masterX)» █ [21:48:23]
```

## trapd00r

```
root@desktop:pts/0-> /root (0)
> █
```

## wedisagree

```
Last login: Tue Jul 26 12:27:23 on ttys001
[~] cd .oh-my-zsh
[.oh-my-zsh] 12:28:20
12:28:25 master 🌈★
```

Instructions to further customize the theme are available as comments in the theme file.


## wezm

```
sagan@galaxy: ~/screen-capture-theme/preview/git-repo — .view/git-repo — zsh — 100x35
(master) % echo "Theme: wezm" ~/screen-capture-theme/preview/git-repo
Theme: wezm
(master) % echo "Testing return value." ~/screen-capture-theme/preview/git-repo
Testing return value.
(master) % false ~/screen-capture-theme/preview/git-repo
(master) [1] % echo Hello World >> file ~/screen-capture-theme/preview/git-repo
(master) % touch erotbnexqdsyxfythcqo ~/screen-capture-theme/preview/git-repo
(master) % git add erotbnexqdsyxfythcqo ~/screen-capture-theme/preview/git-repo
(master) % git add file ~/screen-capture-theme/preview/git-repo
(master) % git commit -m 'Showcasing wezm' &> /dev/null ~/screen-capture-theme/preview/git-repo
(master) % git checkout other-branch ~/screen-capture-theme/preview/git-repo
Switched to branch 'other-branch'
(other-branch) % git checkout master ~/screen-capture-theme/preview/git-repo
Switched to branch 'master'
(master) % ~/screen-capture-theme/preview/git-repo
```

## wuffers


```
{ruby-1.9.2-p290} ~ cd .oh-my-zsh
[master] {ruby-1.9.2-p290} .oh-my-zsh touch x
[master x] {ruby-1.9.2-p290} .oh-my-zsh rm x
[master] {ruby-1.9.2-p290} .oh-my-zsh _
```

xiong-chiamiov

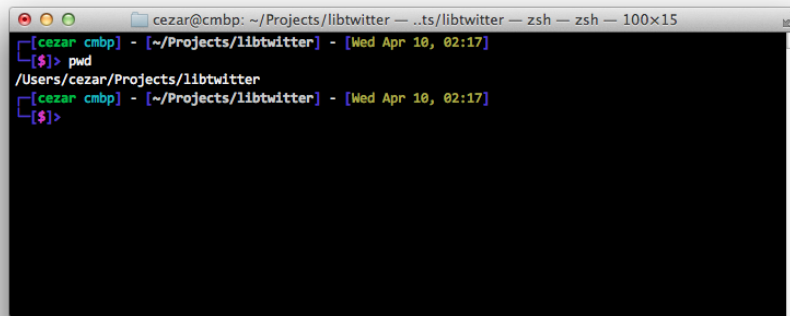

```
cezar@cmbp: ~/Projects/libtwitter — .ts/libtwitter — zsh — zsh — 100x15
[cezar@cmbp] - [~/Projects/libtwitter] - [Wed Apr 10, 02:17]
[$]> cd
/Users/cezar/Projects/libtwitter
[cezar@cmbp] - [~/Projects/libtwitter] - [Wed Apr 10, 02:17]
[$]>
```

xiong-chiamiov-plus

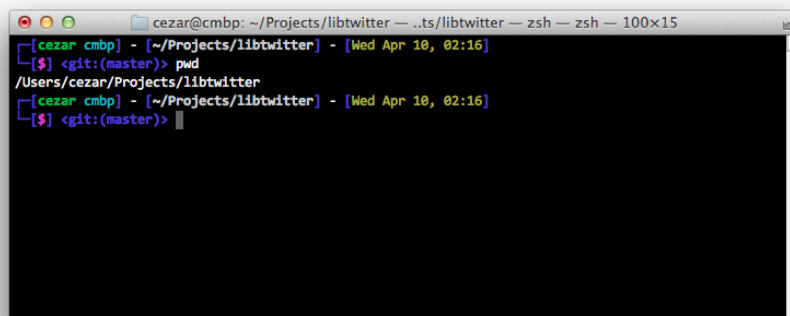


```
cezar@cmbp: ~/Projects/libtwitter — .ts/libtwitter — zsh — zsh — 100x15
[cezar@cmbp] - [~/Projects/libtwitter] - [Wed Apr 10, 02:16]
[$] <git:(master)> cd
/Users/cezar/Projects/libtwitter
[cezar@cmbp] - [~/Projects/libtwitter] - [Wed Apr 10, 02:16]
[$] <git:(master)>
```

ys

Clean, simple, compatible and meaningful. Tested on Linux, Unix and Windows under ANSI colors. It is recommended to use with a dark background.

(more info)

zhann



```
~ j brizon
/Users/steven/Sandbox/brizon
Using /Users/steven/.rvm/gems/ruby-1.9.3-p0 with gemset brizon
brizon j repo
/Users/steven/Sandbox/chef-repo
chef-repo (newrelic) touch x
chef-repo (newrelic) x _
```

```
test — ys@ys-rmbp — ..downloads/test — -zsh — 81x31
Last login: Sun Feb 21 03:03:03 on ttys002

# ys @ ys-rmbp in ~ [3:05:51] tty:s003 L:1 N:1 C:0
$ cd .oh-my-zsh

# ys @ ys-rmbp in ~/.oh-my-zsh on git:ys o [3:06:05] tty:s003 L:1 N:2 C:0
$ ls
MIT-LICENSE.txt  custom      oh-my-zsh.sh  themes
README.markdown lib          plugins       tools
cache           log         templates

# ys @ ys-rmbp in ~/.oh-my-zsh on git:ys o [3:06:06] tty:s003 L:1 N:3 C:0
$ touch test

# ys @ ys-rmbp in ~/.oh-my-zsh on git:ys x [3:06:10] tty:s003 L:1 N:4 C:0
$ asdf
zsh: command not found: asdf

# ys @ ys-rmbp in ~/.oh-my-zsh on git:ys x [3:06:12] tty:s003 L:1 N:5 C:127
$ echo $?
127

# ys @ ys-rmbp in ~/.oh-my-zsh on git:ys x [3:06:15] tty:s003 L:1 N:6 C:0
$ cd ~/Downloads/test

# ys @ ys-rmbp in ~/Downloads/test on hg:default o [3:06:31] tty:s003 L:1 N:7 C:0
$ touch test

# ys @ ys-rmbp in ~/Downloads/test on hg:default x [3:06:51] tty:s003 L:1 N:8 C:0
$
```

Figure 2: ys-zsh-theme



## More themes

You can find more themes [here](#).

(Don't) Send us your theme! (for now)

We have enough themes for the time being. Please fork the project and add on in there, you can let people know how to grab it from there.

Or put it gist and list it in <https://github.com/ohmyzsh/ohmyzsh/wiki/External-themes> .

## Theme Description Format

The theme descriptions in this page should contain:

- \* The name of the theme
- \* A screenshot \* (Preferably in PNG format, and hosted on a GitHub issue)
- \* Instructions for any configuration besides setting `ZSH_THEME` in `~/.zshrc`
- \* For example, font installation, terminal color scheme configuration, or optional environment variables that affect the theme
- \* Any dependencies outside Oh My Zsh

We use manually-constructed screenshots because some of the themes require additional terminal configuration to look their best, and so the code in example shell sessions can showcase the theme's features. There is also a separate collection of automatically-generated screenshots linked at the bottom of this page.

## Uploading screenshots to GitHub

We host all the screenshot images on GitHub itself, to avoid external dependencies on other hosting services or URLs that might break. We use issue attachments which will get them in to githubusercontent.com. (It's also possible to store image files in a GitHub wiki itself, but this requires you to have Contributor permissions for the repo whose Wiki you're editing. The issue-attachment method can be done by anybody.)

To upload an image to GitHub, just drag and drop it into the text area on an issue you're editing. You can use issue #3619 for this to avoid spamming people with notifications about new issues. The uploaded image will turn in to a link in Mark-down format. Edit that to use the special `[!name](image-url)(image-url)` syntax to make the image link to itself, so people can open the image in a new tab to view it full size. (Images inside a wiki page may be displayed scaled down.)

For example:

[! [wezm] (<https://cloud.githubusercontent.com/assets/1441704/6315419/915f6ca6-ba01-11e4-9>

If you have several uploaded screenshot links you need to convert to that self-linked syntax, you can use this `sed` command on the markdown file to programmatically convert them.

```
sed 's/^!\[[a-zA-Z0-9 -]*\](\[^\])*\) *$/[&](\1)/'
```

## Screenshots of Each Theme

Screenshots of each theme (as of 2013-04-10), in OS X Terminal.app using Consolas 13pt and Pro color scheme, inside a folder containing both a git and a mercurial repo. Each screenshot displays the output of the `pwd` command. It has shortcomings (plugins for some themes might be missing), but it offers a convenient and uniform overview of each theme. Plugins used were battery, rvm, hg prompt, among others.