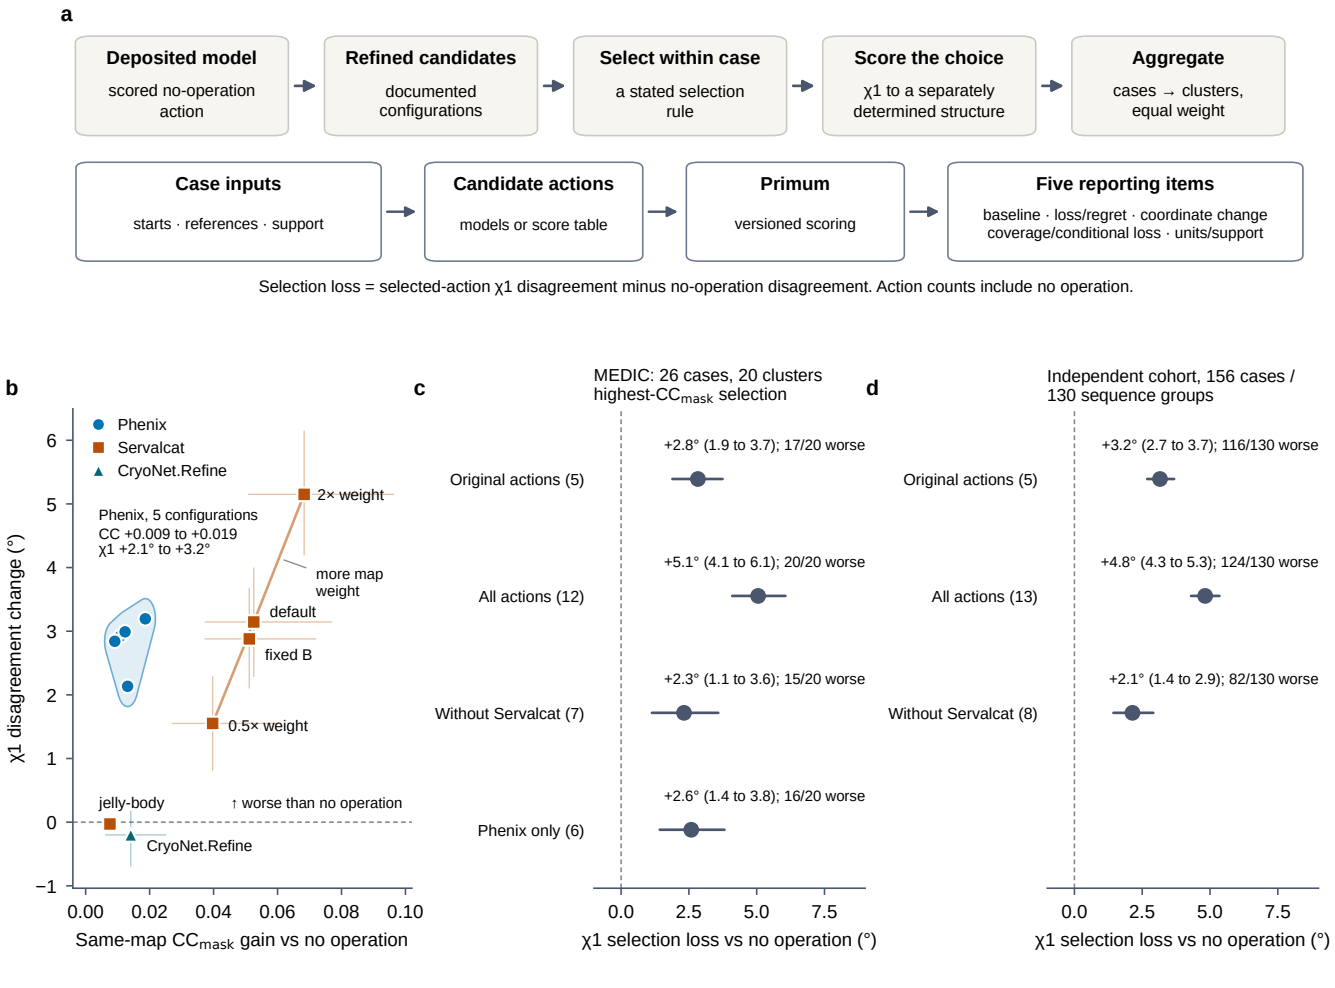
a
Deposited model
scored no-operation action
Refined candidates
documented configurations
Select within case
a stated selection rule
Score the choice
χ1 to a separately determined structure
Aggregate
cases → clusters, equal weight
Case inputs
starts · references · support
Candidate actions
models or score table
Primum
versioned scoring
Five reporting items
baseline · loss/regret · coordinate change
coverage/conditional loss · units/support
Selection loss = selected-action χ1 disagreement minus no-operation disagreement. Action counts include no operation.
b
Phenix
Servalcat
CryoNet.Refine
Phenix, 5 configurations
CC +0.009 to +0.019
χ1 +2.1° to +3.2°
2× weight
more map weight
default
fixed B
0.5× weight
jelly-body
↑ worse than no operation
CryoNet.Refine
χ1 disagreement change (°)
Same-map CCmask gain vs no operation
c
MEDIC: 26 cases, 20 clusters
highest-CCmask selection
Original actions (5)
+2.8° (1.9 to 3.7); 17/20 worse
All actions (12)
+5.1° (4.1 to 6.1); 20/20 worse
Without Servalcat (7)
+2.3° (1.1 to 3.6); 15/20 worse
Phenix only (6)
+2.6° (1.4 to 3.8); 16/20 worse
χ1 selection loss vs no operation (°)
d
Independent cohort, 156 cases / 130 sequence groups
Original actions (5)
+3.2° (2.7 to 3.7); 116/130 worse
All actions (13)
+4.8° (4.3 to 5.3); 124/130 worse
Without Servalcat (8)
+2.1° (1.4 to 2.9); 82/130 worse
χ1 selection loss vs no operation (°)