

ArrayList and Lists

Lab 16

**What is
a list?**



	Name	Time	Artist	Album	Ge
5	<input checked="" type="checkbox"/> I Dare You to Move	4:08	Switchfoot	Learning to Breathe	
6	<input checked="" type="checkbox"/> I've Been Everywhere	3:20	Johnny Cash	Unchained	
7	<input checked="" type="checkbox"/> Brown Eyed Girl (Single Version)	3:05	Van Morrison	Super Hits	
8	<input checked="" type="checkbox"/> Born to Be Wild	3:31	Steppenwolf	Steppenwolf: All Time Greatest	
9	<input checked="" type="checkbox"/> Magic Carpet Ride	4:28	Steppenwolf	Steppenwolf: All Time Greatest	
10	<input checked="" type="checkbox"/> Crazy (Single Version)	2:42	Patsy Cline	Patsy Cline's Greatest Hits (Re	
11	<input checked="" type="checkbox"/> Brick House	3:46	The Commodores	20th Century Masters - The Mill	
12	<input checked="" type="checkbox"/> Cleveland Rocks	2:33	The Presidents of the...	Pure Frosting	
13	<input checked="" type="checkbox"/> Chariots of Fire: Main Title Theme	3:32	Carl Davis & Royal Li...	Great Movie Themes	
14	<input checked="" type="checkbox"/> Dueling Banjos (From "Deliverance")	3:11	The Hit Crew	Smash Hit Dramas Movie Theme	
15	<input checked="" type="checkbox"/> Main Theme (From "Superman")	4:12	John Williams	The Music of John Williams - 40	
16	<input checked="" type="checkbox"/> Main Theme (From "Superman")	4:12	John Williams	The Music of John Williams - 40	
17	<input checked="" type="checkbox"/> I've Been Everywhere	3:20	Johnny Cash	Unchained	
18	<input checked="" type="checkbox"/> Born to Be Wild	3:31	Steppenwolf	Steppenwolf: All Time Greatest	



**What is
an ArrayList?**

ArrayList

ArrayList is a class that houses an array.

An ArrayList can store any type.

All ArrayLists store the first reference at spot / index position 0.

What is an array?

```
int[] nums = new int[10];    //Java int array
```


	0	1	2	3	4	5	6	7	8	9
nums	0	0	0	0	0	0	0	0	0	0

An array is a group of items all of the same type which are accessed through a single identifier.

ArrayList References

ArrayList list;

list
null



null

nothing

list is a reference to an ArrayList.

ArrayList Instantiation

```
new ArrayList();
```

0x213

[]


ArrayLists are Objects.

ArrayList

```
ArrayList list = new ArrayList();
```

list

0x213



0x213

[]

list is a reference to an ArrayList.

ArrayList

```
List ray = new ArrayList();  
ray.add("hello");  
ray.add("whoot");  
ray.add("contests");  
out.println(((String)ray.get(0)).charAt(0));  
out.println(((String)ray.get(2)).charAt(0));
```

OUTPUT

h
c

ray stores Object references.

Open objects.java

Generic ArrayLists

ArrayList

With Java 5, you can now specify which type of reference you want to store in the ArrayList.

```
ArrayList<String> words;  
words = new ArrayList<String>();
```

```
List<Double> decNums;  
decnums = new ArrayList<Double>();
```

ArrayList

With Java 5, you can now specify which type of reference you want to store in the ArrayList.

```
ArrayList<Long> bigStuff;  
bigStuff = new ArrayList<Long>();
```

```
List<It> itList;  
itList = new ArrayList<It>();
```

ArrayList

```
List<String> ray;  
ray = new ArrayList<String>();  
ray.add("hello");  
ray.add("whoot");  
ray.add("contests");  
out.println(ray.get(0).charAt(0));  
out.println(ray.get(2).charAt(0));
```

OUTPUT

h

c

ray stores String references.

Open generics.java

ArrayList

Methods

ArrayList

frequently used methods

Name	Use
add(item)	adds item to the end of the list
add(spot,item)	adds item at spot – shifts items up->
set(spot,item)	put item at spot <code>z[spot]=item</code>
get(spot)	returns the item at spot <code>return z[spot]</code>
size()	returns the # of items in the list
remove()	removes an item from the list
clear()	removes all items from the list

```
import java.util.ArrayList;
```

addOne

```
ArrayList<String> words;  
words = new ArrayList<String>();
```

```
words.add("it");  
words.add("is");  
words.add(0,"a");  
words.add(1,"lie");  
out.println(words);
```

OUTPUT

[a, lie, it, is]

add0 two

```
List<Integer> nums;  
nums = new ArrayList<Integer>();
```

```
nums.add(34);  
nums.add(0,99);  
nums.add(21);  
nums.add(0,11);  
out.println(nums);
```

OUTPUT

[11, 99, 34, 21]

Open
addone.java
addtwo.java

setC

```
ArrayList<Integer> ray;  
ray = new ArrayList<Integer>();  
ray.add(23);  
ray.add(11);  
ray.set(0,66);  
ray.add(53);  
ray.set(1,93);  
ray.add(22);  
out.println(ray);
```

OUTPUT

[66, 93, 53, 22]

setC

```
List<Integer> ray;  
ray = new ArrayList<Integer>();  
ray.add(23);  
ray.add(0, 11);  
ray.set(5,66);  
out.println(ray);
```

OUTPUT

Runtime exception

get()

```
ArrayList<Integer> ray;  
ray = new ArrayList<Integer>();  
ray.add(23);  
ray.add(11);  
ray.add(12);  
ray.add(65);
```

OUTPUT

23

65

```
out.println(ray.get(0));  
out.println(ray.get(3));
```

.get(spot) returns the reference stored at spot!

get()

```
List<Integer> ray;  
ray = new ArrayList<Integer>();  
ray.add(23);  
ray.add(11);  
ray.add(12);  
ray.add(65);  
  
for(int i=0; i<ray.size(); i++)  
    out.println(ray.get(i));
```

OUTPUT

23

11

12

65

.get(spot) returns the reference stored at spot!

Open
set.java
get.java

Processing a list using loops

Traditional for loop

```
for (int i=0; i<ray.size(); i++)  
{  
    out.println(ray.get(i));  
}
```

.size() returns the number of
elements/items/spots/boxes or
whatever you want to call them.

new for loop

```
List<Integer> ray;  
ray = new ArrayList<Integer>();
```

```
ray.add(23);  
ray.add(11);  
ray.add(53);
```

```
for(int num : ray){  
    out.println(num);  
}
```

OUTPUT

23
11
53

Open

newforloopone.java

remove methods

removed one

```
ArrayList<String> ray;  
ray = new ArrayList<String>();
```

```
ray.add("a");  
ray.add("b");  
ray.remove(0);  
ray.add("c");  
ray.add("d");  
ray.remove(0);  
out.println(ray);
```

OUTPUT

[c, d]

removed two

```
List<String> ray;  
ray = new ArrayList<String>();
```

```
ray.add("a");  
ray.add("b");  
ray.remove("a");  
ray.add("c");  
ray.add("d");  
ray.remove("d");  
out.println(ray);
```

OUTPUT

[b, c]

Open

removeone.java

removetwo.java

Removing Multiple Items

Removing multiple items

```
spot = list size – 1  
while( spot is >=0 )  
{  
    if ( this item is a match )  
        remove this item from the list  
        subtract 1 from spot  
}
```

Removing multiple items

```
spot = list.size() - 1  
while( spot >= 0 )  
{  
    if ( list.get(spot).equals( value ) )  
        list.remove( spot );  
    spot = spot - 1  
}
```

Open

removeall.java

clear()

```
ArrayList<String> ray;  
ray = new ArrayList<String>();
```

```
ray.add("a");  
ray.add("x");  
ray.clear();  
ray.add("t");  
ray.add("w");  
out.println(ray);
```

OUTPUT


[t, w]

**Open
clear.java**

ArrayList with User-defined classes

ArrayList w/User Classes

```
ArrayList<Creature> creatures;  
creatures = new ArrayList<Creature>();  
creatures.add(new Creature(4));  
creatures.add(new Creature(9));  
creatures.add(new Creature(1));
```

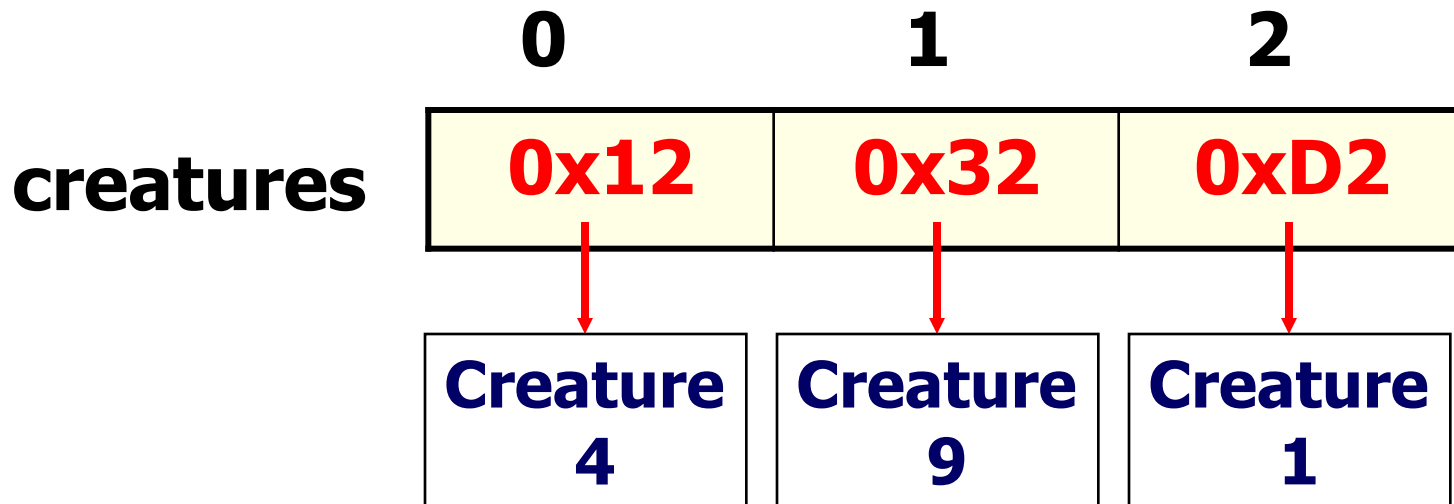

ArrayList w/User Classes

```
ArrayList<Creature> creatures;  
creatures = new ArrayList<Creature>();  
creatures.add(new Creature(4));  
creatures.add(new Creature(9));  
creatures.add(new Creature(1));  
  
out.println(creatures.get(0));  
  
creatures.get(0).setSize(7);  
out.println(creatures.get(0));  
  
out.println(creatures.get(2));
```

OUTPUT

4

7

1

ArrayList w/User Classes

```
creatures.get(0).setSize(7);
```

0x242

**What
does this
return?**

**What
does the
. dot do?**

0x242

Creature

**The . dot grants access to the
Object at the stored address.**

Open

userclassesone.java

Open
creature.java
herd.java
herdrunner.java

Start work on Lab 16

AutoBoxing

AutoUnboxing

Box/Unbox

primitive	object
byte	Byte
short	Short
int	Integer
long	Long
float	Float
double	Double
char	Character
boolean	Boolean
==	.equals()

Box/Unbox

Before Java 5 added in autoboxing and autounboxing, you had to manually wrap primitives.

```
Integer x = new Integer(98);  
int y = 56;  
x= new Integer(y);
```

Box/Unbox

Java now wraps automatically.

Integer numOne = 99;

Integer numTwo = new Integer(99);

=99;

=new Integer(99);

These two lines are equivalent.



Box/Unbox

Java now wraps automatically.

Double numOne = 99.1;

Double numTwo = new Double(99.1);

=99.1;

=new Double(99.1);

These two lines are equivalent.



Box/Unbox

Before Java 5 added in autoboxing and autounboxing, you had to manually unwrap references.

```
Integer ref = new Integer(98);  
int y = ref.intValue();
```

Box/Unbox

Java now unwraps automatically.

```
Integer num = new Integer(3);  
int prim = num.intValue();  
out.println(prim);  
prim = num;  
out.println(prim);
```

OUTPUT

3

3

```
prim=num.intValue();  
prim=num;
```

These two lines are equivalent.

Box/Unbox

```
Double dub = 9.3;  
double prim = dub;  
out.println(prim);
```

```
int num = 12;  
Integer big = num;  
out.println(big.compareTo(12));  
out.println(big.compareTo(17));  
out.println(big.compareTo(10));
```

OUTPUT

9.3

0

-1

1

Open

autoboxunbox.java

new for loop

```
ArrayList<Integer> ray;  
ray = new ArrayList<Integer>();
```

```
//add some values to ray
```

```
int total = 0;  
for(Integer num : ray)  
{
```

```
    //this line shows the AP preferred way
```

```
    //it shows the manual retrieval of the primitive
```

```
    total = total + num.intValue();
```

```
    //the line below accomplishes the same as the line above
```

```
    //but, it uses autounboxing to get the primitive value
```

```
    //total = total + num;
```

```
}
```

```
out.println(total);
```

OUTPUT

153

Open

newforloopone.java

newforlooptwo.java

collections class

Collections

frequently used methods

Name	Use
sort(x)	puts all items in x in ascending order
binarySearch(x,y)	checks x for the location of y
fill(x,y)	fills all spots in x with value y
rotate(x,y)	shifts items in x left or right y locations
reverse(x)	reverses the order of the items in x

```
import java.util.Collections;
```

Collections

```
ArrayList<Integer> ray;  
ray = new ArrayList<Integer>();
```

```
ray.add(23);  
ray.add(11);  
ray.add(66);  
ray.add(53);  
Collections.sort(ray);  
out.println(ray);  
out.println(Collections.binarySearch(ray,677));  
out.println(Collections.binarySearch(ray,66));
```

OUTPUT

```
[11, 23, 53, 66]  
-5  
3
```

Collections

```
ArrayList<Integer> ray;  
ray = ArrayList<Integer>();
```

```
ray.add(23);  
ray.add(11);  
ray.add(53);  
out.println(ray);  
rotate(ray,2);  
out.println(ray);  
rotate(ray,2);  
reverse(ray);  
out.println(ray);
```

OUTPUT

```
[23, 11, 53]  
[11, 53, 23]  
[11, 23, 53]
```

Collections

```
ArrayList<Integer> ray;  
ray = new ArrayList<Integer>();  
ray.add(0);  
ray.add(0);  
ray.add(0);  
out.println(ray);
```

OUTPUT

```
[0, 0, 0]  
[33, 33, 33]
```

```
Collections.fill(ray,33);  
out.println(ray);
```

Open
binarysearch.java
rotate.java
fill.java

search methods

ArrayList

frequently used methods

Name	Use
contains(x)	checks if the list contains x
indexOf(x)	checks the list for the location of x

```
ArrayList<Integer> ray;  
ray = new ArrayList<Integer>();
```

```
ray.add(23);  
ray.add(11);  
ray.add(66);  
ray.add(53);
```

```
out.println(ray);  
out.println(ray.indexOf(21));  
out.println(ray.indexOf(66));
```

```
out.println(ray);  
out.println(ray.contains(21));  
out.println(ray.contains(66));
```

OUTPUT

[23, 11, 66, 53]

-1

2

[23, 11, 66, 53]

false

true

Open
search.java

Open

arraylistuserclasssestwo.java


Java collections

Java Interfaces

The following are important interfaces included in the Java language ::


**Collection
List**

Java Collections

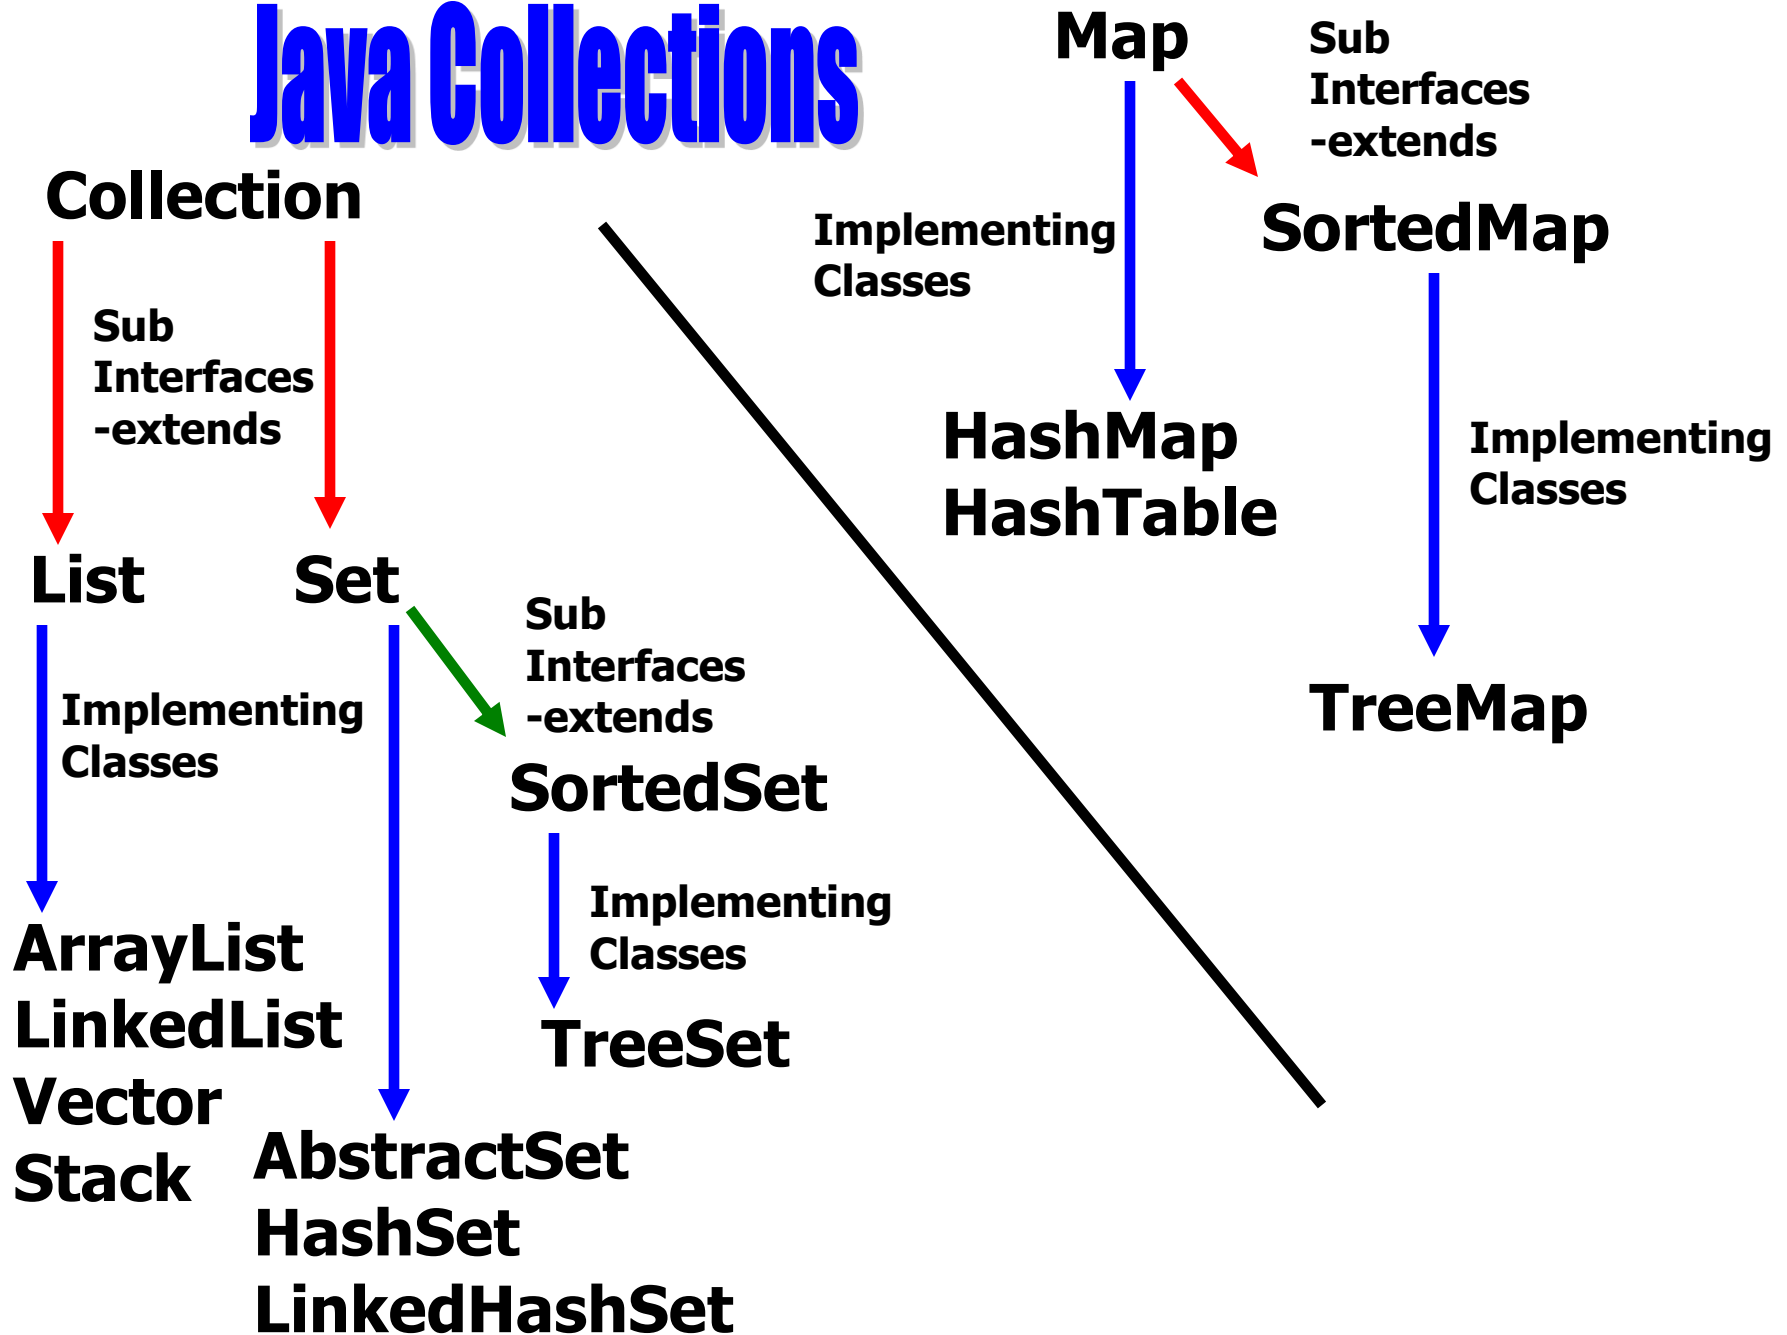

The Collection Interface


The Collection interface is the parent of List and Set. The Collection interface has many methods listed including add(), clear(), remove(), and size().

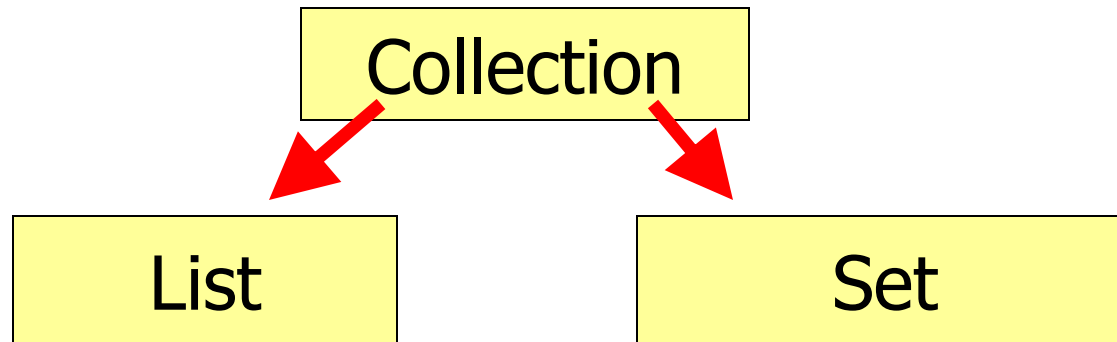

others not shown

The List Interface

The List interface extends the Collection interface. The List interface adds in the get() method as well as several others.

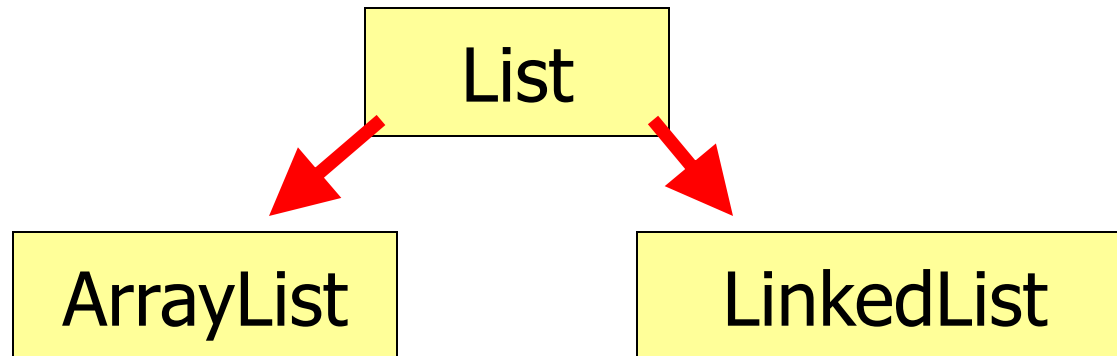

others not shown

ArrayList

ArrayList is a descendant of List and Collection, but because List and Collection are interfaces, you cannot instantiate them.

Collection bad = new Collection(); //illegal

List ray = new ArrayList(); //legal

ArrayList list = new ArrayList(); //legal

ray and list store Object references.

**Continue work
on Lab 16**