



Payeer for CMS Opencart 3.0.2.0


Using FTP client, copy the folders admin and catalog to your website root.
If you need to replacement file, you need to agree.



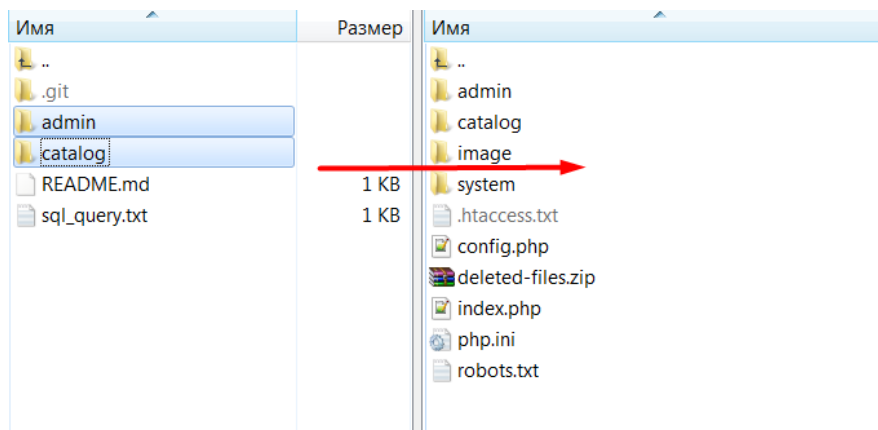


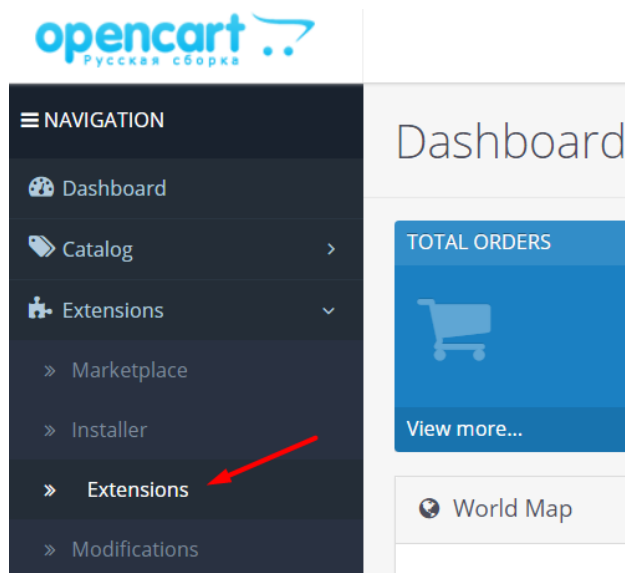



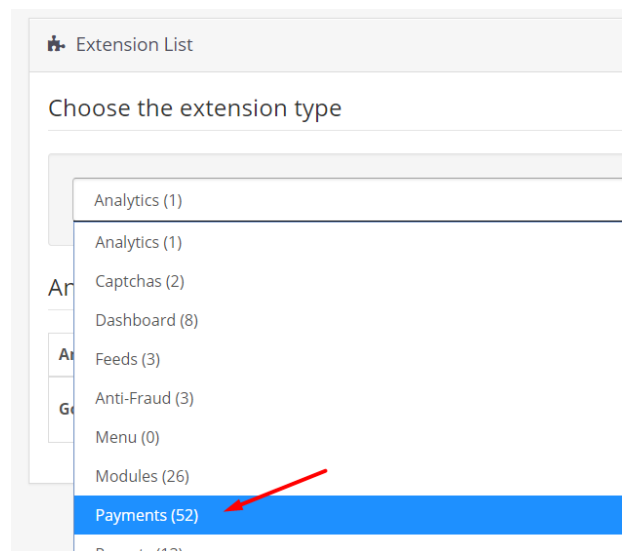




Go to the admin panel of your website. Go to menu “Extensions ->Extensions”.















From the list, select the extension type “Payments”.















Module Payeer should appear in the list of payment systems.

LIQPAY		Disabled	 
NOCHEX		Disabled	 
Payeer		Disabled	 
Paymate		Disabled	 

Opposite payment system Payeer click on the icon “Install”.

LIQPAY		Disabled	 
NOCHEX		Disabled	 
Payeer		Disabled	 
Paymate		Disabled	 


After installation, click on “Edit”.


LIQPAY		Disabled	 
NOCHEX		Disabled	 
Payeer		Disabled	 
Paymate		Disabled	 

You entered the settings for the payment module Payeer. Fill in all required fields:


Payeer

Home > Payment > Payeer


 Payeer module change

* URL merchant 


https://payeer.com/merchant/

* ID shop 


01234567

* Secret key 


1234567

The path to the transaction log 

/payeer_orders.log

IP Filter incoming requests 

123.456.*.*

E-mail alert for Error 

info@payeer.com

Status of waiting for payment

Pending

Status successful payment

Complete

Status fail payment

Failed

Geo zone

All Zones

Sorting order

1

URL merchant: link to payment system Payeer in (default <https://payeer.com/merchant/>);

ID shop: ID of your store in the system Payeer (can be found in the personal cabinet);

Secret key: the secret key of your store, you can also find in the personal cabinet;

The path to the transaction log: the path to the file intended to record the history of payment transactions in the payment system Payeer;

IP filter incoming requests: IP filter incoming requests You can specify the list of all trusted ip addresses of servers, separated by commas. You can also specify a mask instead of the ip address. If the field is empty, checking for trusted ip addresses is not performed.

For example:

192.168.71.87, 192.165.83.17, 192.178.34.15

Or 192.*.71.87, 192.165.83.*, 192.*.34.*

Or *.*.*.* - all available ip addresses;

E-mail alert for Error: email will be sent notifying you in case of an error of payment. The letter will state the reason and basic information about the payment;
Specify the status of orders payment

- 1) **Status of waiting for payment** (default, Pending);
- 2) **Status of successful payment** (default, Complete);
- 3) **Status of failure of payment** (default, Failed);

Geo zone: geographic area where affordable payment method;

Sort order: the order in the list of available payment methods.

Save the changes.

Open the file sql_query.txt from the archive and copy the contents.

Run the SQL query to the database where you installed OpenCart CMS.

The request may be performed using a SQL client or phpMyAdmin (to paste the copied text from the file sql_query.txt).

If the database has a prefix, then append it to the word setting (for example, oc_setting) and confirm the request. The second value in the VALUES – this is the id of your shop in the admin panel. If the shop first, then the value is 0 by default.

After each change module settings in the admin panel Payeer, you need to run the above query to the database to activate the module.

Run SQL query/queries on server "localhost":

```
1 INSERT INTO `oc_setting` (`setting_id`, `store_id`, `code`, `key`, `value`, `serialized`) VALUES
2 (', 0, 'payeer', 'payment_payeer_status', 1, 0)
```


This is the id of your shop in the admin panel

Clear Format Get auto-saved query

☐ Bind parameters

[Delimiter ;] ☒ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks

Enter the URL address in the “Dashboard → Merchant Settings → Settings”:

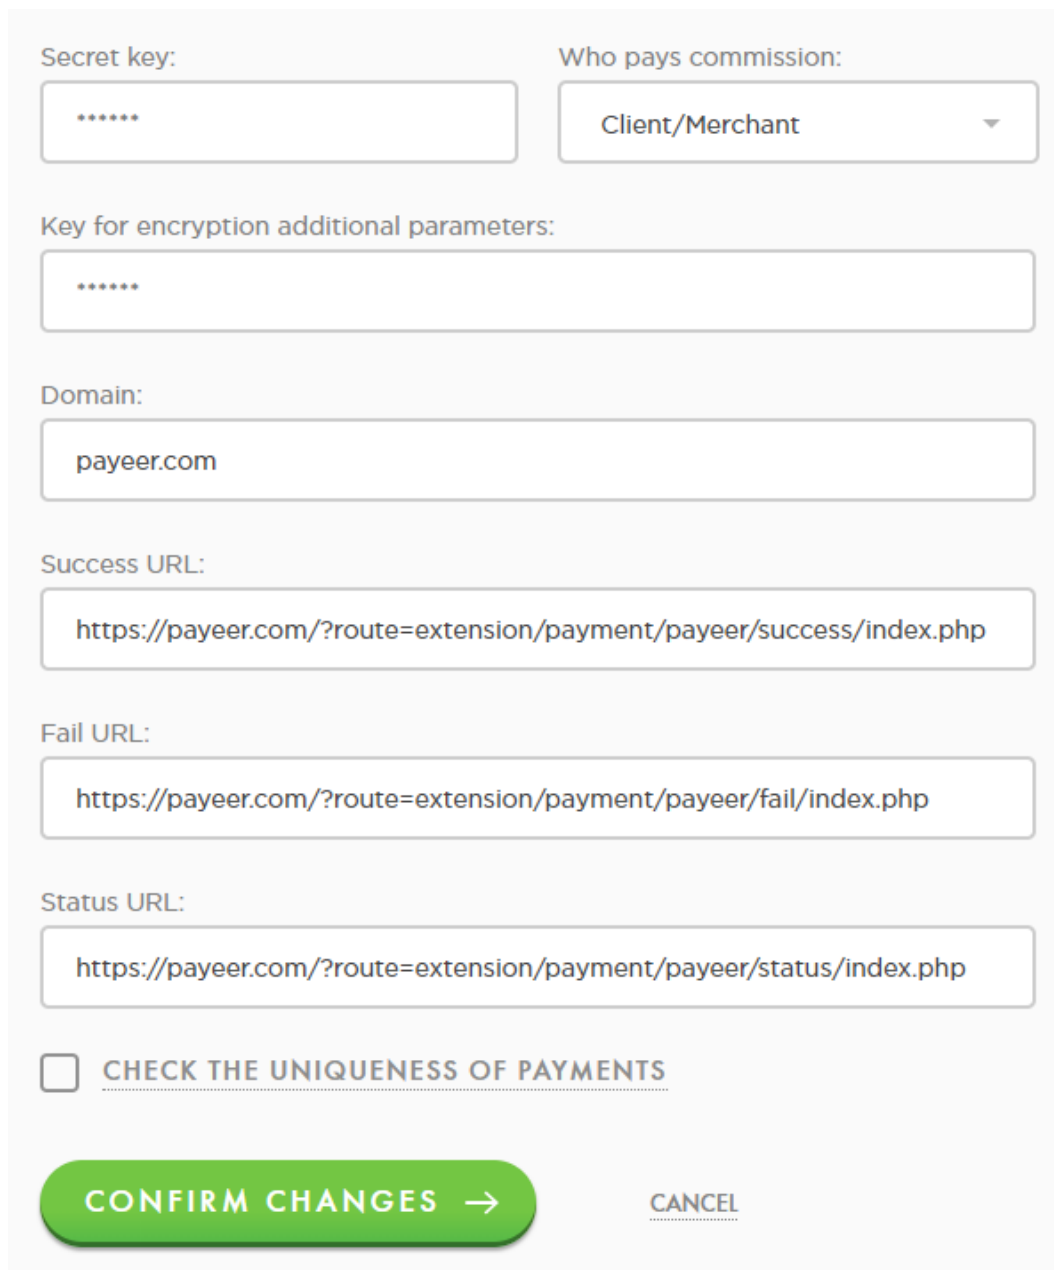

The screenshot shows a web form for configuring Payeer merchant settings. It includes fields for a secret key, a dropdown for 'Who pays commission' (set to 'Client/Merchant'), a field for an encryption key, a domain field (set to 'payeer.com'), and fields for success, fail, and status URLs. All URLs are pre-filled with a placeholder '*****' for the domain. There is a checkbox for 'CHECK THE UNIQUENESS OF PAYMENTS' and two buttons at the bottom: a green 'CONFIRM CHANGES' button with a right arrow and a 'CANCEL' button.

Secret key: *****

Who pays commission: Client/Merchant ▼

Key for encryption additional parameters: *****

Domain: payeer.com

Success URL: https://payeer.com/?route=extension/payment/payeer/success/index.php

Fail URL: https://payeer.com/?route=extension/payment/payeer/fail/index.php

Status URL: https://payeer.com/?route=extension/payment/payeer/status/index.php

☐ CHECK THE UNIQUENESS OF PAYMENTS

CONFIRM CHANGES → **CANCEL**

Success URL:

https:// *****/?route=extension/payment/payeer/success/index.php

Fail URL:

https:// *****/?route=extension/payment/payeer/fail/index.php

Status URL:

https:// *****/?route=extension/payment/payeer/status/index.php

Where ***** is your domain.

Confirm changes.

Payeer module for CMS Opencart 3.0.2.0 configured.