

Time 5


Time 4

Time 3

Time 2

Time 1

Node1 finally finds out that in time 3 there was transaction with bigger hash. He sync his DB and then apply invalid transactions again.

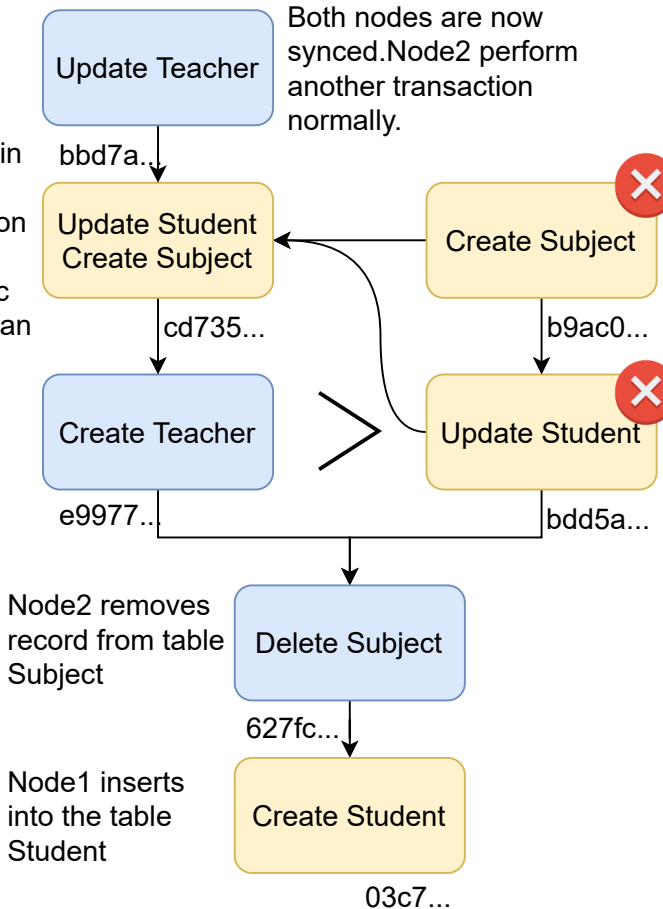

Both nodes are now synced. Node2 perform another transaction normally.

Node1 still does not know about e9977 version of database so he publish new version based on bdd5a

Both nodes add transactions and publish new version of DB. Node2 wins this time, because his transaction has bigger hash.