


| Feature | | Scenario | | | | Step | | | |
|-------------------------|----------|----------|---|---|---|------|---|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| Login on Luma ecommerce | 11.869 s | 2 | 1 | 1 | 0 | 6 | 6 | 0 | 0 |
| Login on Luma ecommerce | 11.946 s | 1 | 0 | 1 | 0 | 3 | 0 | 1 | 2 |

FAIL & SKIP SCENARIOS -- 3 --

| # | Feature Name | Scenario Name |
|---|-------------------------|---|
| 1 | Login on Luma ecommerce | Successful Login with valid credentials |
| 2 | | Successful Login with datatable |


| TAG | | Scer | nario | | Feature | | | | |
|------------|---|------|-------|---|---------|---|---|---|--|
| Name | T | P | F | S | T | P | F | S | |
| @Login | 2 | 1 | 1 | 0 | 1 | 0 | 1 | 0 | |
| @datatable | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 | |

FEATURES SUMMARY -- 5 --

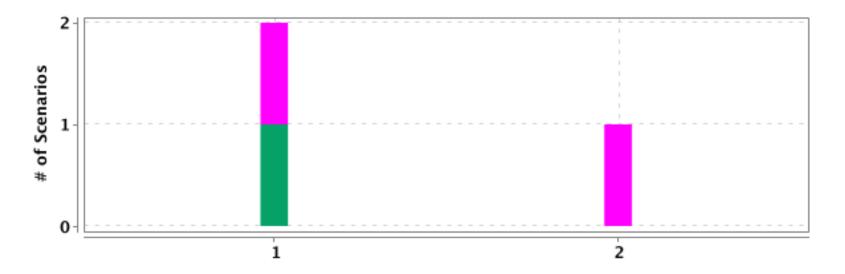

| # | Feature Name | T | P | F | S | Duration |
|---|-------------------------|---|---|---|---|----------|
| 1 | Login on Luma ecommerce | 2 | 1 | 1 | 0 | 11.869 s |
| 2 | Login on Luma ecommerce | 1 | 0 | 1 | 0 | 11.946 s |

SCENARIOS SUMMARY

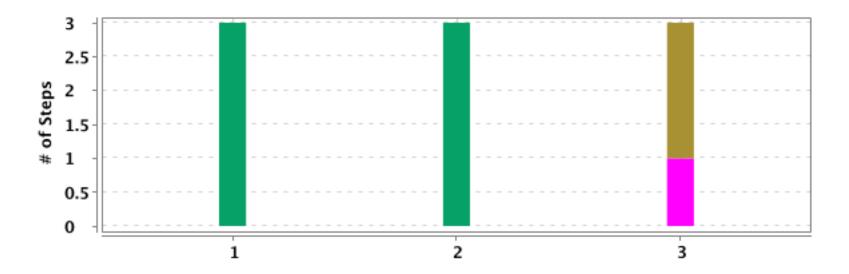


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|-------------------------|---|---|---|---|---|----------|
| 1 | Login on Luma ecommerce | Successful Login with valid credentials | 3 | 3 | 0 | 0 | 11.852 s |
| 2 | | Successful Login with valid credentials | 3 | 3 | 0 | 0 | 11.737 s |
| 3 | | Successful Login with datatable | 3 | 0 | 1 | 2 | 11.945 s |

DETAILED SECTION -- 7

Login on Luma ecommerce

| FAILED | DURATION - 11.869 s | Scenarios | | Steps | |
|-----------------------|---------------------|-----------|---|-----------|---|
| | | Total - 2 | | Total - 6 | |
| / 5:29:39.197 PM // 5 | :29:51.066 PM / | Pass - 1 | 2 | Pass - 6 | 6 |
| | | Fail - 1 | | Fail - 0 | |
| | | Skip - 0 | | Skip - 0 | |
| | | | | | |


Successful Login with valid credentials

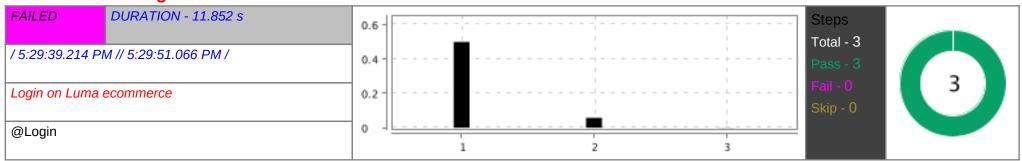

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | When user enters "Iruizajax@gmail.com" and "ckzsd68REn@cgp5" | PASSED | 0.499 s |
| 2 | And user clicks on sign in button | PASSED | 0.057 s |
| 3 | Then message displayed "Account Information" | PASSED | 0.001 s |
| | AFTER - com.magento.utils.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.871 s |
| | org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4.1', java.version: '20.0.1' Driver info: org.openqa.selenium. firefox.FirefoxDriver Command: [d5258f81-793c-40da-ae4b-ea62e833434f, quit {}} Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 116.0.3, moz:accessibilityChecks: false, moz:buildID: 20230815173142, moz:debuggerAddress: 127.0.0.1:13474, moz:geckodriverVersion: 0.33.0, moz:headless: false, moz:platformVersion: 22.5.0, moz:processID: 42049, moz:profile: /var/folders/1n/fmlp82gj2b5, moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://127.0.0.1:13474/devtoo, se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} at java.base/java.lang.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:484) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.lambda\$execute\$1(DriverCommandExecutor.java:128) at java.base/java.util.concurrent.CompletableFuture\$AsyncSupply.run(CompletableFuture.java:1768) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1144) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:642) at java.base/java.lang.Thread.run(Thread.java:1623) | | |

Successful Login with valid credentials

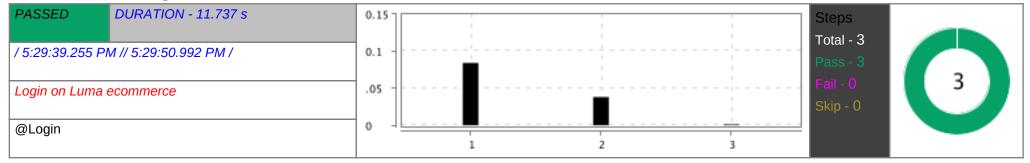


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | When user enters "Iruiz23@gmail.com" and "Iruiz23@#@@!" | PASSED | 0.084 s |
| 2 | And user clicks on sign in button | PASSED | 0.038 s |
| 3 | Then message displayed "Account Information" | PASSED | 0.001 s |

Login on Luma ecommerce

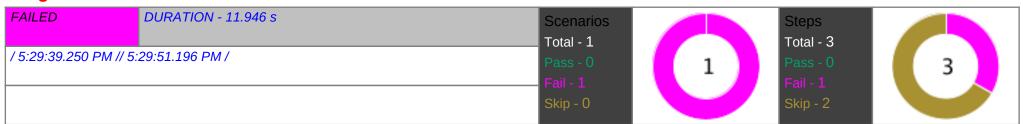

Successful Login with datatable

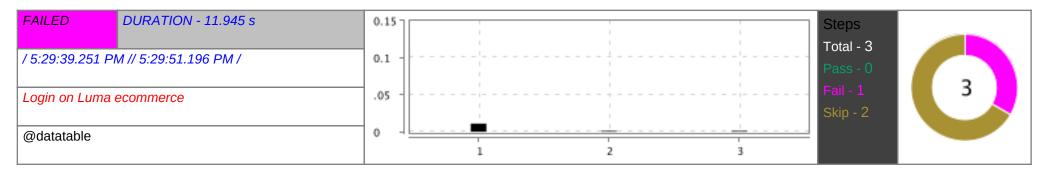

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | When user enters and password | FAILED | 0.011 s |
| | Iruizajax@gmail.com ckzsd68REn@cgp5 | | |
| | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4.1', java.version: '20.0.1' Driver info: org.openqa.selenium. firefox.FirefoxDriver Command: [null, findElement {using=name, value=login[username]}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 116.0.3, moz:accessibilityChecks: false, moz:buildID: 20230815173142, moz:debuggerAddress: 127.0.0.1:13474, moz:geckodriverVersion: 0.33.0, moz:headless: false, moz:platformVersion: 22.5.0, moz:processID: 42049, moz:profile: /var/folders/1n/fmlp82gj2b5, moz:shutdownTimeout: 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://127.0.0.1:13474/devtoo, se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.ElementLocations\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349) at com.magento.steps.LoginSteps.user_enters_and_password(LoginSteps.java:33) | | |
| | at ?.user enters and password(file:///Users/Iruiz/SeleInter05-1/src/test/resources/features/login2.feature:6) | | |
| | * Not displayable characters are replaced by '?'. | | |
| 2 | And user clicks on sign in button | SKIPPED | 0.001 s |
| 3 | Then message displayed "Account Information" | SKIPPED | 0.001 s |
| | AFTER - com.magento.utils.Hooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.003 s |
| | org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Mac OS X', os.arch: 'aarch64', os.version: '13.4.1', java.version: '20.0.1' Driver info: org.openqa.selenium. firefox.FirefoxDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 116.0.3, moz:accessibilityChecks: false, moz:buildID: 20230815173142, moz:debuggerAddress: 127.0.0.1:13474, moz:geckodriverVersion: 0.33.0, moz:headless: false, moz:platformVersion: 22.5.0, moz:processID: 42049, moz:profile: /var/folders/1n/fmlp82gj2b5, moz:shutdownTimeout: | | |

DETAILED SECTION -- 10 --

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | 60000, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://127.0.0.1:13474/devtoo, se:cdpVersion: 85.0, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} at org.openga.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:591) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:595) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:321) at com.magento.utils.Hooks.tearDown(Hooks.java:29) | | |