


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Register new user on Luma Ecommerce	6.035 s	2	0	2	0	8	0	0	8
Login on Luma ecommerce	7.430 s	3	0	3	0	12	0	0	12

FAIL & SKIP SCENARIOS -- 3 --


#	Feature Name	Scenario Name
1	Register new user on Luma Ecommerce	Create new account with valid data
2		Create new account with invalid email
3	Login on Luma ecommerce	Successful Login with valid credentials
4		Successful Login with valid credentials
5		Successful Login with datatable

TAG	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@Account	2	0	2	0	1	0	1	0
@Login	3	0	3	0	1	0	1	0

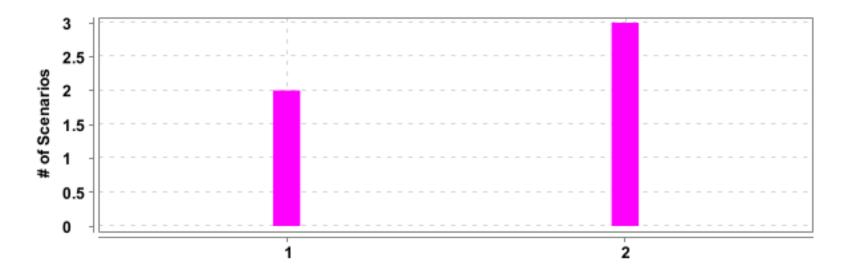

#	Feature Name	T	P	F	S	Duration
1	Register new user on Luma Ecommerce	2	0	2	0	6.035 s
2	Login on Luma ecommerce	3	0	3	0	7.430 s

SCENARIOS SUMMARY -- 6 --

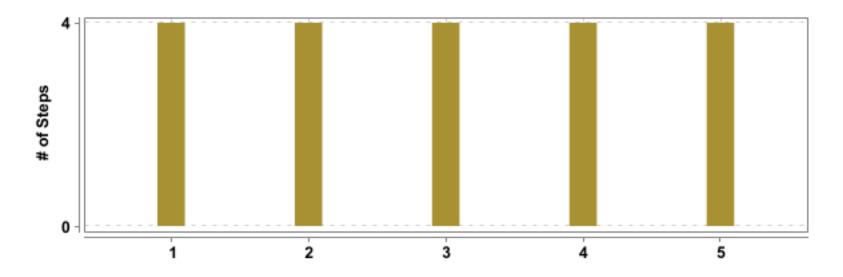


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Register new user on Luma Ecommerce	Create new account with valid data	4	0	0	4	3.840 s
2		Create new account with invalid email	4	0	0	4	2.019 s
3	Login on Luma ecommerce	Successful Login with valid credentials	4	0	0	4	2.733 s
4		Successful Login with valid credentials	4	0	0	4	2.148 s
5		Successful Login with datatable	4	0	0	4	2.151 s

DETAILED SECTION

Register new user on Luma Ecommerce

FAILED	DURATION - 6.035 s	Scenarios		Steps	
		Total - 2		Total - 8	
/ 10:04:00.067 a. m. /	// 10:04:06.102 a. m. /	Pass - 0	2	Pass - 0	8
		Fail - 2		Fail - 0	
		Skip - 0		Skip - 8	


Create new account with valid data

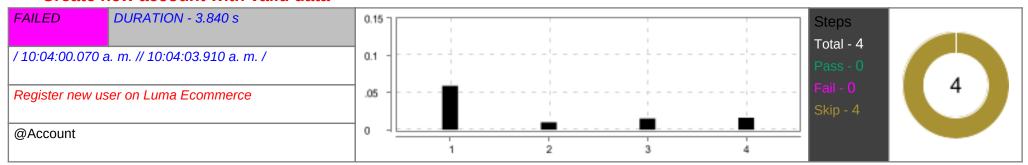

#	Step / Hook Details	Status	Duration
	BEFORE - com.magento.utils.Hooks.setup()	FAILED	3.195 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 400. Message: binary is not a Firefox executable Host info: host: 'NTTD-6V7LBK3', ip: '192.168.232.154' Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.15' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {binary: }}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:163) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171)	PAILED	3.133.5
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)		
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:232)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:159)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:156) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:151)</init></init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:132)</init>		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:127) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:112) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:102) at com.magento.utils.Hooks.setup(Hooks.java:18)</init></init></init>		
1	Given user is on register page "/customer/account/create/"	SKIPPED	0.059 s
2	When user fill out form with his information	SKIPPED	0.010 s
3	And user clicks on register button	SKIPPED	0.015 s
4	Then message diplayed "Account Information"	SKIPPED	0.016 s
	AFTER - com.magento.utils.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.005 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "com.magento.utils.Hooks.driver" is null at com.magento.utils.Hooks.tearDown(Hooks.java:36)		

Create new account with invalid email

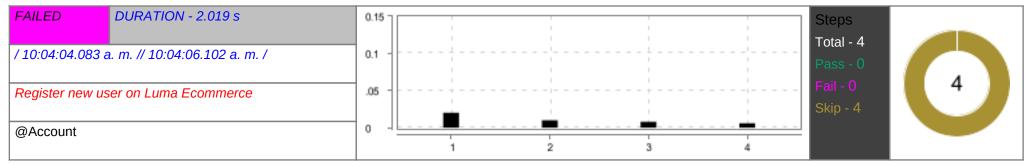


#	Step / Hook Details	Status	Duration
	BEFORE - com.magento.utils.Hooks.setup()	FAILED	1.816 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 400. Message: binary is not a Firefox executable. Host info: host: 'NTTD-6V7LBK3', ip: '192.168.232.154' Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.15' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {binary: }}}]] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:163) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:232)		
	at org.openqa.selenium.remote.RemoteWebDriver. <init>(RemoteWebDriver.java:159)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:156)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:151)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:132)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:127)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:112)</init>		
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:102)</init>		
	at com.magento.utils.Hooks.setup(Hooks.java:18)		
1	Given user is on register page "/customer/account/create/"	SKIPPED	0.020 s
2	When user fill out form with his information with invalid email	SKIPPED	0.010 s
3	And user clicks on register button	SKIPPED	0.008 s
4	Then message diplayed "Please enter a valid email address (Ex: johndoe@domain.com)"	SKIPPED	0.006 s
	AFTER - com.magento.utils.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "com.magento.utils.Hooks.driver" is null at com.magento.utils.Hooks.tearDown(Hooks.java:36)		

Login on Luma ecommerce

FAILED	DURATION - 7.430 s	Scenarios		Steps	
		Total - 3		Total - 12	
/ 10:04:06.223 a. l	m. // 10:04:13.653 a. m. /	Pass - 0	3	Pass - 0	12
		Fail - 3	T J	Fail - 0	12
		Skip - 0		Skip - 12	


Successful Login with valid credentials

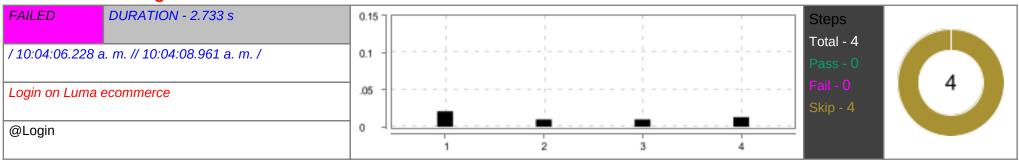

DETAILED SECTION -- 10 --

#	Step / Hook Details	Status	Duration
	BEFORE - com.magento.utils.Hooks.setup()	FAILED	2.495 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 400. Message: binary is not a Firefox executable Host info: host: 'NTTD-6V7LBK3', ip: '192.168.232.154' Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.15' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {binary: }}}} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:232) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:232) at org.openqa.selenium.firefox.FirefoxDriver.init>(FirefoxDriver.java:156) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:132) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:132) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:127) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:127) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:127) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:120) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:112) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:112) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.		
1	Given user is on login page "/customer/account/login/"	SKIPPED	0.021 s
2	When user enters "Iruizajax@gmail.com" and "ckzsd68REn@cgp5"	SKIPPED	0.010 s
3	And user clicks on sign in button	SKIPPED	0.010 s
4	Then message displayed "Account Information"	SKIPPED	0.013 s
	AFTER - com.magento.utils.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "com.magento.utils.Hooks.driver" is null at com.magento.utils.Hooks.tearDown(Hooks.java:36)		

Successful Login with valid credentials

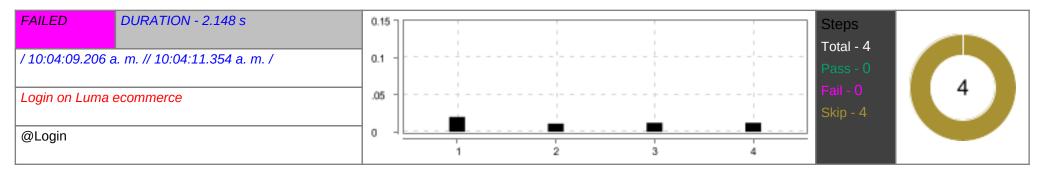

#	Step / Hook Details		Duration
	BEFORE - com.magento.utils.Hooks.setup()	FAILED	1.962 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 400. Message: binary is not a Firefox executable. Host info: host: 'NTTD-6V7LBK3', ip: '192.168.232.154' Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.15' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {binary: }}}} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:159) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:150) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:132) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:127) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:127) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:120) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:120) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:120) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:120) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:120) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:102)		
1	Given user is on login page "/customer/account/login/"	SKIPPED	0.020 s
2	When user enters "Iruiz23@gmail.com" and "Iruiz23@#@@!"	SKIPPED	0.011 s
3	And user clicks on sign in button	SKIPPED	0.012 s
4	Then message displayed "Account Information"	SKIPPED	0.012 s
	AFTER - com.magento.utils.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "com.magento.utils.Hooks.driver" is null at com.magento.utils.Hooks.tearDown(Hooks.java:36)		

DETAILED SECTION -- 12 --

Successful Login with datatable

FAILED	DURATION - 2.151 s	0.15	1		!		Steps	
/ 10:04:11.502 a	a. m. // 10:04:13.653 a. m. /	0.1 -					Total - 4 Pass - 0	
Login on Luma	ecommerce	.05 -	<u> </u>	- 	 		Fail - 0 Skip - 4	4
@Login		0 -	1	2	3	4		

#	Step / Hook Details	Status	Duration
	BEFORE - com.magento.utils.Hooks.setup()	FAILED	1.957 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 400. Message: binary is not a Firefox executable Host info: host: 'NTTD-6V7LBK3', ip: '192.168.232.154' Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.15' Driver info: org.openqa.selenium.firefox.FirefoxDriver Command: [null, newSession {capabilities=[Capabilities {acceptInsecureCerts: true, browserName: firefox, moz:debuggerAddress: true, moz:firefoxOptions: {binary: }}}} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:159) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(RemoteWebDriver.java:156) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:151) at org.openqa.selenium.firefox.FirefoxDriver.sinit>(FirefoxDriver.java:132)		1.937 3
	at org.openqa.selenium.firefox.FirefoxDriver. <init>(FirefoxDriver.java:127) at org.openqa.selenium.firefox.FirefoxDriver.<init>(FirefoxDriver.java:112)</init></init>		
	at org.openqa.selenium.firefox.FirefoxDriver. at org.openqa.selenium.firefox.FirefoxDriver. at com.magento.utils.Hooks.setup(Hooks.java:18)		
1	Given user is on login page "/customer/account/login/"	SKIPPED	0.015 s
2	When user enters and password	SKIPPED	0.016 s
	Iruizajax@gmail.com ckzsd68REn@cgp5]	
3	And user clicks on sign in button	SKIPPED	0.007 s
4	Then message displayed "Account Information"	SKIPPED	0.009 s

DETAILED SECTION -- 13 --

#	Step / Hook Details	Status	Duration
	AFTER - com.magento.utils.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "com.magento.utils.Hooks.driver" is null at com.magento.utils.Hooks.tearDown(Hooks.java:36)		