Dirk Seidensticker/Clemens Schmid

6. Februar 2016


ggplot2 und die Daten laden:

```
library(ggplot2)
```

```
df <- read.csv("../data/AtlantPottery.csv", sep = ',')</pre>
```


Einfacher Barplot

```
ggplot(df, aes(vesselShape)) +
geom_bar()
```

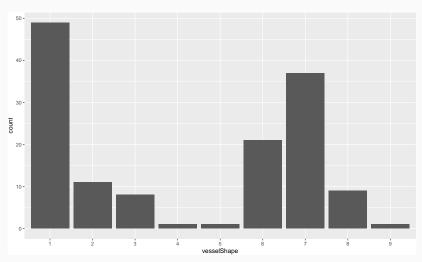

Facet

```
ggplot(df, aes(vesselShape)) +
geom_bar() +
facet_wrap(~ feature_simple)
```

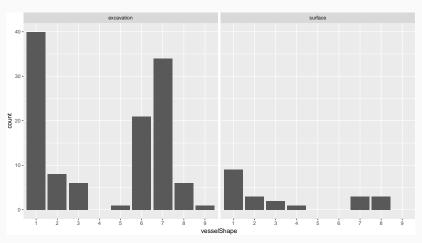

Facet-Grid

```
ggplot(df, aes(vesselShape)) +
geom_bar() +
facet_grid(feature ~ site)
```

