

Gemini

C++ Roast Generator Program

C++



Write a beginner-friendly C++ console program that generates random student excuses for incomplete homework.

Requirements:

- Ask the student for their name using `getline(cin, name)`
- Store exactly 10 excuse templates in a vector
- Each template must contain `{name}` as a placeholder
- Randomly select a template using `rand() % 10`
- Replace `{name}` with the user's input
- Display the excuse to the user
- Add clear comments so beginners understand

Ask Gemini



Tools

Pro



Gemini is AI and can make mistakes.

Show thinking

Here is the complete C++ program without the random seed. As a Class Representative, you've probably heard a few of these exact lines when tracking down assignments!

The code includes clear comments to explain the string replacement and vector logic.

```
C++  
  
#include <iostream>  
#include <string>  
#include <vector>  
#include <cstdlib> // Required for the rand() function  
  
using namespace std;  
  
int main() {  
    // ...  
}
```

Ask Gemini

+ Tools Pro

EXPLORER

FOCP-II-ASSIGNMENTS

HACKEREARTH

LAB MANUAL

VIBE CODING

AI_ROAST_GENERATOR.cpp

AI_ROAST_GENERATOR.exe

AI_ROAST_GENERATOR.pdf

Student_Excuse_Generator.cpp U

Student_Excuse_Generator.exe U

README.md

MovieTickets.cpp

BankBalance.cpp

AI_ROAST_GENERATOR.cpp

Student_Excuse_Generator.cpp U X

VIBE CODING > Student_Excuse_Generator.cpp > main()

```
38     int randomIndex = rand() % 10;
39     string selectedExcuse = excuses[randomIndex];
40
41     // Find the placeholder "{name}" in the selected excuse
42     string placeholder = "{name}";
43     size_t pos = selectedExcuse.find(placeholder);
44
45     // If the placeholder is found (pos is not string::npos), replace it with the actual name
46     if (pos != string::npos)
47     {
48         selectedExcuse.replace(pos, placeholder.length(), name);
49     }
50
51     // Display the final personalized excuse
52     cout << "\n--- EXCUSE GENERATED ---\n";
53     cout << selectedExcuse << endl;
54
55     return 0;
56 }
```

PROBLEMS

DEBUG CONSOLE

TERMINAL

PORTS

TERMINAL

```
++\COLLEGE\FOCP-II-ASSIGNMENTS\VIBE CODING\" ; if ($?) { g++ Student_Excuse_Generator.cpp -o Student_Excuse_Generator } ; if ($?) { .\Student_Excuse_Generator }
Enter the student's name: vipul

--- EXCUSE GENERATED ---
vipul tried finishing the homework, but the internet stopped working.
PS C:\Users\HP\Desktop\SECOND SEM\C++\COLLEGE\FOCP-II-ASSIGNMENTS\VIBE CODING>
```

main*

0 0

Ln 56, Col 2

Spaces: 4


UTF-8

CRLF

{ } C++

Win32

Prettier

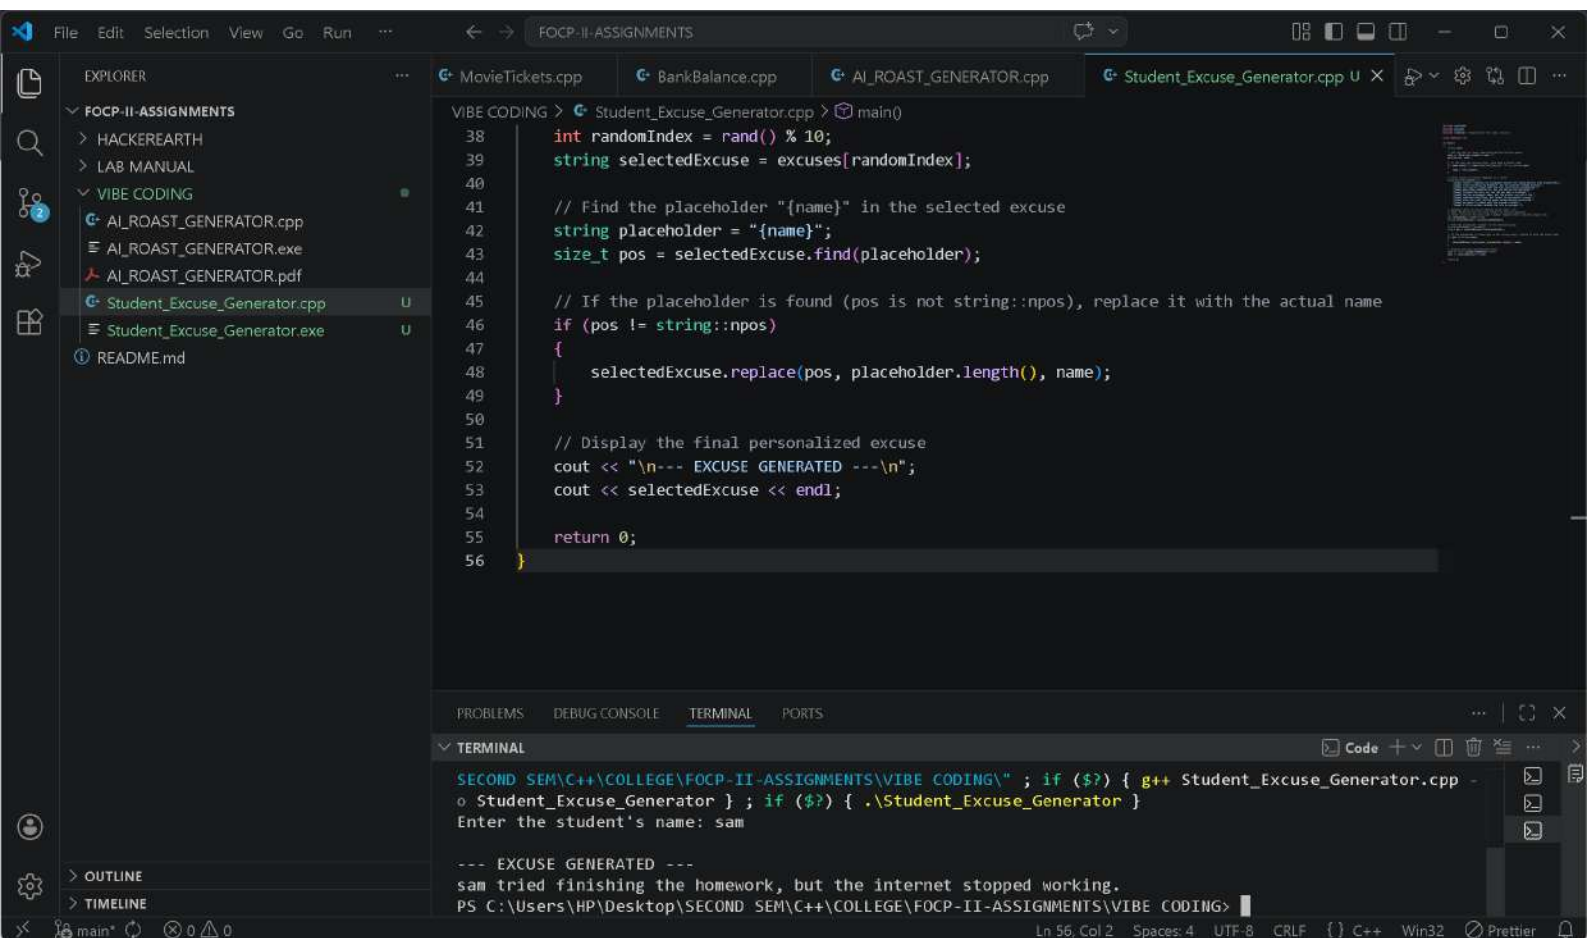

EXPLORER

FOCP-II-ASSIGNMENTS

HACKEREARTH

LAB MANUAL

VIBE CODING

AI_ROAST_GENERATOR.cpp

AI_ROAST_GENERATOR.exe

AI_ROAST_GENERATOR.pdf

Student_Excuse_Generator.cpp

Student_Excuse_Generator.exe

README.md

MovieTickets.cpp

BankBalance.cpp

AI_ROAST_GENERATOR.cpp

Student_Excuse_Generator.cpp

VIBE CODING > Student_Excuse_Generator.cpp > main()

```
38     int randomIndex = rand() % 10;
39     string selectedExcuse = excuses[randomIndex];
40
41     // Find the placeholder "{name}" in the selected excuse
42     string placeholder = "{name}";
43     size_t pos = selectedExcuse.find(placeholder);
44
45     // If the placeholder is found (pos is not string::npos), replace it with the actual name
46     if (pos != string::npos)
47     {
48         selectedExcuse.replace(pos, placeholder.length(), name);
49     }
50
51     // Display the final personalized excuse
52     cout << "\n--- EXCUSE GENERATED ---\n";
53     cout << selectedExcuse << endl;
54
55     return 0;
56 }
```

PROBLEMS

DEBUG CONSOLE

TERMINAL

PORTS

TERMINAL

```
SECOND SEM\C++\COLLEGE\FOCP-II-ASSIGNMENTS\VIBE CODING> ; if ($?) { g++ Student_Excuse_Generator.cpp -
o Student_Excuse_Generator } ; if ($?) { .\Student_Excuse_Generator }
Enter the student's name: priya

--- EXCUSE GENERATED ---
priya tried finishing the homework, but the internet stopped working.
PS C:\Users\HP\Desktop\SECOND SEM\C++\COLLEGE\FOCP-II-ASSIGNMENTS\VIBE CODING>
```

main*

0 0

Ln 56, Col 2

Spaces: 4

UTF-8

CRLF

{}

C++

Win32

Prettier

02 May 2026

Sat 19:46 (Local time)

EXPLORER

FOCP-II-ASSIGNMENTS

HACKEREARTH

LAB MANUAL

VIBE CODING

AI_ROAST_GENERATOR.cpp

AI_ROAST_GENERATOR.exe

AI_ROAST_GENERATOR.pdf

Student_Excuse_Generator.cpp

Student_Excuse_Generator.exe

README.md

MovieTickets.cpp

BankBalance.cpp

AI_ROAST_GENERATOR.cpp

Student_Excuse_Generator.cpp U X

VIBE CODING > Student_Excuse_Generator.cpp > main()

```
38     int randomIndex = rand() % 10;
39     string selectedExcuse = excuses[randomIndex];
40
41     // Find the placeholder "{name}" in the selected excuse
42     string placeholder = "{name}";
43     size_t pos = selectedExcuse.find(placeholder);
44
45     // If the placeholder is found (pos is not string::npos), replace it with the actual name
46     if (pos != string::npos)
47     {
48         selectedExcuse.replace(pos, placeholder.length(), name);
49     }
50
51     // Display the final personalized excuse
52     cout << "\n--- EXCUSE GENERATED ---\n";
53     cout << selectedExcuse << endl;
54
55     return 0;
56 }
```

PROBLEMS

DEBUG CONSOLE

TERMINAL

PORTS

Code + v

TERMINAL

```
SECOND SEM\C++\COLLEGE\FOCP-II-ASSIGNMENTS\VIBE CODING> ; if ($?) { g++ Student_Excuse_Generator.cpp -
o Student_Excuse_Generator } ; if ($?) { .\Student_Excuse_Generator }
Enter the student's name: priya

--- EXCUSE GENERATED ---
priya tried finishing the homework, but the internet stopped working.
PS C:\Users\HP\Desktop\SECOND SEM\C++\COLLEGE\FOCP-II-ASSIGNMENTS\VIBE CODING>
```

main*

0 0 0

In 56, Col 2

Spaces: 4

UTF-8

CRLF

C++

Win32

Prettier



My program shows the same excuse every time I run it. Please fix the random selection so different excuses appear each time.



Fixing the Generator ▾

Ask Gemini



🛠️ Tools

Pro ▾



Gemini is AI and can make mistakes.

Gemini

C++ Roast Generator Program



When you use `rand()` without seeding it first, C++ defaults to a seed of `1`. This means the math used to generate the "random" numbers starts from the exact same point every time the program runs, giving you the identical sequence of results.

By adding `#include <ctime>` and calling `srand(time(0));` at the start of your program, you use the computer's current time as the starting point. Since the time is always changing, your random sequence will change on every run.

Here is the complete, fixed code:

```
C++  
  
#include <iostream>  
#include <string>  
#include <vector>  
#include <cstdlib> // Required for rand() and srand()  
#include <ctime>   // Required for time() to seed the generator  
  
using namespace std;  
  
int main() {
```

Ask Gemini

+ 🛠️ Tools

Pro 📄 🎤

Gemini is AI and can make mistakes.

Gemini

C++ Roast Generator Program

```
C++
cout << "Enter the student's name: ";
getline(cin, name);

// If the user just presses Enter, give them a default name
if (name.empty() || name.find_first_not_of(" \t") == string::npos) {
    name = "The student";
}

// Store exactly 10 excuse templates in a vector
vector<string> excuses = {
    "{name} couldn't complete the assignment because the laptop battery died",
    "{name} tried finishing the homework, but the internet stopped working.",
    "{name} was ready to submit when the file mysteriously disappeared.",
    "{name} would have submitted it, but the dog ate the USB drive.",
    "{name} finished the work, but the LMS was down at midnight.",
    "{name} had the assignment ready, but the printer ran out of ink.",
    "{name} completed everything, but forgot to save before closing.",
    "{name} wrote the code, but the power outage deleted everything.",
    "{name} was about to submit when the browser crashed.",
    "{name}'s little brother deleted the file by accident."
}
```

Ask Gemini

+ Tools

Pro 

Gemini is AI and can make mistakes.

EXPLORER

FOCP-II-ASSIGNMENTS

> HACKEREARTH

> LAB MANUAL

VIBE CODING

AI_ROAST_GENERATOR.cpp

AI_ROAST_GENERATOR.exe

AI_ROAST_GENERATOR.pdf

Student_Excuse_Generator.cpp U

Student_Excuse_Generator.exe U

README.md

MovieTickets.cpp

BankBalance.cpp

AI_ROAST_GENERATOR.cpp

Student_Excuse_Generator.cpp U X

VIBE CODING > Student_Excuse_Generator.cpp > main()

```
41     int randomIndex = rand() % 10;
42     string selectedExcuse = excuses[randomIndex];
43
44     // Find the placeholder "{name}" in the selected excuse
45     string placeholder = "{name}";
46     size_t pos = selectedExcuse.find(placeholder);
47
48     // If the placeholder is found, replace it with the actual name
49     if (pos != string::npos)
50     {
51         selectedExcuse.replace(pos, placeholder.length(), name);
52     }
53
54     // Display the final personalized excuse
55     cout << "\n--- EXCUSE GENERATED ---\n";
56     cout << selectedExcuse << endl;
57
58     return 0;
59 }
```

PROBLEMS

DEBUG CONSOLE

TERMINAL

PORTS

TERMINAL

```
SECOND SEM\C++\COLLEGE\FOCP-II-ASSIGNMENTS\VIBE CODING> if ($?) { g++ Student_Excuse_Generator.cpp -
o Student_Excuse_Generator } ; if ($?) { .\Student_Excuse_Generator }
Enter the student's name: prem

--- EXCUSE GENERATED ---
prem was ready to submit when the file mysteriously disappeared.
PS C:\Users\HP\Desktop\SECOND SEM\C++\COLLEGE\FOCP-II-ASSIGNMENTS\VIBE CODING>
```

main*

0 0 0

Ln 59, Col 2

Spaces: 4

UTF-8

CRLF

{ } C++

Win32

Prettier

EXPLORER

FOCP-II-ASSIGNMENTS

HACKEREARTH

LAB MANUAL

VIBE CODING

AI_ROAST_GENERATOR.cpp

AI_ROAST_GENERATOR.exe

AI_ROAST_GENERATOR.pdf

Student_Excuse_Generator.cpp

Student_Excuse_Generator.exe

README.md

MovieTickets.cpp

BankBalance.cpp

AI_ROAST_GENERATOR.cpp

Student_Excuse_Generator.cpp U X

VIBE CODING > Student_Excuse_Generator.cpp > main()

```
41     int randomIndex = rand() % 10;
42     string selectedExcuse = excuses[randomIndex];
43
44     // Find the placeholder "{name}" in the selected excuse
45     string placeholder = "{name}";
46     size_t pos = selectedExcuse.find(placeholder);
47
48     // If the placeholder is found, replace it with the actual name
49     if (pos != string::npos)
50     {
51         selectedExcuse.replace(pos, placeholder.length(), name);
52     }
53
54     // Display the final personalized excuse
55     cout << "\n--- EXCUSE GENERATED ---\n";
56     cout << selectedExcuse << endl;
57
58     return 0;
59 }
```

PROBLEMS

DEBUG CONSOLE

TERMINAL

PORTS

Code + -

```
SECOND SEM\C++\COLLEGE\FOCP-II-ASSIGNMENTS\VIBE CODING\ ; if ($?) { g++ Student_Excuse_Generator.cpp -
o Student_Excuse_Generator } ; if ($?) { .\Student_Excuse_Generator }
Enter the student's name: riya

--- EXCUSE GENERATED ---
riya wrote the code, but the power outage deleted everything.
PS C:\Users\HP\Desktop\SECOND SEM\C++\COLLEGE\FOCP-II-ASSIGNMENTS\VIBE CODING>
```

main*

0 0

Ln 59, Col 2

Spaces: 4

UTF-8

CRLF

{ } C++

Win32

Prettier

