


Select Lab Module:

Part 1: Calculation Lab (Greedy vs A*)

Reset Module

The Map & Edge Costs: g(n)

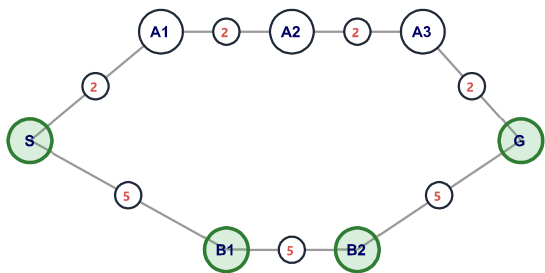

Heuristic Table: h(n)

Node	S	A1	A2	A3	B1	B2	G
h(n)	8	6	4	2	4	2	0

1. Greedy Best-First

2. A* Search

Greedy Best-First Search

Formula: $f(n) = h(n)$

Path: S → B1 → B2 → G

Unexpanded Nodes (Frontier):
Goal Reached!

Calculate the Next Expansion

Node Name

E.G. A1

h(n) Heuristic

0

Evaluate & Expand

Correct! Expanded G.
 $h(G) = 0$.
🏆 **SEARCH COMPLETE!**

Greedy fell for the Trap! (Path Cost: 15)
Because it only looked at the heuristic

$h(n)$, it chose B1 ($h=4$) over A1 ($h=6$). It completely ignored the massive edge costs of 5 on the bottom route!