

BOOTCAMP: TRANSFORMACIÓN DIGITAL PARA LA DOCENCIA TÉCNICA

Nombre del participante:

José Iván Guevara Romero

Institución:

Instituto Nacional de Osicala.

Tema: Script SQL con consultas CRUD y consultas JOIN funcionales sobre la base de datos existente.


Link del Entregable:

<https://github.com/IVANGUEVARA401/IVANGUEVARA401>

05 de junio de 2026

Esquema de la base de datos	3
Consulta 1: 1Ver todos los tipos de acomodación	4
Consulta 2: Ver solo el nombre de cada tipo de acomodacion	5
Consulta 3 : Ver solo el nombre de cada amenity	6
Consulta 4: Ver todos los estados de reserva	7
Consulta 5: Ver todos los locations (países y ciudades)	8
Consulta 6: Contar reservas por estado	9
Consulta 7: Ver todos los owners	10
Consulta 8: Ver todas las rooms	11
Consulta 9: Ver solo las rooms que estan disponibles (is_available = true)	12
Consulta 10: Ver solo las rooms que NO están disponibles	13
Consulta 11: Buscar huéspedes por nombre (búsqueda parcial)	14
Consulta 12: Reviews con promedio de calificación por acomodación	15
Consulta 13: <i>Reservas por país de ubicación</i>	16
Consulta 14: Acomodaciones con más de 3 reservas confirmadas	17
Consulta 15: Insertar un nuevo pago para una reserva	18
Consulta 16: <i>Actualizar disponibilidad de una habitación</i>	19
Consulta 17: <i>Guests con sus reservas (JOIN bookings)</i>	20
Consulta 18: <i>istar huéspedes adicionales por reserva (booking_guests)</i>	21
Consulta 19: <i>Ingresos mensuales del año actual</i>	22
Consulta 20: <i>Huéspedes con más reservas (TOP 10)</i>	23

Esquema de la base de datos

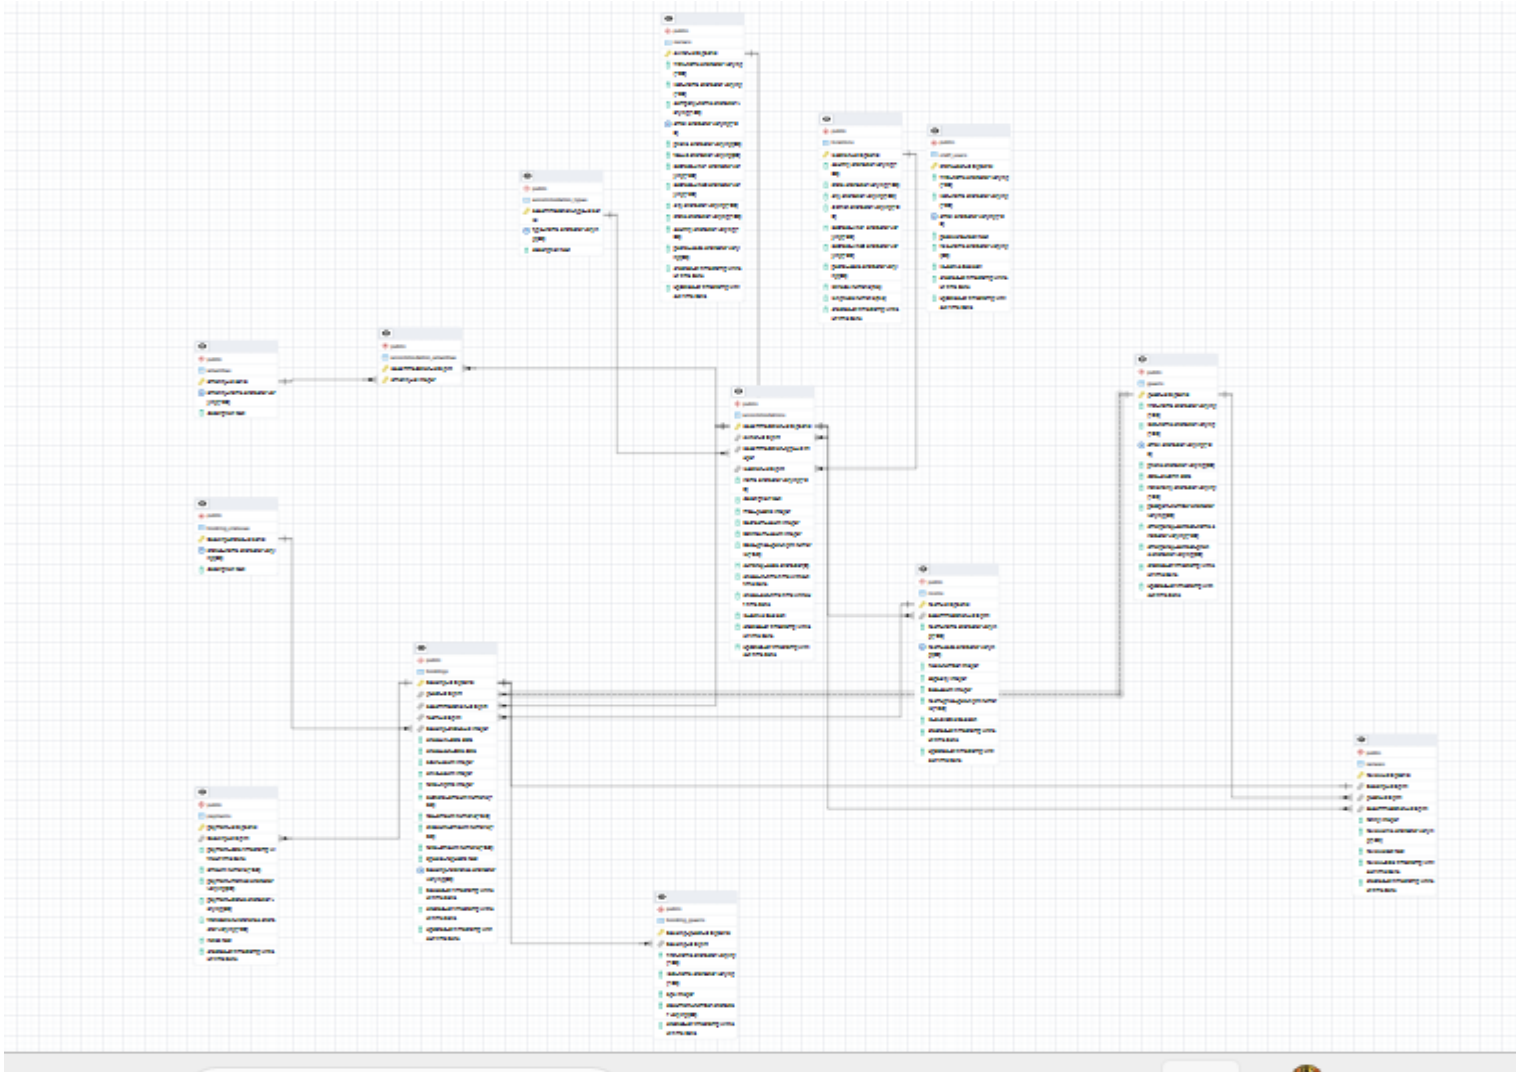

Consulta 1: 1Ver todos los tipos de acomodación

File Object Tools Edit View Window Help

Object Explorer

- > Domains
- > FTS Configurations
- > FTS Dictionaries
- > Aa FTS Parsers
- > FTS Templates
- > Foreign Tables
- > Functions
- > Materialized Views
- > Operators
- > Procedures
- > 1.3 Sequences
- ✓ Tables (14)
 - > accommodation_a
 - > accommodation_t
 - > accommodations
 - > amenities
 - > booking_guests
 - > booking_statuses
 - > bookings
 - > guests
 - > locations
 - > owners
 - > payments
 - > reviews
 - > rooms

accommodation_database.db/postgres@PostgreSQL 18*

accommodation_database.db/postgres@PostgreSQL 18

Query Query History

```
49
50 -- 1Ver todos los tipos de acomodacion
51 SELECT * FROM accommodation_types;
52
```

Data Output Messages Notifications

Showing rows: 1 to 8 Page No: 1 of 1

	accommodation_type_id [PK] integer	type_name character varying (50)	description text
1	1	Hotel	Traditional hotel accommodation
2	2	Hostel	Shared budget accommodation
3	3	Apartment	Private apartment for short stays
4	4	House	Entire residential house
5	5	Villa	Luxury private villa
6	6	Cabin	Small rural or nature-based lodgi...
7	7	Resort	Full-service vacation resort
8	8	Guesthouse	Small privately owned lodging

Consulta 2: Ver solo el nombre de cada tipo de acomodacion

The screenshot shows a PostgreSQL client interface with the following components:

- Object Explorer:** A tree view on the left showing the database structure. The 'Tables (14)' folder is expanded, listing tables such as accommodation_a, accommodation_t, accommodations, amenities, booking_guests, booking_statuses, bookings, guests, locations, owners, payments, reviews, and rooms.
- Query Editor:** The main area for writing SQL queries. It contains the following SQL code:

```
-- 2. Ver solo el nombre de cada tipo de acomodacion
SELECT type_name FROM accommodation_types;
```
- Data Output:** A table displaying the results of the query. It has 8 rows and 1 column, 'type_name'. The data is as follows:

	type_name
1	Hotel
2	Hostel
3	Apartment
4	House
5	Villa
6	Cabin
7	Resort
8	Guesthouse

Consulta 3 : Ver solo el nombre de cada amenity

The screenshot shows a PostgreSQL database management tool interface. The left sidebar displays the 'Object Explorer' with a tree view of database objects. The 'Tables (14)' folder is expanded, showing a list of tables including 'amenities'. The main query editor displays a SQL query: `-- 3 Ver solo el nombre de cada amenity`, `SELECT amenity_name FROM amenities;`, and `-- 15. Ver todos los estados de reserva`. The 'Data Output' tab shows the results of the query, displaying a table with 10 rows of amenity names. The status bar at the bottom indicates 'Total rows: 10', 'Query complete 00:00:00.306', and 'Ln 60, Col 1'.

Object Explorer

- > Domains
- > FTS Configurations
- > FTS Dictionaries
- > Aa FTS Parsers
- > FTS Templates
- > Foreign Tables
- > Functions
- > Materialized Views
- > Operators
- > Procedures
- > 1.3 Sequences
- ▼ Tables (14)
 - > accommodation_a
 - > accommodation_t
 - > accommodations
 - > amenities
 - > booking_guests
 - > booking_statuses
 - > bookings
 - > guests
 - > locations
 - > owners
 - > payments
 - > reviews
 - > rooms
 - > staff_users

accommodation_database.db/postgres@PostgreSQL 18*

accommodation_database.db/postgres@PostgreSQL 18

Query Query History

```
-- 3 Ver solo el nombre de cada amenity
SELECT amenity_name FROM amenities;
-- 15. Ver todos los estados de reserva
```

Data Output Messages Notifications

Showing rows: 1 to 10 Page No: 1 of 1

	amenity_name character varying (100)
1	WiFi
2	Pool
3	Parking
4	AirConditioning
5	Kitchen
6	Breakfast
7	PetFriendly
8	Gym
9	Spa
10	BeachAccess

Total rows: 10 Query complete 00:00:00.306 CRLF Ln 60, Col 1

Consulta 4: Ver todos los estados de reserva

File Object Tools Edit View Window Help

Object Explorer

- > Domains
- > FTS Configurations
- > FTS Dictionaries
- > Aa FTS Parsers
- > FTS Templates
- > Foreign Tables
- > Functions
- > Materialized Views
- > Operators
- > Procedures
- > 1.3 Sequences
- ✓ Tables (14)
 - > accommodation_a
 - > accommodation_t
 - > accommodations
 - > amenities
 - > booking_guests
 - > booking_statuses
 - > bookings
 - > guests
 - > locations
 - > owners
 - > payments
 - > reviews
 - > rooms
 - > staff_users

accommodation_database.db/postgres@PostgreSQL 18*

Query

```
61  
62 -- 4. Ver todos los estados de reserva  
63 SELECT * FROM booking_statuses;  
64
```

Data Output Messages Notifications

Showing rows: 1 to 6 Page No: 1 of 1

	booking_status_id [PK] integer	status_name character varying (50)	description text
1	1	Pending	Booking created but not yet confir...
2	2	Confirmed	Booking confirmed
3	3	CheckedIn	Guest has checked in
4	4	CheckedOut	Guest has checked out
5	5	Cancelled	Booking cancelled
6	6	NoShow	Guest did not arrive

Total rows: 6 Query complete 00:00:02.271

✓ Successfully run. Total query runtime: 2 secs 271 msec. 6 rows affected

CRLF Ln 63, Col 1

Consulta 5: Ver todos los locations (países y ciudades)

File Object Tools Edit View Window Help

Object Explorer

- > Domains
- > FTS Configurations
- > FTS Dictionaries
- > FTS Parsers
- > FTS Templates
- > Foreign Tables
- > Functions
- > Materialized Views
- > Operators
- > Procedures
- > 1.3 Sequences
- ✓ Tables (14)
 - > accommodation_a
 - > accommodation_t
 - > accommodations
 - > amenities
 - > booking_guests
 - > booking_statuses
 - > bookings
 - > guests
 - > locations
 - > owners
 - > payments
 - > reviews
 - > rooms
 - > staff users

accommodation_database.db/postgres@PostgreSQL 18*

accommodation_database.db/postgres@PostgreSQL 18

No limit

Query Query History


```
-- 5. Ver todos los locations (países y ciudades)
SELECT country, city FROM locations;
-- 17 Ver todos los owners
```

Data Output Messages Notifications

Showing rows: 1 to 20 Page No: 1 of 1

	country character varying (100)	city character varying (100)
1	Reino Unido de Gran Bretaña e Irlanda del No...	Eckernförde
2	República Popular Democrática de Corea	South Angel
3	Qatar	Leconte
4	Kenya	Almeria
5	Fidschi	Vieja Chipre
6	Botsuana	Blanchet
7	Rwanda	Saint Tristan-les-Bains
8	Timor-Leste	North Ryanstad
9	Frankreich	Augsburg
10	Géorgie	Vizcaya
11	Finlande	Baleares
12	Canadá	Bernburg

Consulta 6: Contar reservas por estado

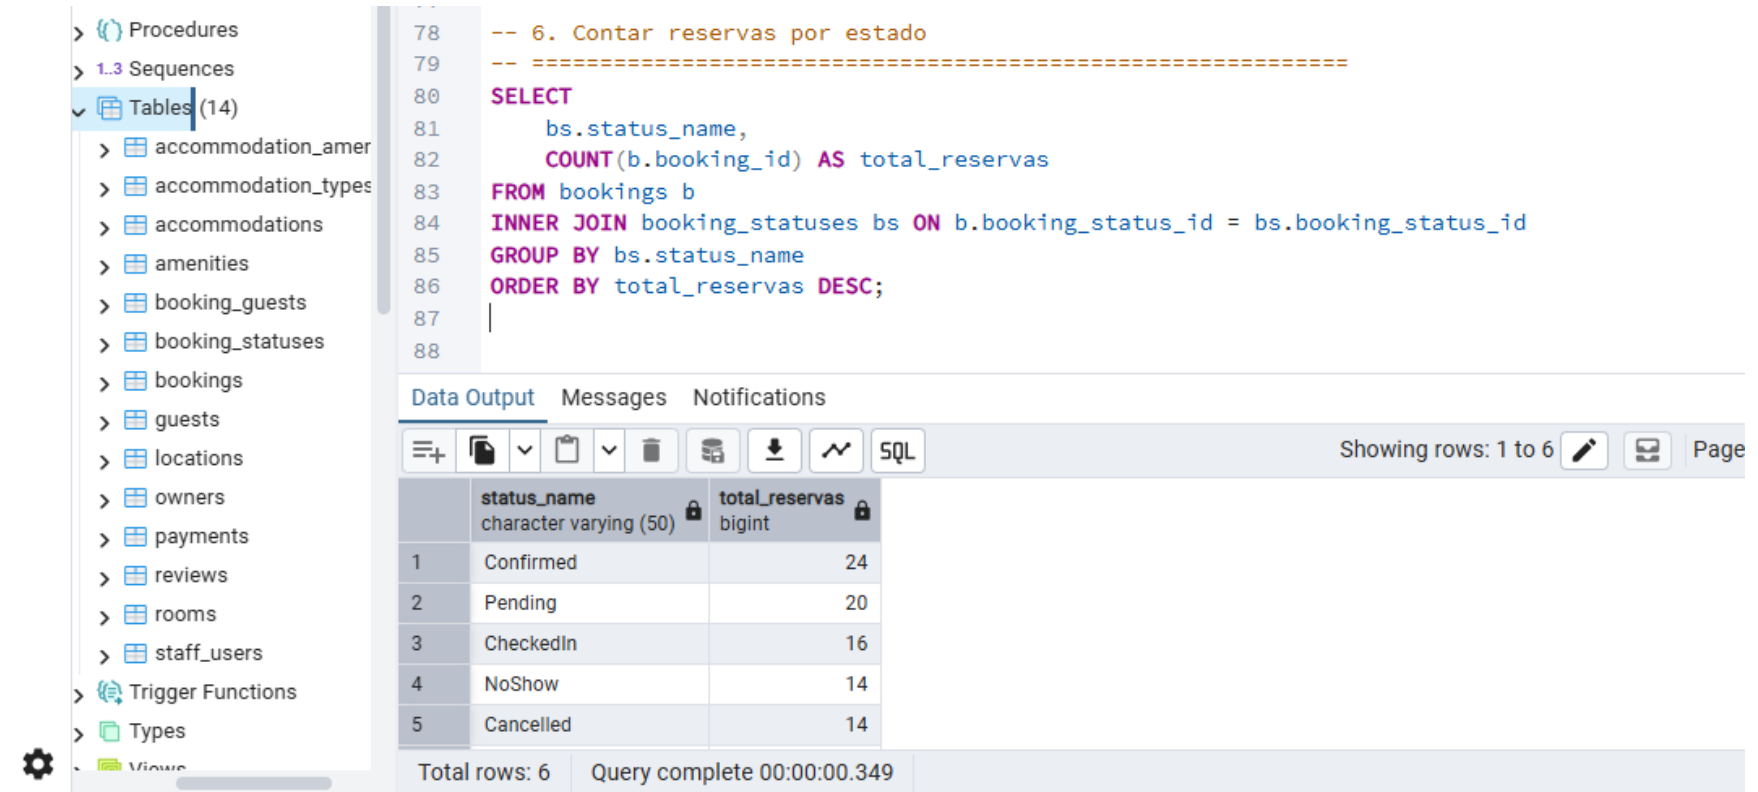

The screenshot displays a database management interface. On the left, a sidebar shows a tree view of database objects: Procedures, Sequences, and Tables (14). The 'Tables' folder is expanded, listing tables such as accommodation_amer, accommodation_types, accommodations, amenities, booking_guests, booking_statuses, bookings, guests, locations, owners, payments, reviews, rooms, and staff_users. The main area shows a SQL query for counting reservations by status. Below the query, the 'Data Output' tab is active, showing a table with 6 rows. The table has two columns: 'status_name' (character varying (50)) and 'total_reservas' (bigint). The rows show the following data: 1 Confirmed 24, 2 Pending 20, 3 CheckedIn 16, 4 NoShow 14, 5 Cancelled 14. The bottom status bar indicates 'Total rows: 6' and 'Query complete 00:00:00.349'.

```
78 -- 6. Contar reservas por estado
79 -- =====
80 SELECT
81     bs.status_name,
82     COUNT(b.booking_id) AS total_reservas
83 FROM bookings b
84 INNER JOIN booking_statuses bs ON b.booking_status_id = bs.booking_status_id
85 GROUP BY bs.status_name
86 ORDER BY total_reservas DESC;
87
88
```

	status_name character varying (50)	total_reservas bigint
1	Confirmed	24
2	Pending	20
3	CheckedIn	16
4	NoShow	14
5	Cancelled	14
Total rows: 6		

Query complete 00:00:00.349

Consulta 7: Ver todos los owners

The screenshot shows a PostgreSQL IDE interface. On the left, the 'Object Explorer' pane displays a tree of database objects, with 'Tables (14)' expanded and 'owners' selected. The main query editor displays the following SQL query:

```
-- 7. Ver todos los owners
SELECT first_name, last_name, company_name FROM owners;
```

Below the query editor, the 'Data Output' pane shows the results of the query. The results are displayed in a table with 3 columns: first_name, last_name, and company_name. The table contains 12 rows of data.

	first_name character varying (100)	last_name character varying (100)	company_name character varying (150)
1	Angel	Hierro	Laboratorios Canales-T...
2	Hugo	Bellido	[null]
3	Karolina	Nieto	Graham-Chavez
4	Hermann-Josef	Hartmann	Zimmerman Inc
5	Cristina	Leduc	Bahena, de Anda y Ojeda
6	Ruy	Macias	[null]
7	Christopher	Baron	[null]
8	Michele	Feliciano	Schneider
9	Anunciación	Real	[null]
10	Ignacio	Stafford	Robinson-Brock
11	Arnaude	Clark	Pires
12	Philippe	Ruiz	[null]

Consulta 8: Ver todas las rooms

File Object Tools Edit View Window Help

Object Explorer

- > Domains
- > FTS Configurations
- > FTS Dictionaries
- > Aa FTS Parsers
- > FTS Templates
- > Foreign Tables
- > Functions
- > Materialized Views
- > Operators
- > Procedures
- > 1.3 Sequences
- ▼ Tables (14)
 - > accommodation_a
 - > accommodation_t
 - > accommodations
 - > amenities
 - > booking_guests
 - > booking_statuses
 - > bookings
 - > guests
 - > locations
 - > owners
 - > payments
 - > reviews
 - > rooms
 - > staff_users

accommodation_database.db/postgres@PostgreSQL 18*

accommodation_database.db/postgres@PostgreSQL 18

Query Query History

```
70  
71 -- 8. Ver todas las rooms  
72 SELECT room_name, room_code, floor_number FROM rooms;  
73
```

Data Output Messages Notifications

Showing rows: 1 to 77 Page No: 1 of 1

	room_name character varying (100)	room_code character varying (50)	floor_number integer
1	Family 1	1-001	3
2	Standard 2	1-002	6
3	Family 3	1-003	10
4	Family 1	2-001	1
5	Family 2	2-002	4
6	Standard 3	2-003	8
7	Double 1	3-001	4
8	Deluxe 2	3-002	5
9	Single 3	3-003	1
10	Family 1	4-001	10
11	Double 3	4-003	6
12	Single 4	4-004	2

Total rows: 77 Query complete 00:00:00.478

✓ Successfully run. Total query runtime: 478 msec. 77 rows affected. ✕

CRLF Ln 71, Col 1

Consulta 9: Ver solo las rooms que estan disponibles (is_available = true)

File Object Tools Edit View Window Help

Object Explorer

- > Domains
- > FTS Configurations
- > FTS Dictionaries
- > Aa FTS Parsers
- > FTS Templates
- > Foreign Tables
- > Functions
- > Materialized Views
- > Operators
- > Procedures
- > 1.3 Sequences
- ✓ > Tables (14)
 - > accommodation_a
 - > accommodation_t
 - > accommodations
 - > amenities
 - > booking_guests
 - > booking_statuses
 - > bookings
 - > guests
 - > locations
 - > owners
 - > payments
 - > reviews
 - > rooms
 - > staff_users

accommodation_database.db/postgres@PostgreSQL 18*

accommodation_database.db/postgres@PostgreSQL 18

Query Query History

```
73
74 -- 9. Ver solo las rooms que estan disponibles (is_available = true)
75 SELECT * FROM rooms WHERE is_available = true;
76
```

Data Output Messages Notifications

Showing rows: 1 to 64 Page No: 1 of 1

	room_id [PK] bigint	accommodation_id bigint	room_name character varying (100)	room_code character varying (50)	floor_number integer	capacity integer	bed_count integer	room_price_per_night numeric (10,2)	is_avails boolean
1	1	1	Family 1	1-001	3	1	2	201.39	true
2	3	1	Family 3	1-003	10	2	1	436.36	true
3	4	2	Family 1	2-001	1	2	3	464.51	true
4	6	2	Standard 3	2-003	8	2	1	413.80	true
5	7	3	Double 1	3-001	4	1	3	120.77	true
6	8	3	Deluxe 2	3-002	5	3	3	269.42	true
7	9	3	Single 3	3-003	1	1	2	113.93	true
8	11	4	Family 1	4-001	10	1	2	452.77	true
9	13	4	Double 3	4-003	6	4	1	475.97	true
10	14	4	Single 4	4-004	2	3	3	175.36	true
11	15	5	Twin 1	5-001	9	2	1	227.61	true
12	17	5	Twin 3	5-003	4	4	3	315.13	true

Total rows: 64 Query complete 00:00:00.334 CRLF Ln 75, Col 1

Consulta 10: Ver solo las rooms que NO están disponibles

File Object Tools Edit View Window Help

Object Explorer

- > Domains
- > FTS Configurations
- > FTS Dictionaries
- > Aa FTS Parsers
- > FTS Templates
- > Foreign Tables
- > Functions
- > Materialized Views
- > Operators
- > Procedures
- > 1.3 Sequences
- ✓ Tables (14)
 - > accommodation_a
 - > accommodation_t
 - > accommodations
 - > amenities
 - > booking_guests
 - > booking_statuses
 - > bookings
 - > guests
 - > locations
 - > owners
 - > payments
 - > reviews
 - > rooms
 - > staff_users

accommodation_database.db/postgres@PostgreSQL 18

accommodation_database.db/postgres@PostgreSQL 18

Query Query History

```
76
77 -- 10. Ver solo las rooms que NO estan disponibles
78 SELECT * FROM rooms WHERE is_available = false;
79
```

Data Output Messages Notifications

Showing rows: 1 to 13 Page No: 1 of 1

	room_id [PK] bigint	accommodation_id bigint	room_name character varying (100)	room_code character varying (50)	floor_number integer	capacity integer	bed_count integer	room_price_per_night numeric (10,2)	is_availa boolean
1	2	1	Standard 2	1-002	6	2	3	147.28	false
2	5	2	Family 2	2-002	4	3	1	400.07	false
3	16	5	Suite 2	5-002	10	3	2	287.53	false
4	20	6	Double 1	6-001	5	2	1	99.26	false
5	45	12	Family 2	12-002	6	1	3	334.35	false
6	53	14	Double 2	14-002	8	4	2	402.68	false
7	59	15	Standard 4	15-004	9	2	2	51.39	false
8	63	16	Standard 4	16-004	3	2	3	476.09	false
9	66	17	Twin 3	17-003	10	1	3	481.25	false
10	73	20	Twin 2	20-002	9	4	2	67.81	false
11	77	20	Penthouse 6	20-006	6	4	2	180.90	false
12	12	4	Standard 2	4-002	7	1	3	465.02	false

Total rows: 13 Query complete 00:00:00.513 CRLF Ln 79, Col 1

Consulta 11: Ver todas las bookings

File Object Tools Edit View Window Help

accommodation_database.db/postgres@PostgreSQL 18* x Untitled* x Untitled* x Untitled* x

accommodation_database.db/postgres@PostgreSQL 18

No limit

Query Query History

```
78 SELECT * FROM rooms WHERE is_available = false;
79
80 -- 11. Ver todas las bookings
81 SELECT booking_id, guest_id, check_in_date, check_out_date FROM bookings;
82
```

Data Output Messages Notifications

Showing rows: 1 to 100 Page No: 1 of 1

	booking_id [PK] bigint	guest_id bigint	check_in_date date	check_out_date date
1	1	39	2025-06-11	2025-06-23
2	2	77	2025-06-08	2025-06-16
3	3	41	2025-06-11	2025-06-25
4	4	55	2025-05-27	2025-05-29
5	6	28	2026-04-08	2026-04-21
6	7	66	2026-05-16	2026-05-26
7	8	69	2025-11-02	2025-11-12
8	9	89	2025-12-05	2025-12-07
9	10	94	2026-01-07	2026-01-09
10	11	80	2025-07-01	2025-07-14
11	12	12	2026-03-03	2026-03-08
12	13	6	2026-01-31	2026-02-11

Total rows: 100 Query complete 00:00:00.409

PostgreSQL 18/accommodation_database.db - Database connected.

CRLF Ln 81, Col 1

Consulta 12: Guests con sus reservas (JOIN bookings)

File Object Tools Edit View Window Help

accommodation_database.db/postgres@PostgreSQL 18* x Untitled* x Untitled* x Untitled* x

accommodation_database.db/postgres@PostgreSQL 18

No limit

Query Query History

```
-- 12. Guests con sus reservas (JOIN bookings)
SELECT g.first_name, g.last_name, b.booking_id, b.check_in_date
FROM guests g
INNER JOIN bookings b ON g.guest_id = b.guest_id;
```

Data Output Messages Notifications

Showing rows: 1 to 100 Page No: 1 of 1

	first_name character varying (100)	last_name character varying (100)	booking_id bigint	check_in_date date
1	Ian	Giner	1	2025-06-11
2	Karl-Josef	Louis	2	2025-06-08
3	Irmtraut	Hettner	3	2025-06-11
4	Henri	Schmidtke	4	2025-05-27
5	Thomas	Gutiérrez	6	2026-04-08
6	Tiburcio	Acuña	7	2026-05-16
7	Isaac	Cotto	8	2025-11-02
8	Orhan	Boutin	9	2025-12-05
9	Marcela	Figuerola	10	2026-01-07
10	Claude	Miller	11	2025-07-01
11	Benjamin	Hartung	12	2026-03-03
12	Steven	Palomino	13	2026-01-31

Total rows: 100 Query complete 00:00:00.257 CRLF Ln 152, Col 1

Consulta 13: Reservas por país de ubicación

File Object Tools Edit View Window Help

accommodation_database.db/postgres@PostgreSQL 18*

accommodation_database.db/postgres@PostgreSQL 18

Query Query History

```
171 ORDER BY promedio_rating DESC;
172
173
174 -- 13. Reservas por país de ubicación
175 SELECT
176     l.country,
177     COUNT(b.booking_id) AS total_reservas,
178     SUM(b.subtotal_amount) AS ingresos_por_pais
179 FROM bookings b
180 INNER JOIN accommodations a ON b.accommodation_id = a.accommodation_id
181 INNER JOIN locations l ON a.location_id = l.location_id
182 WHERE b.booking_status_id IN (2, 3, 4) -- Confirmada, CheckedIn, CheckedOut
183 GROUP BY l.country
184 ORDER BY total_reservas DESC;
```

Data Output Messages Notifications

Showing rows: 1 to 14 Page No: 1 of 1

	country character varying (100)	total_reservas bigint	ingresos_por_pais numeric
1	República Popular Democrática de Co...	8	15315.18
2	Fidschi	8	10852.39
3	Frankreich	6	13976.28
4	Qatar	6	9285.08
5	Botsuana	3	3198.89

Total rows: 14 Query complete 00:00:00.349 CRLF Ln 174, Col 1

Consulta 14: Bookings con nombre del guest (JOIN guests)

The screenshot shows a PostgreSQL database client interface. On the left, a sidebar displays the database structure, including servers, databases, and schemas. The main area shows a query window with the following SQL code:

```
-- 14|. Bookings con nombre del guest (JOIN guests)
SELECT b.booking_id, g.first_name || ' ' || g.last_name AS guest_name, b.check_in_date
FROM bookings b
INNER JOIN guests g ON b.guest_id = g.guest_id;
```

Below the query window, the "Data Output" tab is active, displaying the results of the query in a table format. The table has four columns: **booking_id** (PK), **guest_name**, and **check_in_date**. The results show 12 rows of data.

booking_id	guest_name	check_in_date
1	Ian Giner	2025-06-11
2	Karl-Josef Louis	2025-06-08
3	Irmtraut Hettner	2025-06-11
4	Henri Schmidtke	2025-05-27
5	Thomas Gutiérrez	2026-04-08
6	Tiburcio Acuña	2026-05-16
7	Isaac Cotto	2025-11-02
8	Orhan Boutin	2025-12-05
9	Marcela Figueroa	2026-01-07
10	Claude Miller	2025-07-01
11	Benjamin Hartung	2026-03-03
12	Steven Palomino	2026-01-31

Consulta 15: Suma total de payments por booking (GROUP BY)

The screenshot shows a PostgreSQL query editor interface. The left sidebar displays a tree view of the database structure, including Servers (2), Databases (5), and Schemas (1). The main query editor displays the following SQL code:

```
221 LEFT JOIN reviews r ON a.accommodation_id = r.accommodation_id
222 GROUP BY a.accommodation_id, a.name;
223
224 -- 15. Suma total de payments por booking (GROUP BY)
225 SELECT b.booking_id, SUM(p.amount) AS total_pagado
226 FROM bookings b
227 LEFT JOIN payments p ON b.booking_id = p.booking_id
228 GROUP BY b.booking_id;
229
```

The query results are displayed in the Data Output tab, showing a table with 100 rows. The table has two columns: **booking_id** (PK) and **total_pagado**. The results are as follows:

booking_id	total_pagado
1	55
2	27
3	23
4	56
5	91
6	58
7	8
8	87
9	74

The status bar at the bottom indicates "Total rows: 100", "Query complete 00:00:00.293", and "CRLF Ln 225, Col 1".

Consulta 16: Actualizar disponibilidad de una habitación

The screenshot shows a PostgreSQL client interface with a query editor and a results pane. The query editor contains the following SQL code:

```
-- 16. Accommodations que NO son Hotel (NOT IN)
SELECT * FROM accommodations WHERE accommodation_type_id NOT IN (SELECT accommodation_type_id
FROM accommodation_types WHERE type_name = 'Hotel');
```

The results pane displays the output of the query, showing 17 rows of data. The columns are: accommodation_id [PK] bigint, owner_id bigint, accommodation_type_id integer, location_id bigint, name character varying (150), and description text.

accommodation_id [PK] bigint	owner_id bigint	accommodation_type_id integer	location_id bigint	name character varying (150)	description text
1	1	9	19	Rustic Lodge Ville	Asimismo mes principios peso joven.
2	2	14	13	Rustic Hideaway Ville	Democratic change vote participant institution.
3	3	10	6	Boutique Retreat Ville	Eran buenos natural. General victoria rey su.
4	4	10	5	Modern Escape Ville	La m civil he existencia recursos. Donde próximo sociales vuelve palabra niñ
5	5	10	4	Panoramic Stay Ville	Quinze exiger auquel déposer personne. Rejoindre puissant escalier approach
6	6	18	3	Rustic Getaway de la Monta...	Couper respect soutenir enfoncer encore.
7	7	17	8	Panoramic Getaway dan	María pregunta hasta siete esos.
8	8	2	4	Cozy Lodge Ville	Et considérer poste fait retomber disparaître. Prononcer avenir observer sair
9	9	19	8	Rustic Nest hneuf	Deer habiter naessane respecter assez blanche

Total rows: 17 Query complete 00:00:00.182 CRLF Ln 298, Col 1

Consulta 17: Guests con sus reservas (JOIN bookings)

The screenshot displays a PostgreSQL query editor interface. The left sidebar shows a tree view of the database structure, including Servers (2), PostgreSQL 17, PostgreSQL 18, and Databases (5). The 'accommodation' database is selected, showing its schema (public) with various objects like Aggregates, Collations, Domains, Functions, and Procedures.

The main query editor shows the following SQL query:

```
302 WHERE NOT EXISTS (SELECT 1 FROM bookings b WHERE b.guest_id = g.guest_id);
303
304 -- 17. Accommodations que tienen mas de 3 rooms (HAVING)
305 SELECT a.name, COUNT(r.room_id) AS total_rooms
306 FROM accommodations a
307 INNER JOIN rooms r ON a.accommodation_id = r.accommodation_id
308 GROUP BY a.accommodation_id, a.name
309 HAVING COUNT(r.room_id) > 3;
310
```

The query results are displayed in a table with the following columns: name (character varying (150)) and total_rooms (bigint). The results show 9 rows of accommodation data:

	name	total_rooms
1	Cozy Lodge Ville	6
2	Modern Escape Ville	4
3	Luxury Escape de la Monta...	4
4	Boutique Retreat Ville	4
5	Rustic Retreat furt	6
6	Panoramic Suite Ville	5
7	Rustic Lodge boeuf	5
8	Boutique Nest boeuf	6
9	Panoramic Stay Ville	5

The status bar at the bottom indicates "Total rows: 11" and "Query complete 00:00:00.175". The editor also shows "Showing rows: 1 to 11" and "Page No: 1 of 1".

Consulta 18: Guests con mas de 2 reservas (HAVING)

File Object Tools Edit View Window Help

accommodation_database.db/postgres@PostgreSQL 18* x Untitled* x Untitled* x Untitled* x

accommodation_database.db/postgres@PostgreSQL 18

Query Query History

```
309 HAVING COUNT(r.room_id) > 3;
310
311 -- 18. Guests con mas de 2 reservas (HAVING)
312 SELECT g.first_name || ' ' || g.last_name AS guest_name, COUNT(b.booking_id) AS total_reservas
313 FROM guests g
314 INNER JOIN bookings b ON g.guest_id = b.guest_id
315 GROUP BY g.guest_id, g.first_name, g.last_name
316 HAVING COUNT(b.booking_id) > 2;
317
```

Execute script (F5)

Data Output Messages Notifications

Showing rows: 1 to 7 Page No: 1 of 1

	guest_name	total_reservas
1	Ian Giner	3
2	Graciano Ocaña	3
3	Orhan Boutin	4
4	Irmtraut Hettner	3
5	Sharon Lévy	3
6	Corey Segovia	3
7	Thomas Gutiér...	3

Total rows: 7 Query complete 00:00:00.157

✓ Successfully run. Total query runtime: 157 msec. 7 rows affected. ✕

CRLF Ln 312, Col 1

Consulta 19: Subconsulta correlacionada: accommodations con mas reviews que el promedio

The screenshot shows a PostgreSQL IDE interface. On the left, a tree view displays the database structure, including servers, databases, and schemas. The main window shows a SQL query editor with a correlated subquery. The query is as follows:

```
379 b.total_nights, b.adult_count, b.child_count, b.subtotal_amount;  
380  
381 -- 19. Subconsulta correlacionada: accommodations con mas reviews que el promedio  
382 SELECT a.name, COUNT(r.review_id) AS total_reviews  
383 FROM accommodations a  
384 INNER JOIN reviews r ON a.accommodation_id = r.accommodation_id  
385 GROUP BY a.accommodation_id, a.name  
386 HAVING COUNT(r.review_id) > (  
387     SELECT AVG(review_count) FROM (  
388         SELECT COUNT(review_id) AS review_count FROM reviews GROUP BY accommodation_id  
389     ) AS subq  
390 );  
391
```

Below the query editor, the 'Data Output' tab shows the results of the query. The results are displayed in a table with two columns: 'name' and 'total_reviews'.

	name	total_reviews
1	Cozy Lodge Ville	4
2	Boutique Stay Ville	4
3	Rustic Retreat furt	4
4	Rustic Lodge boeuf	5
5	Panoramic Stay Ville	4
6	Rustic Hideaway Ville	4
7	Luxury Nest Villa	4

The status bar at the bottom indicates 'Total rows: 7' and 'Query complete 00:00:00.222'. The page number is 1 of 1, and the cursor is at line 389, column 14.

Consulta 20: Huéspedes con más reservas (TOP 10)

File Object Tools Edit View Window Help

accommodation_database.db/postgres@PostgreSQL 18* x Untitled* x Untitled* x Untitled* x

accommodation_database.db/postgres@PostgreSQL 18

No limit

Query Query History

```
390 );
391
392 -- 20 Subconsulta: guests que han gastado mas que el promedio general
393 SELECT g.first_name || ' ' || g.last_name AS guest_name, SUM(b.subtotal_amount) AS total_gastado
394 FROM guests g
395 INNER JOIN bookings b ON g.guest_id = b.guest_id
396 GROUP BY g.guest_id, g.first_name, g.last_name
397 HAVING SUM(b.subtotal_amount) > (
398     SELECT AVG(total_gasto) FROM (
399         SELECT SUM(subtotal_amount) AS total_gasto FROM bookings GROUP BY guest_id
400     ) AS subq
401 );
402
```

Data Output Messages Notifications

Showing rows: 1 to 24 Page No: 1 of 1

	guest_name text	total_gastado numeric
1	Richard Maillard	2848.13
2	Igor Arteaga	2861.40
3	Claude Miller	4276.87
4	Lorraine Sierra	2845.08
5	Débora Holmes	5734.54
6	Ian Giner	3564.53
7	Graciann Ocaña	4962.31

Total rows: 24 Query complete 00:00:00.157

Successfully run. Total query runtime: 157 msec. 24 rows affected. X

CRLF Ln 392, Col 1