

Testeo de la implementación de auth básica y protección de CRUD endpoints

De los pasos para implement basic authentication, estos son los hechos y los no hechos por mí hasta ahora:

1. Create a “User” model poniendo **pwhash** y **pwsalt** en lugar de raw string pw (esto pasa para DTORegistro y DTOlogin).
2. Add DbSet<Usuario> in your AppDbContext (ya lo tenía). **Run migrations to update db.**
3. Create **DTOs for Register/Login**
4. Create a **service for pw hashing + JWT token generation** i.e. create a folder Services with file **AuthService.cs**.
5. **Add JWT configuration in appsettings.json** (del backend)
6. **Enable JWT Authentication in Program.cs** (del backend)
7. Create an **AuthenticationController**
8. **Protect your existing CRUD Controllers**
9. **Test in Swagger**

Tengo entendido que no me hace falta proteger los CRUD endpoints para poder testear lo ya hecho, así que primero voy a testear lo ya hecho.

If edit the connection string in the backend's appsettings.json, is it enough with saving the file for the changes to take effect ?

No — just saving `appsettings.json` is not enough.


The backend reads the configuration only when it starts. So after editing the connection string, you must restart the backend container for it to pick up the new value.

Your SQL Server container does **not** need to be restarted.

Eso en referencia a que cambié localhost,1433 por db porque mi backend ahora va correr en container:



```
1 {
2   "ConnectionStrings": {
3     "DefaultConnection": "Server=db;Database=ReservasDb;User Id=sa;Password=docKer!8;TrustServerCertificate=True;"
4   },
5   "Jwt": {
6     "Key": "aP9d73D1jD0m30k1Lma17uiWe05vNfg57"
7   },
8   "Logging": {
9     "LogLevel": {
10      "Default": "Information",
11      "Microsoft.AspNetCore": "Warning"
12    }
13  },
14  "AllowedHosts": "*"
15 }
16
```

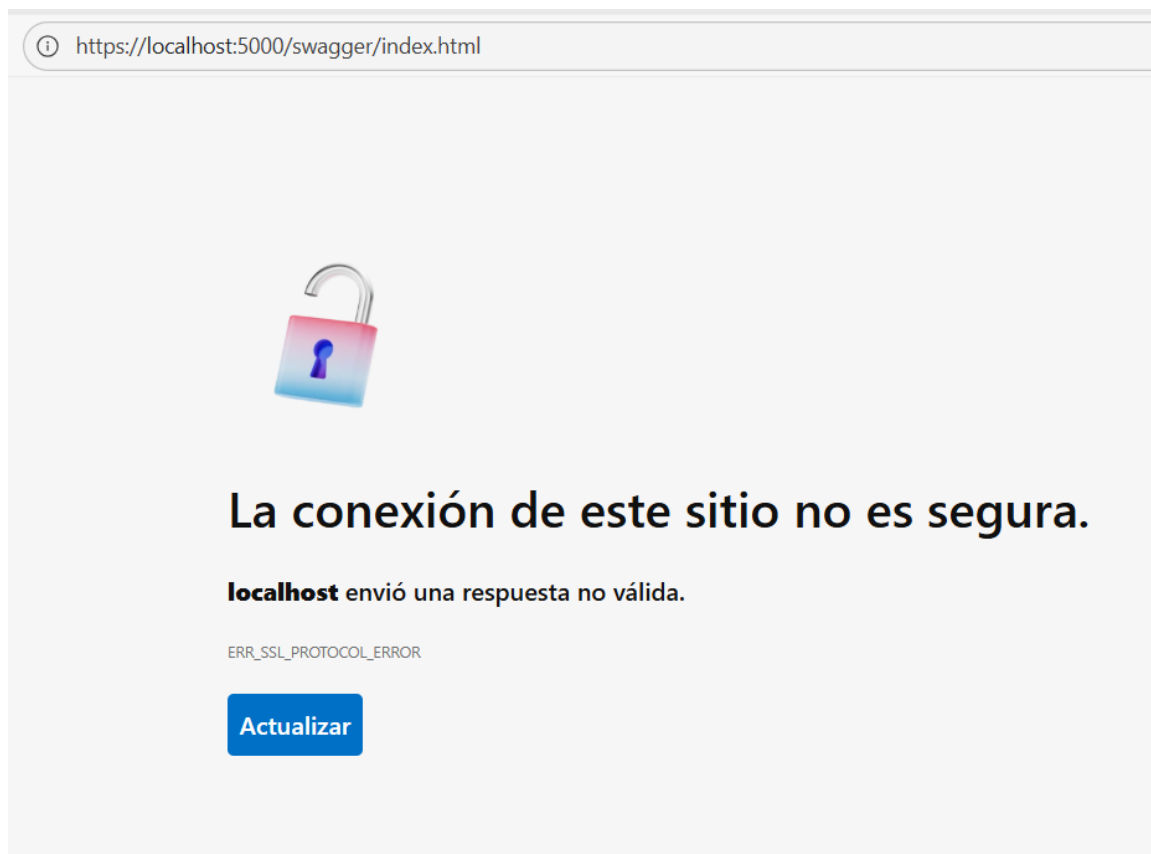F

I've just gone to `https://localhost:5000/swagger/index.html` but for the first time instead of getting to Swagger, I've gone to a screen that says that the connection is not safe and that localhost did not send a valid response. This screen also says `ERR_SSL_PROTOCOL_ERROR`

That happens because your Swagger URL is using **HTTPS** (`https://localhost:5000`) but your backend container may not be properly configured for HTTPS, or the certificate is self-signed and your browser is rejecting it.

Here's what's going on and how to fix it:

1 Use HTTP instead of HTTPS for local testing

Most Dockerized ASP.NET Core setups for local development expose **HTTP** on port 5000.

Try:

```
bash
http://localhost:5000/swagger/index.html
```

Notice the **http** instead of **https**.

If this works, you can safely test Swagger locally without dealing with certificates.

Al respecto de esa URL: “**use the actual port your backend is running on**”.

Hago docker-compose up --build con la intención de que se actualice el swagger.

Thanks a lot for your help, now Swagger shows an "Auth" section and inside it POST /api/Auth/registrar and POST /api/Auth/loguear, why is the section called "Auth" ?

Exactly — that section in Swagger is called “Auth” because of your controller class name:

csharp


Copy code

```
[Route("api/[controller]")]
[ApiController]
public class AuthController : ControllerBase
```

Here's why:

1. The `[ApiController]` + `[Route("api/[controller]")]` combination tells ASP.NET Core that the base route for this controller is `/api/Auth`.
2. `[controller]` is replaced **automatically** by the controller's class name **without the “Controller” suffix**.
 - Your class is named `AuthController` → `[controller]` becomes `Auth`.
 - So the base route is `/api/Auth`.
 - Swagger then organizes endpoints by controller, ↓ the section heading in Swagger UI is `Auth`.

De lo que estamos hablando es de que ahora en Swagger veo:

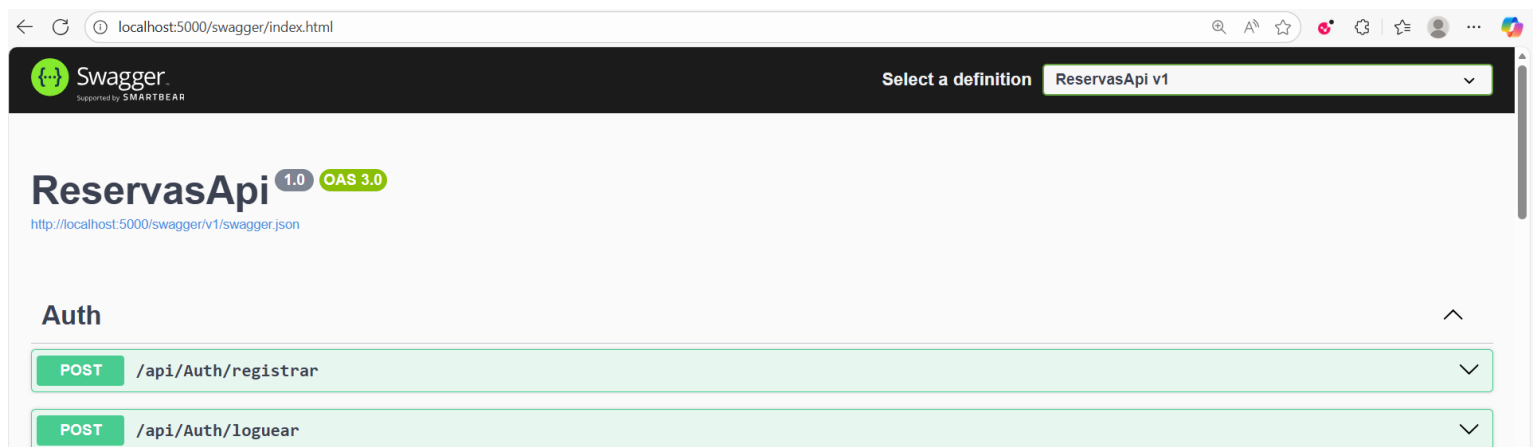

Y debajo todo lo que ya se veía pre-implementar autenticación básica.


Decir que tuve que editar el docker-compose.yml (por haber cambiado la estructura de files/folder del proyecto al meter la carpeta de despliegue y aquí dentro del docker-compose.yml) y decidí de paso quitar lo de Kafka (lo pasé a un txt que está tmb en ‘despliegue’ folder), ahora mi docker-compose.yml es éste:


```
docker-compose.yml X
C: > Users > iago.cadavidgonzalez > Proyectos > reservas-app > despliegue > docker-compose.yml
1  version: "3.9"
2
3  services:
4    frontend:
5      build:
6        context: ../frontend
7      ports:
8        - "4200:80"
9      depends_on:
10       - backend
11
12    backend:
13      build:
14        context: ../backend
15      ports:
16        - "5000:5000"
17      environment:
18        - ASPNETCORE_ENVIRONMENT=Development
19        - ConnectionStrings_DefaultConnection=Server=db;Database=ReservasDb;User Id=sa;Password=docKer!8;TrustServerCertificate=True;
20      depends_on:
21        - db
22
```

```
23  db:
24    image: mcr.microsoft.com/mssql/server:2022-latest
25    container_name: sqlserver
26    environment:
27      - ACCEPT_EULA=Y
28      - SA_PASSWORD=docKer!8
29    ports:
30      - "1433:1433"
31    volumes:
32      - data_sql:/var/opt/mssql
33
34  volumes:
35    data_sql: # SQL Server persistence
36      external: true
37      name: reservas-app_data_sql
```

Como de UsuariosController quité el POST (ya que queda reemplazado por el del registro), pues entonces desaparece de Swagger el POST de Usuarios, como muestro a continuación:

NEXT PAGE

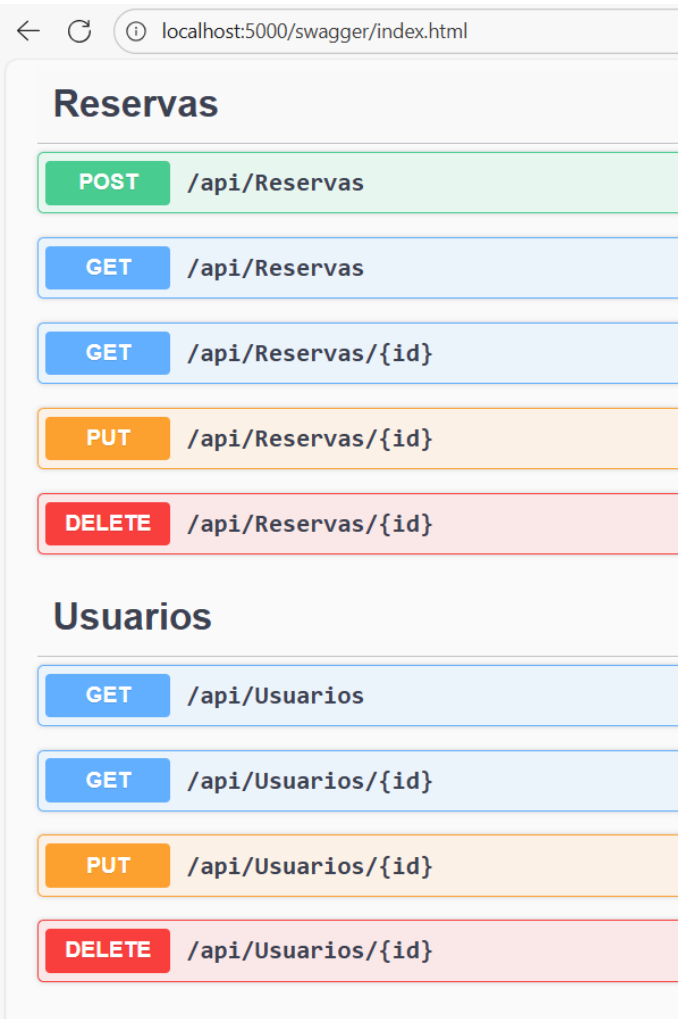

After it finishes

- Open Swagger at:

```
bash
```

 Copy code

```
http://localhost:5000/swagger/index.html
```

- You should now see:
 - **AuthController** with:
 - `POST /api/auth/register`
 - `POST /api/auth/login`
 - Your `UsuariosController` **without the POST /api/usuarios endpoint** (since you commented it out)

Eso está logrado, pero ahora he de testear esos dos POST.

Pruebo a registrar

localhost:5000/swagger/index.html

ReservasApi1.0OAS 3.0

http://localhost:5000/swagger/v1/swagger.json

Auth

POST/api/Auth/registrar

ParametersCancelReset

No parameters

Request bodyapplication/json

Edit Value | Schema

```
{  "dni": "193709870",  "nombreCompleto": "Manuel Molano",  "email": "molano@gmail.com",  "telefono": "635786203",  "domicilio": "Calle Felicidad 9, Vigo",  "fechaNacimiento": "2000-05-24",  "password": "goDofredo567!"}
```

localhost:5000/swagger/index.html

Auth

POST/api/Auth/registrar

ParametersCancelReset

No parameters

Request bodyapplication/json

Edit Value | Schema

```
{  "dni": "193709870",  "nombreCompleto": "Manuel Molano",  "email": "molano@gmail.com",  "telefono": "635786203",  "domicilio": "Calle Felicidad 9, Vigo",  "fechaNacimiento": "2000-05-24",  "password": "goDofredo567!"}
```

Execute

Clico en Execute: NEXT PAGE resultado

Responses

Curl

```
curl -X 'POST' \
  'http://localhost:5000/api/Auth/regar' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
    "dni": "19370987D",
    "nombreCompleto": "Manuel Molano",
    "email": "molano@gmail.com",
    "telefono": "635786203",
    "domicilio": "Calle Felicidad 9, Vigo",
    "fechaNacimiento": "2000-05-24",
    "password": "goDofredo567!"
  }'
```

Request URL

http://localhost:5000/api/Auth/regar

Server response

Code	Details
200	Response body Usuario registrado exitosamente Response headers content-type: text/plain; charset=utf-8 date: Thu, 27 Nov 2025 11:30:54 GMT server: Kestrel transfer-encoding: chunked

Responses

Code	Description	Links
200	OK	No links

```
// 5. retornamos el éxito de la operación de registro de usuario:
return Ok("Usuario registrado exitosamente");
} // final de función Registrar i.e. final de POST: api/auth/register
```

Exit aparece en amarillo cosa que no me hace mucha gracia.

Y en efecto en DBeaver está ese nuevo registro en tabla de usuarios 😊

DBeaver 25.2.4 - Usuarios

File Edit Navigate Search SQL Editor Database Window Help

SQL Commit Rollback Auto master dbo@ReservasDb

Database Navigator Projects

Filter connections by name

master localhost:1433

Databases

- ReservasDb 16M
 - Schemas
 - dbo
 - Tables
 - Cancelaciones
 - Instalaciones 72K
 - Pagos
 - Reservas 216K
 - Usuarios 72K
 - _EFMigrationsHistory

Properties Data Diagram

Show SQL Enter a SQL expression to filter results (use Ctrl+Space)

	AZ Dni	AZ NombreCon	AZ Email	AZ Telefon	AZ Domicilio	FechaNacin	FechaRegistro	PasswordHash	PasswordSalt
1	19370987D	Manuel Molano	molano@gmail.com	635786203	Calle Felicidad 9, Vigo	2000-05-24	2025-11-27 11:30:55.583	(EB>2H ¿ O [_k0V1qA8E p ¥ Q!0 eSzÖEa Çn 'G «) 4V	
2	98761234Z	Laura Gomez	laugom@gmail.com	981856743	Calle Felicidad 9, Madrid	1990-05-10	2025-11-12 14:51:43.861		

Con el valor de los dos campos (hash y salt) de la contraseña como deben estar.

Ahora toca probar el login.

NEXT PAGE

localhost:5000/swagger/index.html

ReservasApi 1.0 OAS 3.0

<http://localhost:5000/swagger/v1/swagger.json>

Auth

POST /api/Auth/registrar

POST /api/Auth/loguear

Parameters

No parameters

Request body

Edit Value | Schema

```
{
  "dni": "193709870",
  "password": "goDofredo567!"
}
```

Execute

Code Details

500 Error: Internal Server Error

Undocumented

Response body

```
System.ArgumentOutOfRangeException: IDX10720: Unable to create KeyedHashAlgorithm for algorithm 'HS512', the key size must be greater than: '512' bits, key has '264' bits. (Parameter 'keyBytes')
```

Parece ser que el problema reside en que en appsettings.json he de poner una Key más larga en lo de jwt key.

Parece ser que la key actual es demasiado corta:

{ } appsettings.json X

C: > Users > iago.cadavidgonzalez > Proyectos > reservas-app > backend > ReservasApi > { } appsettings.json > { } Jwt > abc Key

```
1  {
2    "ConnectionStrings": {
3      "DefaultConnection": "Server=db;Database=ReservasDb;User Id=sa;Password=docKer!8;TrustServerCertificate=True;"
4    },
5    "Jwt": {
6      "Key": "aP9d73D1jD0m30k1Lma17uiWe05vNFg57"
7    },
8    "Logging": {
9      "LogLevel": {
10       "Default": "Information",
11       "Microsoft.AspNetCore": "Warning"
12     }
13   },
14   "AllowedHosts": "*"
15 }
16
```

Nuevo Key string (con este sí funciona el login 😊):

{ } appsettings.json X

C: > Users > iago.cadavidgonzalez > Proyectos > reservas-app > backend > ReservasApi > { } appsettings.json > ...

```
1  {
2    "ConnectionStrings": {
3      "DefaultConnection": "Server=db;Database=ReservasDb;User Id=sa;Password=docKer!8;TrustServerCertificate=True;"
4    },
5    "Jwt": {
6      "Key": "bF7dG3hJ9kL2mN6pQ1rS5tU8vW0xY2zA4bC6dE8fG0hJ2kL4mN6pQ8rS0tU2vW4X"
7    },
8    "Logging": {
9      "LogLevel": {
10       "Default": "Information",
11       "Microsoft.AspNetCore": "Warning"
12     }
13   },
14   "AllowedHosts": "*"
15 }
16
```

Si le quitas la X, ya falla.

Request URL

http://localhost:5000/api/Auth/login

Server response

Code Details

200

Response body

```
{
  "mensaje": "Login exitoso",
  "token": "eyJhbGciOiJIUzI1bzUzIiwiaWUiOiJhbnRpdHkvY2xhaW1zL25hbWU0IiwiaWF0Ij0iMjAyNS11-27T11:30:55.583827",
  "usuario": {
    "dni": "193709870",
    "nombreCompleto": "Manuel Molano",
    "email": "molano@gmail.com",
    "telefono": "635786203",
    "domicilio": "Calle Felicidad 9, Vigo",
    "fechaNacimiento": "2000-05-24",
    "fechaRegistro": "2025-11-27T11:30:55.583827"
  }
}
```



Download

Response headers

```
content-type: application/json; charset=utf-8
date: Thu, 27 Nov 2025 12:02:02 GMT
server: Kestrel
transfer-encoding: chunked
```

Responses

Code Description


Links

200 OK

No links

En **AuthController.cs** :

```
return Ok(new
{
    mensaje = "Login exitoso", //
    token = tokenCreado,
    usuario = new
    {
        usuario.Dni,
        usuario.NombreCompleto,
        usuario.Email,
        usuario.Telefono,
        usuario.Domicilio,
        usuario.FechaNacimiento,
        usuario.FechaRegistro
    }
});
} // final de la función Loguear
```

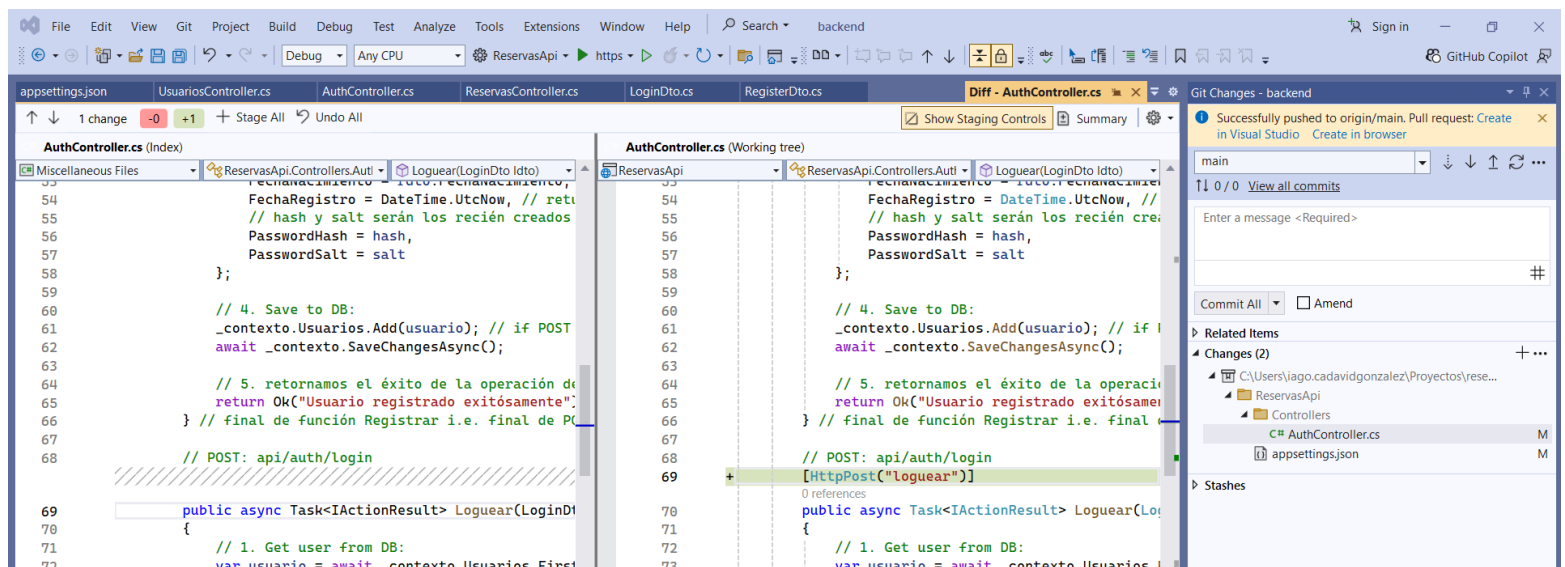

Para ver eso se hace doble click en `AuthController.cs` en GitChanges, lo verde de la derecha es lo nuevo.

