

Ahora sí, me pongo con lo de Kafka semana 2	21
2. Register the Kafka producer in DI (Dependency Injection)	34
3. Inject and call the Kafka producer in your controller -> modifiko ReservasController.cs	34
4. Publish the kafka event (after SaveChangesAsync but before returning)	34
Resultado de los pasos anteriores.....	36
Verify that your ASP.NET Core (Web API) backend is actually publishing messages to Kafka	37
Corro el consumidor kafka sin warning de unknown topic (buenas noticias)	49
add zookeeper service to docker-compose.yml file.....	53
Docker compose up --build exitoso con kafka y zookeeper docker containers and volumes	56
Con KRaft i.e. sin Zookeeper corre sin parar el kafka container	58
Hago docker-compose up --build 17 nov 2025 13:00 (no veo ninguna kafka exception)	58
Creo un github repo de despliegue que será el que aloje el docker-compose.yml.....	58
CONCLUSIÓN DE MI EXPERIENCIA CON KAFKA SO FAR	58

Primero de todo voy comitear y pushear los 35 “cambios de git” que me figuran en vside, que serán todos o casi todos los correspondientes a todo el código que redacté ahí en vs ide en relación a EFC y a CRUD endpoints.

Please now that my backend project has the following structure locally:

backend folder contains .git folder, .github folder, .vs folder, .vscode folder, ReservasApi folder, .dockerignore file, .gitignore file, backend.sln file and Dockerfile.

Inside ReservasApi folder there is bin folder, Controllers folder, Data folder, Migrations folder, Models folder, obj folder, Properties folder, appsettings.Development.json file, appsettings.json file, Program.cs file, ReservasApi.csproj file, ReservasApi.csproj.user file and ReservasApi.http file.

Perfect — thanks for the detailed structure. Given that, your **backend Git repository root is the backend folder**, and **ReservasApi** is just the project folder inside it.

Here’s a step-by-step guide to commit your backend changes **from Visual Studio IDE** and push them to GitHub, taking your folder structure into account: 

Know* debería haber puesto yo.

lago Xesus Cadavid Gonzalez > Proyectos > reservas-app > backend >



 Ordenar 

 Ver 



Nombre	Fecha de modificación	Tipo	Tamaño
.git	10/11/2025 11:36	Carpeta de archivos	
.github	05/11/2025 8:35	Carpeta de archivos	
.vs	05/11/2025 9:45	Carpeta de archivos	
.vscode	03/11/2025 10:28	Carpeta de archivos	
ReservasApi	07/11/2025 14:09	Carpeta de archivos	
.dockerignore	03/11/2025 10:29	Archivo DOCKERIGNORE	1 KB
.gitignore	04/11/2025 11:38	Archivo de origen Git Ignore	1 KB
backend.sln	03/11/2025 10:28	Visual Studio Solution	2 KB
Dockerfile	03/11/2025 10:29	Archivo	1 KB

1 Modified (Modificado)

- These files **already existed in your Git repository** (they were committed previously).
- You made changes to them since the last commit.
- Git marks them as **Modified** because it tracks that the file has been updated but not yet staged/committed.

Example from your backend project:

- If you edited `Program.cs` or `AppDbContext.cs` after the last commit, Git would show them as **Modified**.
-

2 Added / Agregado

- These files are **new files that did not exist in the repository** before.
- Git sees them as “untracked” until you stage them. Once staged, Git will include them in the next commit.

Example in your backend project:

- New controller files like `UsuariosController.cs`, `InstalacionesController.cs`, `PagosController.cs`, `CancelacionesController.cs`.
- 
- Or new model classes you just created, migrations, etc.
-

En mi caso concreto a 10 de noviembre de 2025 justo antes de ponerme con lo de kafka y justo después de probar endpoints con swagger y backend running (tanto en local como en container):

NEXT PAGE

Cambios de GIT: backend

main

↑↓ 0 / 0 confirmaciones de Ver todo

Escriba un mensaje <Requerido>

#

Confirmar todo

☐ Rectificar

Elementos relacionados

Cambios (35)

+ ...

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend

.vs

backend

CopilotIndices\17.14.1347.20289

CodeChunks.dbA

SemanticSymbols.dbA

DesignTimeBuild

.dtbcache.v2A

FileContentIndex

001fee72-0e2b-48bf-a1f8-f5a95360d0b5.vsidxA

023d8be5-1be5-4bd4-8a17-ee795068d185.vsidxA

0f25bf4d-78c9-4de4-84b0-46cb32530c0b.vsidxA

25fc78e8-f8ba-49a7-9225-363601ee93da.vsidxA

9292f386-702d-4cd3-a9d6-8a364006a6e0.vsidxA

a081786e-5e69-47a3-99b3-067c707b543f.vsidxA

v17

.futdcache.v2A

.suoA

DocumentLayout.backup.jsonA

DocumentLayout.jsonA

ProjectEvaluation

backend.metadata.v9.binA

NEXT PAGE

◀ Cambios (35)

$$+ \dots$$

- backend.metadata.v9.bin
- backend.projects.v9.bin
- backend.strings.v9.bin

A
A
A

Controllers

- C# CancelacionesController.cs
- C# InstalacionesController.cs
- C# PagosController.cs
- C# ReservasController.cs
- C# UsuariosController.cs

A
A
A
A
A

C# AppDbContext.cs

A

```
C# 20251107130944_PrimerMigracion.cs
C# 20251107130944_PrimerMigracion.D
C# AppDbContextModelSnapshot.cs
```

A
A
A

- C# Cancelacion.cs
- C# Instalacion.cs
- C# MetodoPago.cs
- C# Pago.cs

A
A
A
A

A

A

N

N

N

A

- Modified files -> Git is tracking changes in files that already exist. Git marks them as Modified because it tracks that the file has been updated but not yet staged/committed.
- Added files -> Git will start tracking these new files when you stage them.

Según lo que dice chatgpt en esos dos guiones, concluyo que ahora debo stagear all 35 changes and then commit them all too.

1 Why staging all is reasonable

- All these changes are related: EF Core setup, models, DbContext, and CRUD controllers.
- Staging all together keeps your first backend commit coherent — one commit contains all the foundational backend code.

2 What to watch out for

- Make sure you **don't accidentally stage generated or temporary files** like:
 - `bin/` folder
 - `obj/` folder
 - `.vs/` folder contents
- These are usually in `.gitignore` already, so Visual Studio will normally exclude them.


✓ How to do it

- In **Git Changes**, click “+ Stage All” (or in Spanish visual Studio: “Etapá todo”).

Cuando me pongo encima del + pone “**agregar todo al “stage”**”.



Al intetarlo, me da este error:

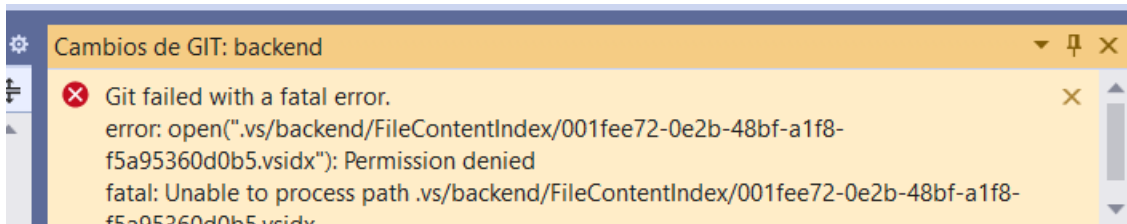

Solución: poner **.vs/** en `.gitignore` file hijo de mi ‘backend’ folder y eliminar los `.vs/` files from git’s staging area (the ones that are already there).

Para eliminarlos, run this command from the ‘backend’ folder (where `.git` is):

git rm --cached -r .vs

-- cached removes “it” from Git without deleting the actual file from your disk.

-r -> recursive, so all .vs subfolders are removed

“it” refers to the `.vs` folder and all its contents –in your case, the `FileContentIndex` files inside `.vs/backend/` (que son los que me dan el error al intentar hacer el stage).


I added `.vs/` to `.gitignore` file and saved this file, now instead of 35 there are 20 git changes

Exactly — that makes sense. ✓

Here's what happened:

- By adding `.vs/` to `.gitignore`, Git now **ignores all files inside the `.vs` folder**, including the ones that were causing the permission errors.
- Those ignored files no longer appear in the **Git Changes** list.
- That's why your changes went down from 35 → 20. Those 20 remaining changes are the **actual code and files you want to commit** (models, controllers, DbContext, migrations, etc.).

You're now ready to **stage and commit these 20 changes** safely.

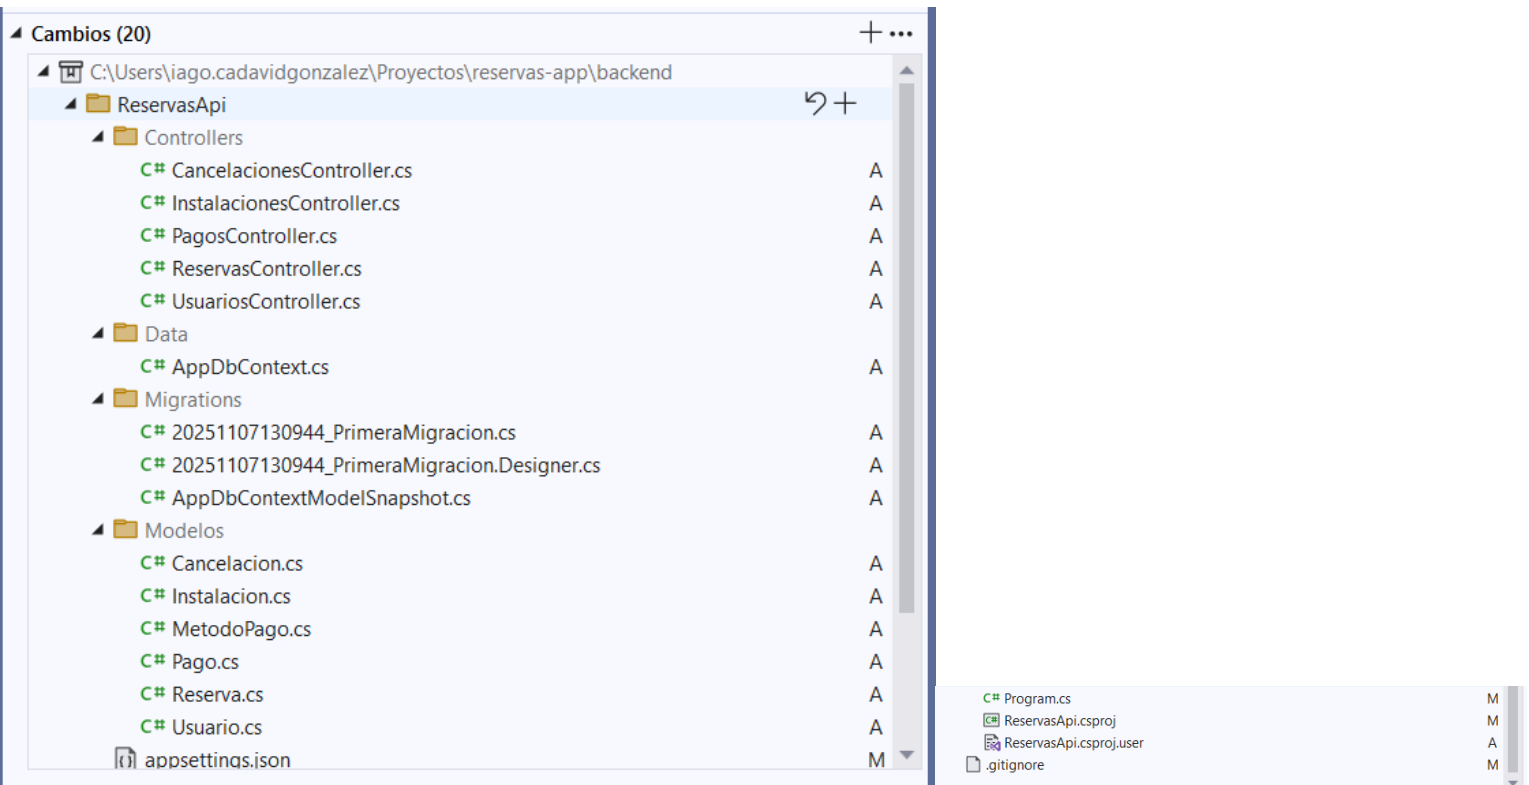

Stashes

Quitar todo

No hay cambios guardados provisionalmente.

Ahora clico en el + pal stage all y no da problema, resultado:

Cambios de GIT: backend

main



↑↓ 0 / 0 [confirmaciones de Ver todo](#)

Escriba un mensaje <Requerido>



Hacer "commit" de cambios "staged" ☐ Rectificar

Elementos relacionados

Cambios "staged" (20)

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend

ReservasApi

Controllers

C# CancelacionesController.cs A

C# InstalacionesController.cs A

C# PagosController.cs A

C# ReservasController.cs A

C# UsuariosController.cs A

Data

C# AppDbContext.cs A

Migrations

C# 20251107130944_Primeramigracion.cs A

C# 20251107130944_Primeramigracion.Designer.cs A

C# AppDbContextModelSnapshot.cs A

Modelos

C# Cancelacion.cs A

Cambios

No hay cambios "unstaged" en el directorio de trabajo.

Stashes


Quitar todo

No hay cambios guardados provisionalmente.

Explorador de soluciones


Cambios de GIT: backend

F

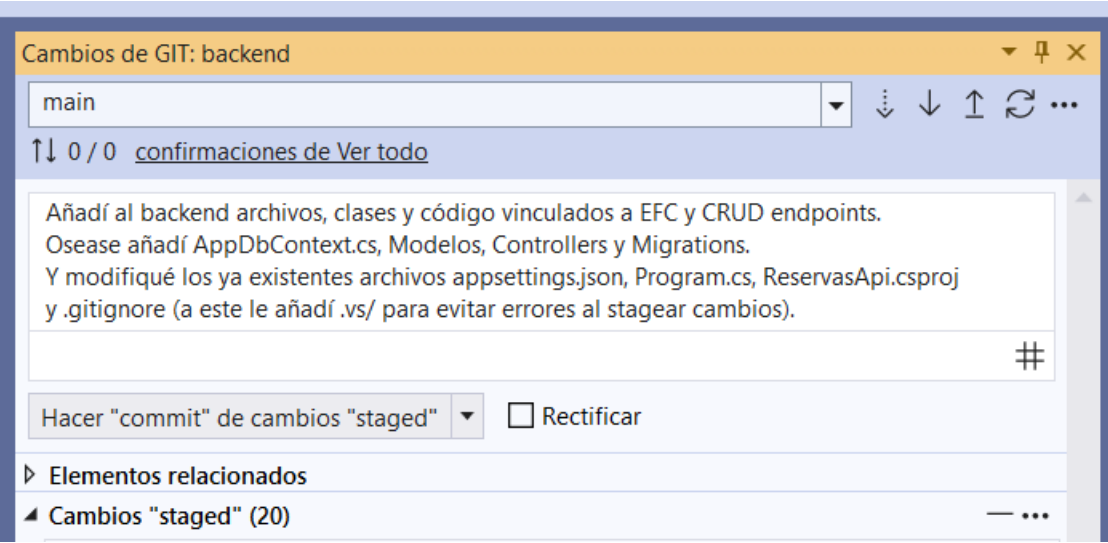

Ahora clico en el botón hacer "comm

cambios "staged", "this will create a local commit with the 20 staged files".

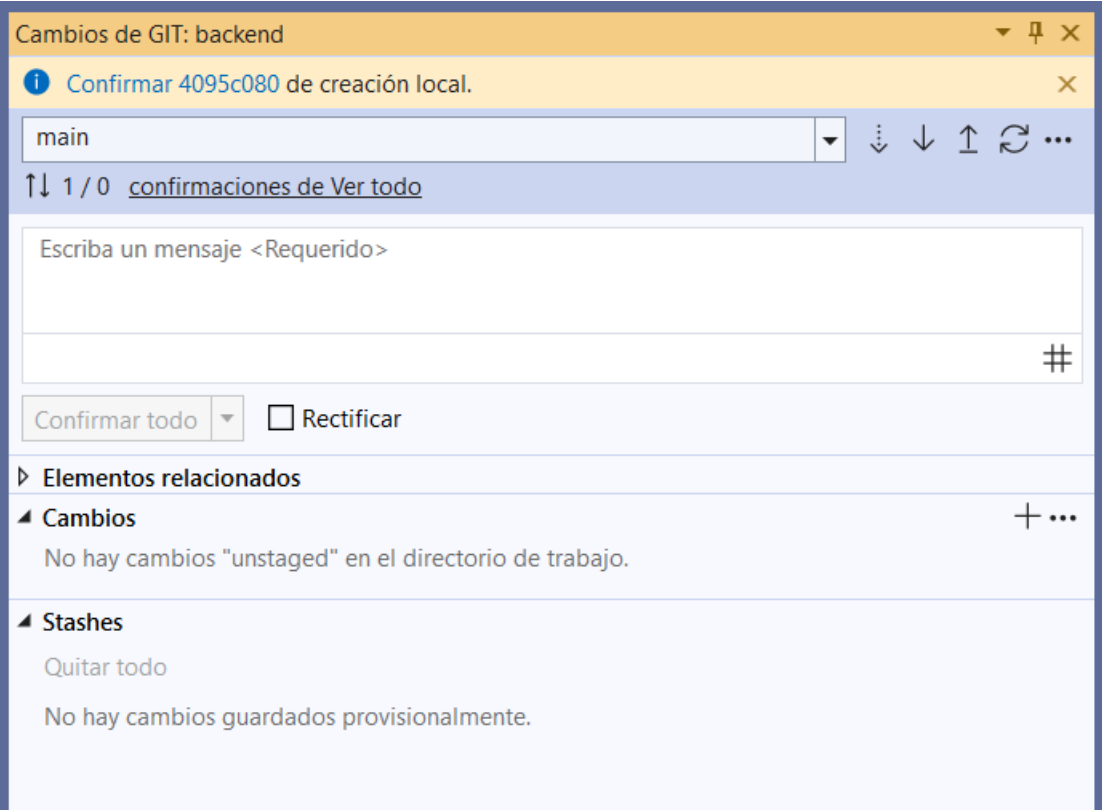

NEXT PAGE

I've just clicked on the button "Commit Staged" and got "Confirmar 4095c080 de creación local" and under main I see "1 / 0"

Perfect — that message means your **staged changes were successfully committed locally**. 

Here's what it tells you:

- "Confirmar 4095c080 de creación local" → Git created a new commit with ID 4095c080 in your local repository.
- "1 / 0" → You have 1 local commit that hasn't been pushed yet to the remote GitHub repository, and 0 uncommitted changes.

Next step: Push to GitHub

- Click the **Push** button (sometimes labeled "Enviar") in the **Git Changes** panel.
- This will upload your local commit to your GitHub repository.
- Once it completes, the "1 / 0" should update to 0 / 0, meaning your local and remote repositories are now synchronized.

After that, all your backend code will be safely on Git! .

NEXT PAGE

But how does VS IDE know about my GitHub if so far I've pushed using Visual Studio Code ?

Ah, that's an important point. Visual Studio doesn't magically know about GitHub — it relies on your **Git configuration** in the repository itself.

Here's how it works in your situation:

- 1. **Your backend folder is already a Git repository** (`.git` folder exists).
- 2. **You've already pushed this repository to GitHub** using VS Code. That means the local Git repo already has a **remote** configured, usually named `origin`.
 - You can check by running in **Command Prompt or Terminal** inside your `backend` folder:

```
bash
git remote -v
```

Copy code

You should see something like:

```
perl
origin https://github.com/your-username/backend.git (fetch)
origin https://github.com/your-username/backend.git (push)
```

Copy code

- 3. **Visual Studio uses the same Git repo.** So when you click **Push**, it just uses the remote already configured (`origin`) and pushes your new commit to GitHub.

✓ In short: **VS IDE doesn't need to know your GitHub account separately**, it just uses the Git configuration that already exists in your local repo.



```
C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend>git remote -v
origin https://github.com/IagoPol/reservas-backend (fetch)
origin https://github.com/IagoPol/reservas-backend (push)
```

NEXT PAGE

Mi backend project en github pre-push (10 noviembre 2025 12:40):

3 errores en backend x Correo: Iago Xesus Ca x Calendario: Iago Xesus x EFCoreCode_y_Primer x Semanal_KAFKA x IagoPol/res

https://github.com/IagoPol/reservas-backend

lagoPol / reservas-backend

Search Type / to se

<> Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

reservas-backend

Public

Pin

Watch 0

main 1 Branch 0 Tags

Go to file t

Add file

<> Code

lagoPol Remove obj folder from tracking

c310319 · last week 4 Commits

.vscode	Commit inicial - ASP.NET Core Web API backend	last week
ReservasApi	Remove obj folder from tracking	last week
.dockerignore	Commit inicial - ASP.NET Core Web API backend	last week
.gitignore	Initial commit	last week
Dockerfile	Commit inicial - ASP.NET Core Web API backend	last week
backend.sln	Commit inicial - ASP.NET Core Web API backend	last week

README

Dentro de ReservasApi:

https://github.com/IagoPol/reservas-backend/tree/main/ReservasApi

lagoPol / reservas-backend

Search Type / to search

<> Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

Files

main + Search

Go to file t

.vscode

ReservasApi

Properties

Program.cs

ReservasApi.csproj

ReservasApi.http

appsettings.Development.json

appsettings.json

.dockerignore

.gitignore

Dockerfile

backend.sln

reservas-backend / ReservasApi


Add file

lagoPol Remove obj folder from tracking


c310319 · last week History

Name	Last commit message	Last commit date
..		
Properties	Commit inicial - ASP.NET Core Web API backend	last week
Program.cs	Commit inicial - ASP.NET Core Web API backend	last week
ReservasApi.csproj	Commit inicial - ASP.NET Core Web API backend	last week
ReservasApi.http	Commit inicial - ASP.NET Core Web API backend	last week
appsettings.Development.json	Commit inicial - ASP.NET Core Web API backend	last week
appsettings.json	Commit inicial - ASP.NET Core Web API backend	last week

Hago el push desde VS IDE clicando en la flecha que apunta parriba:

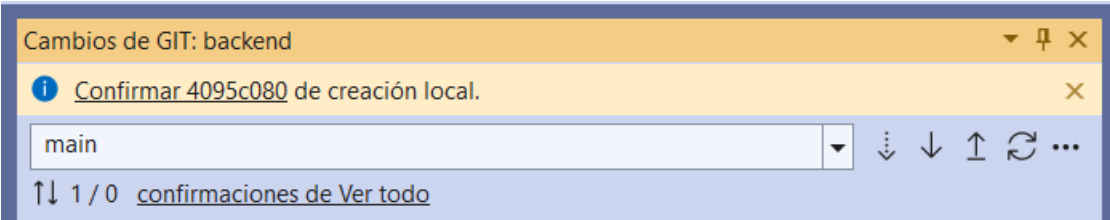


Justo después de clicar en push:

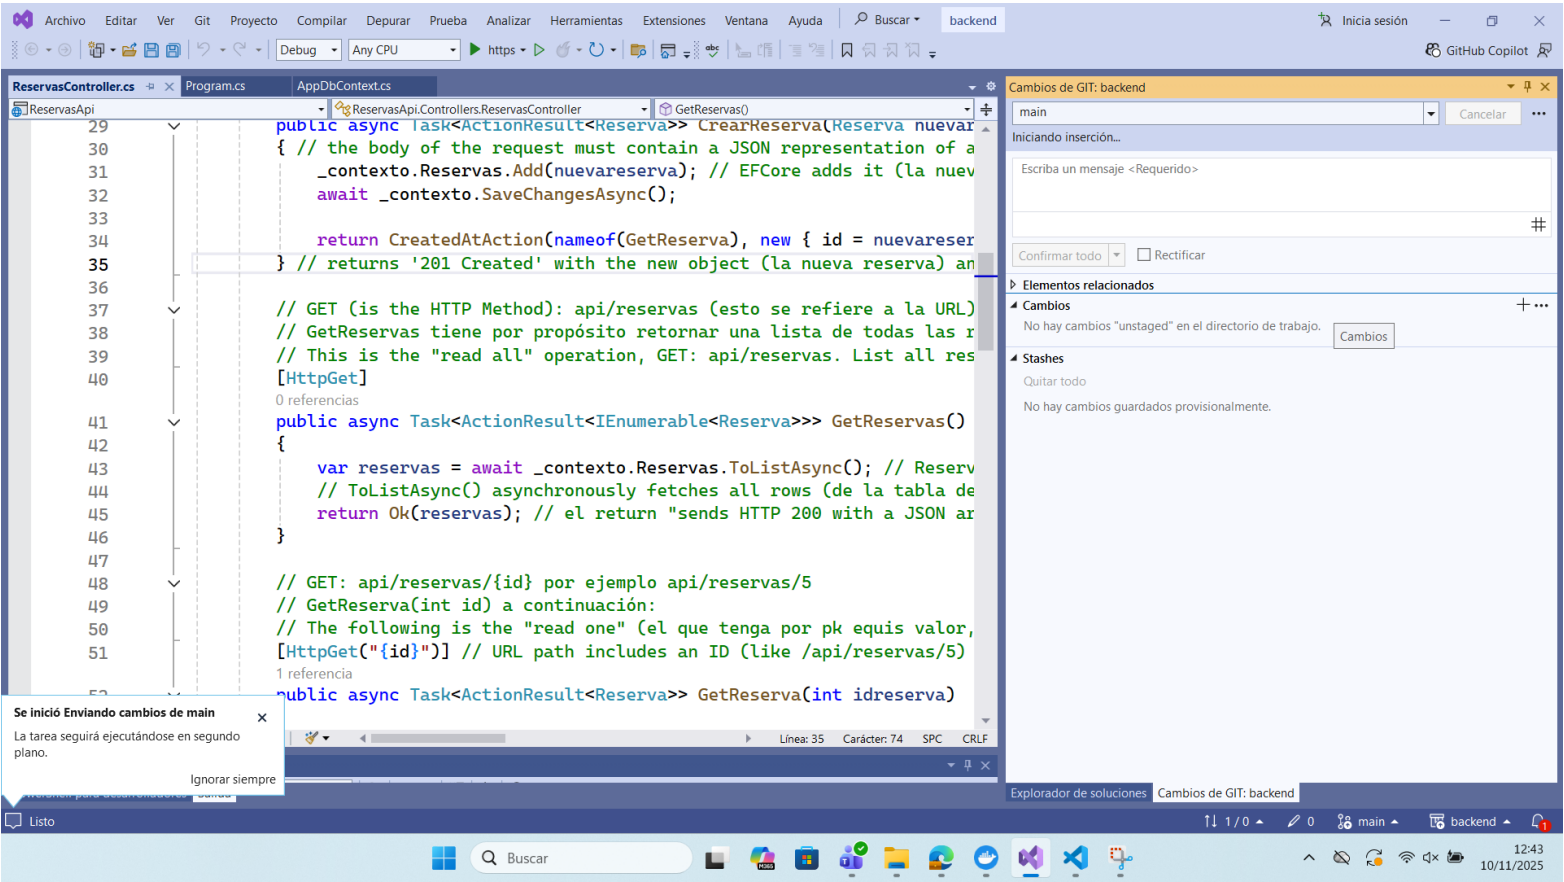

Fijarse que al nordeste pone “Iniciando inserción” y al suroeste pone “Se inició Enviando cambios de main”

Una vez completa el push, pone arriba a la derecha 0 / 0:

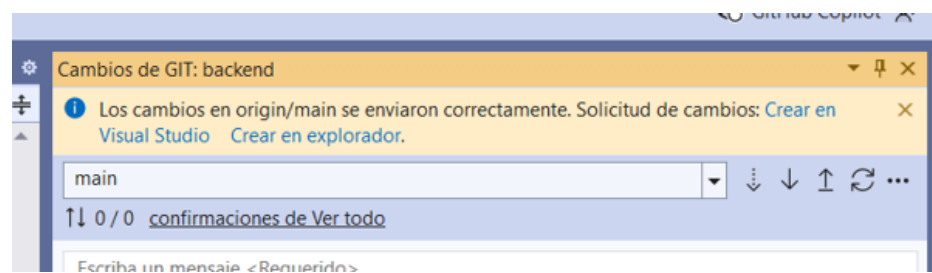

“the 1 / 0 updates to 0 / 0, meaning your local and

repositories are now synchronized.”

Ahora en github si recargo la raíz del backend, vemos que tanto el mensaje de ReservasApi folder como el mensaje de file han cambiado (i.e. ahora ponen el nuevo mensaje, el del último commit):

← ↻ 🔒 https://github.com/lagoPol/reservas-backend/tree/main

lagoPol / reservas-backend

🔍 Type / to search

<> Code Issues Pull requests Actions Projects Wiki Security Insights Settings

reservas-backend Public

📌 Pin

👁 Watch 0

🔗 main 1 Branch 0 Tags

🔍 Go to file t

Add file

<> Code

lagoPol

Añadí al backend archivos, clases y código vinculados a EFC y CRUD en...

4095c08 · 16 minutes ago


🕒 5 Commits

📁 .vscode	Commit inicial - ASP.NET Core Web API backend	last week
📁 ReservasApi	Añadí al backend archivos, clases y código vinculados a EFC ...	16 minutes ago
📄 .dockerignore	Commit inicial - ASP.NET Core Web API backend	last week
📄 .gitignore	Añadí al backend archivos, clases y código vinculados a EFC ...	16 minutes ago
📄 Dockerfile	Commit inicial - ASP.NET Core Web API backend	last week
📄 backend.sln	Commit inicial - ASP.NET Core Web API backend	last week


📖 README

Si entro en ReservasApi folder, ahora veo esto:

NEXT PAGE

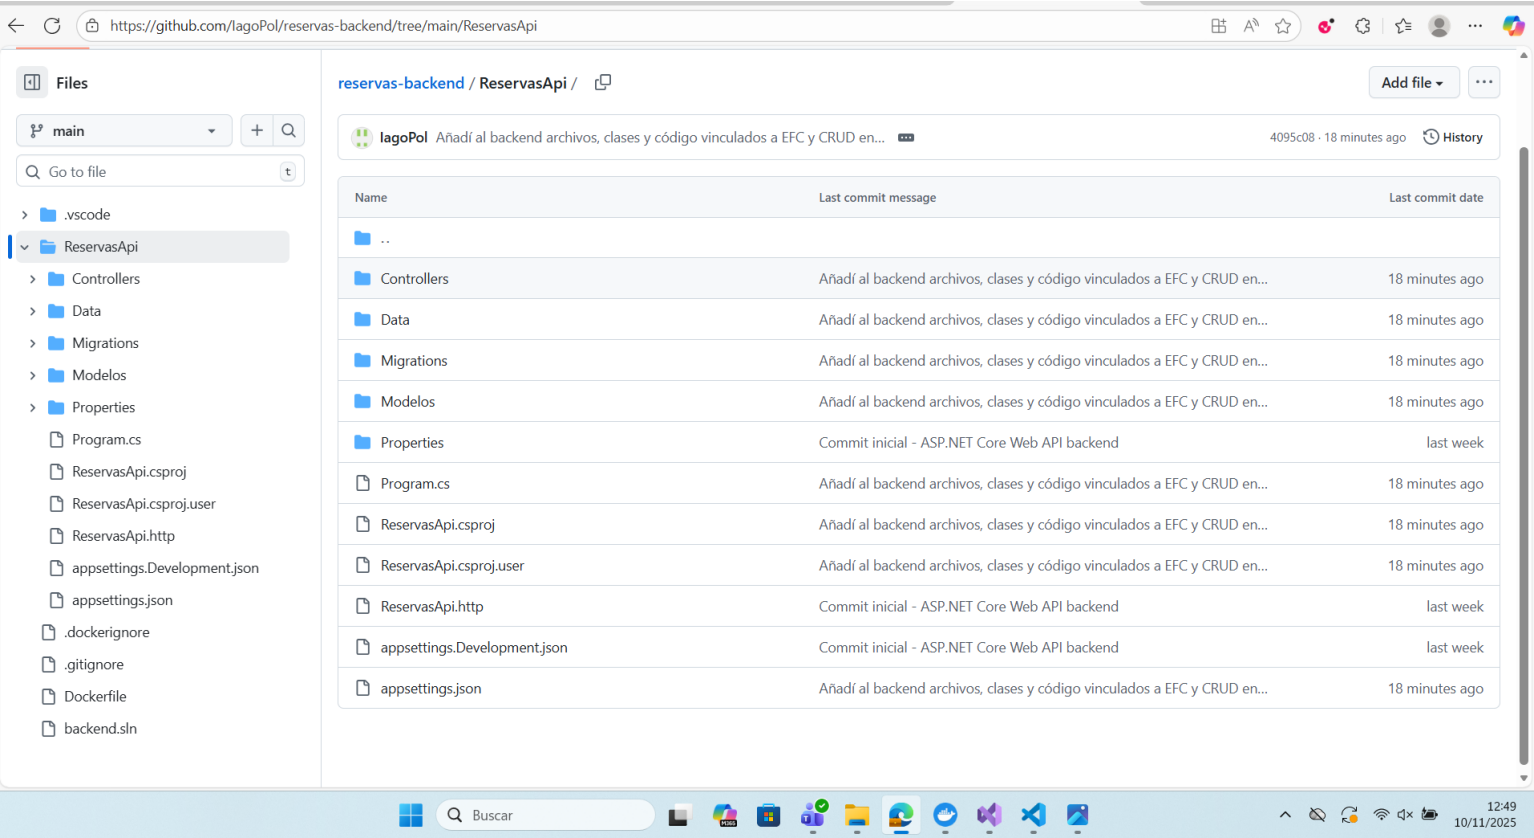

VS antes del push veía:

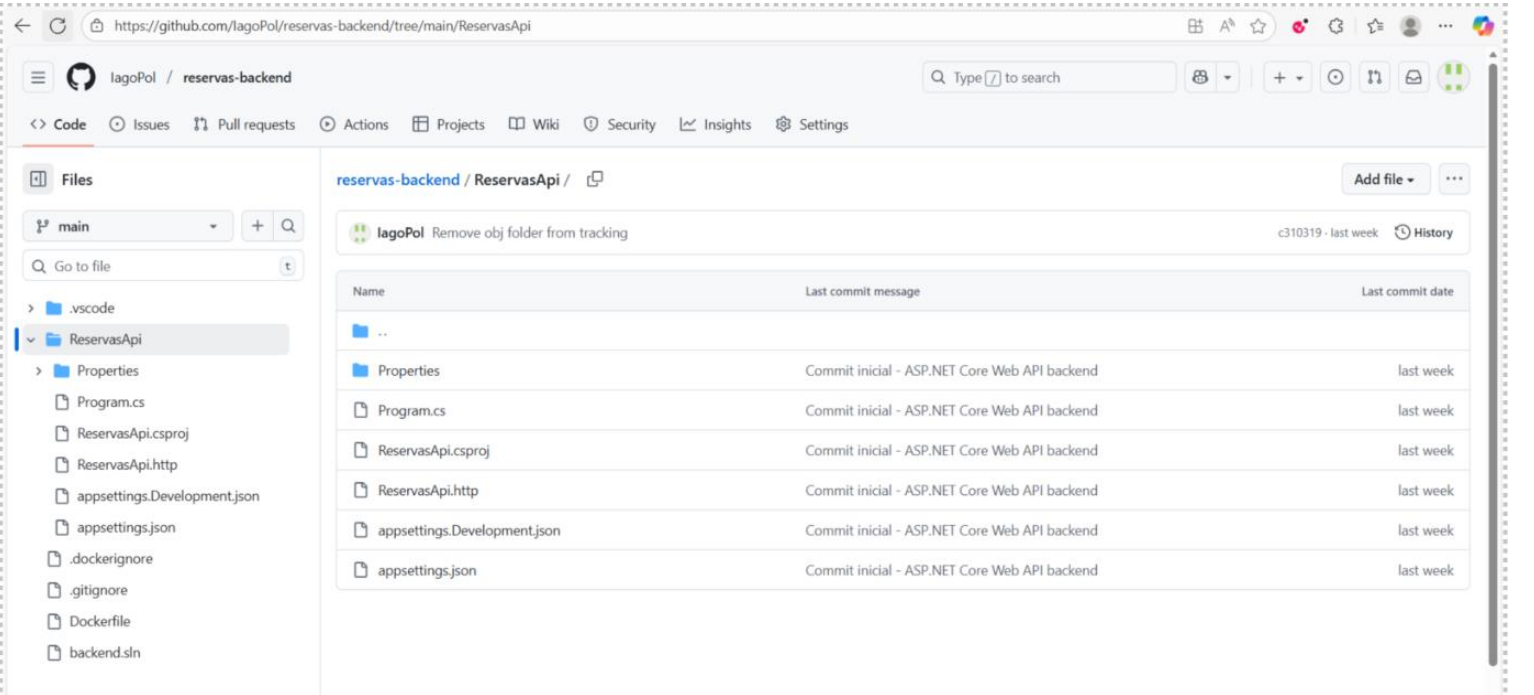

Ahora hay 4 folders nuevas (antes solo había Properties folder) y hay varios files cuyo mensaje ahora es el nuevo, no lo mensaje original.

Doy por exitosa la actualización de mi github.

Pero también voy ahora a meter ya en github (pero en el repo de documentación) la docu de endpoints.

EFCoreCode_y_PrimerosEndpoints.pdf

Commit changes

Añadí vía upload docu endpoints.

La última sección del índice, la cual se titula "Semana 2 - ~~Goals~~", está actualizada a 10 de noviembre de 2025 a las 13:00 horas.

☒ Commit directly to the `main` branch.

☐ Create a **new branch** for this commit and start a pull request. [Learn more about pull requests.](#)

Commit changes

Cancel

<https://github.com/lagoPol/docu-reservas-plexus/upload/main>

lagoPol / docu-reservas-plexus

Type to search

<> Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

lagoPol docu-reservas-plexus Public

Pin Watch

main 1 Branch 0 Tags

Go to file

Add file

<> Code

lagoPol

Añadí vía upload docu endpoints.

953c479 · now 6 Commits

ConfigInicialDockerCompose_InitRepos.pdf	Guia docker git del proyecto	5 days ago
EFCoreCode_y_PrimerosEndpoints.pdf	Añadí vía upload docu endpoints.	now
Semana1_AnalisisRequisitos_Disenos.pdf	Documentación entregable	5 days ago
Semana1_Progreso.pdf	Semana1_MiProgreso	5 days ago

README

Ahora sí, me pongo con lo de Kafka semana 2

- **Publicación del evento “ReservaCreada” en Kafka dummy/real. Publicación de eventos “ReservaCreada” hacia un topic Kafka simulado o real. Eventos iniciales Kafka.**

Esquema Kafka (Eventos y Topics)

Topic	Emisor	Consumidor	Descripción
reservas.creadas	API	Worker, notificador	Publica evento al crear reserva
reservas.finalizacion.pend	API/Scheduler	Worker finalizador	Reserva pendiente a finalizar
reservas.finalizadas	Worker finalizador	Notificaciones	Reserva finalizada o cancelada
reservas.notificaciones	Worker/API	Servicio email/app	Notificaciones en la app/email

Eventos JSON típicos incluyen campos para ID, usuario, espacio, fechas de inicio/fin, estado, y timestamps.

If it helps, they also gave me the following "schema":

Topic: reservas.creadas

Emisor: API

Consumer: Worker, notifier

Description: Publishes an event upon booking creation

Perfect 🍌 — that’s **super helpful**.

That schema is essentially the **contract** for your Kafka event — it describes **what topic** to use, **who sends** it, **who receives** it, and **why** it exists.

Let’s unpack it in the context of your backend (ASP.NET Core Web API) and adjust what we wrote before so it follows this schema exactly.



NEXT PAGE

 What your team’s schema means

Field	Meaning in your case
Topic	<code>reservas.creadas</code> — that’s the exact name of the Kafka topic your backend should publish to (instead of <code>reserva-creada</code>).
Emisor (Emitter)	The API — your backend — is the Kafka producer .
Consumer	“Worker” or “Notifier” services — other apps that will consume these events (you don’t need to implement these yet).
Description	The API must publish an event every time a new booking (<code>Reserva</code>) is created.

Según chatgpt, my goal is:

When someone calls POST /api/reservas, your backend should:

- 1. Create the booking in the SQL Server database (you already do this)
- 2. **Publish a Kafka event to topic reservas.creadas with the booking data**

Regarding “Step 1 — Adjust Kafka producer for the correct topic
Let’s modify the producer you’ll use:” where should I type all that ?

Excellent question — and I’m glad you asked before writing anything 🍌

Here’s **exactly where** and **how** to add that `KafkaProducer` class in your backend project structure.

 Step-by-step placement guide

In your backend project, you already have this structure:

mathematica

Copy code

```
backend/  
├─ ReservasApi/  
│   ├─ Controllers/  
│   ├─ Data/  
│   ├─ Migrations/  
│   ├─ Models/  
│   ├─ Properties/  
│   ├─ Program.cs  
│   └─ ReservasApi.csproj  
└─ ...
```

↓

You will add a new folder and file like this:

ReservasApi/

Messaging/ (new folder here)

KafkaProducer.cs (new file here)

Why call the new folder “Messaging” ?

Excellent question — and you’re thinking like a software architect now 🍌

The folder name `Messaging` is not mandatory — it’s a **convention** based on the *responsibility* of the code that goes inside.

Let me explain the reasoning clearly:

🌱 1. What the folder represents

Your backend currently has these folders:


- **Models** → holds your data entities (Reserva, Usuario, etc.)
- **Controllers** → defines HTTP endpoints
- **Data** → handles EF Core and database context

Now, when you introduce **Kafka**, you’re adding a **new concern** — **message-based communication** (events between services).

So, conceptually, you’re introducing a “**messaging layer**” — something that handles **publishing** or **subscribing** to messages (events).

(en Data solo tengo el appdbContext.cs file)

Yo decido llamarle Eventos a esa carpeta.



Antes dijo chatgpt lo siguiente:

Emisor (Emitter)	The API — your backend — is the Kafka producer .
------------------	--

pero ahora viene a decir que el productor es meramente un .cs file / una clase dentro de mi proyecto backend.

“Think of **Kafka** as a message broker: your backend produces messages (events), and other services can consume them.”


“Understanding what you need to do, you want to:

- **Publish an event called ReservaCreada** from your backend **whenever a booking (Reserva) is created** (o sea, whenever se ejecuta el POST del controller de la tabla de reservas).
- **Send it to a Kafka topic** (simulated or real)
- Eventually. Another service could subscribe to this topic to react (not needed now)

Según chatgpt, kafka will be running locally or Dockerized.

Al tratar de escribir using Confluent.Kafka y new ProducerConfig, me doy cuenta de que mi VS IDE no reconoce nada de eso, y esto es porque “your project doesn’t yet have the **Kafka client library** that defines Producer (and other Kafka classes like ProducerBuilder, Message, etc.)”.

Así que toca “**install the Kafka .NET client package**, para ello in your backend project folder (que en mi caso es el ReservasApi folder, por ser el padre de .csproj file), run this command in a terminal or PowerShell:
dotnet add package Confluent.Kafka”

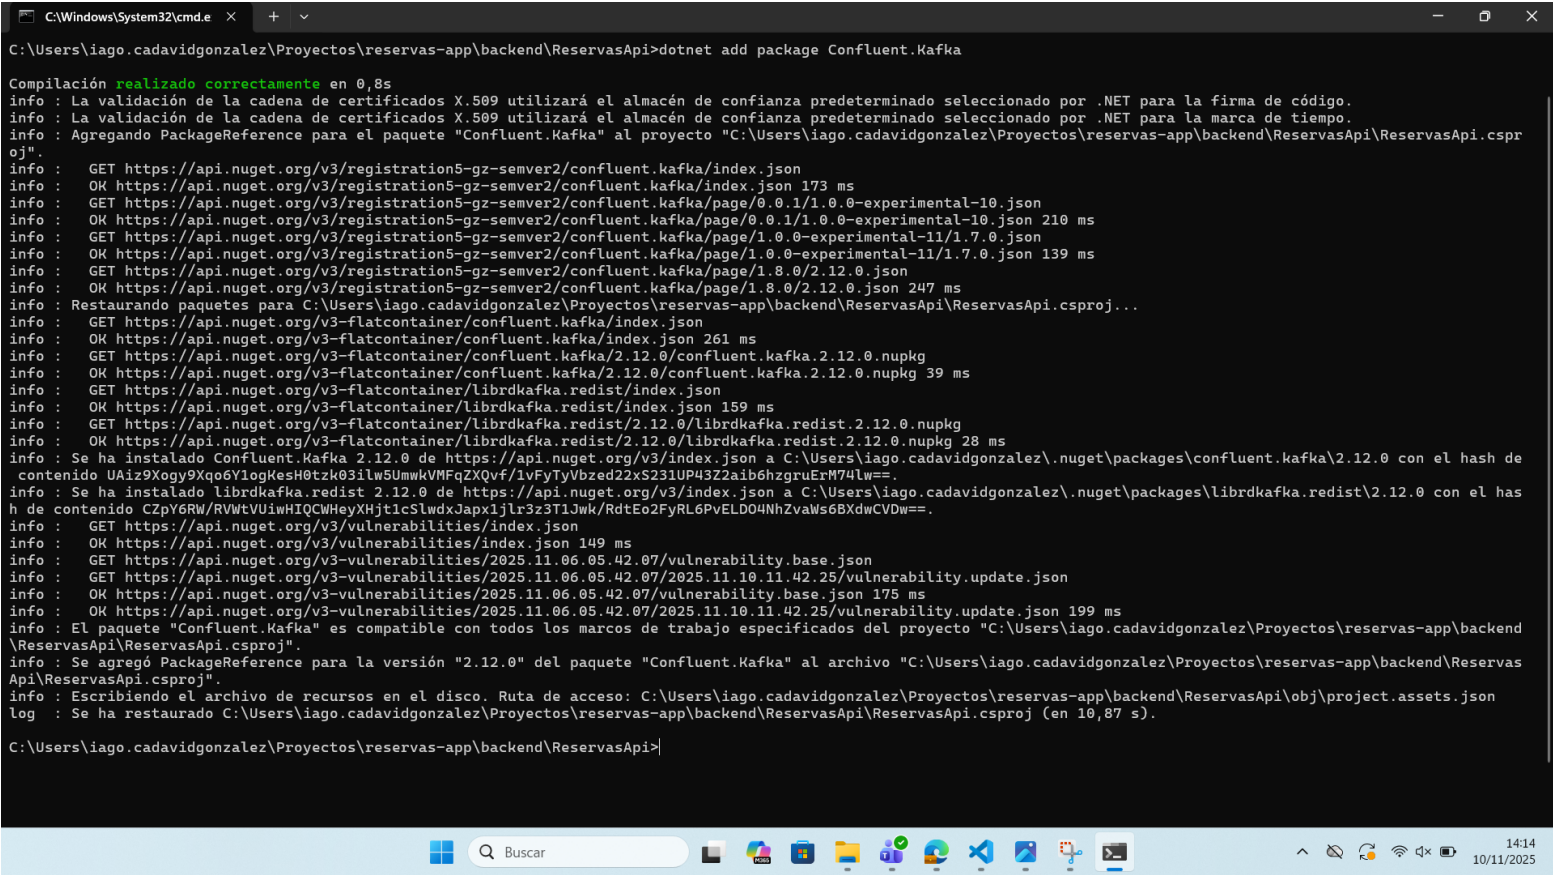

```
C:\Windows\System32\cmd.exe
C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend\ReservasApi>dotnet add package Confluent.Kafka

Compilación realizado correctamente en 0,8 s
info : La validación de la cadena de certificados X.509 utilizará el almacén de confianza predeterminado seleccionado por .NET para la firma de código.
info : La validación de la cadena de certificados X.509 utilizará el almacén de confianza predeterminado seleccionado por .NET para la marca de tiempo.
info : Agregando PackageReference para el paquete "Confluent.Kafka" al proyecto "C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend\ReservasApi\ReservasApi.csproj".
info : GET https://api.nuget.org/v3/registration5-gz-semver2/confluent.kafka/index.json
info : OK https://api.nuget.org/v3/registration5-gz-semver2/confluent.kafka/index.json 173 ms
info : GET https://api.nuget.org/v3/registration5-gz-semver2/confluent.kafka/page/0.0.1/1.0.0-experimental-10.json
info : OK https://api.nuget.org/v3/registration5-gz-semver2/confluent.kafka/page/0.0.1/1.0.0-experimental-10.json 210 ms
info : GET https://api.nuget.org/v3/registration5-gz-semver2/confluent.kafka/page/1.0.0-experimental-11/1.7.0.json
info : OK https://api.nuget.org/v3/registration5-gz-semver2/confluent.kafka/page/1.0.0-experimental-11/1.7.0.json 139 ms
info : GET https://api.nuget.org/v3/registration5-gz-semver2/confluent.kafka/page/1.8.0/2.12.0.json
info : OK https://api.nuget.org/v3/registration5-gz-semver2/confluent.kafka/page/1.8.0/2.12.0.json 247 ms
info : Restaurando paquetes para C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend\ReservasApi\ReservasApi.csproj...
info : GET https://api.nuget.org/v3-flatcontainer/confluent.kafka/index.json
info : OK https://api.nuget.org/v3-flatcontainer/confluent.kafka/index.json 261 ms
info : GET https://api.nuget.org/v3-flatcontainer/confluent.kafka/2.12.0/confluent.kafka.2.12.0.nupkg
info : OK https://api.nuget.org/v3-flatcontainer/confluent.kafka/2.12.0/confluent.kafka.2.12.0.nupkg 39 ms
info : GET https://api.nuget.org/v3-flatcontainer/librdkafka.redist/index.json
info : OK https://api.nuget.org/v3-flatcontainer/librdkafka.redist/index.json 159 ms
info : GET https://api.nuget.org/v3-flatcontainer/librdkafka.redist/2.12.0/librdkafka.redist.2.12.0.nupkg
info : OK https://api.nuget.org/v3-flatcontainer/librdkafka.redist/2.12.0/librdkafka.redist.2.12.0.nupkg 28 ms
info : Se ha instalado Confluent.Kafka 2.12.0 de https://api.nuget.org/v3/index.json a C:\Users\iago.cadavidgonzalez\.nuget\packages\confluent.kafka\2.12.0 con el hash de contenido UAiz9Xogy9Xqo6YlogKesH0tzk03ilw5UmwkVMFqZXQvf/1vFyTyVbzed22xS231UP43Z2aib6hzgruErM74lw==.
info : Se ha instalado librdkafka.redist 2.12.0 de https://api.nuget.org/v3/index.json a C:\Users\iago.cadavidgonzalez\.nuget\packages\librdkafka.redist\2.12.0 con el hash de contenido CZpY6RW/RVWtVUiiHQCWHeyXHjt1cSlwdxJapx1jlr3z3T1Jwk/RdtEo2FyRL6PvELD04NhZvaWs6BXdwCVDw==.
info : GET https://api.nuget.org/v3/vulnerabilities/index.json
info : OK https://api.nuget.org/v3/vulnerabilities/index.json 149 ms
info : GET https://api.nuget.org/v3/vulnerabilities/2025.11.06.05.42.07/vulnerability.base.json
info : GET https://api.nuget.org/v3/vulnerabilities/2025.11.06.05.42.07/2025.11.10.11.42.25/vulnerability.update.json
info : OK https://api.nuget.org/v3/vulnerabilities/2025.11.06.05.42.07/vulnerability.base.json 175 ms
info : OK https://api.nuget.org/v3/vulnerabilities/2025.11.06.05.42.07/2025.11.10.11.42.25/vulnerability.update.json 199 ms
info : El paquete "Confluent.Kafka" es compatible con todos los marcos de trabajo especificados del proyecto "C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend\ReservasApi\ReservasApi.csproj".
info : Se agregó PackageReference para la versión "2.12.0" del paquete "Confluent.Kafka" al archivo "C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend\ReservasApi\ReservasApi.csproj".
info : Escribiendo el archivo de recursos en el disco. Ruta de acceso: C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend\ReservasApi\obj\project.assets.json
log : Se ha restaurado C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend\ReservasApi\ReservasApi.csproj (en 10,87 s).

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend\ReservasApi>
```


That installs **Confluent.Kafka**, the **official .NET client library** for Apache Kafka. It is what provides:

- **ProducerConfig**
- **ProducerBuilder**
- **ConsumerConfig**
- **Message<TKey, TValue>** and all the Kafka interaction APIs.

Entonces ya he hecho esto:

Step 2 — Install Kafka NuGet package

This class depends on **Confluent.Kafka**, a popular Kafka client for .NET.

In the **Package Manager Console** (inside Visual Studio) or terminal from your backend folder, run:

```
bash

dotnet add package Confluent.Kafka
```

This installs the Kafka client library your producer will use.

Tratándose del “step 2 in the overall process of enabling your ASP.NET Core backend to publish Kafka e specifically, the (Kafka) event “ReservaCreada” to the topic reservas.creadas.”

Recordemos que my goal is:

When someone class POST /api/reservas, my backend should:

1. Create the booking in the SQL Server db (ya lo hago)
2. **Publish a Kafka event to topic reservas.creadas** with the booking data

Para lo segundo empiezo por redactar el código del productor, pero dicho código va en función de Reserva.cs (i.e. el model de reservas), ReservasController.cs y, entre otros, saber el kafka broker address.

Pero eso último parece implicar que necesito tener un kafka broker to begin with, y esto dice chatgpt que NO me lo da el haber instalado Confluent.Kafka NuGet package / library.

Para tener un **kafka broker**, continúa chatgpt, si voy a empezar con “**run kafka via Docker**” (which is by far the easiest and cleanest way to get a (kafka) broker running) he de **bajarme la imagen docker de kafka** (me recomienda versión 3.8.0., dice que a fines de 2025 es la latest stable):

[<https://kafka.apache.org/downloads>] aquí está dicha imagen, pero me la bajo así: (next page)

CA Administrador: Símbolo del sistema

```
Microsoft Windows [Versión 10.0.26200.7019]
(c) Microsoft Corporation. Todos los derechos reservados.

C:\Windows\System32>docker pull apache/kafka:3.8.0
3.8.0: Pulling from apache/kafka
e9e1a86a14df: Pull complete
e2d8f56b95eb: Pull complete
a39822f482a5: Pull complete
634d60101085: Pull complete
c23d170f77ed: Pull complete
1673c1a2cfa7: Pull complete
c6a83fedfae6: Pull complete
c4c98316ca78: Pull complete
0b502c76566e: Pull complete
a42500819bdc: Pull complete
Digest: sha256:c89f315cff967322c5d2021434b32271393cb193aa7ec1d43e97341924e57069
Status: Downloaded newer image for apache/kafka:3.8.0
docker.io/apache/kafka:3.8.0
```

“When you use the official Docker image `apache/kafka:3.8.0` (or any version equal to or over 3.3, versión desde la cual se reemplazó a ZooKeeper), you automatically have KRaft build in, therefore you do NOT need to install KRaft separately.”

Once the (docker kafka) image is downloaded, **start Kafka in KRaft (self-managed) mode i.e. run the downloaded image** with:

Con ese comando you’re **starting a container from an image that lives inside Docker’s own storage**, not your current folder, so it does not matter which dir you’re in when you run that ‘docker run’ command.

Administrador: Windows PowerShell

```
Windows PowerShell
Copyright (C) Microsoft Corporation. Todos los derechos reservados.

Instale la versión más reciente de PowerShell para obtener nuevas características y mejoras. https://aka.ms/PSWindows

PS C:\WINDOWS\system32> docker run -d `
>> --name kafka-broker `
>> -p 9092:9092 `
>> -e KAFKA_NODE_ID=1 `
>> -e KAFKA_PROCESS_ROLES=broker,controller `
>> -e KAFKA_LISTENERS=PLAINTEXT://0.0.0.0:9092,CONTROLLER://0.0.0.0:9093 `
>> -e KAFKA_ADVERTISED_LISTENERS=PLAINTEXT://localhost:9092 `
>> -e KAFKA_CONTROLLER_LISTENER_NAMES=CONTROLLER `
>> -e KAFKA_CONTROLLER_QUORUM_VOTERS=1@localhost:9093 `
>> -e KAFKA_LOG_DIRS=/tmp/kraft-combined-logs `
>> apache/kafka:3.8.0
4832020a380f4b34f6fe4fd8c65e5d912cdf40f73d28e950bf8807ae6b3901bf
PS C:\WINDOWS\system32>
```

“That output is actually good news, the alphanumeric code is **the container ID that Docker assigns to the running Kafka container** means Docker successfully started the container in **detached mode (-d)**, which is exactly what we wanted.”

docker run tells Docker to **create and start a new container form an image** (la que me descargué de kafka).

-d means detached mode -> **the container runs in the background. Docker immediately returns the container ID** instead of logs in the terminal.

--name kafka-broker names the container kafka-broker so you can easily refer to it in commands like:

docker stop kafka-broker or docker logs kafka-broker.

-p 9092:9092

- **Maps** host port 9092 -> container port 9092
- This makes Kafka accessible on your local machine at localhost:9092
- Format: <host_port>:<container_port>

-e KAFKA_NODE_ID=1 sets the kafa node id to 1; each kafka broker *in a cluster* needs a unique ID.

-e stands for environment variable, it tells Docker: "set this variable inside the container before starting it."

So -e KAFKA_NODE_ID=1 means the container will have an environment variable KAFKA_NODE_ID with value 1.

Kafka reads these env. variables when it starts, so it knows how to configure itself.

-e KAFKA_PROCESS_ROLES=broker,controller

Tells Kafka what role this node has:

- **Broker** -> handles messages, topics, producers, consumers
- **Controller** -> manages metadata and *cluster* state (like the old Zookeeper role)

By combining them, a single node runs both roles, which is perfect for local development.

-e KAFKA_LISTENERS=etc.

Where Kafka listens for connections:

- PLAINTEXT://0.0.0.0:9092 -> Kafka **accepts client connections on port 9092** (any network interface)
- CONTROLLER://0.0.0.0:9093-> internal port **for KRaft controller communication**

-e KAFKA_ADVERTISED_LISTENERS=PLAINTEXT://localhost:9092

Kafka tells clients: "this is how you reach me", clients (like my .NET app) connect using localhost:9092, advertised listeners must match what your client will use.

Sigue en NEXT PAGE

9 -e KAFKA_CONTROLLER_LISTENER_NAMES=CONTROLLER

- Informs Kafka which listener is used for **controller traffic**.
 - Matches the `CONTROLLER://...` listener defined earlier.
-

10 -e KAFKA_CONTROLLER_QUORUM_VOTERS=1@localhost:9093

- Required for **KRaft mode**:
 - Indicates this node (ID 1) participates in the **controller quorum**.
 - Quorum is like “voting” to manage cluster metadata.
 - Syntax: `<node_id>@<controller_port>`
-

1 1 -e KAFKA_LOG_DIRS=/tmp/kraft-combined-logs

- Kafka needs a directory to store **logs and data** (topics, messages, offsets).
 - Here we use `/tmp/kraft-combined-logs` **inside the container**.
 - Note: this data will disappear if the container is  oved, unless you mount a volume. removed pone
-

1 2 apache/kafka:3.8.0

- Specifies the **Docker image** to run:
 - `apache/kafka` → official Apache Kafka image
 - `3.8.0` → version tag
-

✓ TL;DR

- Runs **Kafka broker + controller** in **KRaft mode**
 - Exposes it on **localhost:9092** for your .NET app
 - Uses **detached mode** so your terminal is free
 - Stores data **inside the container** (not persistent yet)
-

F

En base a tener codificado **Reserva.cs** y **ReservasController.cs**, tener instalado **Confluent.Kafka** NuGet package (desde visual studio teniendo abierta la solución de mi backend) (lo instalas pa poder en código poner using Confluent.Kafka así poder usar sus clases), haber decidido el **topic name**, saber mi **kafka broker address** (lo primero es crear dicho broker que mostré justo antes cómo lograr), y saber que en relación a Dependency Injection tengo en mi Program.cs lo siguiente

PAGE

```
// Add EF Core and configure SQL Server using the connection string from appsettings.json (hijo de 'ReservasApi' folder
builder.Services.AddDbContext<AppDbContext>(opciones =>
    opciones.UseSqlServer(builder.Configuration.GetConnectionString("DefaultConnection"))) // en appsettings.json puse "
};
```

En base a todo eso, tenemos the full context i.e. everything we need to be able to **integrate a Kafka producer** in a clean, DI-friendly way so that **every time I (o el cliente supongo) create a new Reserva, a Kafka message (i.e. event) is published to a topic** named reservas.creadas.

Vamos entonces a “**Create a Kafka producer service**”, para ello let’s **create a new file** called **KafkaProducerService.cs** (ProductorKafka.cs le voy a llamar yo) Chatgpt desta vez a este file de namespace le pone ReservasApi.Services, la vez anterior le puso Reservas.Api.Messa voy a poner ReservasApi.Eventos osease voy a crear una carpeta llamada Eventos dentro de la carpeta ReservasApi (folder padre del .csproj file de mi backend)

Uno de los using que vamos a poner en ese productorkafka.cs es .Json, tenemos 2 alternativas, la más moderna tengo entendido que es **System.Text.Json** pero otra que todavía is still very common in Kafka examples es **Newtonsoft.Json**.

Decido usar System.Text.Json, cuidado porque en función del que uses cambia el código que pones:

System.Text.Json -> var mensaje = JsonSerializer.Serialize(new

Newtonsoft.Json -> var mensaje = JsonConvert.SerializeObject(new

Lo que no cambia es el paso 2:

2. Register the Kafka producer in DI (Dependency Injection)

i.e. añadir lo siguiente en Program.cs

```
// Register the Kafka producer in DI, para ello añado esta línea antes de var app = builder.Build() y después de var builder = WebApplication.CreateBuilder(args):
builder.Services.AddSingleton<IServicioProductorKafka, ProductorKafka>(); // ProductorKafka es una clase creada por mí que implementa la interfaz IServicioProductorKafka
```


3. Inject and call the Kafka producer in your controller -> modifico ReservasController.cs

```
// Propiedad que pongo para "Inject and call the Kafka producer in my ReservasController":
private readonly IServicioProductorKafka _productorKafka; // _kafkaProducer
```

```
public ReservasController(AppDbContext contexto, IServicioProductorKafka productorKafka)
{ // los valores pasados como params del constructor se ponen como valores de las propiedades
    _contexto = contexto;
    _productorKafka = productorKafka;
}
```

4. Publish the kafka event (after SaveChangesAsync but before returning)

```
// Placing Kafka publishing after the mapping to DTO is perfectly fine.
// Publish Kafka event (un valid placement de esta línea de código es después del "map to DTO" code -en especial debe ir después del await _contexto_SaveChangesAsy
await _productorKafka.PublicarReservaCreadaAsync(nuevareserva); // awaits the message to ensure it's successfully sent before returning 201 Created.
// la anterior línea es reemplazable por la siguiente:
// _ = _productorKafka.PublicarReservaCreadaAsync(nuevareserva); esto es la versión "fire-and-forget" of the Kafka call, se usa if...
//...if you don't want to block the HTTP response while Kafka is publishing
```

Es lo que me recomienda chatgpt para que los cambios anteriores (new file `KafkaProducerService.cs`, nueva interfaz –esto no se lo dije-, added lines to `Program.cs`, added code to `ReservasController.cs`) surtan efecto. Yo creo que también me valdría hacer un dotnet build desde la carpeta padre de este file o sea desde `ReservasApi`, puesto que es la carpeta que contiene todo lo modificado, si no me confundo.

I think all those changes (new file `KafkaProducerService.cs`, new file for its interface, added lines to `Program.cs`, added code to `ReservasController.cs`) were made inside my `.csproj` file's parent folder (this folder is named `ReservasApi` in my case), so I guess it should be enough with dotnet build running it from `ReservasApi`, do you agree ?

Yes — I agree. ✓

Since all your changes are **inside the same project folder** (`ReservasApi` , the folder containing the `.csproj` file), running:

```
bash
cd path/to/ReservasApi
dotnet build
```

Copy code

will:

- Compile the new file `KafkaProducerService.cs` and its interface
- Recompile `Program.cs` with the added DI line
- Recompile `ReservasController.cs` with the new constructor injection and Kafka call
- Make everything ready to run

No need to reference the `.sln` unless you want to build other projects in the solution as well.

```
C:\Windows\System32\cmd.e  X  +  v
Microsoft Windows [Versión 10.0.26200.7019]
(c) Microsoft Corporation. Todos los derechos reservados.

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend\ReservasApi>dotnet build
Restauración completada (6,2s)
ReservasApi realizado correctamente (36,7s) -> bin\Debug\net9.0\ReservasApi.dll
Compilación realizado correctamente en 47,5s
```

NEXT PAGE

Resultado de los pasos anteriores

When you POST /api/reservas in Swagger, your backend will:

1. Validate the DTO.
2. Save the new booking to SQL Server (savechangesasync)
3. **Publish a JSON message** with booking info **to Kafka topic reservas.creadas**
4. Return 201 Created with the reservation DTO

[Verify that your ASP.NET Core \(Web API\) backend is actually publishing messages to Kafka](#)

There are 3 ways to verify it and all are easy:

Method 1 is to **Use the Kafka console consumer** (recommended) that subscribes to the topic

“Since you are running Kafka in a Docker container,
simply open a terminal and run (before you publish the message *i.e. antes de hacer post /api/reservas*):”

1. Identify the (name of your) topic; en mi caso se llama reservas.creadas.
2. **Start a consumer** for that topic:

If you installed Kafka via Docker (which I indeed did), the command usually looks like:

```
docker exec -it <kafka-container-name> \ (o ` en PowerShell)  
kafka-console-consumer.sh --bootstrap-server localhost:9092 --topic reservas.creadas --from-beginning
```

This will **start a consumer inside your existing Kafka container**,
it will print all messages in the topic 'reservas.creadas'.
These messages will be printed in the terminal where you started the Kafka console cosumer,
immediately *as they arrive in the topic* i.e. messages appear **immediately after they are published by your ASP.NET Core backend to Kafka** *(recordar que la línea de código que hace esta publicación la puse antes en mi ReservasController.cs)*.
If you used **--from-beginning**, you also see **all previous messages already in the topic**.
Whereas if you did NOT use **--from-beginnin**, you'll only see messages published after the consumer starts.

<kafka-container-name> debe ser el del container that you already have running, ya que
docker exec runs a command inside an existing container
Con **docker ps** you can find the actual container name.

Once this consumer is running,

1. Open Swagger
2. POST a new reserva to /api/reservas
3. And immediately you should **see the JSON message printed in the terminal** (the one where you started the Kafka console consumer, dicha terminal puede ser la del powershell de tu host machine's windows).

```
PS C:\WINDOWS\system32> docker ps
error during connect: Get "http://%2F%2F.%2Fpipe%2FdockerDesktopLinuxEngine/v1.51/containers/json": open //./pipe/dockerDesktopLinuxEngine: El sistema no puede encontrar el archivo especificado.
PS C:\WINDOWS\system32>
```

Según chatgpt, significa que el **Docker CLI cannot connect to the Docker daemon**, which on Windows usually happen because **Docker Desktop is not running** (en efecto en mi caso it is not running).

```
Administrador: Windows PowerShell

PS C:\WINDOWS\system32> docker ps
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS          NAMES
PS C:\WINDOWS\system32>
```

Docker ps command only

shows running containers by default. To see all containers, use the --all (or -a) flag.

```
PS C:\WINDOWS\system32> docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS          NAMES
4832020a380f   apache/kafka:3.8.0   "/__cacert_entrypoin..." 20 hours ago   Exited (143) 18 hours ago           kafka-broker
f48ee9969a69   reservas-app-backend  "dotnet ReservasApi. ...." 24 hours ago   Exited (0) 18 hours ago           reservas-app-backend-1
1294f966d9a5   reservas-app-frontend  "/docker-entrypoint. ...." 43 hours ago   Exited (0) 43 hours ago           reservas-app-frontend-1
db9de1366414   mcr.microsoft.com/mssql/server:2022-latest  "/opt/mssql/bin/laun..." 43 hours ago   Exited (137) 18 hours ago           sqlserver
94b9b0895494   ubuntu          "/bin/bash"              4 weeks ago    Exited (0) 4 weeks ago           dreamy_haibt
5f1347c184de   hello-world      "/hello"                  4 weeks ago    Exited (0) 4 weeks ago           vibrant_carson
PS C:\WINDOWS\system32>
```

kafka-broker es el nombre de mi kafka docker container.

```
PS C:\WINDOWS\system32> docker exec -it kafka-broker kafka-console-consumer.sh --bootstrap-server localhost:9092 --topic reservas.creadas --from-beginning
Error response from daemon: container 4832020a380f4b34f6fe4fd8c65e5d912cdf40f73d28e950bf8807ae6b3901bf is not running
PS C:\WINDOWS\system32> docker exec -it kafka-broker kafka-console-consumer.sh --bootstrap-server localhost:9092 --topic reservas.creadas --from-beginning
OCI runtime exec failed: exec failed: unable to start container process: exec: "kafka-console-consumer.sh": executable file not found in $PATH: unknown
PS C:\WINDOWS\system32>
```

Entre el primero y el segundo fui a Docker Desktop y cliqué en el botón “play” del kafka docker container.
Significado del segundo fallo según chatgpt:

✔ What it means

1. `docker exec` tried to run `kafka-console-consumer.sh` inside your container.
2. Docker looked in the container’s `$PATH` for an executable with that name.
3. It couldn’t find it → the executable is either:
 - In a folder not included in `$PATH` (common with Confluent Kafka images), or
 - Not installed at all (if you used a minimal Kafka image).

◆ Important clarification

- This does not mean Kafka itself is missing — your broker may be running fine.
- It **simply means** the script `kafka-console-consumer.sh` is not in the container’s `PATH`.

La primera opción to fix that es to find the full path and run it, para ello open a shell inside the container, para ello en powershell ejecuto **docker exec -it kafka-broker bash**

NEXT PAGE

```
PS C:\WINDOWS\system32> docker exec -it kafka-broker bash
4832020a380f:/$
```

A continuación, “locate the consumer script” ejecutando en ese bash lo siguiente:

find / -name “kafka-console-consumer.sh” 2>/dev/null

Las comillas dobles en este caso no hacen falta por no haber caracteres especiales, pero es una buena práctica ponerlas. El **–name “blabla.sh”** filters the sesarch to only the Kafka consumer script.

El **find** is a linux/unix command to search for files or directories.

/ es para que **the starting directory for the search** sea the root of the filesystem inside the container, así buscará everywhere in the container’s filesystem.

2 es un linux file descriptor que se refiere al standard error (0 sería std input y 1 std output),

2> redirects std error somewhere

/dev/null is a “balck hole” -anything sent there is discarded.

Ponemos **2>/dev/null** to **hide the error messages** (que en este caso pueden surgir porque **find /** may try to access system dirs where you do not have permission), **leaving only the valid search results**.

Administrador: Windows PowerShell

```
PS C:\WINDOWS\system32> docker exec -it kafka-broker bash
4832020a380f:/$ find / -name kafka-console-consumer.sh 2>/dev/null
/opt/kafka/bin/kafka-console-consumer.sh
4832020a380f:/$
```

That confirms where the Kafka consumer script lives inside your container: en la ruta del output.

How to run the consumer now:

Since the script is NOT in the container’s PATH, you need to use the full path when running docker exec:

PowerShell one-liner:

docker exec –it kafka-broker /opt/kafka/bin/kafka-console-consumer.sh --botstrap-server localhost:9092 -
-topic reservas.creadas --from-beginning

(exit bash before running it)

```
PS C:\WINDOWS\system32> docker exec -it kafka-broker /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server localhost:9092 --topic reservas.creadas --from-beginning
[2025-11-14 10:00:43,976] WARN [Consumer clientId=console-consumer, groupId=console-consumer-62879] Error while fetching metadata with correlation id 2 : {reservas.creadas=UNKNOWN_TOPIC_OR_PARTITION} (org.apache.kafka.clients.NetworkClient)
```

Warning al ejecutar ese docker exec:

```
PS C:\WINDOWS\system32> docker exec -it kafka-broker /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server localhost:9092 --topic reservas.creadas --from-beginning
[2025-11-14 10:00:43,976] WARN [Consumer clientId=console-consumer, groupId=console-consumer-62879] Error while fetching metadata with correlation id 2 : {reservas.creadas=UNKNOWN_TOPIC_OR_PARTITION} (org.apache.kafka.clients.NetworkClient)
```

Según Chatgpt, ese warning se debe a lo siguiente:

NEXT PAGE


```
nginx
```

```
UNKNOWN_TOPIC_OR_PARTITION
```

[Copy code](#)

This means the topic `reservas.creadas` does not exist yet in Kafka. Kafka cannot fetch metadata for a topic that hasn't been created or seen a message.

✅ Why this happens

1. Kafka can auto-create topics when a producer publishes a message, but **some Kafka configs disable auto-topic creation** (`auto.create.topics.enable=false`).
2. You started the consumer **before any message was produced** and the topic doesn't exist yet.
3. Hence, the consumer can't subscribe and shows the warning.

✅ How to fix it

There are two options:

Option 1: Publish a message from your API first

- Run your **POST /api/reservas** in Swagger to create a new reserva.
- The Kafka producer in your API will create the topic (if auto-topic creation is enabled) or you can configure it to create it.
- Then the consumer can reconnect and start seeing messages.

Recordemos que ya antes chatgpt me había dicho de hacer eso mismo:

🚀 What happens next?

Once this consumer is running:

1. Open Swagger
2. POST a new reserva to `/api/reservas`
3. And immediately you should **see the JSON message printed in the terminal**.

Example output:

```
json
```

[Copy code](#)

```
{"ReservaId":5,"Dni":"12345678A","InstalacionId":2,"FechaHora":"2025-11-14T10:00:00","NumeroAsiste
```


If you see that → **Kafka publish works**.

“the terminal”: next page

The one where you started the Kafka console consumer, en mi caso la delpowershell de windows de mi host machine.

Pone **“NumeroAsistentes”:3}** el final de captura anterior.

Para poder hacer POST con Swagger debo tener en ejecución tanto el backend docker container como el de sqlserver.

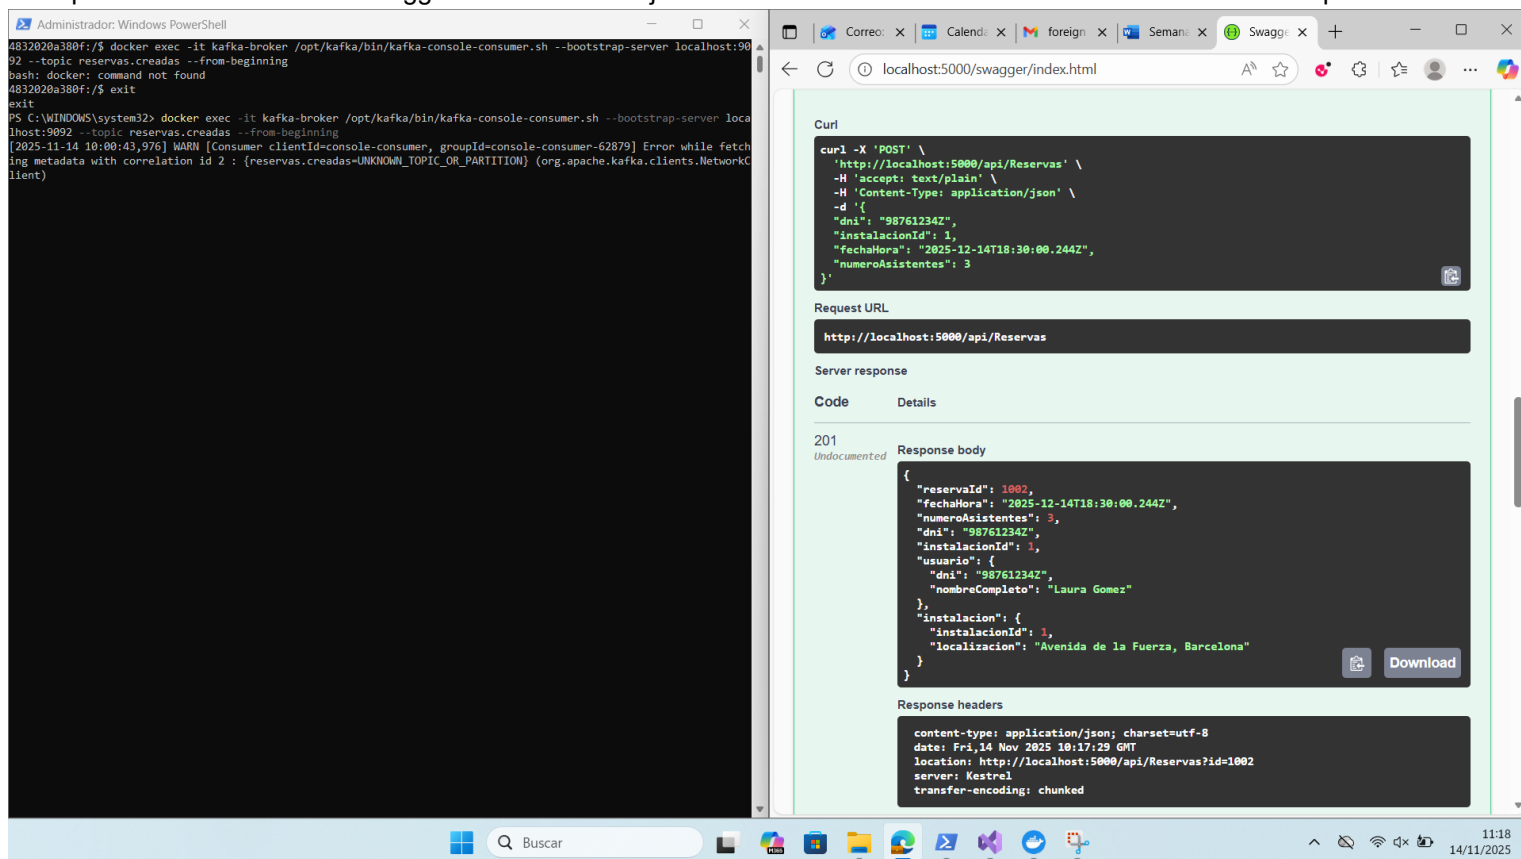

Veo un doble problema: que reservald pone 1002 en vez de 3 y que el consumidor kafka sigue poniendo lo mismo, I don't see any json message immediately printed in the terminal.

En el proceso de solucionar lo del 1002 me encuentro con esto:

```
mssql@db9de1366414:/ $ /opt/mssql-tools/bin/sqlcmd -S localhost -U sa -P 'docKer!8'
bash: /opt/mssql-tools/bin/sqlcmd: No such file or directory
mssql@db9de1366414:/ $
```


Dice chatgpt que eso

significa que **sqlcmd utility is NOT installed inside your SQL Server container**. With the official M. SQL Server Docker image, the container runs SQL Server, but does not include sqlcmd by default.


Entonces me recomienda chatgpt to “use a **sql client** on your windows host” like **DBeaver** or SSMS. Uso Dbeaver.

In DBeaver, **right-click your db connection -> SQL Editor -> New SQL Script**, a new edito rtab opens, connected to your db, run the query:

SELECT IDENT_CURRENT('Reservas') AS CurrentIdentity; this shows the next Reservald that will be assigned, likely it is 1002, which is why your new record got that ID. Reservas es el nombre de la tabla tal como se ve en DBeaver Schemas-> dbo-> Tables.

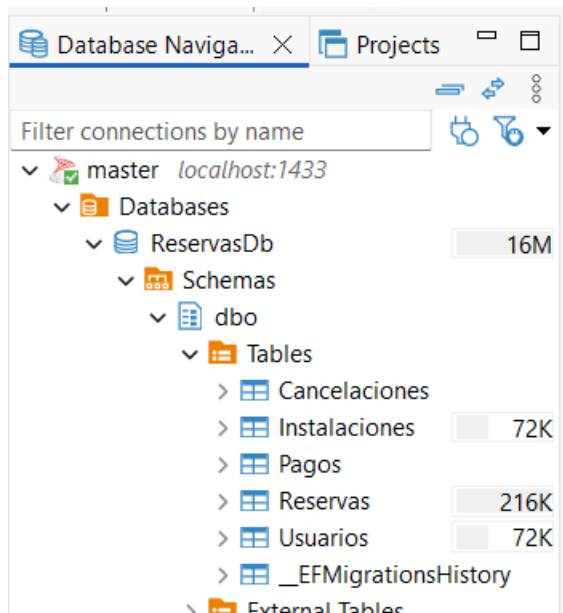


Debería estar ReservasDb en bold, en vez de estar la master hija de master (dicha master hija no se ve en esa captura, pero como digo aparece en bold), para ello right click on ReservasDb y left click on Set as default, así se pone en negrita ReservasDb, entonces **voy al Sql Script Editor de DBeaver desde master connection (padre de ReservasDb) y ejecuto:**

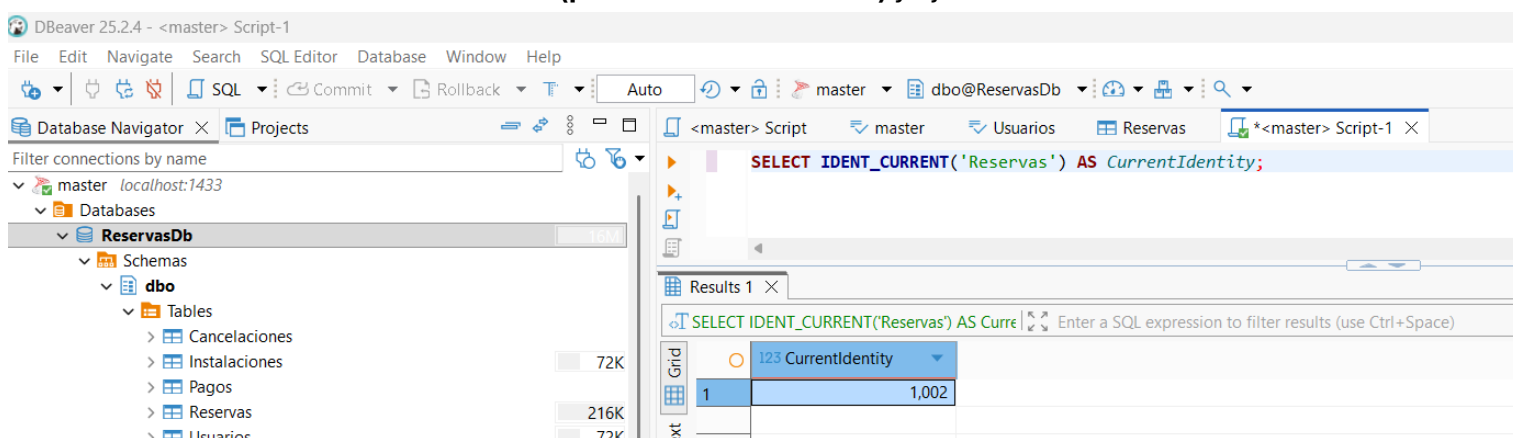


Ahí está el 1002 famoso, para **pasarlo a 3**, you can resed (reseed*) the identity using **DBCC CHECKIDENT**

DBCC CHECKIDENT ('Reservas', RESEED, 2);

You are telling SQL Server: the last id value in the table Reservas is 2, therefore the next inserted row will get Reservald=3 automatically.

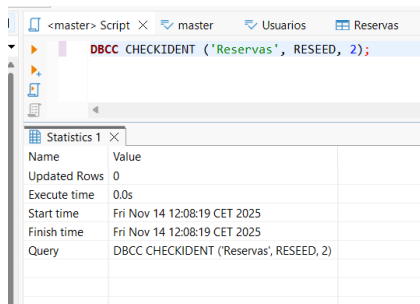

Next page

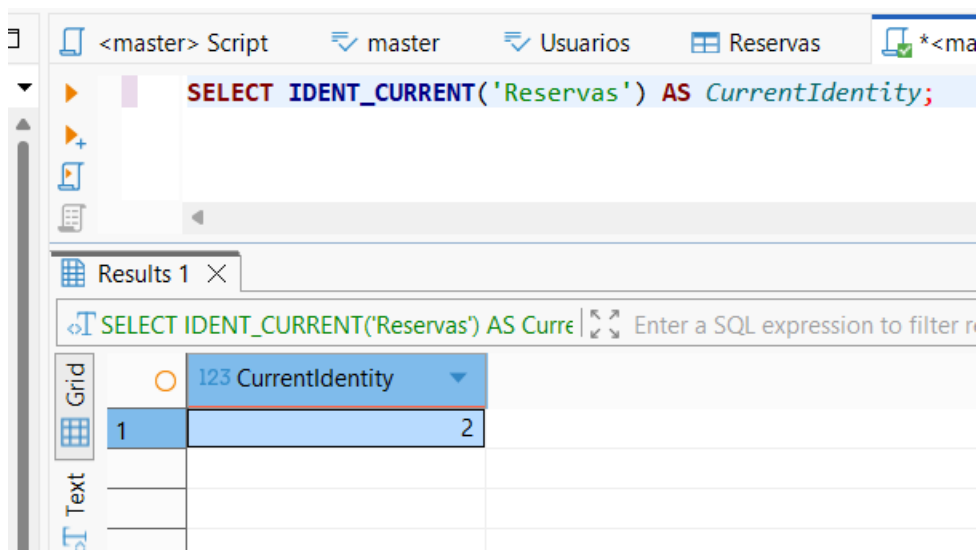

Resuelto ese problema, ahora voy con el problema que actualmente tengo en Kafka, para lo cual voy chequear como está el `auto.create.topics.enable`, pa ver si está a true o a false. Para ello:

Check broker config via `kafka-configs.sh` :

Abro PowerShell de windows y “open a shell inside your Kafka container” ejecutando para ello:

docker exec -it kafka-broker bash

Run the following command to **describe broker-level configs**:

`/opt/kafka/bin/kafka-configs.sh --bootstrap-server localhost:9092 --entity-type brokers --entity-name 1 --describe` (1 porque mi broker ID es 1, cosa que establecí en un comando anteriormente ejecutado, en el que puse el NODE Id)

```

Administrador: Windows PowerShell
4832020a380f:/$ /opt/kafka/bin/kafka-configs.sh --bootstrap-server localhost:9092 --entity-type brokers --entity-name 1 --describe
Dynamic configs for broker 1 are:
4832020a380f:/$

```

--describe only shows dynamic configs, so if nothing appears, it just means all configs are static, which is normal. Static configs are defined in `server.properties` (or via environment variables in Docker) VS Dynamic configs are modified at runtime using `kafka-config.sh --alter`.

env | grep KAFKA_AUTO_CREATE_TOPICS_ENABLE is a way to check env variables inside the container.

env prints all env variables in the current shell/session (el output es en plan

algo=algo

algo=algo

Etc.

| is a pipe: it **sends the output of env to the next command**.

grep searches for lines containing the string **KAFKA_AUTO_CREATE_TOPICS_ENABLE**.

If the variable is set, you'll see sth like: `KAFKA_AUTO_CREATE_TOPICS_ENABLE=false`

NEXT PAGE

```
4832020a380f:/$ env | grep KAFKA_AUTO_CREATE_TOPICS_ENABLE
4832020a380f:/$
```

Returns nothing means the env variable is NOT

set in your container, since in my case I got UNKNOWN_TOPIC_OR_PARTITION strongly suggests that auto-topic creation is disabled (false) by default (aunque el default suele ser true).

Since auto-topic creation seems disabled, the simplest approach is to **create the topic manually**:

powershell

```
docker exec -it kafka-broker /opt/kafka/bin/kafka-topics.sh \
  --create \
  --bootstrap-server localhost:9092 \
  --replication-factor 1 \
  --partitions 1 \
  --topic reservas.creadas
```

- This ensures the topic exists before your API tries to publish.
- After creating the topic, your consumer will be able to read messages from it. *i.e. messages published by api backend to it*

Al respecto del cursor parpadeante en la terminal en la que corrí el consumidor kafka:

Why the blinking cursor appears

1. When you run:

bash

Copy

```
docker exec -it kafka-broker /opt/kafka/bin/kafka-console-consumer.sh \
  --bootstrap-server localhost:9092 --topic reservas.creadas --from-beginning
```

- You are **starting a Kafka consumer** in “console mode”.
 - The consumer connects to the broker and **waits for messages** on the topic `reservas.creadas`.
2. The blinking cursor means:
 - The consumer is **actively running** and **listening for new messages**.
 - It is essentially “blocking” — waiting for messages to arrive.
 - Nothing will appear until either:
 - A message already exists in the topic (from `--from-beginning`), or
 - A new message is published.

Dicha pantalla es ésta: NEXT PAGE


```
PS C:\WINDOWS\system32> docker exec -it kafka-broker /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server localhost:9092 --topic reservas.creadas --from-beginning
[2025-11-14 10:00:43,976] WARN [Consumer clientId=console-consumer, groupId=console-consumer-62879] Error while fetching metadata with correlation id 2 : (reservas.creadas=UNKNOWN_TOPIC_OR_PARTITION) (org.apache.kafka.clients.NetworkClient)
```

Volviendo con lo de que chatgpt me recomienda para mi caso crear a mano el topic, primero le pido que me enseñe como chequear que no hay topics created yet, me dice you can easily check whether a topic already exists in your Kafka broker. Since you are running Kfaka in Docker, here's how:

Ejecutamos el siguiente comando en PowerShell porque dicho comando “**lists all topics currently present in your Kafka broker**”, dicho comando se divide en dos partes:

docker exec -it kafka-broker : runs a command inside the Kafka container

/opt/kafka/bin/kafka-topics.sh --list --bootstrap-server localhost:99092 : asks Kafka to **show every topic that exists on the broker running at localhost:9092**

Ya está creado el topic!

```
PS C:\WINDOWS\system32> docker exec -it kafka-broker /opt/kafka/bin/kafka-topics.sh --list --bootstrap-server localhost:9092
reservas.creadas
```

That means the topic reservas.creadas already exists in your Kafka broker, so you do not need to create it manually. Your producer in the API should be able to publish messages to it.

Make sure your consumer is running (it is proque el cursos is blinking)
and then test by sending a POST /api/reservas from Swagger **to see the message appear**.

Corro el consumidor kafka sin warning de unknown topic (buenas noticias)

Administrador: Windows PowerShell

```
PS C:\WINDOWS\system32> docker exec -it kafka-broker /opt/kafka/bin/kafka-console-consumer.sh `
>> --bootstrap-server localhost:9092 --topic reservas.creadas --from-beginning
```


No warning -> The topic reservas.creadas exists, so the consumer can connect and read messages.

Blinking cursor (no se aprecia en imagen, pero me está parpadeando en línea subsiguiente a --from-beginning) -> the consumer is actively runnig and waiting for new messages.

--from-beginning -> if there were *previous messages* in the topic, they will be *printed* first. If the topic is empty, it just waits.

Now, while the consumer keeps running in that termianl, **go to swagger and POST a new reserva** to /api/reservas, **the consumer should immediately print the JSON message for that new reserva**.

NEXT PAGE

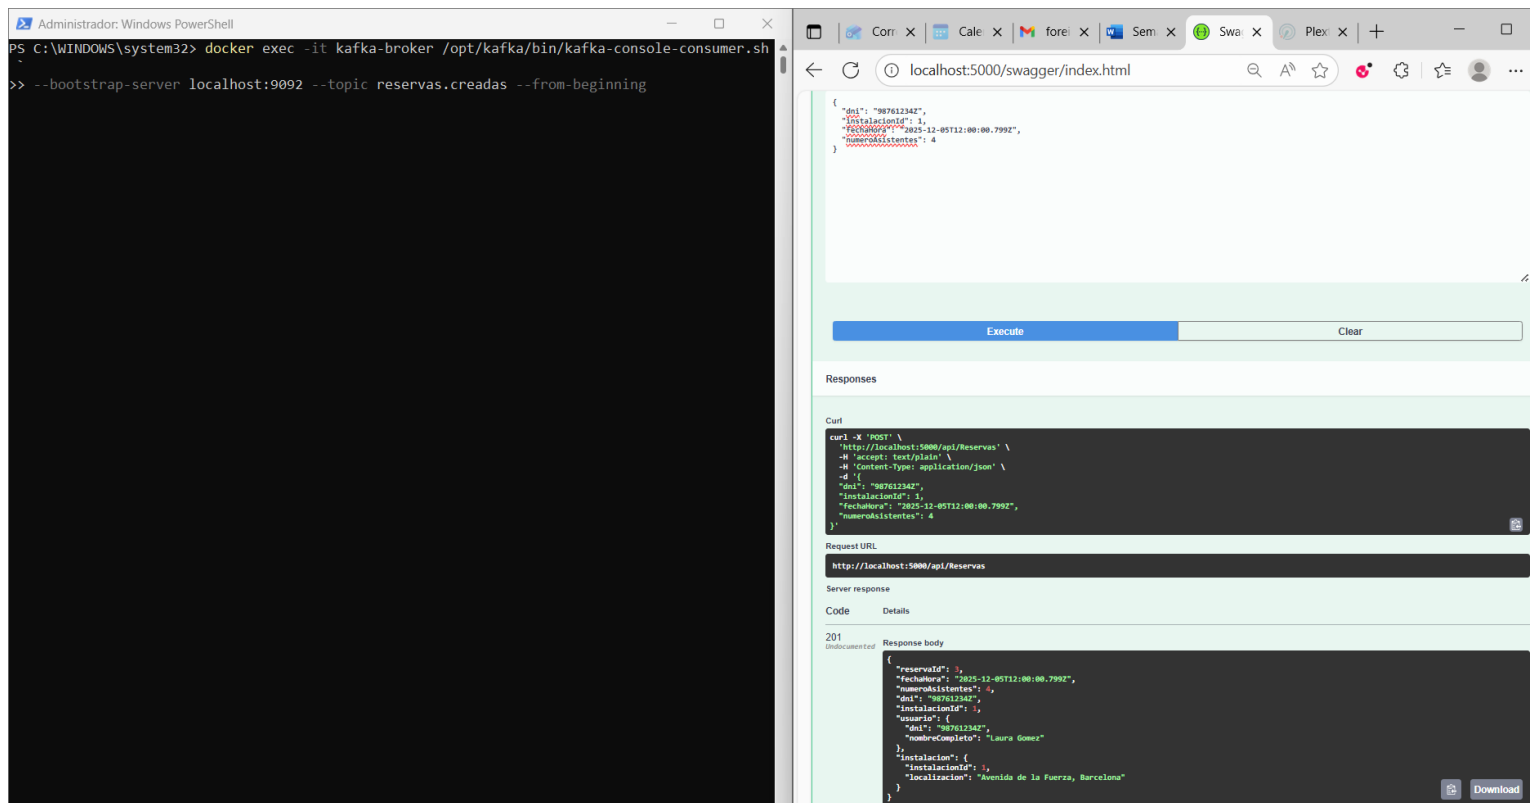

Sigue sin aparecer nada en terminal de consumidor kafka, entonces me dice chatgpt de chequear varias cosas:

1.

```
public class ProductorKafka : IServicioProductorKafka // Kaf
{ // clase ProductorKafka debe implementar el miembro de la
  // Le defino dos propiedades privadas de solo lectura a
  private readonly IProducer<Null, string> _productor;
  private readonly string _topic = "reservas.creadas";
```

Your topic name _topic matches

the consumer, so this is correct.

3. Check the broker address:

both the producer and the consumer must point to the same Kafka broker.

En la práctica, me recomienda **probar con kafka-broker:9092** en lugar de localhost:9092 en
var config = new ProducerConfig { BootstrapServers = "localhost:9092" }; que está en
ProductorKafka.cs

Dotnet build desde ReservasApi folder for that change to take effect: NEXT PAGE

```
C:\Windows\System32\cmd.e X + v

Microsoft Windows [Versión 10.0.26200.7019]
(c) Microsoft Corporation. Todos los derechos reservados.

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\backend\ReservasApi>dotnet build
Restauración completada (0,3s)
ReservasApi realizado correctamente (4,4s) → bin\Debug\net9.0\ReservasApi.dll

Compilación realizado correctamente en 5,3s
```

Además paré el backend container y lo reinicié (a recomendación de chatgpt), pero still no json message pops up en el consumidor:

```
Administrador Windows PowerShell
PS C:\WINDOWS\system32> docker exec -it kafka-broker /opt/kafka/bin/kafka-console-consumer.sh --zookeeper.connect localhost:2181 --topic reservas.creadas --from-beginning
```

Swagger UI interface showing a successful POST request to `http://localhost:5000/api/Reservas`. The response is a JSON object with the following structure:

```
{
  "reservaId": 1,
  "fechaReserva": "2026-01-05T12:00:00.799Z",
  "numeroAsistentes": 5,
  "dni": "98761234Z",
  "instalacionId": 1,
  "nombreCompleto": "Laura Gomez",
  "instalacion": {
    "instalacionId": 1,
    "localizacion": "Avenida de la Fuerza, Barcelona"
  }
}
```

The response headers include:

```
Content-Type: application/json; charset=utf-8
Date: Fri, 14 Nov 2025 12:00:18 GMT
Location: http://localhost:5000/api/Reservas?id=1
Server: Kestrel
Transfer-Encoding: chunked
```

El último cambio, el del último check (broker address) lo hice porque según chatgpt **if your api runs inside another container (que es mi caso)**, localhost won't reach the broker container –**you need the container name as hostname for example kafka-broker:9092**.

Tercer check ya lo tengo como me recomienda (con el await) y no como no recomienda (fire and forget):

```
// Placing Kafka publishing after the mapping to DTO is perfectly fine.
// Publish Kafka event (un valid placement de esta línea de código es después del "map to DTO" code -en especial debe ir después del await _contexto_SaveChangesAsync
await _productorKafka.PublicarReservaCreadaAsync(nuevareserva); // awaits the message to ensure it's successfully sent before returning 201 Created.
// la anterior línea es reemplazable por la siguiente:
// _ = _productorKafka.PublicarReservaCreadaAsync(nuevareserva); esto es la versión "fire-and-forget" of the Kafka call, se usa if...
//...if you don't want to block the HTTP response while Kafka is publishing
```


Tmb en aras de solucionar el problema de que no aparece json message en consumer kafka, pongo esto en ProductorKafka.cs:

```
// Log before publishing (esto lo añado en el proceso de intentar solucionar el problema de que el consumidor kafka no muestra json messages upon swagger posting):
Console.WriteLine($"Publicando reserva {reserva.ReservaId} to topic {_topic} con mensaje: {mensaje}");

try // esto lo añado en el proceso de intentar solucionar el problema de que el consumidor kafka no muestra json messages upon swagger posting
{
    // Produce the message to Kafka
    var resultado = await _productor.ProduceAsync(
        _topic,
        new Message<Null, string> { Value = mensaje }
    );

    //Log success
    Console.WriteLine($"Kafka OK => {resultado.TopicPartitionOffset}");
}
catch (Exception ex)
{
    // Log any errors:
    Console.WriteLine($"Error publicando reserva {reserva.ReservaId}: {ex.Message}");
}


// final del body de public async Task PublicarReservaCreadaAsync
```

lo de var resultado está igual que antes, pero antes no estaba envuelto en un try catch.

Hago dotnet build desde padre de backend .csproj file osease desde carpeta ReservaApi.

Y esta vez voy para primero el consumidor kafka con control+c y luego paro los containers, luego reinicio los containers y luego reinicio el consumidor kafka.

Tan pronto paro el container kafka-broker se nota en terminal del runing kafka consumer:

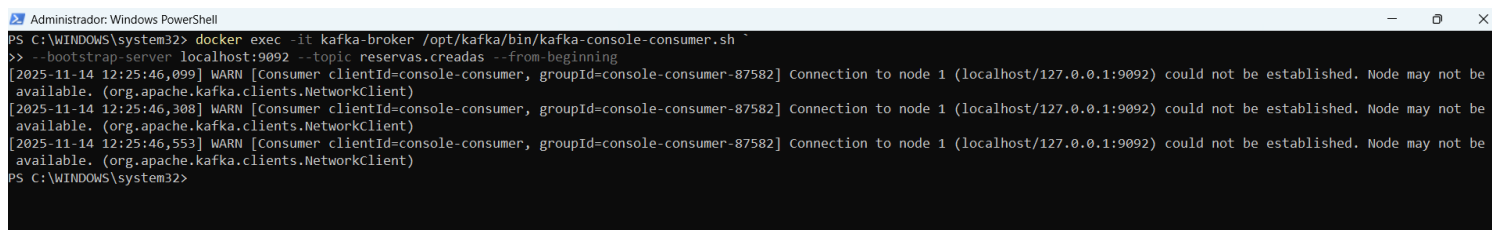

Teniendo todo parado, hago desde carpeta padre del docker-compose.yml un docker-compose down y un docker-compose up --build.

Reinicio todo otra vez pero ahora resulta que el loading del POST no termina nunca.

Me dice chatgpt que chequee el docker-compose.yml, se lo muestro, me dice “claro es que no tienes el código relativo al servicio y volumen kafka”, lo añado, hago otra vez docker-compose up --build, me da error porque ya existe un container con el mismo nombre que es el que había creado con docker run -d, lo elimino y vuelvo correr el docker-compose up --build, me lo hace pero da alerta en el output de que debería usar zookeeper, entonces vamos usarlo, para ello

add zookeeper service to docker-compose.yml file

NEXT PAGE


```

33  >Run Service
34  kafka-broker:
35      image: apache/kafka:3.8.0
36      container_name: kafka-broker
37      volumes:
38      | - kafka_data:/var/lib/kafka/data
39      ports:
40      | - "9092:9092"
41      environment:
42      | KAFKA_BROKER_ID: 1
43      | KAFKA_ZOOKEEPER_CONNECT: zookeeper:2181
44      | KAFKA_ADVERTISED_LISTENERS: PLAINTEXT://kafka-broker:9092
45      | KAFKA_AUTO_CREATE_TOPICS_ENABLE: "true"
46      depends_on:
47      | - zookeeper
48
49  >Run Service
50  zookeeper:
51      image: bitnami/zookeeper:3.9
52      container_name: zookeeper
53      volumes:
54      | - zookeeper_data:/bitnami
55      ports:
56      | - "2181:2181"
57      environment:
58      | ALLOW_ANONYMOUS_LOGIN: "yes"
59
60  volumes:
61      data_sql: # SQL Server persistence
62      kafka_data: # Kafka persistence
63      zookeeper_data: # ZooKeeper data

```

Me cargo los dos volúmenes anónimos:

```

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker volume inspect 05640919c4e17ffffd1d2cb27686b8cbcd298d692f7461832f99545f701e783ee
[
  {
    "CreatedAt": "2025-11-14T13:13:44Z",
    "Driver": "local",
    "Labels": {
      "com.docker.volume.anonymous": ""
    },
    "Mountpoint": "/var/lib/docker/volumes/05640919c4e17ffffd1d2cb27686b8cbcd298d692f7461832f99545f701e783ee/_data",
    "Name": "05640919c4e17ffffd1d2cb27686b8cbcd298d692f7461832f99545f701e783ee",
    "Options": null,
    "Scope": "local"
  }
]

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker volume rm 05640919c4e17ffffd1d2cb27686b8cbcd298d692f7461832f99545f701e783ee
05640919c4e17ffffd1d2cb27686b8cbcd298d692f7461832f99545f701e783ee

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker volume inspect 7b44a7a2f551f8a6ec02ab1a8699b2b85851f3b226ff5caf4e13b6252883c33e
[
  {
    "CreatedAt": "2025-11-14T13:13:44Z",
    "Driver": "local",
    "Labels": {
      "com.docker.volume.anonymous": ""
    },
    "Mountpoint": "/var/lib/docker/volumes/7b44a7a2f551f8a6ec02ab1a8699b2b85851f3b226ff5caf4e13b6252883c33e/_data",
    "Name": "7b44a7a2f551f8a6ec02ab1a8699b2b85851f3b226ff5caf4e13b6252883c33e",
    "Options": null,
    "Scope": "local"
  }
]

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker volume rm 7b44a7a2f551f8a6ec02ab1a8699b2b85851f3b226ff5caf4e13b6252883c33e
7b44a7a2f551f8a6ec02ab1a8699b2b85851f3b226ff5caf4e13b6252883c33e

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>

```

Me quedan entonces estos dos:

Ask Gordon BETA

Containers

Images

Volumes

Kubernetes

Builds

Models

MCP Toolkit BETA

Docker Hub

Volumes [Give feedback](#)

Create

	Name ↑	Created	Size	Actions
☐	☐ reservas-app_data_sql	2 days ago	156.2 MB	
☐	☐ reservas-app_kafka_data	1 hour ago	0 Bytes	

Me cargo el de kafka porque quiero que el docker-compose up --build me lo recreé de cero.

docker desktop PERSONAL

Ctrl+K

1

Sign in

Ask Gordon BETA

Containers

Images

Volumes

Kubernetes

Builds

Models

MCP Toolkit BETA

Docker Hub

Docker Scout

Extensions

Volumes [Give feedback](#)

Create

	Name ↑	Created	Size	Actions
☐	☐ reservas-app_data_sql	2 days ago	156.2 MB	
☐	☐ reservas-app_kafka_data	2 hours ago	0 Bytes	

Delete volume?

The 'reservas-app_kafka_data' volume is selected for deletion.

Cancel

Delete forever

Showing 2 items

Walkthroughs

Multi-container applications
8 mins

Persist your data between containers
3 mins

[View more in the Learning center](#)

Engine running

RAM 1.05 GB CPU 0.00% Disk: 18.16 GB used (limit 1006.85 GB)

Terminal

New version available

15:37
14/11/2025

PÁGINA SIGUIENTE

Docker compose up --build exitoso con kafka y zookeeper docker containers and volumes

```
C:\Windows\System32\cmd.exe X + v

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker-compose down
time="2025-11-14T15:43:29+01:00" level=warning msg="C:\\Users\\iago.cadavidgonzalez\\Proyectos\\reservas-app\\docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion"

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker-compose up --build
time="2025-11-14T15:43:33+01:00" level=warning msg="C:\\Users\\iago.cadavidgonzalez\\Proyectos\\reservas-app\\docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion"
[+] Running 10/10
  ✓ zookeeper Pulled
  ✓ 57a9514ca2b7 Pull complete
  ✓ 90aeb859e514 Pull complete
  ✓ 82babd302d33 Pull complete
  ✓ 39769250f2be Pull complete
  ✓ 6d6eb8535819 Pull complete
  ✓ 43f89b94cd7d Pull complete
  ✓ 22236c04ae51 Pull complete
  ✓ 72d9be105ba9 Pull complete
  ✓ a249d4c681b8 Pull complete
[+] Building 3.8s (35/35) FINISHED
=> [internal] load local bake definitions
=> => reading from stdin 1.11kB
=> [frontend internal] load build definition from Dockerfile
=> => transferring dockerfile: 4.60kB
=> [backend internal] load build definition from Dockerfile
=> => transferring dockerfile: 760B
=> [frontend internal] load metadata for docker.io/library/node:22
=> [frontend internal] load metadata for docker.io/library/nginx:alpine
=> [backend internal] load metadata for mcr.microsoft.com/dotnet/aspnet:9.0
=> [backend internal] load metadata for mcr.microsoft.com/dotnet/sdk:9.0
=> [backend internal] load .dockerignore
=> => transferring context: 383B
=> [backend build 1/7] FROM mcr.microsoft.com/dotnet/sdk:9.0@sha256:1ea5b7f2154cbd1e20a336cb56957dba30a7ce30ef5c1c032a37c42801594713
=> => resolve mcr.microsoft.com/dotnet/sdk:9.0@sha256:1ea5b7f2154cbd1e20a336cb56957dba30a7ce30ef5c1c032a37c42801594713
=> [backend internal] load build context
=> => transferring context: 2.01kB
=> [backend base 1/2] FROM mcr.microsoft.com/dotnet/aspnet:9.0@sha256:1b8d328201297fd5ca40dc1a0788aa9e813f58279c3410fe82dce6744c36d03f
=> => resolve mcr.microsoft.com/dotnet/aspnet:9.0@sha256:1b8d328201297fd5ca40dc1a0788aa9e813f58279c3410fe82dce6744c36d03f
=> CACHED [backend base 2/2] WORKDIR /app
=> CACHED [backend final 1/2] WORKDIR /app
=> CACHED [backend build 2/7] WORKDIR /src
=> CACHED [backend build 3/7] COPY [ReservasApi/ReservasApi.csproj, ReservasApi/]
=> CACHED [backend build 4/7] RUN dotnet restore "ReservasApi/ReservasApi.csproj"
=> CACHED [backend build 5/7] COPY . .
=> CACHED [backend build 6/7] WORKDIR /src/ReservasApi
```

```

=> CACHED [backend build 7/7] RUN dotnet build "ReservasApi.csproj" -c Release -o /app/build
=> CACHED [backend publish 1/1] RUN dotnet publish "ReservasApi.csproj" -c Release -o /app/publish /p:UseAppHost=false
=> CACHED [backend final 2/2] COPY --from=publish /app/publish .
=> [backend] exporting to image
=> => exporting layers
=> => exporting manifest sha256:fc5af237955bbf98b47ca56d3792a227c383107bc4219d5db92808b5148f72ae
=> => exporting config sha256:b9e854ef66cf440a7301c2cfaec137433d00c74e65e19a40f1a9231cb0dce536
=> => exporting attestation manifest sha256:26dd216b612bdcf9e8bc5512a79088dd6c70c86dbb97576138ff4c43ce290d37
=> => exporting manifest list sha256:87e5912b5ee216f06de158f03e80556549acfa9c7807bc62e15c0f5764e134c3
=> => naming to docker.io/library/reservas-app-backend:latest
=> => unpacking to docker.io/library/reservas-app-backend:latest
=> [backend] resolving provenance for metadata file
=> [frontend internal] load .dockerignore
=> => transferring context: 2B
=> [frontend build 1/6] FROM docker.io/library/node:22@sha256:dcf06103a9d4087e3244a51697adbbb85331dcb7161dbe994ca1cd07dd32e2a5
=> => resolve docker.io/library/node:22@sha256:dcf06103a9d4087e3244a51697adbbb85331dcb7161dbe994ca1cd07dd32e2a5
=> [frontend stage-1 1/2] FROM docker.io/library/nginx:alpine@sha256:b3c656d55d7ad751196f21b7fd2e8d4da9cb430e32f646adcf92441b72f82b14
=> => resolve docker.io/library/nginx:alpine@sha256:b3c656d55d7ad751196f21b7fd2e8d4da9cb430e32f646adcf92441b72f82b14
=> [frontend internal] load build context
=> => transferring context: 1.65MB
=> CACHED [frontend build 2/6] WORKDIR /app
=> CACHED [frontend build 3/6] COPY package*.json ./
=> CACHED [frontend build 4/6] RUN npm install
=> CACHED [frontend build 5/6] COPY . .
=> CACHED [frontend build 6/6] RUN npm run build -- --configuration production
=> CACHED [frontend stage-1 2/2] COPY --from=build /app/dist/reservas-frontend /usr/share/nginx/html
=> [frontend] exporting to image
=> => exporting layers
=> => exporting manifest sha256:753a68f9da77723b3cc3632668086b1fec9c7a060701741a396c92f2ebe4f43f
=> => exporting config sha256:d7c74e2b24b42710420b467ba832578a3345ef5578665619a0c9ea5771bafcc1
=> => exporting attestation manifest sha256:431d1d1385bc2cf722b7f20bb7389d8e332852f0350ca7b3f77d0c02f3b69ef73
=> => exporting manifest list sha256:3d99775706c4e0be0ad56ef6c517926293c7333201b830881b7c99d535882d43
=> => naming to docker.io/library/reservas-app-frontend:latest
=> => unpacking to docker.io/library/reservas-app-frontend:latest
=> [frontend] resolving provenance for metadata file
[+] Running 10/10
✔reservas-app-backend           Built
✔reservas-app-frontend          Built
✔Network reservas-app_default   Created
✔Volume reservas-app_kafka_data Created
✔Volume reservas-app_zookeeper_data Created
✔Container sqlserver             Created
✔Container zookeeper             Created
✔Container reservas-app-backend-1 Created
✔Container kafka-broker          Created

```

```

✔Container reservas-app-frontend-1 Created
Attaching to kafka-broker, backend-1, frontend-1, sqlserver, zookeeper
zookeeper | ZooKeeper JMX enabled by default
zookeeper | Using config: /conf/zoo.cfg
sqlserver | SQL Server 2022 will run as non-root by default.
sqlserver | This container is running as user mssql.
sqlserver | Your master database file is owned by mssql.
sqlserver | To learn more visit https://go.microsoft.com/fwlink/?linkid=2099216.
kafka-broker | ===> User
kafka-broker | uid=1000(appuser) gid=1000(appuser) groups=1000(appuser)
kafka-broker | ===> Setting default values of environment variables if not already set.
kafka-broker | CLUSTER_ID not set. Setting it to default value: "5L6g3nShT-eMCTK--X86sw"
kafka-broker | ===> Configuring ...
kafka-broker | ===> Launching ...
kafka-broker | ===> Using provided cluster id 5L6g3nShT-eMCTK--X86sw ...
zookeeper | 2025-11-14 14:44:00,582 [myid:] - INFO [main:o.a.z.s.q.QuorumPeerConfig@177] - Reading configuration from: /conf/zoo.cfg
zookeeper | 2025-11-14 14:44:00,590 [myid:] - INFO [main:o.a.z.s.q.QuorumPeerConfig@431] - clientPort is not set
zookeeper | 2025-11-14 14:44:00,591 [myid:] - INFO [main:o.a.z.s.q.QuorumPeerConfig@444] - secureClientPort is not set
zookeeper | 2025-11-14 14:44:00,597 [myid:] - INFO [main:o.a.z.s.q.QuorumPeerConfig@460] - observerMasterPort is not set
zookeeper | 2025-11-14 14:44:00,597 [myid:] - INFO [main:o.a.z.s.q.QuorumPeerConfig@477] - metricsProvider.className is org.apache.zookeeper.metrics.impl.DefaultMetr
icsProvider
zookeeper | 2025-11-14 14:44:00,613 [myid:] - ERROR [main:o.a.z.s.q.QuorumPeerConfig@702] - Invalid configuration, only one server specified (ignoring)
zookeeper | 2025-11-14 14:44:00,618 [myid:] - INFO [main:o.a.z.s.DatadirCleanupManager@78] - autopurge.snapRetainCount set to 3
zookeeper | 2025-11-14 14:44:00,619 [myid:] - INFO [main:o.a.z.s.DatadirCleanupManager@79] - autopurge.purgeInterval set to 0
zookeeper | 2025-11-14 14:44:00,619 [myid:] - INFO [main:o.a.z.s.DatadirCleanupManager@101] - Purge task is not scheduled.
zookeeper | 2025-11-14 14:44:00,619 [myid:] - WARN [main:o.a.z.s.q.QuorumPeerMain@139] - Either no config or no quorum defined in config, running in standalone mode
zookeeper | 2025-11-14 14:44:00,621 [myid:] - INFO [main:o.a.z.j.ManagedUtil@46] - Log4j 1.2 jmx support not found; jmx disabled.
zookeeper | 2025-11-14 14:44:00,622 [myid:] - INFO [main:o.a.z.s.q.QuorumPeerConfig@177] - Reading configuration from: /conf/zoo.cfg
zookeeper | 2025-11-14 14:44:00,623 [myid:] - INFO [main:o.a.z.s.q.QuorumPeerConfig@431] - clientPort is not set
frontend-1 | /docker-entrypoint.sh: /docker-entrypoint.d/ is not empty, will attempt to perform configuration
zookeeper | 2025-11-14 14:44:00,624 [myid:] - INFO [main:o.a.z.s.q.QuorumPeerConfig@444] - secureClientPort is not set
frontend-1 | /docker-entrypoint.sh: Looking for shell scripts in /docker-entrypoint.d/
zookeeper | 2025-11-14 14:44:00,624 [myid:] - INFO [main:o.a.z.s.q.QuorumPeerConfig@460] - observerMasterPort is not set
zookeeper | 2025-11-14 14:44:00,625 [myid:] - INFO [main:o.a.z.s.q.QuorumPeerConfig@477] - metricsProvider.className is org.apache.zookeeper.metrics.impl.DefaultMet
ricsProvider
zookeeper | 2025-11-14 14:44:00,628 [myid:] - ERROR [main:o.a.z.s.q.QuorumPeerConfig@702] - Invalid configuration, only one server specified (ignoring)

```



```
frontend-1 | /docker-entrypoint.sh: Launching /docker-entrypoint.d/10-listen-on-ipv6-by-default.sh
zookeeper | 2025-11-14 14:44:00,631 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServerMain@123] - Starting server
zookeeper | 2025-11-14 14:44:00,670 [myid:1] - INFO [main:o.a.z.s.ServerMetrics@64] - ServerMetrics initialized with provider org.apache.zookeeper.metrics.impl.DefaultMetricsProvider@55141def
zookeeper | 2025-11-14 14:44:00,683 [myid:1] - INFO [main:o.a.z.s.a.DigestAuthenticationProvider@51] - ACL digest algorithm is: SHA1
zookeeper | 2025-11-14 14:44:00,683 [myid:1] - INFO [main:o.a.z.s.a.DigestAuthenticationProvider@65] - zookeeper.DigestAuthenticationProvider.enabled = true

frontend-1 | 10-listen-on-ipv6-by-default.sh: info: Getting the checksum of /etc/nginx/conf.d/default.conf
frontend-1 | 10-listen-on-ipv6-by-default.sh: info: Enabled listen on IPv6 in /etc/nginx/conf.d/default.conf

zookeeper | 2025-11-14 14:44:00,687 [myid:1] - INFO [main:o.a.z.s.p.FileTxnSnapLog@124] - zookeeper.snapshot.trust.empty : false

frontend-1 | /docker-entrypoint.sh: Sourcing /docker-entrypoint.d/15-local-resolvers.envsh

zookeeper | 2025-11-14 14:44:00,717 [myid:1] - INFO [main:o.a.z.ZooKeeperBanner@42] -
frontend-1 | /docker-entrypoint.sh: Launching /docker-entrypoint.d/20-envsubst-on-templates.sh

frontend-1 | /docker-entrypoint.sh: Launching /docker-entrypoint.d/30-tune-worker-processes.sh

zookeeper | 2025-11-14 14:44:00,717 [myid:1] - INFO [main:o.a.z.ZooKeeperBanner@42] - -----
frontend-1 | /docker-entrypoint.sh: Configuration complete; ready for start up

zookeeper | 2025-11-14 14:44:00,717 [myid:1] - INFO [main:o.a.z.ZooKeeperBanner@42] - |___ / | |
frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: using the "epoll" event method

zookeeper | 2025-11-14 14:44:00,718 [myid:1] - INFO [main:o.a.z.ZooKeeperBanner@42] - / / ___ ___ | | __ ___ ___ _ __ ___ _ __

frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: nginx/1.29.3
zookeeper | 2025-11-14 14:44:00,718 [myid:1] - INFO [main:o.a.z.ZooKeeperBanner@42] - / / / _ \ / _ \ | | / / / _ \ / _ \ | ' \ / _ \ | ' \ |

zookeeper | 2025-11-14 14:44:00,718 [myid:1] - INFO [main:o.a.z.ZooKeeperBanner@42] - / /__ | ( ) | | ( ) | | < | __/ | __/ | |__ | | __/ | |
frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: built by gcc 14.2.0 (Alpine 14.2.0)

zookeeper | 2025-11-14 14:44:00,718 [myid:1] - INFO [main:o.a.z.ZooKeeperBanner@42] - /-----| \___/ \___/ |_\| \___/ \___/ | \_/ \___/ |_\|
frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: OS: Linux 6.6.87.2-microsoft-standard-WSL2

frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: getrlimit(RLIMIT_NOFILE): 1048576:1048576
zookeeper | 2025-11-14 14:44:00,718 [myid:1] - INFO [main:o.a.z.ZooKeeperBanner@42] - | |

frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: start worker processes

frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: start worker process 30
zookeeper | 2025-11-14 14:44:00,718 [myid:1] - INFO [main:o.a.z.ZooKeeperBanner@42] - |_|
zookeeper | 2025-11-14 14:44:00,718 [myid:1] - INFO [main:o.a.z.ZooKeeperBanner@42] -

frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: start worker process 31

zookeeper | 2025-11-14 14:44:00,720 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:zookeeper.version=3.9.0-1674a5e97f43bc38e9bf56b04f83a7ae34d68249
, built on 2023-07-19 09:09 UTC
frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: start worker process 32

zookeeper | 2025-11-14 14:44:00,721 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:host.name=c94d3f8c3c48

frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: start worker process 33
zookeeper | 2025-11-14 14:44:00,721 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:java.version=11.0.20.1

frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: start worker process 34
zookeeper | 2025-11-14 14:44:00,721 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:java.vendor=Eclipse Adoptium

frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: start worker process 35
zookeeper | 2025-11-14 14:44:00,721 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:java.home=/opt/java/openjdk
frontend-1 | 2025/11/14 14:44:00 [notice] 1#1: start worker process 36
```

NEXT PAGE

```
zookeeper | 2025-11-14 14:44:00,721 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:java.class.path=/apache-zookeeper-3.9.0-bin/bin/./zookeeper-metrics-providers/zookeeper-prometheus-metrics/target/classes:/apache-zookeeper-3.9.0-bin/bin/./zookeeper-server/target/classes:/apache-zookeeper-3.9.0-bin/bin/./build/classes:/apache-zookeeper-3.9.0-bin/bin/./zookeeper-metrics-providers/zookeeper-prometheus-metrics/target/lib/*.jar:/apache-zookeeper-3.9.0-bin/bin/./zookeeper-server/target/lib/*.jar:/apache-zookeeper-3.9.0-bin/bin/./build/lib/*.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/zookeeper-prometheus-metrics-3.9.0.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/zookeeper-jute-3.9.0.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/zookeeper-3.9.0.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/snappy-java-1.10.1.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/slf4j-api-1.7.30.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/simpleclient-servlet-0.9.0.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/simpleclient-hotspot-0.9.0.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/simpleclient-common-0.9.0.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/simpleclient-0.9.0.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-transport-native-unix-common-4.1.94.Final.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-transport-native-epoll-4.1.94.Final.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-transport-4.1.94.Final.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-tcnative-classes-2.0.61.Final.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-tcnative-boringssl-static-2.0.61.Final-windows-x86_64.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-tcnative-boringssl-static-2.0.61.Final-osx-x86_64.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-tcnative-boringssl-static-2.0.61.Final-linux-aarch_64.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-tcnative-boringssl-static-2.0.61.Final.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-resolver-4.1.94.Final.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-handler-4.1.94.Final.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-common-4.1.94.Final.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-codec-4.1.94.Final.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/netty-buffer-4.1.94.Final.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/metrics-core-4.1.12.1.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/logback-core-1.2.10.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/logback-classic-1.2.10.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jline-2.14.6.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jetty-util-ajax-9.4.51.v20230217.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jetty-util-9.4.51.v20230217.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jetty-servlet-9.4.51.v20230217.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jetty-server-9.4.51.v20230217.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jetty-security-9.4.51.v20230217.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jetty-io-9.4.51.v20230217.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jetty-http-9.4.51.v20230217.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/javax.servlet-api-3.1.0.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jackson-databind-2.15.2.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jackson-core-2.15.2.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/jackson-annotations-2.15.2.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/commons-io-2.11.0.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/commons-cli-1.5.0.jar:/apache-zookeeper-3.9.0-bin/bin/./lib/audience-annotations-0.12.0.jar:/apache-zookeeper-3.9.0-bin/bin/./zookeeper-*.jar:/apache-zookeeper-3.9.0-bin/bin/./zookeeper-server/src/main/resources/lib/*.jar:/conf:
backend-1 | warn: Microsoft.AspNetCore.Hosting.Diagnostics[15]

zookeeper | 2025-11-14 14:44:00,721 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:java.library.path=/usr/java/packages/lib:/usr/lib64:/lib64:/lib:
frontend-1 | 2025/11/14 14:44:00 [notice] #1: start worker process 37

zookeeper | 2025-11-14 14:44:00,721 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:java.io.tmpdir=/tmp
backend-1 | Overriding HTTP_PORTS '8080' and HTTPS_PORTS ''. Binding to values defined by URLs instead 'http://*:5000'.

zookeeper | 2025-11-14 14:44:00,721 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:java.compiler=<NA>
zookeeper | 2025-11-14 14:44:00,721 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:os.name=Linux
zookeeper | 2025-11-14 14:44:00,721 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:os.arch=amd64
zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:os.version=6.6.87.2-microsoft-standard-WSL2

backend-1 | info: Microsoft.Hosting.Lifetime[14]
zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:user.name=zookeeper

backend-1 | Now listening on: http://[::]:5000
zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:user.home=/home/zookeeper

backend-1 | info: Microsoft.Hosting.Lifetime[0]
zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:user.dir=/apache-zookeeper-3.9.0-bin

backend-1 | Application started. Press Ctrl+C to shut down.
zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:os.memory.free=230MB

backend-1 | info: Microsoft.Hosting.Lifetime[0]
zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:os.memory.max=1000MB

zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.Environment@98] - Server environment:os.memory.total=250MB

backend-1 | Hosting environment: Development
zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@149] - zookeeper.enableEagerACLCheck = false

backend-1 | info: Microsoft.Hosting.Lifetime[0]
zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@162] - zookeeper.digest.enabled = true

zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@166] - zookeeper.closeSessionTxn.enabled = true
backend-1 | Content root path: /app

zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@2251] - zookeeper.serializeLastProcessedZxid.enabled = true
zookeeper | 2025-11-14 14:44:00,723 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@1594] - zookeeper.flushDelay = 0 ms
```

```
zookeeper | 2025-11-14 14:44:00,722 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@2251] - zookeeper.serializeLastProcessedZxid.enabled = true
zookeeper | 2025-11-14 14:44:00,723 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@1594] - zookeeper.flushDelay = 0 ms
zookeeper | 2025-11-14 14:44:00,723 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@1603] - zookeeper.maxWriteQueuePollTime = 0 ms
zookeeper | 2025-11-14 14:44:00,723 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@1612] - zookeeper.maxBatchSize=1000
zookeeper | 2025-11-14 14:44:00,723 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@287] - zookeeper.intBufferStartingSizeBytes = 1024
zookeeper | 2025-11-14 14:44:00,725 [myid:1] - INFO [main:o.a.z.s.BlueThrottle@141] - Weighed connection throttling is disabled
zookeeper | 2025-11-14 14:44:00,731 [myid:1] - INFO [main:o.a.z.s.AuthenticationHelper@66] - zookeeper.enforce.auth.enabled = false
zookeeper | 2025-11-14 14:44:00,733 [myid:1] - INFO [main:o.a.z.s.AuthenticationHelper@67] - zookeeper.enforce.auth.schemes = []
zookeeper | 2025-11-14 14:44:00,736 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@1406] - minSessionTimeout set to 4000 ms
zookeeper | 2025-11-14 14:44:00,736 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@1415] - maxSessionTimeout set to 40000 ms
zookeeper | 2025-11-14 14:44:00,737 [myid:1] - INFO [main:o.a.z.s.ResponseCache@45] - getData response cache size is initialized with value 400.
zookeeper | 2025-11-14 14:44:00,738 [myid:1] - INFO [main:o.a.z.s.ResponseCache@45] - getChildren response cache size is initialized with value 400.
zookeeper | 2025-11-14 14:44:00,739 [myid:1] - INFO [main:o.a.z.s.u.RequestPathMetricsCollector@109] - zookeeper.pathStats.slotCapacity = 60
zookeeper | 2025-11-14 14:44:00,739 [myid:1] - INFO [main:o.a.z.s.u.RequestPathMetricsCollector@110] - zookeeper.pathStats.slotDuration = 15
zookeeper | 2025-11-14 14:44:00,739 [myid:1] - INFO [main:o.a.z.s.u.RequestPathMetricsCollector@111] - zookeeper.pathStats.maxDepth = 6
zookeeper | 2025-11-14 14:44:00,739 [myid:1] - INFO [main:o.a.z.s.u.RequestPathMetricsCollector@112] - zookeeper.pathStats.initialDelay = 5
zookeeper | 2025-11-14 14:44:00,739 [myid:1] - INFO [main:o.a.z.s.u.RequestPathMetricsCollector@113] - zookeeper.pathStats.delay = 5
zookeeper | 2025-11-14 14:44:00,740 [myid:1] - INFO [main:o.a.z.s.u.RequestPathMetricsCollector@114] - zookeeper.pathStats.enabled = false
zookeeper | 2025-11-14 14:44:00,743 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@1631] - The max bytes for all large requests are set to 104857600
zookeeper | 2025-11-14 14:44:00,743 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@1645] - The large request threshold is set to -1
zookeeper | 2025-11-14 14:44:00,743 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@385] - Created server with tickTime 2000 ms minSessionTimeout 4000 ms maxSessionTim
eout 40000 ms clientPortListenBacklog -1 datadir /data/ /data/version-2 snapdir /data/version-2
zookeeper | 2025-11-14 14:44:00,818 [myid:1] - INFO [main:o.e.j.u.l.Log@170] - Logging initialized @1082ms to org.eclipse.jetty.util.log.Slf4jLog
zookeeper | 2025-11-14 14:44:00,975 [myid:1] - WARN [main:o.e.j.s.h.ContextHandler@1662] - o.e.j.s.ServletContextHandler@4c1909a3{/null,STOPPED} contextPath ends wi
th /*
zookeeper | 2025-11-14 14:44:00,975 [myid:1] - WARN [main:o.e.j.s.h.ContextHandler@1673] - Empty contextPath
zookeeper | 2025-11-14 14:44:01,018 [myid:1] - INFO [main:o.e.j.s.Server@375] - jetty-9.4.51.v20230217; built: 2023-02-17T08:19:37.309Z; git: b45c405e4544384de066f81
4ed42ae3dceacd49; jvm 11.0.20.141
zookeeper | 2025-11-14 14:44:01,081 [myid:1] - INFO [main:o.e.j.s.s.DefaultSessionIdManager@334] - DefaultSessionIdManager workingName=node0
zookeeper | 2025-11-14 14:44:01,082 [myid:1] - INFO [main:o.e.j.s.s.DefaultSessionIdManager@339] - No SessionScavenger set, using defaults
zookeeper | 2025-11-14 14:44:01,087 [myid:1] - INFO [main:o.e.j.s.s.HouseKeeper@132] - node0 Scavenging every 60000ms
zookeeper | 2025-11-14 14:44:01,104 [myid:1] - WARN [main:o.e.j.s.ConstraintSecurityHandler@759] - ServletContext@o.e.j.s.ServletContextHandler@4c1909a3{/null,START
ING} has uncovered http methods for path: /*
zookeeper | 2025-11-14 14:44:01,125 [myid:1] - INFO [main:o.e.j.s.h.ContextHandler@921] - Started o.e.j.s.ServletContextHandler@4c1909a3{/null,AVAILABLE}
zookeeper | 2025-11-14 14:44:01,156 [myid:1] - INFO [main:o.e.j.s.AbstractConnector@333] - Started ServerConnector@24fcf36f[HTTP/1.1, (http/1.1)]{0.0.0.0:8080}
zookeeper | 2025-11-14 14:44:01,156 [myid:1] - INFO [main:o.e.j.s.Server@415] - Started @1424ms
zookeeper | 2025-11-14 14:44:01,157 [myid:1] - INFO [main:o.a.z.s.a.JettyAdminServer@201] - Started AdminServer on address 0.0.0.0, port 8080 and command URL /comman
ds
zookeeper | 2025-11-14 14:44:01,167 [myid:1] - INFO [main:o.a.z.s.ServerCnxnFactory@169] - Using org.apache.zookeeper.server.NIOServerCnxnFactory as server connectio
n factory
zookeeper | 2025-11-14 14:44:01,169 [myid:1] - WARN [main:o.a.z.s.ServerCnxnFactory@309] - maxCnxns is not configured, using default value 0.
zookeeper | 2025-11-14 14:44:01,173 [myid:1] - INFO [main:o.a.z.s.NIOServerCnxnFactory@652] - Configuring NIO connection handler with 10s sessionless connection time
out, 2 selector thread(s), 16 worker threads, and 64 kB direct buffers.
zookeeper | 2025-11-14 14:44:01,175 [myid:1] - INFO [main:o.a.z.s.NIOServerCnxnFactory@660] - binding to port /0.0.0.0:2181
```

```
zookeeper | 2025-11-14 14:44:01,200 [myid:1] - INFO [main:o.a.z.s.w.WatchManagerFactory@42] - Using org.apache.zookeeper.server.watch.WatchManager as watch manager
zookeeper | 2025-11-14 14:44:01,201 [myid:1] - INFO [main:o.a.z.s.w.WatchManagerFactory@42] - Using org.apache.zookeeper.server.watch.WatchManager as watch manager
zookeeper | 2025-11-14 14:44:01,202 [myid:1] - INFO [main:o.a.z.s.ZKDatabase@135] - zookeeper.snapshotSizeFactor = 0.33
zookeeper | 2025-11-14 14:44:01,202 [myid:1] - INFO [main:o.a.z.s.ZKDatabase@155] - zookeeper.commitLogCount=500
zookeeper | 2025-11-14 14:44:01,211 [myid:1] - INFO [main:o.a.z.s.p.SnapStream@61] - zookeeper.snapshot.compression.method = CHECKED
zookeeper | 2025-11-14 14:44:01,212 [myid:1] - INFO [main:o.a.z.s.p.FileTxnSnapLog@480] - Snapshotting: 0x0 to /data/version-2/snapshot.0
zookeeper | 2025-11-14 14:44:01,219 [myid:1] - INFO [main:o.a.z.s.ZKDatabase@292] - Snapshot loaded in 17 ms, highest zxid is 0x0, digest is 1371985504
zookeeper | 2025-11-14 14:44:01,220 [myid:1] - INFO [main:o.a.z.s.p.FileTxnSnapLog@480] - Snapshotting: 0x0 to /data/version-2/snapshot.0
zookeeper | 2025-11-14 14:44:01,221 [myid:1] - INFO [main:o.a.z.s.ZooKeeperServer@589] - Snapshot taken in 1 ms
zookeeper | 2025-11-14 14:44:01,237 [myid:1] - INFO [ProcessThread(sid:0 cport:2181)::o.a.z.s.PrepareRequestProcessor@138] - PrepRequestProcessor (sid:0) started, reconf
igEnabled=false
zookeeper | 2025-11-14 14:44:01,237 [myid:1] - INFO [main:o.a.z.s.RequestThrottler@75] - zookeeper.request_throttler.shutdownTimeout = 10000 ms
zookeeper | 2025-11-14 14:44:01,272 [myid:1] - INFO [main:o.a.z.s.ContainerManager@83] - Using checkIntervalMs=60000 maxPerMinute=10000 maxNeverUsedIntervalMs=0
zookeeper | 2025-11-14 14:44:01,275 [myid:1] - INFO [main:o.a.z.a.ZKAuditProvider@42] - ZooKeeper audit is disabled.
kafka-broker | The kafka configuration file appears to be for a legacy cluster. Formatting is only supported for clusters in KRaft mode.
sqlserver | 2025-11-14 14:44:04.38 Server Setup step is FORCE copying system data file 'C:\templatedata\model_replicatedmaster.mdf' to '/var/opt/mssql/data/model
_replicatedmaster.mdf'.
2025-11-14 14:44:04.40 Server Setup step is FORCE copying system data file 'C:\templatedata\model_replicatedmaster.ldf' to '/var/opt/mssql/data/model_replicatedmaste
r.ldf'.
2025-11-14 14:44:04.41 Server Setup step is FORCE copying system data file 'C:\templatedata\model_msdbdata.mdf' to '/var/opt/mssql/data/model_msdbdata.mdf'.
2025-11-14 14:44:04.44 Server Setup step is FORCE copying system data file 'C:\templatedata\model_msdblog.ldf' to '/var/opt/mssql/data/model_msdblog.ldf'.
2025-11-14 14:44:04.48 Server Microsoft SQL Server 2022 (RTM-CU21) (KB5065865) - 16.0.4215.2 (X64)
sqlserveAug 11 2025 13:24:21
sqlserveCopyright (C) 2022 Microsoft Corporation
sqlserveDeveloper Edition (64-bit) on Linux (Ubuntu 22.04.5 LTS) <X64>
2025-11-14 14:44:04.48 Server UTC adjustment: 0:00
2025-11-14 14:44:04.48 Server (c) Microsoft Corporation.
2025-11-14 14:44:04.48 Server All rights reserved.
2025-11-14 14:44:04.48 Server Server process ID is 480.
2025-11-14 14:44:04.49 Server Logging SQL Server messages in file '/var/opt/mssql/log/errorlog'.
2025-11-14 14:44:04.49 Server Registry startup parameters:
sqlserve -d /var/opt/mssql/data/master.mdf
sqlserve -l /var/opt/mssql/data/masterlog.ldf
sqlserve -e /var/opt/mssql/log/errorlog
2025-11-14 14:44:04.49 Server SQL Server detected 1 sockets with 4 cores per socket and 8 logical processors per socket, 8 total logical processors; using 8 logical
processors based on SQL Server licensing. This is an informational message; no user action is required.
2025-11-14 14:44:04.50 Server SQL Server is starting at normal priority base (-7). This is an informational message only. No user action is required.
2025-11-14 14:44:04.50 Server Detected 12676 MB of RAM, 12305 MB of available memory, 12395 MB of available page file. This is an informational message; no user acti
on is required.
2025-11-14 14:44:04.50 Server Using conventional memory in the memory manager.
2025-11-14 14:44:04.50 Server Detected pause instruction latency: 109 cycles.
2025-11-14 14:44:04.50 Server SQL Server detected the following NUMA node configuration (NUMA Node number 0, Processor Group number 0, CPU Mask 0x00000000000000ff).
2025-11-14 14:44:04.53 Server Page exclusion bitmap is enabled.
2025-11-14 14:44:04.58 Server Buffer pool extension is not supported on Linux platform.
```

```
2025-11-14 14:44:04.60 Server Buffer Pool: Allocating 16777216 bytes for 1967646 hashPages.
2025-11-14 14:44:04.71 Server Buffer pool extension is already disabled. No action is necessary.
2025-11-14 14:44:05.07 Server Installing Client TLS certificates to the store.
2025-11-14 14:44:05.08 Server CPU vectorization level(s) detected: SSE SSE2 SSE3 SSE3S SSE41 SSE42 AVX AVX2 POPCNT BMI1 BMI2 AVX512 (F CD BW DQ VL IFMA VBMI VBM2 V
NNI BITALG VPOQCNTDQ VP2INTERSECT)
2025-11-14 14:44:05.15 Server Successfully initialized the TLS configuration. Allowed TLS protocol versions are ['1.0 1.1 1.2']. Allowed TLS ciphers are ['ECDHE-ECDS
A-AES128-GCM-SHA256: ECDHE-ECDSA-AES256-GCM-SHA384: ECDHE-RSA-AES128-GCM-SHA256: ECDHE-RSA-AES256-GCM-SHA384: ECDHE-ECDSA-AES128-SHA256: ECDHE-ECDSA-AES256-SHA384: ECDHE-ECDSA-
AES256-SHA: ECDHE-ECDSA-AES128-SHA: AES256-GCM-SHA384: AES128-GCM-SHA256: AES256-SHA256: AES128-SHA256: AES256-SHA: AES128-SHA: !DHE-RSA-AES256-GCM-SHA384: !DHE-RSA-AES128-GCM-SHA
256: !DHE-RSA-AES256-SHA: !DHE-RSA-AES128-SHA']
2025-11-14 14:44:05.18 Server Query Store settings initialized with enabled = 1,
2025-11-14 14:44:05.19 Server The maximum number of dedicated administrator connections for this instance is '1'
2025-11-14 14:44:05.20 Server Node configuration: node 0: CPU mask: 0x00000000000000ff:0 Active CPU mask: 0x00000000000000ff:0. This message provides a description o
f the NUMA configuration for this computer. This is an informational message only. No user action is required.
2025-11-14 14:44:05.24 Server Using dynamic lock allocation. Initial allocation of 2500 Lock blocks and 5000 Lock Owner blocks per node. This is an informational m
essage only. No user action is required.
2025-11-14 14:44:05.28 Server In-Memory OLTP initialized on standard machine.
2025-11-14 14:44:05.31 Server [INFO] Created Extended Events session 'hkenginexesession'
2025-11-14 14:44:05.32 Server CLR version v4.0.30319 loaded.
2025-11-14 14:44:05.32 Server Database Instant File Initialization: enabled. For security and performance considerations see the topic 'Database Instant File Initial
ization' in SQL Server Books Online. This is an informational message only. No user action is required.
2025-11-14 14:44:05.34 Server ForceFlush is enabled for this instance.
2025-11-14 14:44:05.34 Server Total Log Writer threads: 2. This is an informational message; no user action is required.
2025-11-14 14:44:05.35 Server clwb is selected for pmem flush operation.
2025-11-14 14:44:05.35 Server Software Usage Metrics is disabled.
2025-11-14 14:44:05.36 spid28s [1]. Feature Status: PVS: 0. CTR: 0. ConcurrentPFSUpdate: 1. ConcurrentGAMUpdate: 1. ConcurrentSGAMUpdate: 1, CleanupUnderUserTransacti
on: 0. TranLevelPVS: 0
2025-11-14 14:44:05.37 spid28s Starting up database 'master'.
2025-11-14 14:44:05.45 spid28s ForceFlush feature is enabled for log durability.
2025-11-14 14:44:05.45 spid28s 29 transactions rolled forward in database 'master' (1:0). This is an informational message only. No user action is required.
2025-11-14 14:44:05.47 spid28s 0 transactions rolled back in database 'master' (1:0). This is an informational message only. No user action is required.
2025-11-14 14:44:05.47 spid28s Recovery is writing a checkpoint in database 'master' (1). This is an informational message only. No user action is required.
2025-11-14 14:44:05.56 spid30s [32762]. Feature Status: PVS: 0. CTR: 0. ConcurrentPFSUpdate: 1. ConcurrentGAMUpdate: 1. ConcurrentSGAMUpdate: 1, CleanupUnderUserTrans
action: 0. TranLevelPVS: 0
2025-11-14 14:44:05.55 spid30s [32767]. Feature Status: PVS: 0. CTR: 0. ConcurrentPFSUpdate: 1. ConcurrentGAMUpdate: 1. ConcurrentSGAMUpdate: 1, CleanupUnderUserTrans
action: 0. TranLevelPVS: 0
2025-11-14 14:44:05.55 spid28s Starting up database 'model_replicatedmaster'.
2025-11-14 14:44:05.55 spid30s Starting up database 'mssqlsystemresource'.
2025-11-14 14:44:05.80 spid30s The resource database build version is 16.00.4215. This is an informational message only. No user action is required.
2025-11-14 14:44:05.59 spid30s [3]. Feature Status: PVS: 0. CTR: 0. ConcurrentPFSUpdate: 1. ConcurrentGAMUpdate: 1. ConcurrentSGAMUpdate: 1, CleanupUnderUserTransacti
on: 0. TranLevelPVS: 0
2025-11-14 14:44:05.59 spid30s Starting up database 'model'.
2025-11-14 14:44:05.66 spid28s Converting database 'model_replicatedmaster' from version 927 to the current version 957.
2025-11-14 14:44:05.67 spid28s Database 'model_replicatedmaster' running the upgrade step from version 927 to version 928.
2025-11-14 14:44:05.70 spid28s Database 'model_replicatedmaster' running the upgrade step from version 928 to version 929.
2025-11-14 14:44:05.70 Server Common language runtime (CLR) functionality initialized.
```

```
2025-11-14 14:44:05.74 spid28s Database 'model_replicatedmaster' running the upgrade step from version 929 to version 930.
2025-11-14 14:44:05.76 spid28s Database 'model_replicatedmaster' running the upgrade step from version 930 to version 931.
2025-11-14 14:44:05.77 spid28s Database 'model_replicatedmaster' running the upgrade step from version 931 to version 932.
2025-11-14 14:44:05.78 spid28s Database 'model_replicatedmaster' running the upgrade step from version 932 to version 933.
2025-11-14 14:44:05.79 spid28s Database 'model_replicatedmaster' running the upgrade step from version 933 to version 934.
2025-11-14 14:44:05.80 spid28s Database 'model_replicatedmaster' running the upgrade step from version 934 to version 935.
2025-11-14 14:44:05.82 spid28s Database 'model_replicatedmaster' running the upgrade step from version 935 to version 936.
2025-11-14 14:44:05.82 Server External governance manager initialized
2025-11-14 14:44:05.83 spid28s Database 'model_replicatedmaster' running the upgrade step from version 936 to version 937.
2025-11-14 14:44:05.84 spid28s Database 'model_replicatedmaster' running the upgrade step from version 937 to version 938.
2025-11-14 14:44:05.85 spid28s Database 'model_replicatedmaster' running the upgrade step from version 938 to version 939.
2025-11-14 14:44:05.86 spid28s Database 'model_replicatedmaster' running the upgrade step from version 939 to version 940.
2025-11-14 14:44:05.88 spid28s Database 'model_replicatedmaster' running the upgrade step from version 940 to version 941.
2025-11-14 14:44:05.89 spid28s Database 'model_replicatedmaster' running the upgrade step from version 941 to version 942.
2025-11-14 14:44:05.90 spid28s Database 'model_replicatedmaster' running the upgrade step from version 942 to version 943.
2025-11-14 14:44:05.91 spid28s Database 'model_replicatedmaster' running the upgrade step from version 943 to version 944.
2025-11-14 14:44:05.96 spid28s Database 'model_replicatedmaster' running the upgrade step from version 944 to version 945.
2025-11-14 14:44:05.97 spid28s Database 'model_replicatedmaster' running the upgrade step from version 945 to version 946.
2025-11-14 14:44:05.99 spid28s Database 'model_replicatedmaster' running the upgrade step from version 946 to version 947.
2025-11-14 14:44:06.00 spid28s Database 'model_replicatedmaster' running the upgrade step from version 947 to version 948.
2025-11-14 14:44:06.01 spid28s Database 'model_replicatedmaster' running the upgrade step from version 948 to version 949.
2025-11-14 14:44:06.02 spid28s Database 'model_replicatedmaster' running the upgrade step from version 949 to version 950.
2025-11-14 14:44:06.03 spid28s Database 'model_replicatedmaster' running the upgrade step from version 950 to version 951.
2025-11-14 14:44:06.05 spid28s Database 'model_replicatedmaster' running the upgrade step from version 951 to version 952.
2025-11-14 14:44:06.07 spid28s Database 'model_replicatedmaster' running the upgrade step from version 952 to version 953.
2025-11-14 14:44:06.09 spid28s Database 'model_replicatedmaster' running the upgrade step from version 953 to version 954.
2025-11-14 14:44:06.10 spid28s Database 'model_replicatedmaster' running the upgrade step from version 954 to version 955.
2025-11-14 14:44:06.11 spid28s Database 'model_replicatedmaster' running the upgrade step from version 955 to version 956.
2025-11-14 14:44:06.13 spid28s Database 'model_replicatedmaster' running the upgrade step from version 956 to version 957.
2025-11-14 14:44:06.19 spid28s [32761]. Feature Status: PVS: 0. CTR: 0. ConcurrentPFSUpdate: 1. ConcurrentGAMUpdate: 1. ConcurrentSGAMUpdate: 1, CleanupUnderUserTrans
action: 0. TranLevelPVS: 0
2025-11-14 14:44:06.19 spid28s Starting up database 'model_msdb'.
2025-11-14 14:44:06.27 spid28s Converting database 'model_msdb' from version 927 to the current version 957.
2025-11-14 14:44:06.27 spid28s Database 'model_msdb' running the upgrade step from version 927 to version 928.
2025-11-14 14:44:06.29 spid28s Database 'model_msdb' running the upgrade step from version 928 to version 929.
2025-11-14 14:44:06.33 spid28s Database 'model_msdb' running the upgrade step from version 929 to version 930.
2025-11-14 14:44:06.34 spid28s Database 'model_msdb' running the upgrade step from version 930 to version 931.
2025-11-14 14:44:06.36 spid28s Database 'model_msdb' running the upgrade step from version 931 to version 932.
2025-11-14 14:44:06.37 spid28s Database 'model_msdb' running the upgrade step from version 932 to version 933.
2025-11-14 14:44:06.38 spid28s Database 'model_msdb' running the upgrade step from version 933 to version 934.
2025-11-14 14:44:06.40 spid28s Database 'model_msdb' running the upgrade step from version 934 to version 935.
2025-11-14 14:44:06.41 spid28s Database 'model_msdb' running the upgrade step from version 935 to version 936.
2025-11-14 14:44:06.42 spid28s Database 'model_msdb' running the upgrade step from version 936 to version 937.
2025-11-14 14:44:06.43 spid28s Database 'model_msdb' running the upgrade step from version 937 to version 938.
2025-11-14 14:44:06.44 spid28s Database 'model_msdb' running the upgrade step from version 938 to version 939.
```



```
2025-11-14 14:44:06.44 spid28s Database 'model_msdb' running the upgrade step from version 938 to version 939.
2025-11-14 14:44:06.45 spid28s Database 'model_msdb' running the upgrade step from version 939 to version 940.
2025-11-14 14:44:06.46 spid28s Database 'model_msdb' running the upgrade step from version 940 to version 941.
2025-11-14 14:44:06.47 spid28s Database 'model_msdb' running the upgrade step from version 941 to version 942.
2025-11-14 14:44:06.48 spid28s Database 'model_msdb' running the upgrade step from version 942 to version 943.
2025-11-14 14:44:06.51 spid28s Database 'model_msdb' running the upgrade step from version 943 to version 944.
2025-11-14 14:44:06.52 spid28s Database 'model_msdb' running the upgrade step from version 944 to version 945.
2025-11-14 14:44:06.54 spid28s Database 'model_msdb' running the upgrade step from version 945 to version 946.
2025-11-14 14:44:06.55 spid28s Database 'model_msdb' running the upgrade step from version 946 to version 947.
2025-11-14 14:44:06.56 spid28s Database 'model_msdb' running the upgrade step from version 947 to version 948.
2025-11-14 14:44:06.57 spid28s Database 'model_msdb' running the upgrade step from version 948 to version 949.
2025-11-14 14:44:06.58 spid28s Database 'model_msdb' running the upgrade step from version 949 to version 950.
2025-11-14 14:44:06.59 spid28s Database 'model_msdb' running the upgrade step from version 950 to version 951.
2025-11-14 14:44:06.61 spid28s Database 'model_msdb' running the upgrade step from version 951 to version 952.
2025-11-14 14:44:06.62 spid28s Database 'model_msdb' running the upgrade step from version 952 to version 953.
2025-11-14 14:44:06.64 spid28s Database 'model_msdb' running the upgrade step from version 953 to version 954.
2025-11-14 14:44:06.65 spid28s Database 'model_msdb' running the upgrade step from version 954 to version 955.
2025-11-14 14:44:06.66 spid28s Database 'model_msdb' running the upgrade step from version 955 to version 956.
2025-11-14 14:44:06.69 spid28s Database 'model_msdb' running the upgrade step from version 956 to version 957.
2025-11-14 14:44:06.75 spid28s Resource governor reconfiguration succeeded.
2025-11-14 14:44:06.75 spid40s Attribute synchronization initialized
2025-11-14 14:44:06.75 spid28s SQL Server Audit is starting the audits. This is an informational message. No user action is required.
2025-11-14 14:44:06.76 spid40s Attribute synchronization manager initialized
2025-11-14 14:44:06.76 spid28s SQL Server Audit has started the audits. This is an informational message. No user action is required.
2025-11-14 14:44:06.81 spid28s SQL Trace ID 1 was started by login "sa".
2025-11-14 14:44:06.82 spid28s Server name is '24f32c5d8aea'. This is an informational message only. No user action is required.
2025-11-14 14:44:06.85 spid47s Always On: The availability replica manager is starting. This is an informational message only. No user action is required.
2025-11-14 14:44:06.85 spid30s Clearing tempdb database.
2025-11-14 14:44:06.85 spid49s [5]. Feature Status: PVS: 0. CTR: 0. ConcurrentPFSUpdate: 1. ConcurrentGAMUpdate: 1. ConcurrentSGAMUpdate: 1, CleanupUnderUserTransacti
on: 0. TranLevelPVS: 0
2025-11-14 14:44:06.85 spid48s [4]. Feature Status: PVS: 0. CTR: 0. ConcurrentPFSUpdate: 1. ConcurrentGAMUpdate: 1. ConcurrentSGAMUpdate: 1, CleanupUnderUserTransacti
on: 0. TranLevelPVS: 0
2025-11-14 14:44:06.85 spid47s Always On: The availability replica manager is waiting for the instance of SQL Server to allow client connections. This is an informati
onal message only. No user action is required.
2025-11-14 14:44:06.86 spid49s Starting up database 'ReservasDb'.
2025-11-14 14:44:06.86 spid48s Starting up database 'msdb'.
2025-11-14 14:44:06.87 spid49s RemoveStaleDbEntries: Cleanup of stale DB entries called for database ID: [5]
2025-11-14 14:44:06.87 spid49s RemoveStaleDbEntries: Cleanup of stale DB entries skipped because master db is not memory optimized. DbId: 5.
2025-11-14 14:44:06.93 spid49s Parallel redo is started for database 'ReservasDb' with worker pool size [4].
2025-11-14 14:44:06.97 spid49s 49 transactions rolled forward in database 'ReservasDb' (5:0). This is an informational message only. No user action is required.
2025-11-14 14:44:07.03 spid30s [2]. Feature Status: PVS: 0. CTR: 0. ConcurrentPFSUpdate: 1. ConcurrentGAMUpdate: 1. ConcurrentSGAMUpdate: 1, CleanupUnderUserTransacti
on: 0. TranLevelPVS: 0
2025-11-14 14:44:07.03 spid30s Starting up database 'tempdb'.

2025-11-14 14:44:07.03 spid30s Starting up database 'tempdb'.
2025-11-14 14:44:07.03 spid49s Recovery is writing a checkpoint in database 'msdb' (4). This is an informational message only. No user action is required.
2025-11-14 14:44:07.04 spid48s 0 transactions rolled back in database 'ReservasDb' (5:0). This is an informational message only. No user action is required.
2025-11-14 14:44:07.05 spid48s Parallel redo is shutdown for database 'ReservasDb' with worker pool size [4].
2025-11-14 14:44:07.53 spid30s The tempdb database has 8 data file(s).
2025-11-14 14:44:07.54 spid38s The Service Broker endpoint is in disabled or stopped state.
2025-11-14 14:44:07.54 spid38s The Database Mirroring endpoint is in disabled or stopped state.
2025-11-14 14:44:07.54 spid37s A self-generated certificate was successfully loaded for encryption.
2025-11-14 14:44:07.54 spid37s Server is listening on [ 'any' <ipv6> 1433] accept sockets 1.
2025-11-14 14:44:07.54 spid37s Server is listening on [ 'any' <ipv4> 1433] accept sockets 1.
2025-11-14 14:44:07.55 spid38s Service Broker manager has started.
2025-11-14 14:44:07.57 Server Server is listening on [ ::1 <ipv6> 1434] accept sockets 1.
2025-11-14 14:44:07.58 Server Server is listening on [ 127.0.0.1 <ipv4> 1434] accept sockets 1.
2025-11-14 14:44:07.58 Server Dedicated admin connection support was established for listening locally on port 1434.
2025-11-14 14:44:07.58 spid37s Server is listening on [ ::1 <ipv6> 1431] accept sockets 1.
2025-11-14 14:44:07.58 spid37s Server is listening on [ 127.0.0.1 <ipv4> 1431] accept sockets 1.
2025-11-14 14:44:07.58 spid37s Recovery is complete. This is an informational message only. No user action is required.
2025-11-14 14:44:07.59 spid37s SQL Server is now ready for client connections. This is an informational message; no user action is required.
2025-11-14 14:49:16.06 spid77 Attempting to load library 'xplog70.dll' into memory. This is an informational message only. No user action is required.
2025-11-14 14:49:16.08 spid77 Using 'xplog70.dll' version '2022.160.4215' to execute extended stored procedure 'xp_msver'. This is an informational message only; no
user action is required.
```

Eso es todo el output. POCO DESPUÉS HICE DOWN UP OTRA VEZ, pero sin cambiar nada de código, simplemente eliminando todos los volúmenes menos el sqlserver otra vez.

Since now we are using zookeeper, should I change any code in my ProductorKafka.cs or in the interface that class implements, or in Program.cs or in ReservasController.cs ?

No — you don't need to change any of your C# code in ProductorKafka.cs , its interface, Program.cs , or ReservasController.cs . 

Ahora los volúmenes que tengo son estos: (notablemente más que antes -sqlserver + 2 anónimos-)

Volumes [Give feedback](#)

Q

Search

☐	Name ↑	Created	Size	Actions
☐	157dabcbcb0750eefc12c3360d23f1d8c50e4ffc7002da5fee23328a7783ace	5 seconds ago	0 Bytes	
☐	45ccd3ab8e6da676446f3ebbf6a7d80a702d7594aa794718b2d1148ccacb7a5a	5 seconds ago	0 Bytes	
☐	6eaa2e323d647037c7226e4d83fdc47e364628dcd2b6517fdd9a8ab9e27ee8b5	5 seconds ago	0 Bytes	
☐	c58669f2ecb8dce7d06695ed796296eb8564a66d866557c09484b83f6d9415cb	5 seconds ago	0 Bytes	
☐	fd6ee7d3c8fd9fcfff5454bd0c25e37e4796458781cf704e0b34dcdae4b51b00	5 seconds ago	0 Bytes	
☐	reservas-app_data_sql	2 days ago	156.2 MB	
☐	reservas-app_kafka_data	5 seconds ago	0 Bytes	
☐	reservas-app_zookeeper_data	5 seconds ago	0 Bytes	

El problema que ahora tengo es que el contenedor kafka se para tan pronto lo arranco, el resto de containers incluyendo el zookeeper no se paren, pero el de kafa sí.

A este respecto el viernes pasado (hoy es lunes) seguramente hice cambios en código del docker-compose.yml de cara a solucionarlo pero recuerdo perfectamente que no di con la tecla, llegando a la conclusión de que tendré que probar con kraft en vez de con zookeeper porque de hecho en Logs de Docker Desktop hace referencia a que is expecting kraft o algo así.

Mi docker-compose.yml actual con zookeper container es éste:

NEXT PAGE

```
docker-compose.yml X
C: > Users > iago.cadavidgonzalez > Proyectos > reservas-app > docker-compose.yml
1  version: "3.9"
2
3  services:
4      >Run Service
5      frontend:
6          build:
7              context: ./frontend
8          ports:
9              - "4200:80"
10         depends_on:
11             - backend
12
13     >Run Service
14     backend:
15         build:
16             context: ./backend
17         ports:
18             - "5000:5000"
19         environment:
20             - ASPNETCORE_ENVIRONMENT=Development
21             - ConnectionStrings_DefaultConnection=Server=db;Database=ReservasDb;User Id=sa;Password=docKer!8;TrustServerCertificate=True;
22         depends_on:
23             - db
24
25     >Run Service
26     db:
27         image: mcr.microsoft.com/mssql/server:2022-latest
28         container_name: sqlserver
29         environment:
30             - ACCEPT_EULA=Y
31             - SA_PASSWORD=docKer!8
32         ports:
33             - "1433:1433"
34         volumes:
35             - data_sql:/var/opt/mssql
36
37     >Run Service
38     kafka-broker:
```

Sigue y termina en NEXT PAGE

Run Service

kafka-broker:

```
image: apache/kafka:3.8.0
container_name: kafka-broker
volumes:
  - kafka_data:/var/lib/kafka/data
ports:
  - "9092:9092"
environment:
  KAFKA_BROKER_ID: 1
  KAFKA_ZOOKEEPER_CONNECT: zookeeper:2181
  KAFKA_ADVERTISED_LISTENERS: PLAINTEXT://kafka-broker:9092
  KAFKA_LISTENERS: PLAINTEXT://0.0.0.0:9092
  KAFKA_AUTO_CREATE_TOPICS_ENABLE: "true"
depends_on:
  - zookeeper
```

Run Service

zookeeper:

```
image: zookeeper:3.9.0
container_name: zookeeper
volumes:
  - zookeeper_data:/data
ports:
  - "2181:2181"
environment:
  ALLOW_ANONYMOUS_LOGIN: "yes"
```

volumes:

```
data_sql: # SQL Server persistence
kafka_data: # Kafka persistence
zookeeper_data: # ZooKeeper data
```

Pero ya digo que de esa manera el kafka container se para tol rato dando este error (la línea resaltada fue sin querer):

NEXT PAGE

```
====> User
uid=1000(appuser) gid=1000(appuser) groups=1000(appuser)
====> Setting default values of environment variables if not already set.
CLUSTER_ID not set. Setting it to default value: "5L6g3nShT-eMCtK--X86sw"
====> Configuring ...
====> Launching ...
====> Using provided cluster id 5L6g3nShT-eMCtK--X86sw ...
The kafka configuration file appears to be for a legacy cluster. Formatting is only supported for clusters in KRaft mode.
====> User
uid=1000(appuser) gid=1000(appuser) groups=1000(appuser)
====> Setting default values of environment variables if not already set.
CLUSTER_ID not set. Setting it to default value: "5L6g3nShT-eMCtK--X86sw"
====> Configuring ...
====> Launching ...
====> Using provided cluster id 5L6g3nShT-eMCtK--X86sw ...
The kafka configuration file appears to be for a legacy cluster. Formatting is only supported for clusters in KRaft mode.
```

So perhaps I should use KRaft instead of Zookeeper, please teach me how.

You're correct — **Kafka 3.8 no longer supports running with ZooKeeper** by default.

The logs clearly say:

"The kafka configuration file appears to be for a legacy cluster. Formatting is only supported for clusters in KRaft mode."

So your container is trying to start Kafka in **KRaft mode** but you're providing **ZooKeeper configs**, which makes it crash.

A pesar de

que había sido el propio chatgpt el que me había recomendado usar zookeeper.

"How to fix it: use Kafka in KRaft mode (no ZooKeeper):

Starting with Kafka 3.5+, the official Kafka images support only KRaft unless you manually switch back to legacy mode.

So let's rewrite docker-compose.yml to use a **single-node KRaft controller + broker**.

Replace your 'kafka-broker' and 'zookeeper' services with the following" (Remove the Zookeeper service entirely because KRaft replaces it):

NEXT PAGE

🔥 docker-compose.yml X

C: > Users > iago.cadavidgonzalez > Proyectos > reservas-app > 🔥 docker-compose.yml

```
1  version: "3.9"
2
3  >Run All Services
4  services:
5    >Run Service
6    frontend:
7      build:
8        context: ./frontend
9      ports:
10       - "4200:80"
11     depends_on:
12       - backend
13
14   >Run Service
15   backend:
16     build:
17       context: ./backend
18     ports:
19       - "5000:5000"
20     environment:
21       - ASPNETCORE_ENVIRONMENT=Development
22       - ConnectionStrings_DefaultConnection=Server=db;Database=ReservasDb;User Id=sa;Password=docKer!8;TrustServerCertificate=True;
23     depends_on:
24       - db
```

>Run Service

```
23 db:
24   image: mcr.microsoft.com/mssql/server:2022-latest
25   container_name: sqlserver
26   environment:
27     - ACCEPT_EULA=Y
28     - SA_PASSWORD=docKer!8
29   ports:
30     - "1433:1433"
31   volumes:
32     - data_sql:/var/opt/mssql
```


>Run Service

```
33 kafka:
34   image: apache/kafka:3.8.0
35   container_name: kafka
36   ports:
37     - "9092:9092"
38   environment:
39     # Basic KRaft settings
40     KAFKA_NODE_ID: 1
41     KAFKA_PROCESS_ROLES: broker,controller
42     KAFKA_CONTROLLER_QUORUM_VOTERS: 1@kafka:9093
43     # Listeners
44     KAFKA_LISTENERS: PLAINTEXT://0.0.0.0:9092,CONTROLLER://0.0.0.0:9093
45     KAFKA_ADVERTISED_LISTENERS: PLAINTEXT://kafka:9092
46     KAFKA_CONTROLLER_LISTENER_NAMES: CONTROLLER
47     KAFKA_INTER_BROKER_LISTENER_NAME: PLAINTEXT
48     # Log directories for KRaft metadata
```




```
48 # Log directories for KRaft metadata
49 KAFKA_LOG_DIRS: /var/lib/kafka/data
50 # Auto topic creation
51 KAFKA_AUTO_CREATE_TOPICS_ENABLE: "true"
52 # Cluster ID (must be explicitly provided for KRaft), a 16-32 character alphanumeric string, me lo invento yo.
53 CLUSTER_ID: "N1V3PRBMYxyMYHRMFN3W1"
54 volumes:
55   - kafka_data:/var/lib/kafka/data
56
57 volumes:
58   data_sql: # SQL Server persistence
59   kafka_data: # Kafka persistence
```

Tras escribir el nuevo docker-compose.yml, corro docker-compose down desde carpeta padre del .yml pero me fijo en que a pesar de hacerlo me siguen quedando en DD's Containers section los containers kafka-broker y zookeeper, los elimino "a mano":

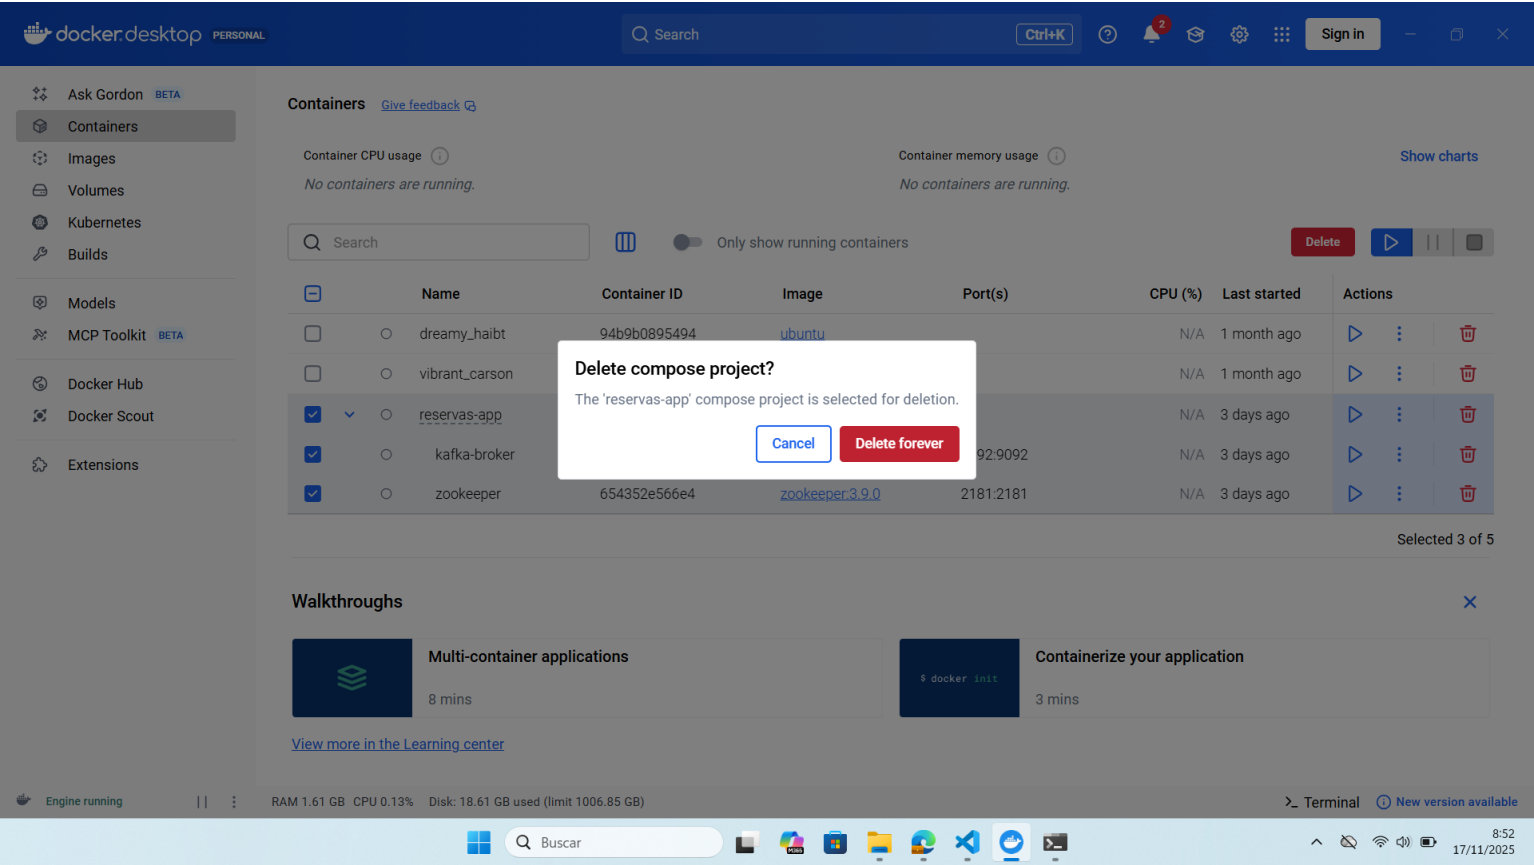

El que el docker-compose down no los eliminase puede deberse a que "they were not created by the same docker-compose.yml, Docker only removes containers that belong to the compose project in the current dir".

Elimino todos los volúmenes excepto el de sql :

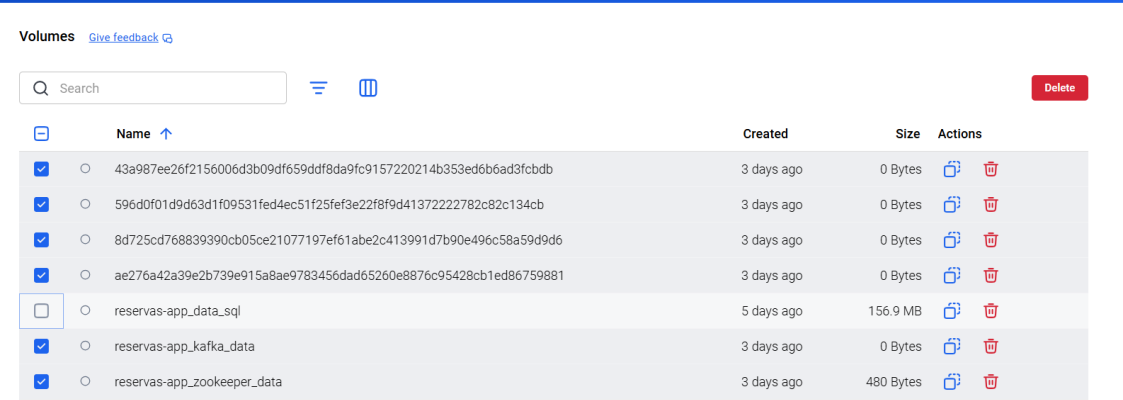

Con KRaft i.e. sin Zookeeper corre sin parar el kafka container

Containers [Give feedback](#)

Container CPU usage ⓘ
6.71% / 800% (8 CPUs available)

Container memory usage ⓘ
1.39GB / 15.11GB

Show charts

Only show running containers

☐	Name	Container ID	Image	Port(s)	CPU (%)	Last started	Actions
☐	▼ ● reservas-app	-	-	-	3.92%	2 minutes ago	
☐	● sqlserver	a673bdada8cd	mssql/server:2022-latest	1433:1433	1.56%	2 minutes ago	
☐	● kafka	e90a7d4165d1	apache/kafka:3.8.0	9092:9092	2.35%	2 minutes ago	
☐	● backend-1	51c27f2792f5	reservas-app-backend	5000:5000	0.01%	2 minutes ago	
☐	● frontend-1	249a14ed376e	reservas-app-frontend	4200:80	0%	2 minutes ago	

Showing 7 items

Volumes [Give feedback](#)

Create

☐	Name ↑	Created	Size	Actions
☐	● 1bf49358842d6bbf5a43a8b643386a187debd6b76ffded68b4a82e99ae345c0	3 minutes ago	0 Bytes	
☐	● eb89820f7c8d8da3fe0d0ceefbf91d51564d774bcd79a57b64eeb184e2e74ef8	3 minutes ago	0 Bytes	
☐	● reservas-app_data_sql	5 days ago	156.9 MB	
☐	● reservas-app_kafka_data	3 minutes ago	0 Bytes	

Las dos capturas superiores las saqué justo después de ejecutar **docker-compose up --build** en folder padre del docker-compose.yml. Este up build no terminó como suele terminar (su output me refiero) es decir no termino con líneas relativas al sqlserver sino con líneas relativas a kafka; de hecho el output lo que más tenía era líneas sobre kafka.

Lo muestro resumido (todo el principio, 2nda mitad de output simplemente lo comento) a continuación:

```
C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker-compose down
time="2025-11-17T08:49:45+01:00" level=warning msg="C:\\Users\\iago.cadavidgonzalez\\Proyectos\\reservas-app\\docker-compose.yml: the attribute 'version' is obsolete, it
will be ignored, please remove it to avoid potential confusion"
[+] Running 4/4
✔Container reservas-app-frontend-1   Removed           0.1s
✔Container reservas-app-backend-1   Removed           0.1s
✔Container sqlserver                 Removed           0.0s
✔Network reservas-app-default        Removed           0.3s

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker-compose up --build
time="2025-11-17T08:56:50+01:00" level=warning msg="C:\\Users\\iago.cadavidgonzalez\\Proyectos\\reservas-app\\docker-compose.yml: the attribute 'version' is obsolete, it
will be ignored, please remove it to avoid potential confusion"
[+] Building 7.8s (35/35) FINISHED
=> [internal] load local bake definitions                                0.0s
=> => reading from stdin 1.1kB                                          0.0s
=> [backend internal] load build definition from Dockerfile             0.0s
=> => transferring dockerfile: 760B                                     0.0s
=> [frontend internal] load build definition from Dockerfile            0.0s
=> => transferring dockerfile: 4.60kB                                    0.0s
=> [backend internal] load metadata for mcr.microsoft.com/dotnet/aspnet:9.0 0.5s
=> [backend internal] load metadata for mcr.microsoft.com/dotnet/sdk:9.0 0.5s
=> [frontend internal] load metadata for docker.io/library/nginx:alpine 2.2s
=> [frontend internal] load metadata for docker.io/library/node:22      2.3s
=> [backend internal] load .dockerignore                                0.0s
=> => transferring context: 383B                                         0.0s
=> [backend build 1/7] FROM mcr.microsoft.com/dotnet/sdk:9.0@sha256:1ea5b7f2154cbd1e20a336cb56957dba30a7ce30ef5c1c032a37c42801594713 0.0s
=> => resolve mcr.microsoft.com/dotnet/sdk:9.0@sha256:1ea5b7f2154cbd1e20a336cb56957dba30a7ce30ef5c1c032a37c42801594713 0.0s
=> [backend internal] load build context                                0.0s
=> => transferring context: 2.01kB                                       0.0s
=> [backend base 1/2] FROM mcr.microsoft.com/dotnet/aspnet:9.0@sha256:1b8d328201297fd5ca40dc1a0788aa9e813f58279c3410fe82dce6744c36d03f 0.0s
=> => resolve mcr.microsoft.com/dotnet/aspnet:9.0@sha256:1b8d328201297fd5ca40dc1a0788aa9e813f58279c3410fe82dce6744c36d03f 0.0s
=> CACHED [backend base 2/2] WORKDIR /app                               0.0s
=> CACHED [backend final 1/2] WORKDIR /app                               0.0s
=> CACHED [backend build 2/7] WORKDIR /src                               0.0s
=> CACHED [backend build 3/7] COPY [ReservasApi/ReservasApi.csproj, ReservasApi/] 0.0s
=> CACHED [backend build 4/7] RUN dotnet restore "ReservasApi/ReservasApi.csproj" 0.0s
=> CACHED [backend build 5/7] COPY . .                                  0.0s
=> CACHED [backend build 6/7] WORKDIR /src/ReservasApi                  0.0s
=> CACHED [backend build 7/7] RUN dotnet build "ReservasApi.csproj" -c Release -o /app/build 0.0s
=> CACHED [backend publish 1/1] RUN dotnet publish "ReservasApi.csproj" -c Release -o /app/publish /p:UseAppHost=false 0.0s
=> CACHED [backend final 2/2] COPY --from=publish /app/publish .        0.0s
=> [backend] exporting to image                                          0.1s
=> => exporting layers                                                  0.0s
=> => exporting manifest sha256:a590f094668cd495c2af9cfccdd2a390e83da24f0d024793d15c30711abb72431 0.0s
```

```
=> => exporting manifest sha256:a590f094668cd495c2af9cfccdd2a390e83da24f0d024793d15c30711abb72431
=> => exporting config sha256:d9d4966cc15f59e052c88dcd54de3ba8f7514df2b84a6a47db7cb284237bdc
=> => exporting attestation manifest sha256:b8c86f8b80a4da6e45d4fd03108eb77bfc2e03dalf1cabf91d15c66d9f534bc1
=> => exporting manifest list sha256:6f7cd328f64221987aceefdd72ec5203d186513856c31285b21b2786f9eb6202
=> => naming to docker.io/library/reservas-app-backend:latest
=> => unpacking to docker.io/library/reservas-app-backend:latest
=> [backend] resolving provenance for metadata file
=> [frontend internal] load .dockerignore
=> => transferring context: 2B
=> [frontend build 1/6] FROM docker.io/library/node:22@sha256:dcf06103a9d4087e3244a51697adbbb85331dcb7161dbe994ca1cd07dd32e2a5
=> => resolve docker.io/library/node:22@sha256:dcf06103a9d4087e3244a51697adbbb85331dcb7161dbe994ca1cd07dd32e2a5
=> [frontend internal] load build context
=> => transferring context: 1.65MB
=> [frontend stage-1 1/2] FROM docker.io/library/nginx:alpine@sha256:b3c656d55d7ad751196f21b7fd2e8d4da9cb430e32f646adc92441b72f82b14
=> => resolve docker.io/library/nginx:alpine@sha256:b3c656d55d7ad751196f21b7fd2e8d4da9cb430e32f646adc92441b72f82b14
=> CACHED [frontend build 2/6] WORKDIR /app
=> CACHED [frontend build 3/6] COPY package*.json ./
=> CACHED [frontend build 4/6] RUN npm install
=> CACHED [frontend build 5/6] COPY . .
=> CACHED [frontend build 6/6] RUN npm run build -- --configuration production
=> CACHED [frontend stage-1 2/2] COPY --from=build /app/dist/reservas-frontend /usr/share/nginx/html
=> [frontend] exporting to image
=> => exporting layers
=> => exporting manifest sha256:268f4eb6cd70ed0d737ba50371706c64ca260d64eed3c24ff240eef1c1fa9296
=> => exporting config sha256:0b3dcf948bfb563a78608e5f5efb95022edc1ee73f64bfa352e1fffb53fc19bc5
=> => exporting attestation manifest sha256:518489e70f38638eb09d4a3854c51e2dc99ee7e0c9cdc22755b4404470a717ce
=> => exporting manifest list sha256:95e8b775cf844764ad60belef07dd30b37e17a6a5f94de0748b7106342c3b636
=> => naming to docker.io/library/reservas-app-frontend:latest
=> => unpacking to docker.io/library/reservas-app-frontend:latest
=> [frontend] resolving provenance for metadata file
[+] Running 8/8
✔reservas-app-backend           Built
✔reservas-app-frontend          Built
✔Network reservas-app_default   Created
✔Volume reservas-app_kafka_data Created
✔Container kafka                 Created
✔Container sqlserver             Created
✔Container reservas-app-backend-1 Created
✔Container reservas-app-frontend-1 Created
Attaching to kafka, backend-1, frontend-1, sqlserver
sqlserver | SQL Server 2022 will run as non-root by default.
kafka     | ==> User
```



```

kafka      | ==> User

kafka      | uid=1000(appuser) gid=1000(appuser) groups=1000(appuser)
kafka      | ==> Setting default values of environment variables if not already set.

sqlserver  | Your master database file is owned by mssql.

kafka      | ==> Configuring ...
sqlserver  | To learn more visit https://go.microsoft.com/fwlink/?linkid=2099216.

kafka      | Running in KRaft mode...
kafka      | ==> Launching ...
kafka      | ==> Using provided cluster id NLV3PRBMxyMYHRMFN3Wl ...
frontend-1 | /docker-entrypoint.sh: /docker-entrypoint.d/ is not empty, will attempt to perform configuration
frontend-1 | /docker-entrypoint.sh: Looking for shell scripts in /docker-entrypoint.d/
frontend-1 | /docker-entrypoint.sh: Launching /docker-entrypoint.d/10-listen-on-ipv6-by-default.sh
frontend-1 | 10-listen-on-ipv6-by-default.sh: info: Getting the checksum of /etc/nginx/conf.d/default.conf
frontend-1 | 10-listen-on-ipv6-by-default.sh: info: Enabled listen on IPv6 in /etc/nginx/conf.d/default.conf
frontend-1 | /docker-entrypoint.sh: Sourcing /docker-entrypoint.d/15-local-resolvers.envsh
frontend-1 | /docker-entrypoint.sh: Launching /docker-entrypoint.d/20-envsubst-on-templates.sh
frontend-1 | /docker-entrypoint.sh: Launching /docker-entrypoint.d/30-tune-worker-processes.sh
frontend-1 | /docker-entrypoint.sh: Configuration complete; ready for start up
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: using the "epoll" event method
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: nginx/1.29.3
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: built by gcc 14.2.0 (Alpine 14.2.0)
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: OS: Linux 6.6.87.2-microsoft-standard-WSL2
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: getrlimit(RLIMIT_NOFILE): 1048576:1048576
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: start worker processes
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: start worker process 30
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: start worker process 31
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: start worker process 32
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: start worker process 33
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: start worker process 34
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: start worker process 35
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: start worker process 36
frontend-1 | 2025/11/17 07:57:03 [notice] 1#1: start worker process 37
backend-1  | warn: Microsoft.AspNetCore.Hosting.Diagnostics[15]
backend-1  |     Overriding HTTP_PORTS '8080' and HTTPS_PORTS ''. Binding to values defined by URLs instead 'http://+:5000'.
backend-1  | info: Microsoft.Hosting.Lifetime[14]

```

NEXT PAGE

```

backend-1 | warn: Microsoft.AspNetCore.Hosting.Diagnostics[15]
backend-1 | Overriding HTTP_PORTS '8080' and HTTPS_PORTS ''. Binding to values defined by URLs instead 'http://+:5000'.
backend-1 | info: Microsoft.Hosting.Lifetime[14]
backend-1 | Now listening on: http://[::]:5000
backend-1 | info: Microsoft.Hosting.Lifetime[0]
backend-1 | Application started. Press Ctrl+C to shut down.
backend-1 | info: Microsoft.Hosting.Lifetime[0]
backend-1 | Hosting environment: Development
backend-1 | info: Microsoft.Hosting.Lifetime[0]
backend-1 | Content root path: /app
kafka     | [2025-11-17 07:57:05,885] INFO Registered kafka:type=kafka.Log4jController MBean (kafka.utils.Log4jControllerRegistration$)
kafka     | [2025-11-17 07:57:05,942] INFO Setting -D jdk.tls.rejectClientInitiatedRenegotiation=true to disable client-initiated TLS renegotiation (org.apache.zookeepe
r.common.X509Util)
kafka     | [2025-11-17 07:57:05,946] INFO RemoteLogManagerConfig values:
kafka     |   log.local.retention.bytes = -2
kafka     |   log.local.retention.ms = -2
kafka     |   remote.fetch.max.wait.ms = 500
kafka     |   remote.log.index.file.cache.total.size.bytes = 1073741824
kafka     |   remote.log.manager.copier.thread.pool.size = 10
kafka     |   remote.log.manager.copy.max.bytes.per.second = 9223372036854775807
kafka     |   remote.log.manager.copy.quota.window.num = 11
kafka     |   remote.log.manager.copy.quota.window.size.seconds = 1
kafka     |   remote.log.manager.expiration.thread.pool.size = 10
kafka     |   remote.log.manager.fetch.max.bytes.per.second = 9223372036854775807
kafka     |   remote.log.manager.fetch.quota.window.num = 11
kafka     |   remote.log.manager.fetch.quota.window.size.seconds = 1
kafka     |   remote.log.manager.task.interval.ms = 30000
kafka     |   remote.log.manager.task.retry.backoff.max.ms = 30000
kafka     |   remote.log.manager.task.retry.backoff.ms = 500
kafka     |   remote.log.manager.task.retry.jitter = 0.2
kafka     |   remote.log.manager.thread.pool.size = 10
kafka     |   remote.log.metadata.custom.metadata.max.bytes = 128
kafka     |   remote.log.metadata.manager.class.name = org.apache.kafka.server.log.remote.metadata.storage.TopicBasedRemoteLogMetadataManager
kafka     |   remote.log.metadata.manager.class.path = null
kafka     |   remote.log.metadata.manager.impl.prefix = rlm.config.
kafka     |   remote.log.metadata.manager.listener.name = null
kafka     |   remote.log.reader.max.pending.tasks = 100
kafka     |   remote.log.reader.threads = 10
kafka     |   remote.log.storage.manager.class.name = null
kafka     |   remote.log.storage.manager.class.path = null
kafka     |   remote.log.storage.manager.impl.prefix = rsm.config.
kafka     |   remote.log.storage.system.enable = false
kafka     | (org.apache.kafka.server.log.remote.storage.RemoteLogManagerConfig)
kafka     | [2025-11-17 07:57:06,053] INFO RemoteLogManagerConfig values:
kafka     |   log.local.retention.bytes = -2

```

Y

Sigue con líneas de kafka, luego intercala líneas de kafka con las del sqlserver, y finalmente termina con otra vez mazó líneas de kafka.

Ejecuto ahora un comando that **lists all topics** para ver si actualmente tengo ya alguno creado o no:

```

Administrador: Windows PowerShell
PS C:\WINDOWS\system32> docker exec -it kafka /opt/kafka/bin/kafka-topics.sh --list --bootstrap-server kafka:9092

PS C:\WINDOWS\system32>

```

I got empty output meaning NO topics exist yet.

“Because you’re using the official Apache Kafka 3.8 image, the Kafka CLI tools are inside the (kafka) container under: **/opt/kafka/bin**”

docker exec tells Docker to **execute a command inside a running container**. Syntax:

docker exec [options] <container> <command>

En mi caso options es **-it** y ‘**kafka**’ es the name of the container where you want the command to run.

-it is two flags combined to **interact with a container command**, like CLI tools or a shell:

-i es **interactive** mode: keeps **STDIN** open so **the command can receive input if needed**.

-t es **allocate a pseudo-TTY**: gives you a terminal-like interface

`/opt/kafka/bin/kafka-topics.sh` is the **Kafka CLI script for managing topics**, it's inside the container at `/opt/kafka/bin` (the [Kafka CLI tools](#) are inside the (kafka) container under: `/opt/kafka/bin`), **kafka-topics.sh** can create, delete, describe or **list Kafka topics**.

--list is an argument passed to `kafka-topics.sh` telling it to **list all topics** in the Kafka *cluster*.

--bootstrap-server kafka:9092 tells the Kafka CLI **how to connect to the Kafka broker**:

'kafka' is the **hostname of the broker** as seen from inside the container.

9092 is the **port where Kafka listens for client connections** (the PLAINTEXT listener you configured (en docker-compose.yml)).

Bootstrap-server is necessary because **Kafka is a distributed system**: the CLI uses this **broker as a starting point to discover the cluster**.

✅ Putting it all together

bash

 Copy code

```
docker exec -it kafka /opt/kafka/bin/kafka-topics.sh --list --bootstrap-server kafka:9092
```

Means:

1. Go inside the running `kafka` container (`docker exec -it kafka`)
2. Run the Kafka topics CLI (`/opt/kafka/bin/kafka-topics.sh`)
3. Ask it to **list all topics** (`--list`)
4. Connect to the Kafka broker at `kafka:9092` (`--bootstrap-server kafka:9092`)

The output will be all the topics currently in that Kafka cluster. If there's nothing yet, the output will be empty (which is normal for a fresh KRaft Kafka cluster).



NEXT PAGE

Sure! Here's a reminder of the full command to start a Kafka consumer and exactly where to run it.

✓ Kafka consumer command

Assuming your container is named `kafka` :

powershell

Copy code

```
docker exec -it kafka /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server kafka:9092 --topic test-topic --from-beginning
```

Breakdown:

- `docker exec -it kafka` → run a command interactively inside the Kafka container
- `/opt/kafka/bin/kafka-console-consumer.sh` → the Kafka CLI script for consuming messages
- `--bootstrap-server kafka:9092` → Kafka broker to connect to
- `--topic test-topic` → the topic to consume from ↓
- `--from-beginning` → consume messages starting from the very beginning of the topic

Final del comando es **--topic test-topic --from-beginning**

--topic test-topic is the topic to consume from.

```
Administrator: Windows PowerShell
PS C:\WINDOWS\system32> docker exec -it kafka /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server kafka:9092 --topic test-topic --from-beginning
[2025-11-17 08:50:50,782] WARN [Consumer clientId=console-consumer, groupId=console-consumer-26436] Error while fetching metadata with correlation id 2 : {test-topic=UNKNOWN_TOPIC_OR_PARTITION} (org.apache.kafka.clients.NetworkClient)
```

Ahí no se aparecía pero el cursor está parpadeando en la terminal.

But despite the warning I think the kafka consumer is running, since the cursor is blinking on the terminal, do you agree or not ?

Yes — I agree. ✓

Even though you see the warning:

nginx

Copy code

UNKNOWN_TOPIC_OR_PARTITION

the Kafka consumer process is **still running**.

- The blinking cursor means it's waiting for messages.
- It hasn't crashed; it's just waiting for the topic to exist and/or receive messages.
- As soon as the topic `test-topic` is created (or if any messages are produced to it), the consumer will start receiving them. ↓

“If your backend exposes a Swagger POST endpoint *that produces messages to Kafka*, you can use it ([the endpoint](#)) to test your running consumer ([ver si publica json messages upon Swagger posting](#)) **instead of the Kafka CLI producer**”

However, “just because you have a Swagger POST endpoint does not automatically mean *it produces messages to Kafka*”, so “we need to **check whether your backend actually publishes to Kafka when that endpoint is called.**”

To **verify if a Swagger POST endpoint produces Kafka messages**, en primer lugar Check the backend code i.e. look in **your backend project** for the **controller method corresponding to the Swagger POST endpoint**.

Le paso a chagpt mi código del httpost de mi ReservasController y le pregunto si ve que el endpoint produce mensajes to Kafka, me resopnde:

Yes — from what you pasted, your endpoint **does produce messages to Kafka**. ✅

The key line is:

csharp

 Copy code

```
await _productorKafka.PublicarReservaCreadaAsync(nuevareserva);
```

Here's why this confirms it:

1. `_productorKafka` is clearly a **Kafka producer service** (or at least some service that publishes Kafka messages).
2. `PublicarReservaCreadaAsync(nuevareserva)` is called **after the database save**, so every time a new `Reserva` is created, this method is invoked.
3. Because it's `await` ed, the HTTP request waits until the Kafka message is successfully sent before returning the 201 Created response.
4. The comment in your code even says:

csharp

 Copy code

```
// Publish Kafka event (un valid placement de esta línea de código es después del "map to DTO" co
```

which explicitly describes it as publishing a Kafka event.

✅ Conclusion

- Your `POST /api/reservas` endpoint produces Kafka messages.
- Every time you create a new reservation, a message is sent to Kafka.
- You can now safely test your Kafka consumer by calling this Swagger POST endpoint — any new reservation will appear as a message in your Kafka topic.

Y si no me confundo...

... lo que he de ver es que upon Swagger POSTing aparece un json message en terminal del kafka consumer.

Upon Swagger POSTing should I see new output in the kafka consumer terminal or not ?

Yes — you should see new output in the Kafka consumer terminal if everything is set up correctly. 

Here's why:

1. Your POST endpoint calls:

cs

sharp

Copy code

```
await _productorKafka.PublicarReservaCreadaAsync(nuevareserva);
```

This publishes a message to Kafka for every new reservation.

2. Your Kafka consumer is already running and subscribed to the same topic where `_productorKafka` sends messages (e.g., `test-topic`).

3. Kafka consumers receive messages as soon as they are produced.

En ambos

(kafka consumer code –en windows powershell- y kakfa producer code –en VS IDE-) puse reservas.creadas como nombre del topic:

```
PS C:\WINDOWS\system32> docker exec -it kafka /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server kafka:9092 --topic reservas.creadas --from-beginning
[2025-11-17 09:17:34,495] WARN [Consumer clientId=console-consumer, groupId=console-consumer-20266] Error while fetching metadata with correlation id 2 : {reservas.creadas=UNKNOWN_TOPIC_OR_PARTITION} (org.apache.kafka.clients.NetworkClient)
```

ProductorKafka.cs

ProductorKafka.cs

IServicioProductorKafka.cs

Program.cs

ReservasApi.Eventos.ProductorKafka

```
using Confluent.Kafka; // me lo reconoce/autocompleta post-hacer dotnet add package C
using System.Text.Json;
using ReservasApi.Modelos; // para poder poner ": IServicioProductorKafa" sin error.

namespace ReservasApi.Eventos // o ReservasApi.Services o ReservasApi.Messages
{
    2 references
    public class ProductorKafka : IServicioProductorKafka // KafkaProducerService.cs
    { // clase ProductorKafka debe implementar el miembro de la interfaz, dicho miemb
      // Le defino dos propiedades privadas de solo lectura a esta clase:
      private readonly IProducer<Null, string> _productor;
      private readonly string _topic = "reservas.creadas";
```

NEXT PAGE


Is my kafka produce service interface correctly written given my kafka producer code I already provided ?

```
public interface IServicioProductorKafka // IKafkaProducerService
{
    Task PublicarReservaCreadaAsync(Reserva reserva); // en la
    implementación precedo esto de public async
}
```

Yes — your interface is **correctly written** for the producer code you provided. ✅

Pues voy probar el swagger post api reservas a ver si aparece nuevo output en terminal de kafka consumer.


Pero ojo que ya vuelvo a tener rebelde el id de reserva:

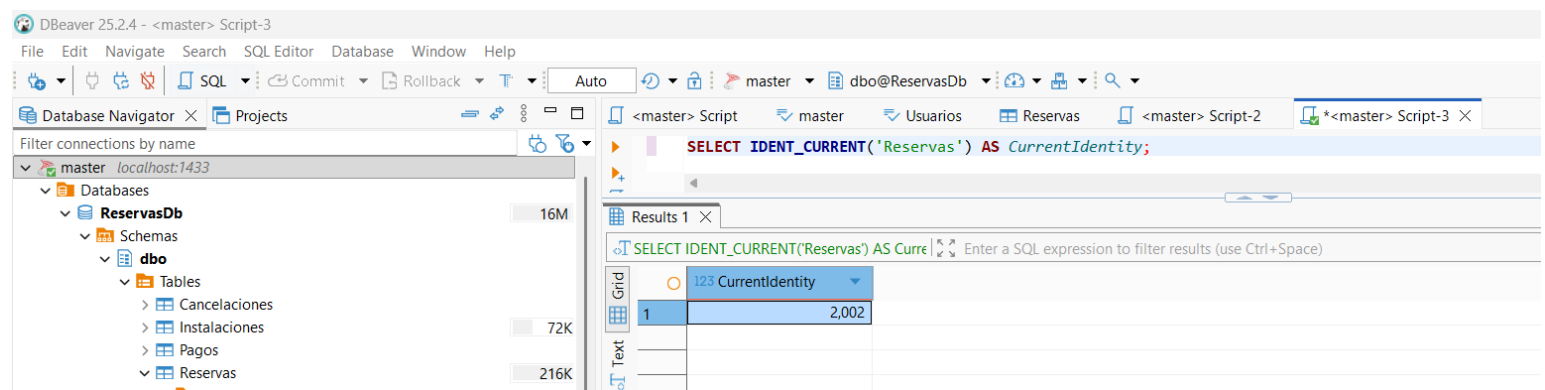

The screenshot shows the DBeaver 25.2.4 interface. The left sidebar displays the database structure for 'master' on 'localhost:1433', including 'ReservasDb' and its 'dbo' schema with tables like 'Cancelaciones', 'Instalaciones', 'Pagos', and 'Reservas'. The main window shows a SQL script with the query: `SELECT IDENT_CURRENT('Reservas') AS CurrentIdentity;`. The results pane shows a single row with the value 2,002 for 'CurrentIdentity'.

CurrentIdentity
2,002

Lo pongo a 4 (porque ya tengo 4 reservas y quiero que la siguiente sea la 5) así:

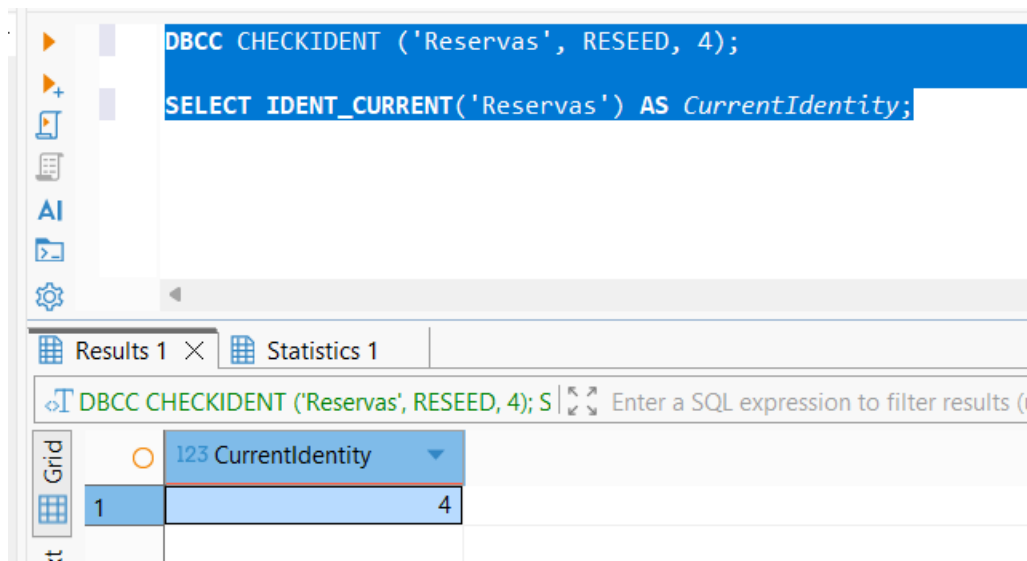

Recordemos que primero Set as default

en ReservasDb (porque me suele salir su hermana 'master' en negrita, entonces con set as default ReservasDb pongo en negrita ReservasDb) y SQL editor->new sql script desde master connection padre de ReservasDb.

En mi productorkafka.cs cambio kafka-broker a kafka porque así lo tengo en docker-compose.yml.

```
var config = new ProducerConfig  
{  
    BootstrapServers = "kafka:9092" // mi broker address,  
}; // cambio localhost por kafka-broker
```

Según chatgpt, para que el cambio surta efecto

llega con hacer lo siguiente (habiendo primero guardado el file modificado): "rebuild backend *Docker image*"

```
C:\Windows\System32\cmd.e X + v
Microsoft Windows [Versión 10.0.26200.7171]
(c) Microsoft Corporation. Todos los derechos reservados.

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker-compose build backend
time="2025-11-17T10:46:32+01:00" level=warning msg="C:\\Users\\iago.cadavidgonzalez\\Proyectos\\reservas-app\\docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion"
[+] Building 14.0s (20/20) FINISHED
=> [internal] load local bake definitions 0.0s
=> => reading from stdin 598B 0.0s
=> [internal] load build definition from Dockerfile 0.0s
=> => transferring dockerfile: 760B 0.0s
=> [internal] load metadata for mcr.microsoft.com/dotnet/sdk:9.0 0.6s
=> [internal] load metadata for mcr.microsoft.com/dotnet/aspnet:9.0 0.6s
=> [internal] load .dockerignore 0.0s
=> => transferring context: 383B 0.0s
=> [build 1/7] FROM mcr.microsoft.com/dotnet/sdk:9.0@sha256:1ea5b7f2154cbd1e20a336cb56957dba30a7ce30ef5c1c032a37c4280159471 0.0s
=> => resolve mcr.microsoft.com/dotnet/sdk:9.0@sha256:1ea5b7f2154cbd1e20a336cb56957dba30a7ce30ef5c1c032a37c42801594713 0.0s
=> [base 1/2] FROM mcr.microsoft.com/dotnet/aspnet:9.0@sha256:1b8d328201297fd5ca40dc1a0788aa9e813f58279c3410fe82dce6744c36d 0.0s
=> => resolve mcr.microsoft.com/dotnet/aspnet:9.0@sha256:1b8d328201297fd5ca40dc1a0788aa9e813f58279c3410fe82dce6744c36d03f 0.0s
=> [internal] load build context 0.0s
=> => transferring context: 5.14kB 0.0s
=> CACHED [build 2/7] WORKDIR /src 0.0s
=> CACHED [build 3/7] COPY [ReservasApi/ReservasApi.csproj, ReservasApi/] 0.0s
=> CACHED [build 4/7] RUN dotnet restore "ReservasApi/ReservasApi.csproj" 0.0s
=> [build 5/7] COPY . 0.1s
=> [build 6/7] WORKDIR /src/ReservasApi 0.0s
=> [build 7/7] RUN dotnet build "ReservasApi.csproj" -c Release -o /app/build 6.6s
=> [publish 1/1] RUN dotnet publish "ReservasApi.csproj" -c Release -o /app/publish /p:UseAppHost=false 2.3s
=> CACHED [base 2/2] WORKDIR /app 0.0s
=> CACHED [final 1/2] WORKDIR /app 0.0s
=> [final 2/2] COPY --from=publish /app/publish . 0.2s
=> exporting to image 3.6s
=> => exporting layers 3.0s
=> => exporting manifest sha256:6f9c16c437f7aa887e1314ebb0d9c5a02615c820b38296ffdc8214ea55fd2c11 0.0s
=> => exporting config sha256:d3b7b83cbd8cdf066d4a588eb75e16a4f2a0e0b9fffedb6433bacdfae0bfc7e1 0.0s
=> => exporting attestation manifest sha256:758cbfa87b1c32c54343a5094bd0e7de9a1bed284b245538efe55906cbe04eeb 0.0s
=> => exporting manifest list sha256:1bf1f089075f78691312b3004ddf70a24eda094e5f1c3c7338edd241ae8fe89a 0.0s
=> => naming to docker.io/library/reservas-app-backend:latest 0.0s
=> => unpacking to docker.io/library/reservas-app-backend:latest 0.4s
=> resolving provenance for metadata file 0.0s
[+] Building 1/1
✔reservas-app-backend Built 0.0s
```

Seguido de “restart your backend container: after rebuilding, start everything fresh”

```
C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker-compose up -d
time="2025-11-17T10:47:16+01:00" level=warning msg="C:\\Users\\iago.cadavidgonzalez\\Proyectos\\reservas-app\\docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please remove it to avoid potential confusion"
[+] Running 4/4
✔Container sqlserver Running 0.0s
✔Container kafka Running 0.0s
✔Container reservas-app-backend-1 Started 1.5s
✔Container reservas-app-frontend-1 Started 0.3s

C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>
```

-d to run in detached mode, no watching logs in real time (you’d omit -d to watch them).

Ambos comandos ejecutados en cmd desde la carpeta padre de docker-compose.yml.

Ahora el consumer no me da el aviso que daba antes, ahora solo muestra el blinking cursor (el cual en la captura no se aprecia) :

```
Administrador: Windows PowerShell
PS C:\WINDOWS\system32> docker exec -it kafka /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server kafka:9092 --topic reservas.creadas --from-beginning
```

Ahora el post api reservas en swagger enseguida cargó este resultado (me esperaba id 5 en vez de 6, pero bueno):

Code	Details
201 <i>Undocumented</i>	Response body <pre>{ "reservaId": 6, "fechaHora": "2025-12-17T09:45:00.772Z", "numeroAsistentes": 5, "dni": "98761234Z", "instalacionId": 1, "usuario": { "dni": "98761234Z", "nombreCompleto": "Laura Gomez" }, "instalacion": { "instalacionId": 1, "localizacion": "Avenida de la Fuerza, Barcelona" } }</pre>

Pero sigue sin aparecer nada en terminal del consumidor kafka:

```
Administrador: Windows PowerShell
PS C:\WINDOWS\system32> docker exec -it kafka /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server kafka:9092 --topic reservas.creadas --from-beginning
```

El topic ya existe (de hecho hay 2):

```
PS C:\WINDOWS\system32> docker exec -it kafka /opt/kafka/bin/kafka-topics.sh --list --bootstrap-server kafka:9092
reservas.creadas
test-topic
PS C:\WINDOWS\system32>
```


Hablando con chatgpt sobre esta situación y pasándole todo mi docker-compose.yml por si hay algún fallo (y ya habiéndole pasado mi productor kafka cs file y su interfaz), llega a la conclusión de recomendarme esto:

Run the console consumer from another container on the same network:

Powershell:

```
docker run --rm --network x -it apache/kafka:3.8.0 /opt/kafka/bin/kafka-console-consumer.sh  
--bootstrap-server kafka:9092 --topic reservas.creadas --from-beginning
```

Replace **x** with **your actual Compose network**. Para averiguar the name of my Docker Compose network corro el comando **docker network ls** en la windows powershell, which **lists all Docker networks**.

```
PS C:\WINDOWS\system32> docker network ls
NETWORK ID          NAME                DRIVER              SCOPE
098e442649ad        bridge             bridge             local
f7316c0eabbd        host               host               local
99c520f7a572        none              null               local
59b402e222c3        reservas-app_default bridge             local
PS C:\WINDOWS\system32>
```

By default, Docker Compose creates a network named after the folder containing your docker-compose.yml, with **_default** appended. Como dicha folder en mi caso se llama reservas-app, the network is named **reservas-app_default**.

docker run tells Docker to **start a new container** from an image

--rm automatically removes the container after it exits. It keeps your Docker environment clean –no leftover stopped containers. **NO se lo voy a poner porque I want to have a dedicated Kafka consumer container for repeated tests.**

--network reservas-app_default connects the new container to the Docker Compose network llamada reservas-app_default. This **allows the (new) container to communicate with other services** in the Compose app **by service name** (ofr example ‘kafka’ for your kafka broker). “essential because your kafka broker is only reachable inside the compose network”.

-it = -i (interactive mode, keeps STDIN open) + -t (allocates a pseudo-TTY)
-it allow you to see the output in your terminal and interact if needed.

apache/kafka:3.8.0 is the **Docker image** to use for the new container. It’s the official Kafka image version 3.8.0.

El resto es el “command inside the container”, en concreto:

/opt/kafka/bin/kafka-console-consumer.sh runs Kafka’s console consumer, a CLI tool to read messages from a topic.

--bootstrap-server kafka:9092 es para **connect to the Kafka broker** at hostname ‘kafka’ on port ‘9092’. ‘kafka’ resolves because the container is on the Compose network.

`--topic reservas.creadas` specifies which **topic to consume messages from**.

`--from-beginning` starts reading from the **earliest message in the topic**, not just new messages. Useful for testing or catching messages sent before the consumer started.

```
PS C:\WINDOWS\system32> docker network ls
NETWORK ID      NAME                DRIVER            SCOPE
098e442649ad    bridge              bridge            local
f7316c0eabbd    host                host              local
99c520f7a572    none                null              local
59b402e222c3    reservas-app_default bridge            local
PS C:\WINDOWS\system32> docker run --network reservas-app_default -it apache/kafka:3.8.0 `
>> /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server kafka:9092 --topic reservas.creadas --from-beginning
```

Containers en mi Docker Desktop (quizzical_wilson ha de ser el consumidor kafka container):

☐	quizzical_wilson	b81fa777d527	apache/kafka:3.8.0	0.49%	55 seconds ago	
☐	reservas-app	-	-	3.73%	1 hour ago	
☐	sqlserver	a673bdada8cd	mssql/server:2022-latest 1433:1433	1.97%	3 hours ago	
☐	kafka	e90a7d4165d1	apache/kafka:3.8.0 9092:9092	1.69%	3 hours ago	
☐	frontend-1	249a14ed376e	reservas-app-frontend 4200:80	0%	1 hour ago	
☐	backend-1	0c85a5510e63	reservas-app-backend 5000:5000	0.07%	1 hour ago	

Pero nuevamente pasa lo mismo, se inserta la reserva pero nada aparece en el consumidor:

Code

Details

201

Undocumented

Response body

```
{
  "reservaId": 7,
  "fechaHora": "2025-12-10T11:00:00.445Z",
  "numeroAsistentes": 7,
  "dni": "98761234Z",
  "instalacionId": 1,
  "usuario": {
    "dni": "98761234Z",
    "nombreCompleto": "Laura Gomez"
  },
  "instalacion": {
    "instalacionId": 1,
    "localizacion": "Avenida de la Fuerza, Barcelona"
  }
}
```

Response headers


```
PS C:\WINDOWS\system32> docker run --network reservas-app_default -it apache/kafka:3.8.0 `
>> /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server kafka:9092 --topic reservas.creadas --from-beginning
```

Entonces me dice chatgpt de probar to **run the consumer in “host network” mode**, just in case your problem is an advertised listener problem, so **try connecting from your host** instead of a container.

Para ello **quita lo de --network reservas-app_default** y justo después del `-it` pone `-p 9092:9092`, which **maps a port from the container to your host**, so you can access Kafka from your host machine. La sintaxis es:

`-p <host_port>:<container_por>`

Y en lugar de `--bootstrap-server kafka:9092`, ahora ponemos `--bootstrap-server localhost:9092`.

Pero por varios probelmas no fui capaz de correr el consumidor in “host network” mode.

Volviendo con la anterior forma de hacerlo pero **quitando el --from-beginning**, pasa lo mismo, inserta reserva pero nada aparece en consumer:

The image shows two side-by-side windows. The left window is a Windows PowerShell terminal titled 'Administrador: Windows PowerShell'. It contains the following commands and output:

```
>> /opt/kafka/bin/kafka-console-consumer.sh --bootstrap-server kafka:9092 --to
pic reservas.creadas
```

The right window is a web browser showing the Swagger UI for a REST API. The address bar shows 'localhost:5000/swagger/index.html'. The 'Curl' section contains the following command:

```
curl -X 'POST' \
'http://localhost:5000/api/Reservas' \
-H 'accept: text/plain' \
-H 'Content-Type: application/json' \
-d '{
  "dni": "98761234Z",
  "instalacionId": 1,
  "fechaHora": "2025-12-31T12:15:00.184Z",
  "numeroAsistentes": 3
}'
```

The 'Request URL' is 'http://localhost:5000/api/Reservas'. The 'Server response' shows a '201' status code. The 'Response body' contains the following JSON:

```
{
  "reservaId": 8,
  "fechaHora": "2025-12-31T12:15:00.184Z",
  "numeroAsistentes": 3,
  "dni": "98761234Z",
  "instalacionId": 1,
  "usuario": {
    "dni": "98761234Z",
    "nombreCompleto": "Laura Gomez"
  },
  "instalacion": {
    "instalacionId": 1,
    "localizacion": "Avenida de la Fuerza, Barcelona"
  }
}
```

A 'Download' button is visible at the bottom right of the response body.

Probé a añadir más código en listeners en .yaml, en particular añadí un tal PLAINTEXT_HOST, pero después de unas 3 excepciones por este tema al correr docker-compose up --build, chatggpt me recomendó volver al pasado o sea quitar ese código de listeners plaintext_host, así que en efecto volví al pasado, ahora esa parte está de nuevo así en docker-compose.yaml:

```
# Listeners
KAFKA_LISTENERS: PLAINTEXT://0.0.0.0:9092,CONTROLLER://0.0.0.0:9093
KAFKA_ADVERTISED_LISTENERS: PLAINTEXT://kafka:9092
KAFKA_CONTROLLER_LISTENER_NAMES: CONTROLLER
KAFKA_INTER_BROKER_LISTENER_NAME: PLAINTEXT
```

Hago docker-compose up --build 17 nov 2025 13:00 (no veo ninguna kafka exception)

Cada vez que hago un down y luego un up --build, elimino entre ambos todos los volúmenes menos el de sql.

```
C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app>docker-compose up --build
time="2025-11-17T12:40:58+01:00" level=warning msg="C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\docker-compose.yml: the attribute 'version' is obsolete, it
will be ignored, please remove it to avoid potential confusion"
[+] Building 3.2s (35/35) FINISHED
=> [internal] load local bake definitions                                0.0s
=> => reading from stdin 1.1kB                                         0.0s
=> [backend internal] load build definition from Dockerfile             0.0s
=> => transferring dockerfile: 760B                                     0.0s
=> [frontend internal] load build definition from Dockerfile           0.0s
=> => transferring dockerfile: 4.60kB                                    0.0s
=> [frontend internal] load metadata for docker.io/library/nginx:alpine 1.2s
=> [frontend internal] load metadata for docker.io/library/node:22     1.4s
=> [backend internal] load metadata for mcr.microsoft.com/dotnet/sdk:9.0 0.6s
=> [backend internal] load metadata for mcr.microsoft.com/dotnet/aspnet:9.0 0.7s
=> [backend internal] load .dockerignore                                0.0s
=> => transferring context: 383B                                         0.0s
=> [backend build 1/7] FROM mcr.microsoft.com/dotnet/sdk:9.0@sha256:1ea5b7f2154cbd1e20a336cb56957dba30a7ce30ef5c1c032a37c42801594713 0.0s
=> => resolve mcr.microsoft.com/dotnet/sdk:9.0@sha256:1ea5b7f2154cbd1e20a336cb56957dba30a7ce30ef5c1c032a37c42801594713 0.0s
=> [backend internal] load build context                                0.0s
=> => transferring context: 2.01kB                                       0.0s
=> [backend base 1/2] FROM mcr.microsoft.com/dotnet/aspnet:9.0@sha256:1b8d328201297fd5ca40dc1a0788aa9e813f58279c3410fe82dce6744c36d03f 0.0s
=> => resolve mcr.microsoft.com/dotnet/aspnet:9.0@sha256:1b8d328201297fd5ca40dc1a0788aa9e813f58279c3410fe82dce6744c36d03f 0.0s
=> CACHED [backend base 2/2] WORKDIR /app                               0.0s
=> CACHED [backend final 1/2] WORKDIR /app                               0.0s
=> CACHED [backend build 2/7] WORKDIR /src                               0.0s
=> CACHED [backend build 3/7] COPY [ReservasApi.csproj, ReservasApi/] 0.0s
=> CACHED [backend build 4/7] RUN dotnet restore "ReservasApi/ReservasApi.csproj" 0.0s
=> CACHED [backend build 5/7] COPY . . .                                0.0s
=> CACHED [backend build 6/7] WORKDIR /src/ReservasApi                  0.0s
=> CACHED [backend build 7/7] RUN dotnet build "ReservasApi.csproj" -c Release -o /app/build 0.0s
=> CACHED [backend publish 1/1] RUN dotnet publish "ReservasApi.csproj" -c Release -o /app/publish /p:UseAppHost=false 0.0s
=> CACHED [backend final 2/2] COPY --from=publish /app/publish .        0.0s
=> [backend] exporting to image                                         0.1s
=> => exporting layers                                                  0.0s
=> => exporting manifest sha256:f7bf971d856d97616d60fb3c3c2690c922fee2fc0d6b44a93ac339390a950ca0 0.0s
=> => exporting config sha256:58337d6ec4ef41e7a87a5998d786c094a30b2a2041623fea19d35e95c4fc4b6f 0.0s
=> => exporting attestation manifest sha256:dca661edc6d86d0384077573594166e483be968319f77d8b857d0d0945f1c8a5 0.0s
=> => exporting manifest list sha256:1e60f35690b0350c2c9d32e4f5308309a3b727a52a5e8e2daf2b7bc54cbb5030 0.0s
=> => naming to docker.io/library/reservas-app-backend:latest          0.0s
=> => unpacking to docker.io/library/reservas-app-backend:latest        0.0s
=> [backend] resolving provenance for metadata file                     0.0s
=> [frontend internal] load .dockerignore                                0.0s
=> => transferring context: 2B                                           0.0s
=> [frontend build 1/6] FROM docker.io/library/node:22@sha256:dcf06103a9d4087e3244a51697adbbb8531dcb7161dbe994ca1cd07dd32e2a5 0.0s
```

Next page

```

=> [frontend build 1/6] FROM docker.io/library/node:22@sha256:dcf06103a9d4087e3244a51697adbbb85331dcb7161dbe994ca1cd07dd32e2a5
=> => resolve docker.io/library/node:22@sha256:dcf06103a9d4087e3244a51697adbbb85331dcb7161dbe994ca1cd07dd32e2a5
=> [frontend internal] load build context
=> => transferring context: 1.65MB
=> [frontend stage-1 1/2] FROM docker.io/library/nginx:alpine@sha256:b3c656d55d7ad751196f21b7fd2e8d4da9cb430e32f646adcf92441b72f82b14
=> => resolve docker.io/library/nginx:alpine@sha256:b3c656d55d7ad751196f21b7fd2e8d4da9cb430e32f646adcf92441b72f82b14
=> CACHED [frontend build 2/6] WORKDIR /app
=> CACHED [frontend build 3/6] COPY package*.json ./
=> CACHED [frontend build 4/6] RUN npm install
=> CACHED [frontend build 5/6] COPY . .
=> CACHED [frontend build 6/6] RUN npm run build -- --configuration production
=> CACHED [frontend stage-1 2/2] COPY --from=build /app/dist/reservas-frontend /usr/share/nginx/html
=> [frontend] exporting to image
=> => exporting layers
=> => exporting manifest sha256:03b852ef92b06150952642952f6d0295ec4383ec2443a46ef4e1c54538e312d8
=> => exporting config sha256:47b134c951e854a5680c405157ed2ab854cd696aba49549012a34bf4698bfc7b
=> => exporting attestation manifest sha256:1aa964d3d6cdb7ebe8c943ed64f839b425a860863bbb4f7795e3e1ba8f6276fb
=> => exporting manifest list sha256:d08b05cb4b5558c81e04c9b16e447f92c4512169c48fbb6f4080712cfa300d2b
=> => naming to docker.io/library/reservas-app-frontend:latest
=> => unpacking to docker.io/library/reservas-app-frontend:latest
=> [frontend] resolving provenance for metadata file
[+] Running 8/8
✔reservas-app-backend           Built
✔reservas-app-frontend          Built
✔Network reservas-app_default   Created
✔Volume reservas-app_kafka_data Created
✔Container sqlserver             Created
✔Container kafka                 Created
✔Container reservas-app-backend-1 Created
✔Container reservas-app-frontend-1 Created
Attaching to kafka, backend-1, frontend-1, sqlserver
kafka | ==> User
kafka | uid=1000(appuser) gid=1000(appuser) groups=1000(appuser)
kafka | ==> Setting default values of environment variables if not already set.
kafka | ==> Configuring ...
kafka | Running in KRaft mode...

sqlserver | SQL Server 2022 will run as non-root by default.

kafka | ==> Launching ... w Config  Enable Watch

```

NEXT PAGE

```

kafka      | ==> Launching ... w Config  W Enable Watch
sqlserver  | This container is running as user mssql.
kafka      | ==> Using provided cluster id NlV3PRBMxyMYHRMFN3WL ...

sqlserver  | Your master database file is owned by mssql.
sqlserver  | To learn more visit https://go.microsoft.com/fwlink/?linkid=2099216.
frontend-1 | /docker-entrypoint.sh: /docker-entrypoint.d/ is not empty, will attempt to perform configuration
frontend-1 | /docker-entrypoint.sh: Looking for shell scripts in /docker-entrypoint.d/
frontend-1 | /docker-entrypoint.sh: Launching /docker-entrypoint.d/10-listen-on-ipv6-by-default.sh
frontend-1 | 10-listen-on-ipv6-by-default.sh: info: Getting the checksum of /etc/nginx/conf.d/default.conf
frontend-1 | 10-listen-on-ipv6-by-default.sh: info: Enabled listen on IPv6 in /etc/nginx/conf.d/default.conf
frontend-1 | /docker-entrypoint.sh: Sourcing /docker-entrypoint.d/15-local-resolvers.envsh
frontend-1 | /docker-entrypoint.sh: Launching /docker-entrypoint.d/20-envsubst-on-templates.sh
frontend-1 | /docker-entrypoint.sh: Launching /docker-entrypoint.d/30-tune-worker-processes.sh
frontend-1 | /docker-entrypoint.sh: Configuration complete; ready for start up
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: using the "epoll" event method
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: nginx/1.29.3
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: built by gcc 14.2.0 (Alpine 14.2.0)
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: OS: Linux 6.6.87.2-microsoft-standard-WSL2
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: getrlimit(RLIMIT_NOFILE): 1048576:1048576
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: start worker processes
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: start worker process 30
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: start worker process 31
backend-1  | warn: Microsoft.AspNetCore.Hosting.Diagnostics[15]

frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: start worker process 32
backend-1  | Overriding HTTP_PORTS '8080' and HTTPS_PORTS ''. Binding to values defined by URLs instead 'http://+:5000'.
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: start worker process 33
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: start worker process 34
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: start worker process 35
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: start worker process 36
frontend-1 | 2025/11/17 11:41:03 [notice] 1#1: start worker process 37
backend-1  | info: Microsoft.Hosting.Lifetime[14]
backend-1  | Now listening on: http://[::]:5000
backend-1  | info: Microsoft.Hosting.Lifetime[0]
backend-1  | Application started. Press Ctrl+C to shut down.
backend-1  | info: Microsoft.Hosting.Lifetime[0]
backend-1  | Hosting environment: Development
backend-1  | info: Microsoft.Hosting.Lifetime[0]
backend-1  | Content root path: /app
kafka      | [2025-11-17 11:41:04,723] INFO Registered kafka:type=kafka.Log4jController MBean (kafka.utils.Log4jControllerRegistration$)

```

Y luego ya es todo kafka con algunas cosillas de sqlserver.

Y para testear el kafka consumer recordar que puedo hacerlo o bien vía su propio container así:

Run the console consumer from another container on the same network:

Powershell:

```

docker run --rm --network reservas-app_default -it apache/kafka:3.8.0
/opt/kafka/bin/kafka-console-consumer.sh
--bootstrap-server kafka:9092 --topic reservas-creadas --from-beginning

```

O bien con “consumer is running inside the same container as the broker”:


```

docker exec -it kafka /opt/kafka/bin/kafka-console-consumer.sh
--bootstrap-server kafka:9092 --topic reservas-creadas --from-beginning (o sin --from-beginning)

```

Siendo ‘kafka’ el nombre de mi kafka container y reservas-app_default el nombre de la red.

Lo cierto es que mi consumidor kafka sí reconoce la creación del topic:

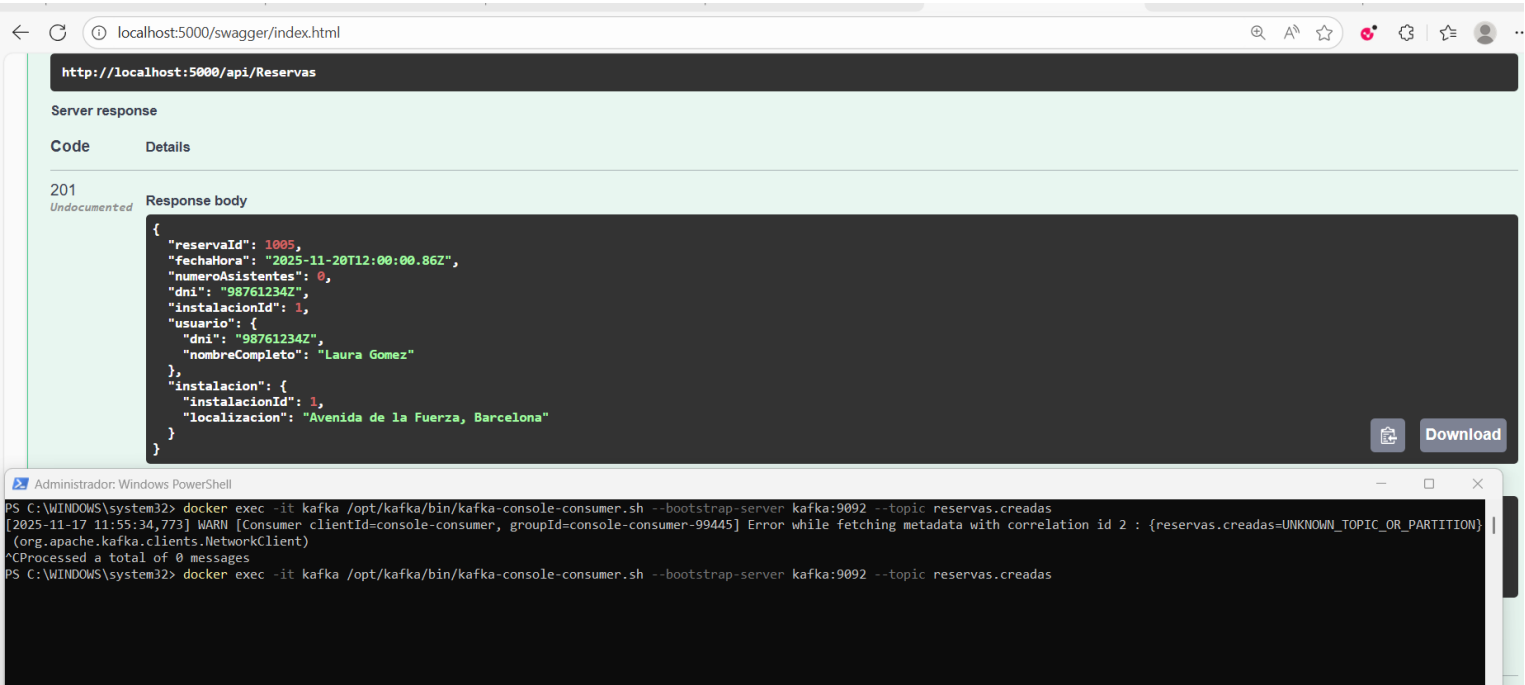


El primer consumidor lo hice antes de POST (creador del topic) VS el segundo consumidor después de hacer post (i.e. después de crear el topic debido a `KAFKA_AUTO_CREATE_TOPICS_ENABLE: "true"` en mi `docker-compose.yml`), el tema es que no imprime el json message.

Y si cancelo ese segundo consumidor y arranco el del container, éste tmb reconoce el topic i.e. no da el error de Unknown topic:




Pero igualmente al postear no aparece nada en la terminal del consumidor:


NEXT PAGE

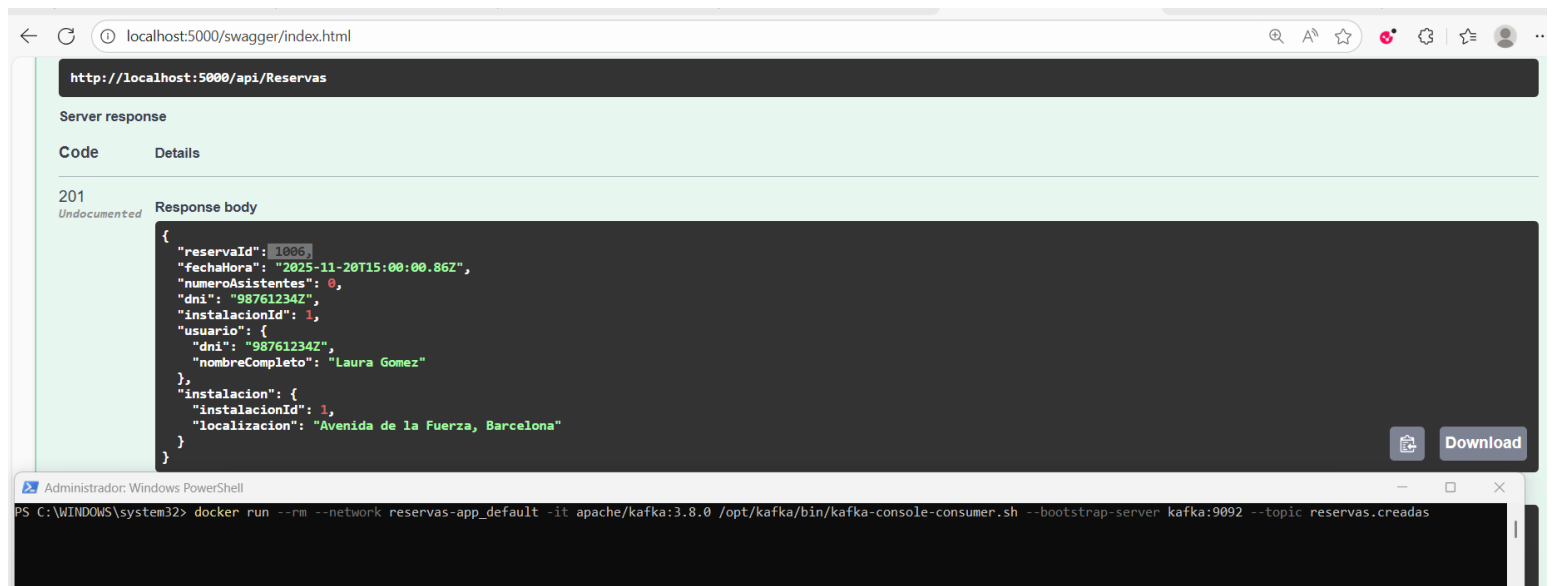


Voy con esa situación a comitear localmente en VS IDE las novedades de mi backend (que son las de kafka), que son estas:


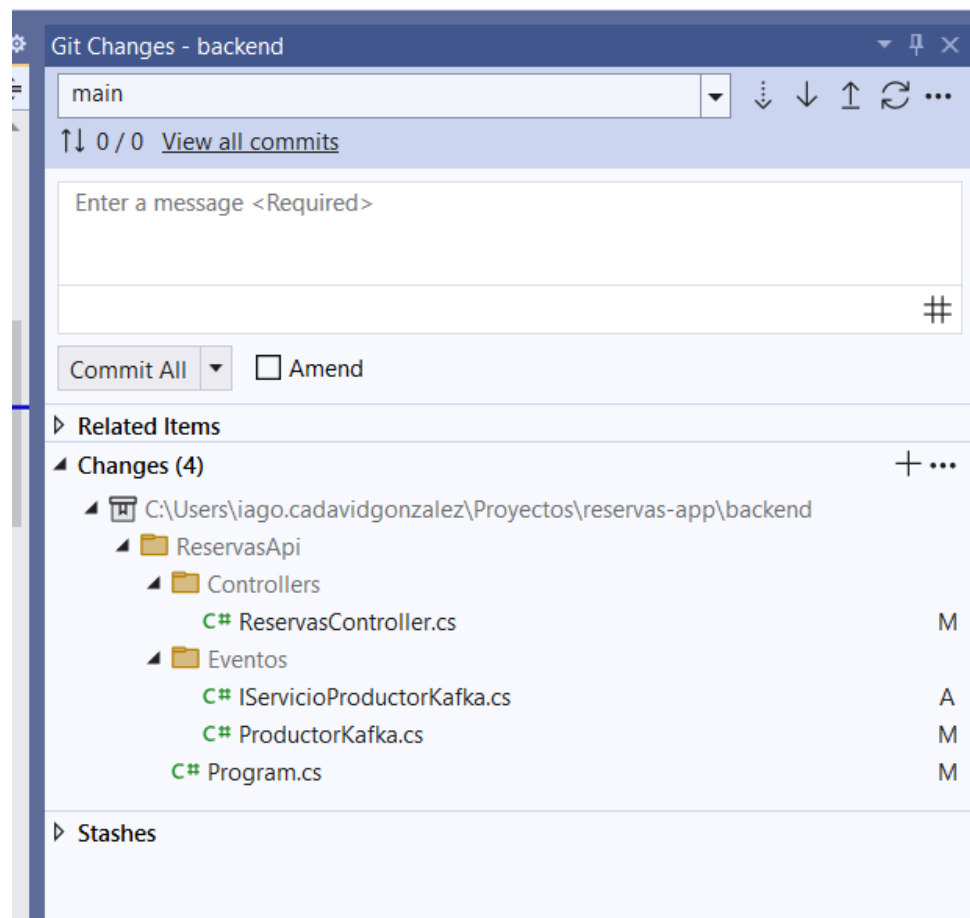


De commit message pongo “añado el código kafka a mi backend” y le doy a commit all:

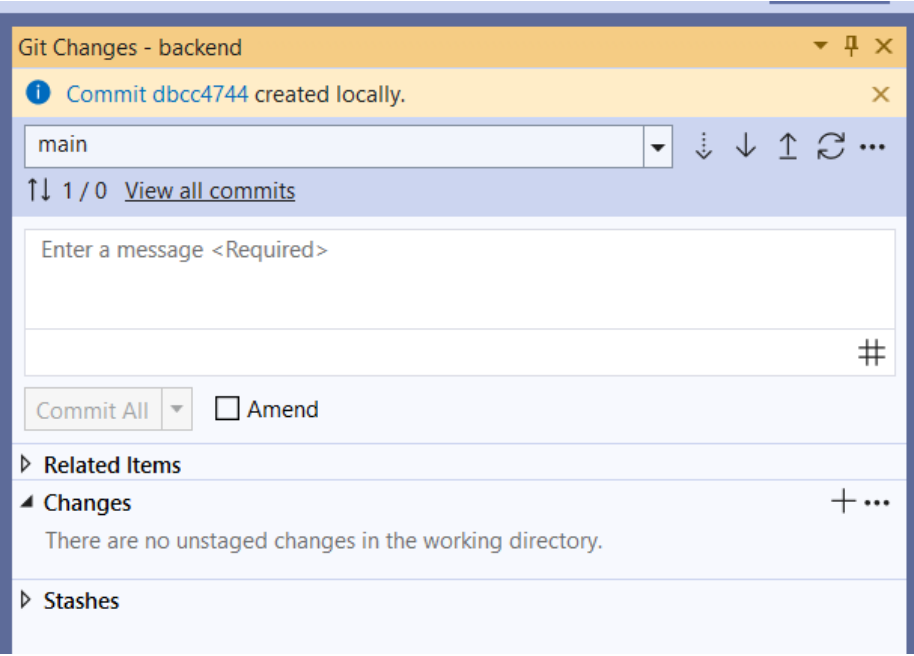

1/0 porque hay un commit pendiente de pushear al github, entonces clico en la flecha del push.

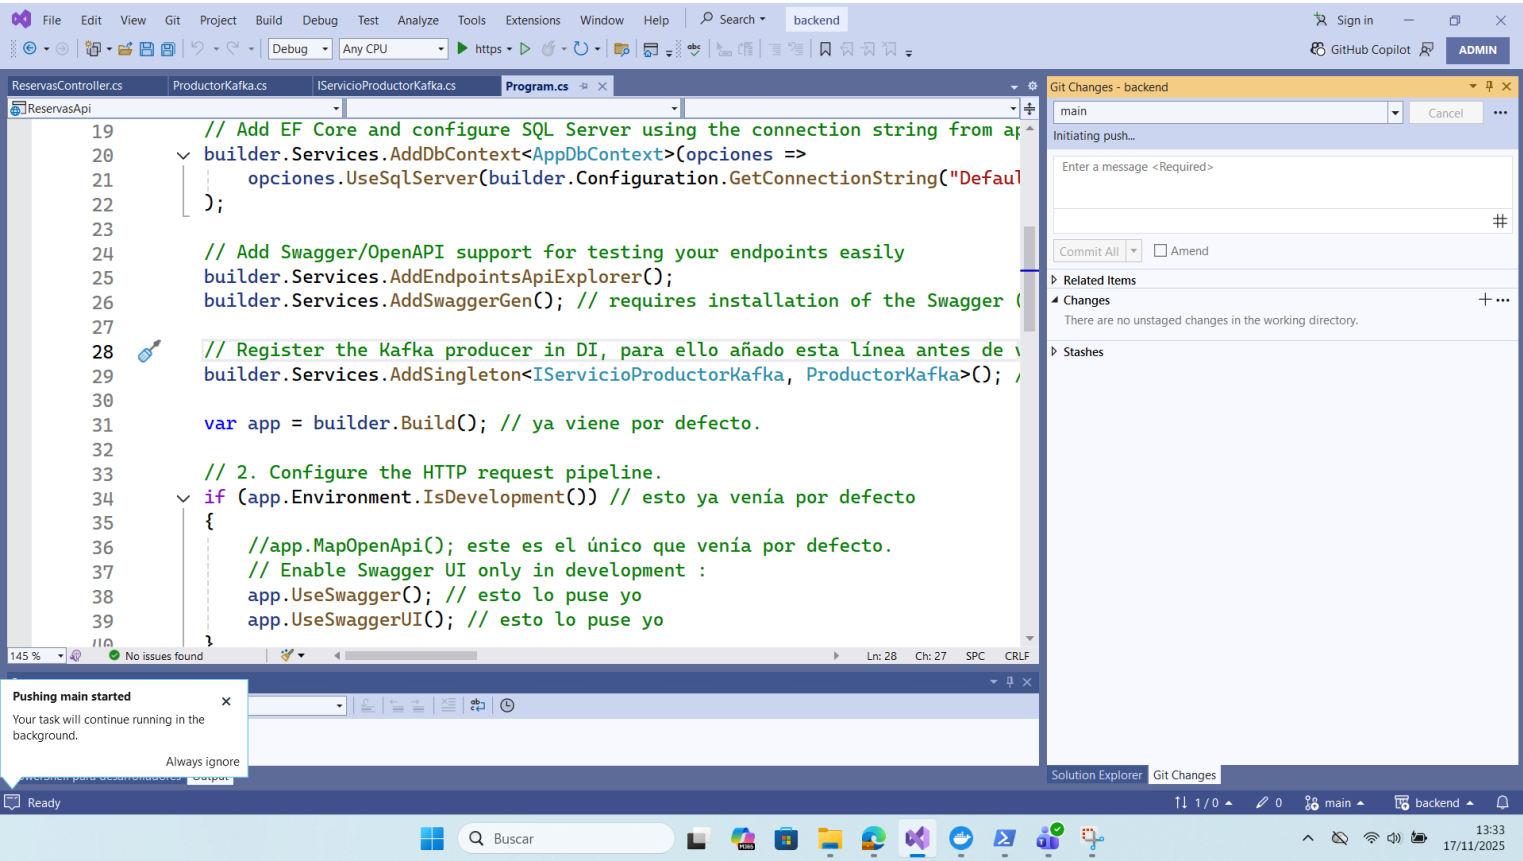

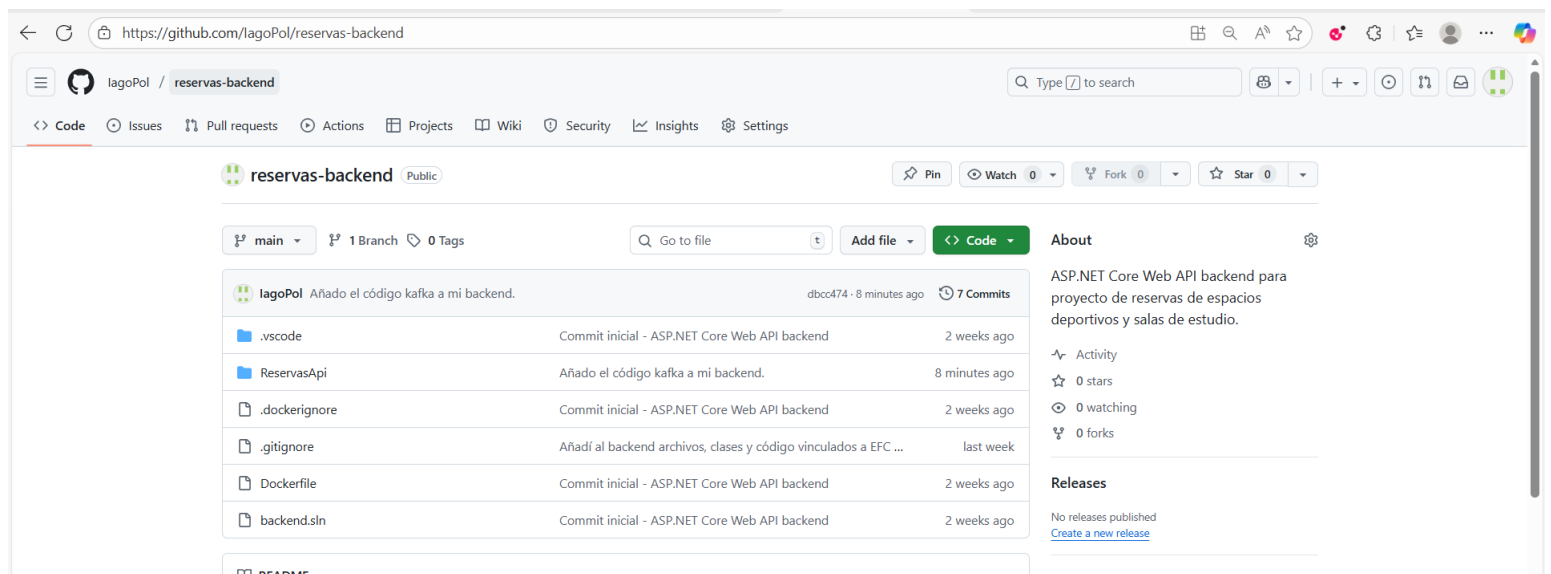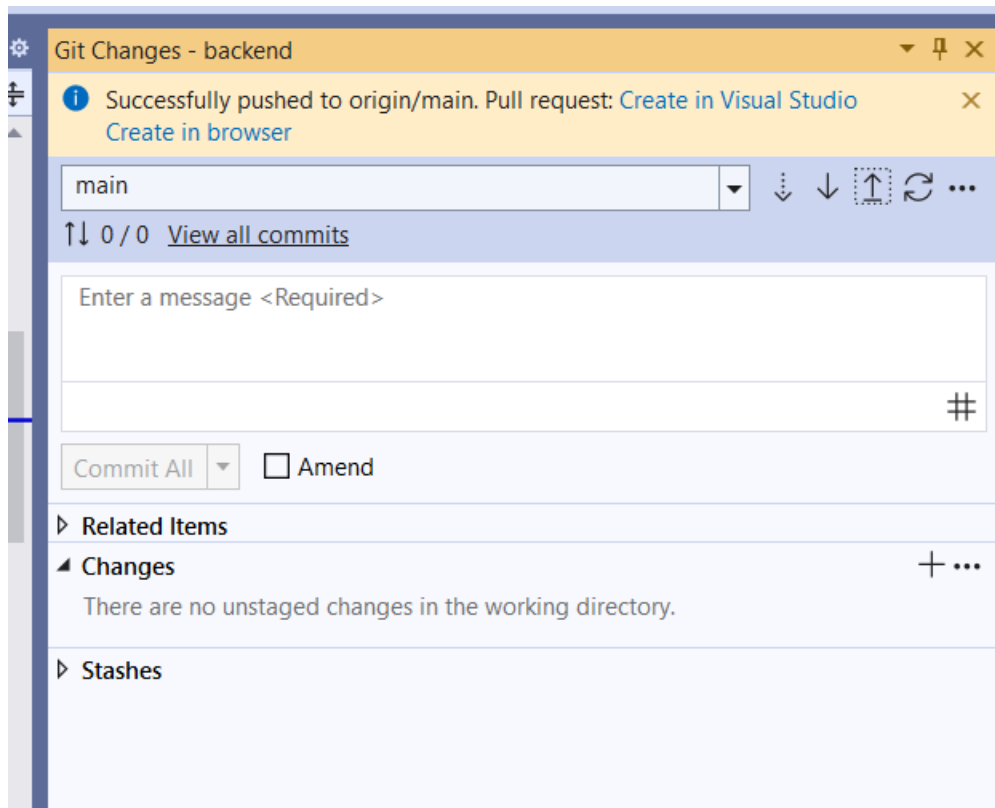

Creo un github repo de despliegue que será el que aloje el docker-compose.yml

NEXT PAGE


Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).

Required fields are marked with an asterisk (*).

1 General

Owner *



Repository name *

reservas-despliegue

✓ reservas-despliegue is available.

Great repository names are short and memorable. How about **laughing-winner**?

Description

Fundamentalmente este repo contiene el archivo docker-compose.yml

65 / 350 characters

2 Configuration

Choose visibility *

Choose who can see and commit to this repository

Public

Add README

READMEs can be used as longer descriptions. [About READMEs](#)

Off ☐

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

No .gitignore


Add license

Licenses explain how others can use your code. [About licenses](#)

No license

Create repository

NEXT PAGE

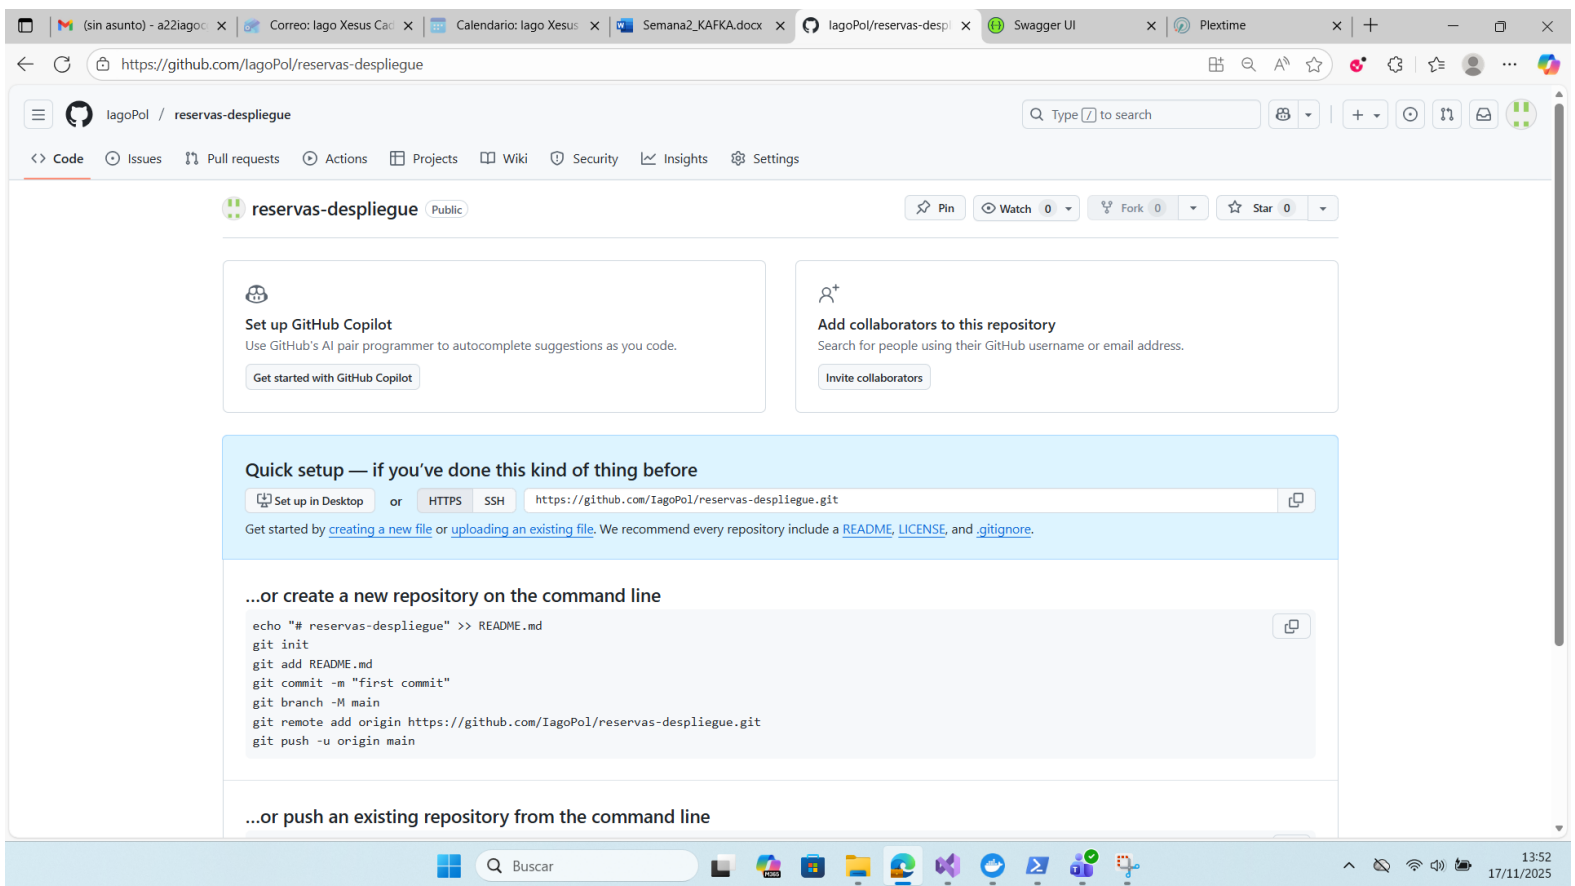

Okay, so I currently have:

reservas-app folder contains backend folder, frontend folder and deployment folder (contains docker-compose.yml), how do I turn deployment folder into a git repo using visual studio code ?

Here's the **exact step-by-step** for turning your `deployment` folder (inside `reservas-app`) into a **new Git repository** using **Visual Studio Code**.


You will end with:

- a new local Git repo in `deployment/`
- connected to your deployment GitHub repo
- ready to push



Abro VSC, File -> Open Folder y selecciono mi carpeta 'despliegue' (hija de reservas-app)


Una vez abierto (despliegue folder en vsc), go to the Source Control icon on the left (looks like a branch):

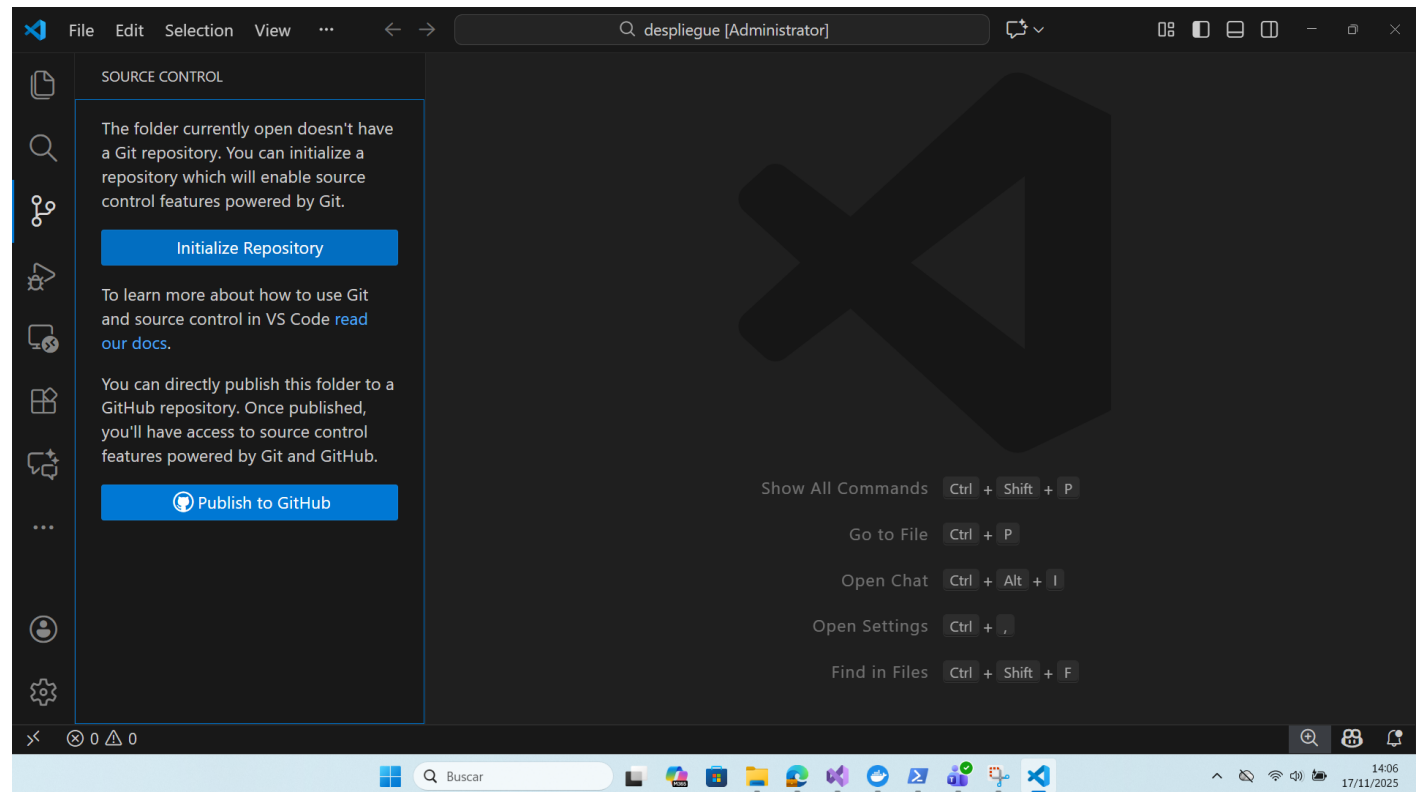

Clicas en Initialize Repository, entonces VSC will create a new (local) git repo only inside this folder, generating: Deployment/.git/

That is now your new (local) Git repo.

Pero yo prefiero hacerlo a código i.e. using Git commands in the terminal (instead of via VSC buttons):

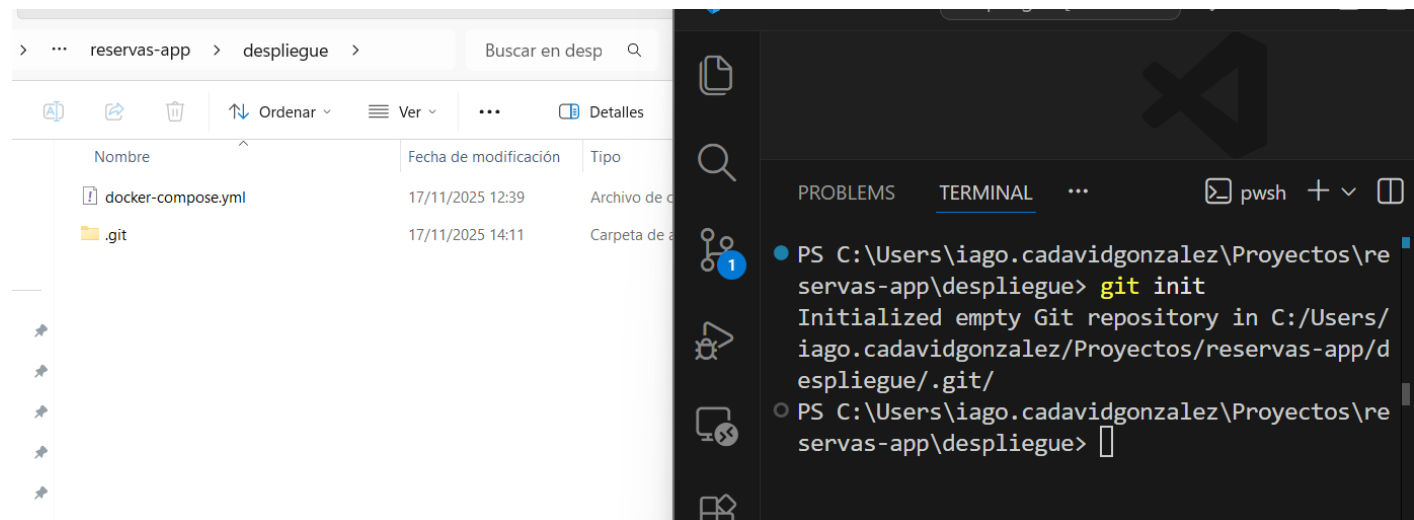

```
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git init
Initialized empty Git repository in C:/Users/iago.cadavidgonzalez/Proyectos/reservas-app/despliegue/.git/
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue>
```

git init creates the hidden folder .git dentro de 'despliegue' folder.

“Now you have a local Git repository”.

Lo verificamos así:

```
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    docker-compose.yml

nothing added to commit but untracked files present (use "git add" to track)
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue>
```

Con ese git add añado el docker-compose.yml a la staging area (pone el .yml en verde –en vez de en rojo- y como “changes to be committed” -en vez de como untracked files-):


```

● PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    docker-compose.yml

nothing added to commit but untracked files present (use "git add" to track)
● PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git add docker-compose.yml
● PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   docker-compose.yml

○ PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue>

```

Now onto make your local git repo have one commit (**git commit -m "Add docker-compose.yml"**):

```

● PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    docker-compose.yml

nothing added to commit but untracked files present (use "git add" to track)
● PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git add docker-compose.yml
● PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   docker-compose.yml

● PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git commit -m "Add docker-compose.yml"
[master (root-commit) cda1e7] Add docker-compose.yml
 1 file changed, 59 insertions(+)
 create mode 100644 docker-compose.yml
● PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git status
On branch master
nothing to commit, working tree clean
○ PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue>

```

```
nothing to commit, working tree clean
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git rev-list --count HEAD
1
```

rev-list =

revision list, lists the commits (revisions) reachable from a given reference (HEAD en caso de querer que esta referencia sea “the current branch”)

El comando que acabamos de ejecutar lists all commits reachable from HEAD (my current branch) y **--count** returns just the **number of commits**.

Connect to your already-created GitHub repo:

git remote add origin https://github.com/IagoPol/reservas-despliegue.git


```
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git remote add remodeploy https://github.com/IagoPol/reservas-despliegue.git
```

remodeploy es el nombre que le doy a ese nuevo (add) “remote” (the name you are giving to that remote, se le suele dar ‘origin’). **Each Git repository** has its own **set of remotes**. Since your backend repo and frontend repo are separate Git repos, they can both have a remote called ‘origin’ pointing to different URLs (las de los repos remotos en github).

```
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git remote add remodeploy https://github.com/IagoPol/reservas-despliegue.git
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git remote -v
remodeploy      https://github.com/IagoPol/reservas-despliegue.git (fetch)
remodeploy      https://github.com/IagoPol/reservas-despliegue.git (push)
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue>
```

```
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git branch -M main
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue> git push -u remodeploy main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 1.01 KiB | 1.01 MiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/IagoPol/reservas-despliegue.git
 * [new branch]      main -> main
branch 'main' set up to track 'remodeploy/main'.
PS C:\Users\iago.cadavidgonzalez\Proyectos\reservas-app\despliegue>
```

Ese output dice chagpt que es bueno, que el push fue bien.

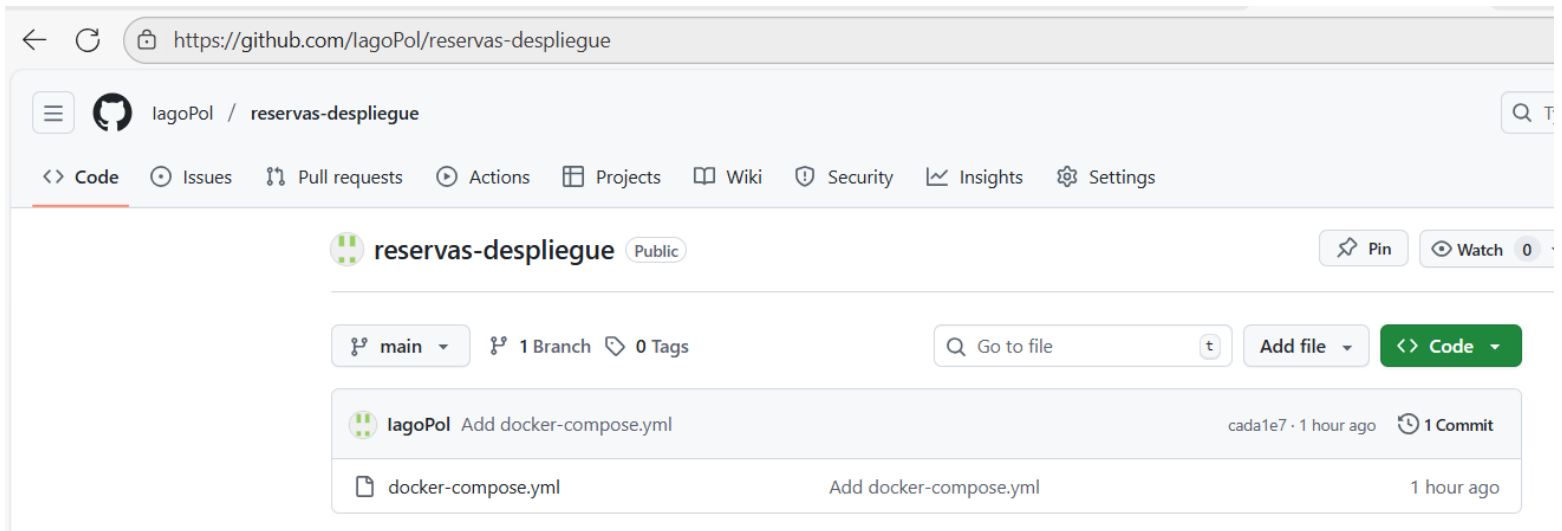

CONCLUSIÓN DE MI EXPERIENCIA CON KAFKA SO FAR

Todo bien hasta el último momento, en que el consumidor kafka no escupe por consola un output por cada Swagger Post. Sin embargo, dicho consumidor sí es capaz de reconocer si hay o no creado un topic (de no haberlo creado, te da una alerta, VS si ya hay topic creado no dice nada)