

POSTMAN en lugar de Swagger

Regarding "Open Postman", is it an app I have to install or what ?

Yes — **Postman is a separate application** you need to install on your computer. It's not built into Visual Studio or Docker; it's a standalone tool specifically for testing APIs.

Here's what you need to know:

1. Installation

- Go to [Postman Download Page](#) ↗
 - Download the version for your OS (Windows, macOS, Linux)
 - Install it like any other app.
-

2. How it works

- Postman provides a **GUI** where you can:
 - Send HTTP requests (GET, POST, PUT, DELETE...)
 - Set headers, query parameters, and body data
 - See responses from your API (status code, JSON body, headers)
 - Save requests for later or automate tests

It's basically a user-friendly "browser" for APIs, more  advanced than Swagger for testing.

Página siguiente

Download Postman

Download the app to get started using the Postman API Platform today. Or, if you prefer a browser experience, you can try the web version of Postman.

The Postman app


Download the app to get started with the Postman API Platform.

Windows 64-bit

Windows ARM64

By downloading and using Postman, I agree to the [Privacy Policy](#) and [Terms](#).

[Release Notes](#) →

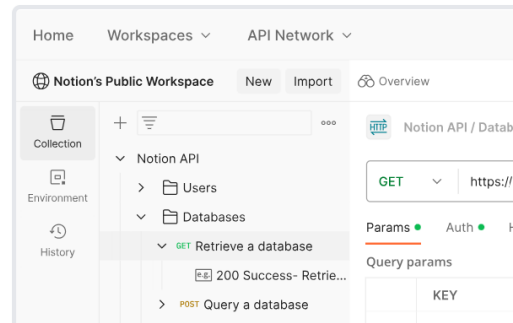

Postman (x64).exe	24/11/2025 13:32	Aplicación	145.606 KB
-------------------	------------------	------------	------------



Working with APIs simplified with Postman

Enter your work email

Your work email makes it easy for you to collaborate with your teammates.

Create Free Account

Already have an account? [Log In](#)

Continue with Google

Continue with Github

Single Sign On (SSO)

Continue without an account

NEXT PAGE

Okay, I've just installed Postman, I selected "Continue without an account" and therefore I got the warning "You can use the Lightweight API Client to send requests and view the responses. But that'll be all". Will that be enough for my purpose of testing the CRUD endpoints of my backend Controllers ?

Yes — that **lightweight API client is more than enough** for testing your CRUD endpoints. You don't need a Postman account to send requests, view responses, or test all your API endpoints.

Here's what you get with "Continue without an account":

What you can do


- Send **GET, POST, PUT, DELETE** requests.
- Set **headers**, query parameters, and request bodies.
- View **response status codes, headers, and JSON bodies**.
- Save requests locally (as long as you don't need cloud sync).

What you cannot do

- Sync requests across devices.
- Share collections in the cloud.
- Use some advanced collaboration or automation features.

Clico entonces en Open lightweight API client, se ve esto:

NEXT PAGE

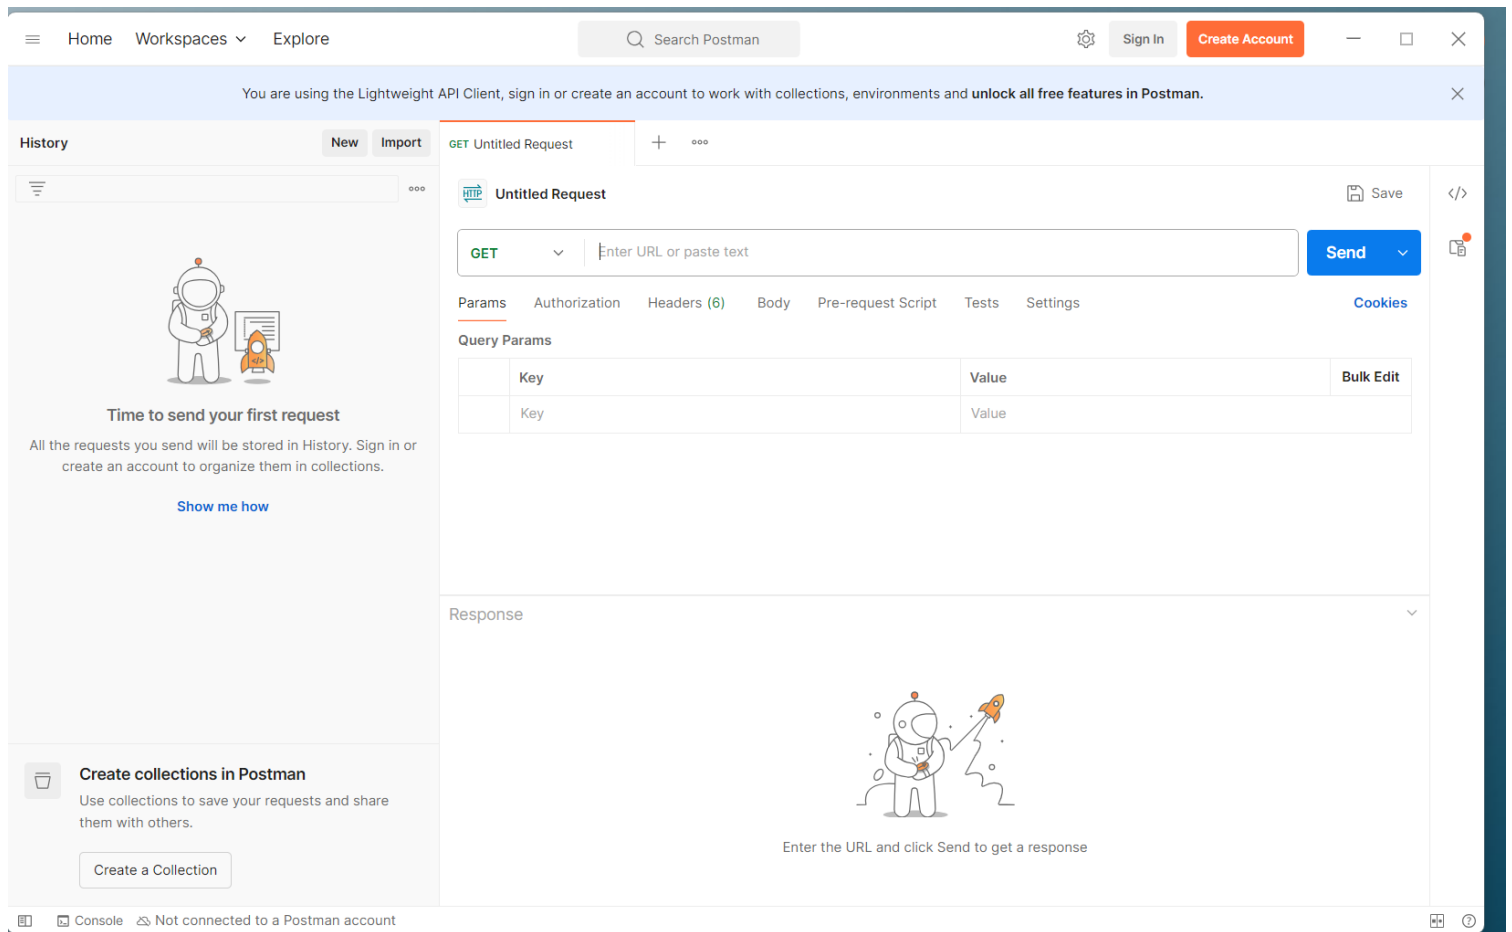

Para testear el get api reservas con Postman y since my (backend) API is running in Docker (in a docker container), the key is **using** the correct **URL and port that your container exposes** (to host machine). Since my ASP.NET Core Web API is running inside its own Docker container, I need to make sure Postman can reach it.

So let's check my (backend docker) container setup to make sure that when I run my API (backend) container I **publish the port from the container to my host machine**. You can verify with **docker ps**. En 1io puedo ejecutar docker ps desde any terminal and current directory.

NEXT PAGE

docker.desktopPERSONAL

Search

Ctrl+K

2

Sign in

Ask GordonBETA

Containers

Images

Volumes

Kubernetes

Builds

Models

MCP ToolkitBETA

Docker Hub

Docker Scout

Extensions

ContainersGive feedback

Container CPU usage ⓘ
No containers are running.

Container memory usage ⓘ
No containers are running.

Show charts

Search

Only show running containers

	Name	Container ID	Image	Port(s)	CPU (%)	Last started	Actions
☐	☐ dreamy_haibt	94b9b0895494	ubuntu		N/A	1 month ago	
☐	☐ vibrant_carson	5f1347c184de	hello-world		N/A	1 month ago	
☐	☒ reservas-app	-	-	-	N/A	8 seconds ago	
☐	☐ frontend-1	f339e2c11f42	reservas-app-frontend	4200:80	N/A	8 days ago	
☐	☒ backend-1	e6050240ed80	reservas-app-backend	5000:5000	N/A	13 seconds ago	
☐	☐ kafka	e864573c522f	apache/kafka.3.8.0	9092:9092	N/A	8 days ago	
☐	☒ sqlserver	b5eda878b15c	mssql/server.2022-latest	1433:1433	N/A	9 seconds ago	

```
C:\Users\iago.cadavidgonzalez>docker ps
CONTAINER ID   IMAGE                                COMMAND                  CREATED        STATUS        PORTS                                NAMES
e6050240ed80   reservas-app-backend               "dotnet ReservasApi..." 7 days ago    Up About a minute    0.0.0.0:5000->5000/tcp, [::]:5000->5000/tcp   reservas-app-backend-1
b5eda878b15c   mcr.microsoft.com/mssql/server:2022-latest  "/opt/mssql/bin/laun..." 7 days ago    Up About a minute    0.0.0.0:1433->1433/tcp, [::]:1433->1433/tcp   sqlserver
```

You **determine the correct URL** by looking at how your Docker container exposes its ports to the host machine. This is the **key step before using Postman**. To determine the URL for Postman, run the command `docker ps` in any terminal (like cmd) and from any curr dir, since Docker commands do NOT depend on your current folder.

Then look at the PORTS column, le digo lo que me pone y me responde:

NEXT PAGE

Regarding "STEP 2 - Look at the PORTS column", what I see (in the backend container row) is the following:

```
0.0.0.0:5000->5000/tcp, [::]:5000->5000/tcp
```

Great — that tells us exactly what your Postman URL should be.

✓ What your port mapping means

You see:

```
bash
0.0.0.0:5000->5000/tcp, [::]:5000->5000/tcp
```

This means:

- **Host port 5000** is mapped to
- **Container port 5000**

So your ASP.NET Core Web API is listening **inside the container on port 5000**, and Docker exposes that same port **to your host machine**.

[

El ejemplo que inicialmente ponía chatgpt no tenía , **etc.** y en vez del segundo 5000 ponía 80, tal que así:

[0.0.0.0:5000->80/tcp](#) y lo interpretaba así (izquierda host port, derecha container port):

[Container port 80 -> Host port 5000](#) (nótese que le da la vuelta a la flecha), meaning you reach your API at:

<http://localhost:5000> (arduino pone donde suele poner bash o powershell)

Now you **append the endpoint**:

<http://localhost:5000/api/reservas> This is your Postman URL.

]

Tmb concluye que esa es la URL en mi caso, que es el de , **[::]:etc.**

✓ Your GET reservas endpoint in Postman

Put this in Postman:

```
bash
```

```
http://localhost:5000/api/reservas
```

- Method: **GET**
- No body needed
- Click **Send**

You should get the JSON list of reservations returned by your `GetReservas()` method.

🧪 If it doesn't work

Try accessing the same URL in your browser:


```
bash
```

```
http://localhost:5000/swagger/index.html
```

If Swagger loads, the mapping is 100% correct.

<http://localhost:5000/swagger/index.html>

Swagger indeed loads:

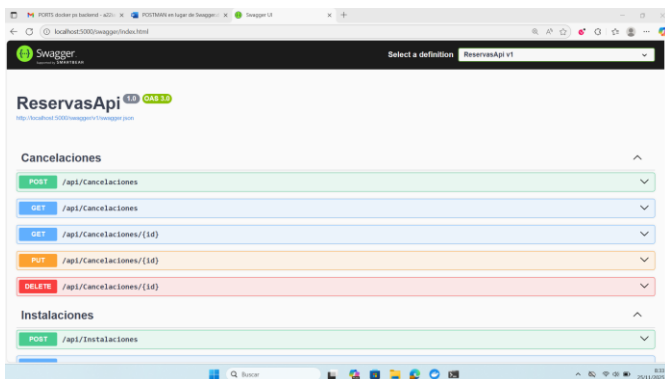

Ahora vamos a poner la URL en Postsman:

✓ Your GET reservas endpoint in Postman

Put this in Postman:

```
bash
```

```
http://localhost:5000/api/reservas
```

- Method: **GET**
- No body needed
- Click **Send**

You should get the JSON list of reservations returned by your `GetReservas()` method.

- Swagger usually runs at `https://localhost:5001/swagger/index.html`.

2. Open Postman

- If you don't have it, download and install from [Postman](#).
- Launch Postman and click "New" → "HTTP Request".

3. Set up a request in Postman

1. Select the HTTP method

- Use **GET**, **POST**, **PUT**, or **DELETE** depending on your endpoint.

2. Enter the URL

Example: `https://localhost:5001/api/Products`

- Make sure it matches your controller route.

3. Set Headers (if needed)

- Common headers:

```
makefile
```

```
Key: Content-Type
```

```
Value: application/json
```

- If you have authentication (JWT, API key), add an `Authorization` header.

Voy seleccionar GET

4. Add request body (for POST/PUT)

- Switch to the **Body** tab → choose **raw** → **JSON**.
- Example POST JSON for a **Product** :

```
json

{
  "name": "New Product",
  "price": 19.99,
  "stock": 50
}
```

5. Send the request

- Click **Send**.
- Postman will show:
 - **Status code** (e.g., 200, 201, 404)
 - **Response body** (JSON)
 - **Headers**

6. Verify responses

- Compare the response with what you expect based on your Swagger tests.
- For GET requests, make sure the returned data matches your database.
- For POST/PUT, check that changes actually appear in the database.

7. Optional: Save requests in a Collection




- Click **Save** → give the request a name → optionally add to a **Collection**.

el paso 4 me lo salto.


Entonces, abro Postman y me encuentro con esto:

Como voy a hacer un GET api reservas,

NEXT PAGE

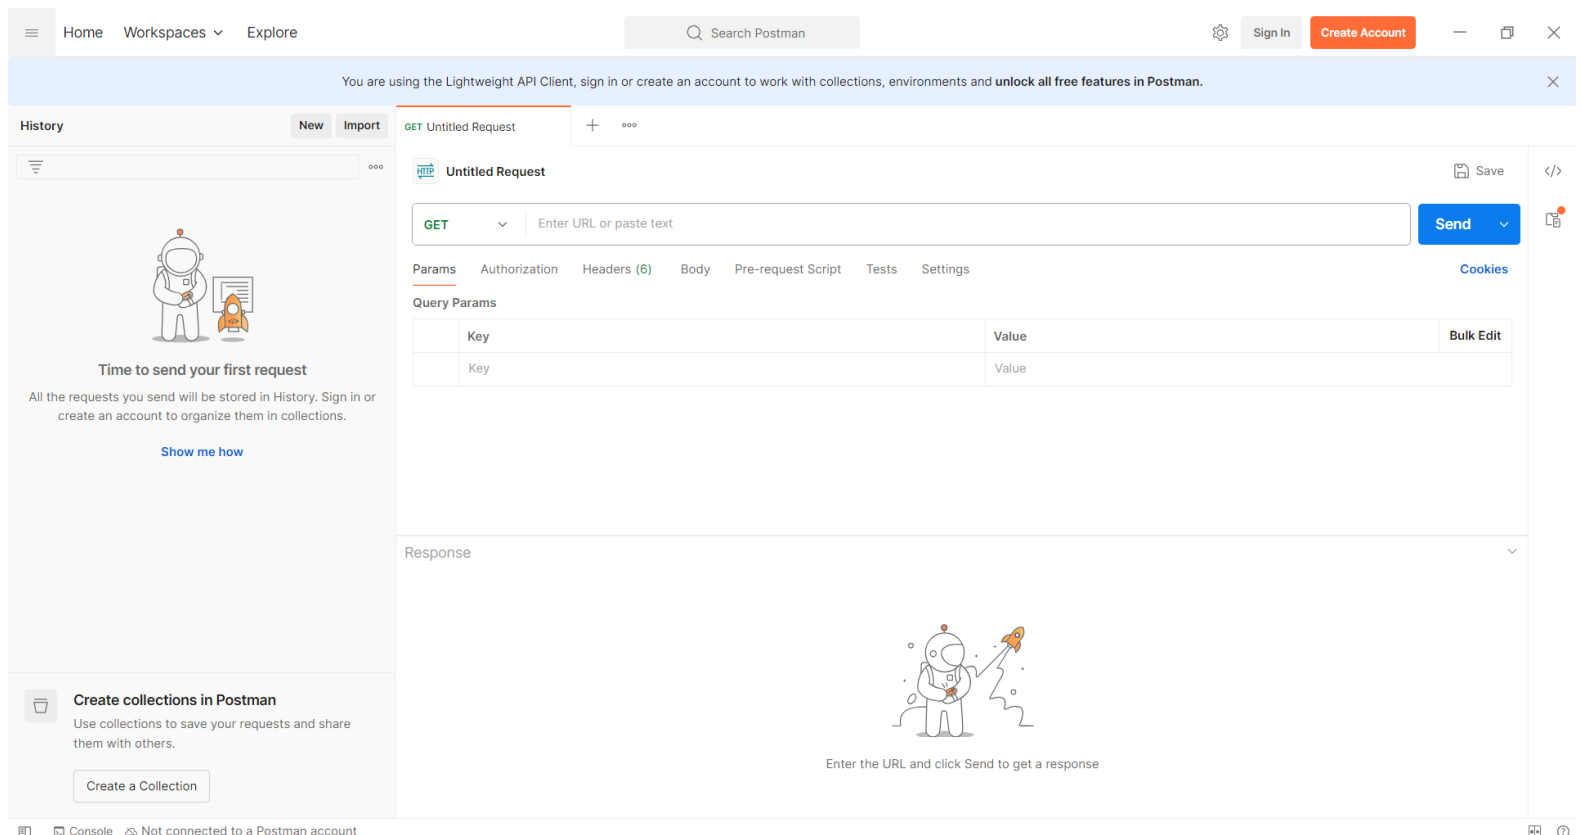

Creo que no necesito darle a New + Http Request porque me da que ya me viene abierto lo que eso abriría (pestaña Untitled Request).

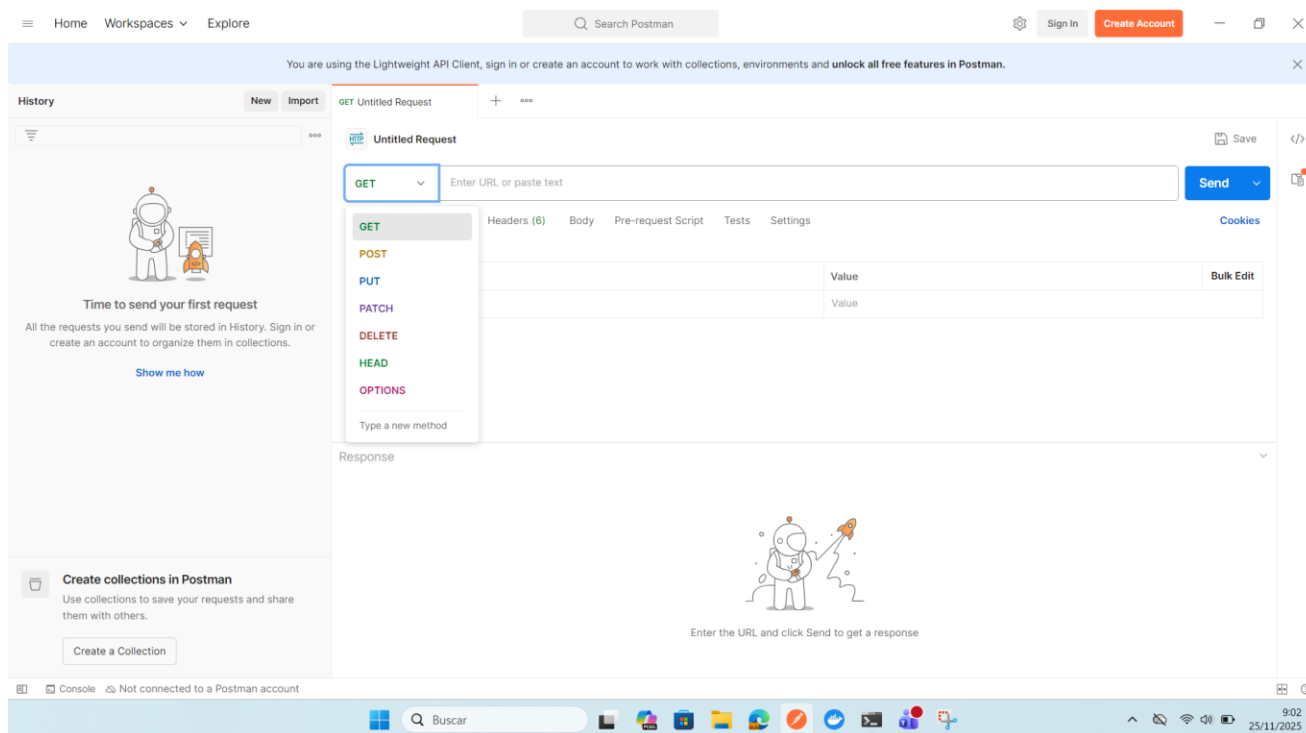

HomeWorkspacesExplore

Search Postman

Sign InCreate Account

You are using the Lightweight API Client, sign in or create an account to work with collections, environments and unlock all free features in Postman.

History

NewImport



Time to send your first request

All the requests you send will be stored in History. Sign in or create an account to organize them in collections.

Show me how

Create collections in Postman

Use collections to save your requests and share them with others.

Create a Collection

GET http://localhost:5000/api/

http://localhost:5000/api/reservas

GET

http://localhost:5000/api/reservas

Send

Params

Authorization

Headers (6)

Body

Pre-request

Query Params

	Key	
	Key	

Bulk Edit

Enter a URL or cURL command

Get started by adding the API request URL or cURL command to test an endpoint. A URL typically has a base location and a path. For example, `https://postman-echo.com/get`.

Response



Click Send to get a response

Console

Not connected to a Postman account

9:05 25/11/2025

Regarding "Set Headers (if needed)
Common headers:" do I need to set headers for get /api /reservas ?

Short answer: No — for a simple GET /api/reservas request, you do NOT need to set any headers in Postman.

Your endpoint:

```
csharp

[HttpGet]
public async Task<ActionResult<IEnumerable<ReservaLeerDto>>> GetReservas()
```

 Copy code

accepts a normal GET request with no authentication, no body, and no special content type. ASP.NET Core will return JSON by default.

✓ So for testing GET /api/reservas in Postman:

You only need:

- Method: GET
- URL: http://localhost:5000/api/reservas
- No headers
- No body
- Press Send

Postman will automatically set the minimal headers it needs, including:

En ReservasController.cs:

```
// GET (is the HTTP Method): api/reservas (esto se refiere a la URL)
// GetReservas tiene por propósito retornar una lista de todas las reservas from the database.
// This is the "read all" operation, GET: api/reservas. List all reservas.
```

```
[HttpGet]
```

2 references

```
public async Task<ActionResult<IEnumerable<ReservaLeerDto>>> GetReservas()
```

Swagger izquierda, Postman derecha:

NEXT PAGE

localhost:5000/swagger/index.html

Execute Clear

Responses

Curl

```
curl -X 'GET' \
'http://localhost:5000/api/Reservas' \
-H 'accept: text/plain'
```

Request URL

http://localhost:5000/api/Reservas

Server response

Code	Details
200	Response body <pre>[{ "reservaId": 1, "fechaHora": "2025-11-25T15:00:00.768", "numeroAsistentes": 6, "dni": "98761234Z", "instalacionId": 1, "usuario": { "dni": "98761234Z", "nombreCompleto": "Laura Gomez" }, "instalacion": { "instalacionId": 1, "localizacion": "Avenida de la Fuerza, Barcelona" } }]</pre>

Postman interface showing a GET request to http://localhost:5000/api/reservas. The response is a JSON array containing reservation details.

GET http://localhost:5000/api/reservas

Send

Params Auth Headers (6) Body Pre-req. Tests Settings Cookies

Query Params

Key	Value	Bulk Edit
Key	Value	

Body

200 OK 357 ms 3.14 KB Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "reservaId": 1,
3   "fechaHora": "2025-11-25T15:00:00.768",
4   "numeroAsistentes": 6,
5   "dni": "98761234Z",
6   "instalacionId": 1,
7   "usuario": {
8     "dni": "98761234Z",
9     "nombreCompleto": "Laura Gomez"
10  },
11   "instalacion": {
12     "instalacionId": 1,
13     "localizacion": "Avenida de la Fuerza, Barcelona"
14   }
15 },
16 ]
17
```

Con lo cual por lo menos con el get api reservas funciona perfectamente postman al igual que swagger.