
ABSTRACT TO MICROSOFT SENTINEL

THE PLAYBOOK · PUBLIC EDITION

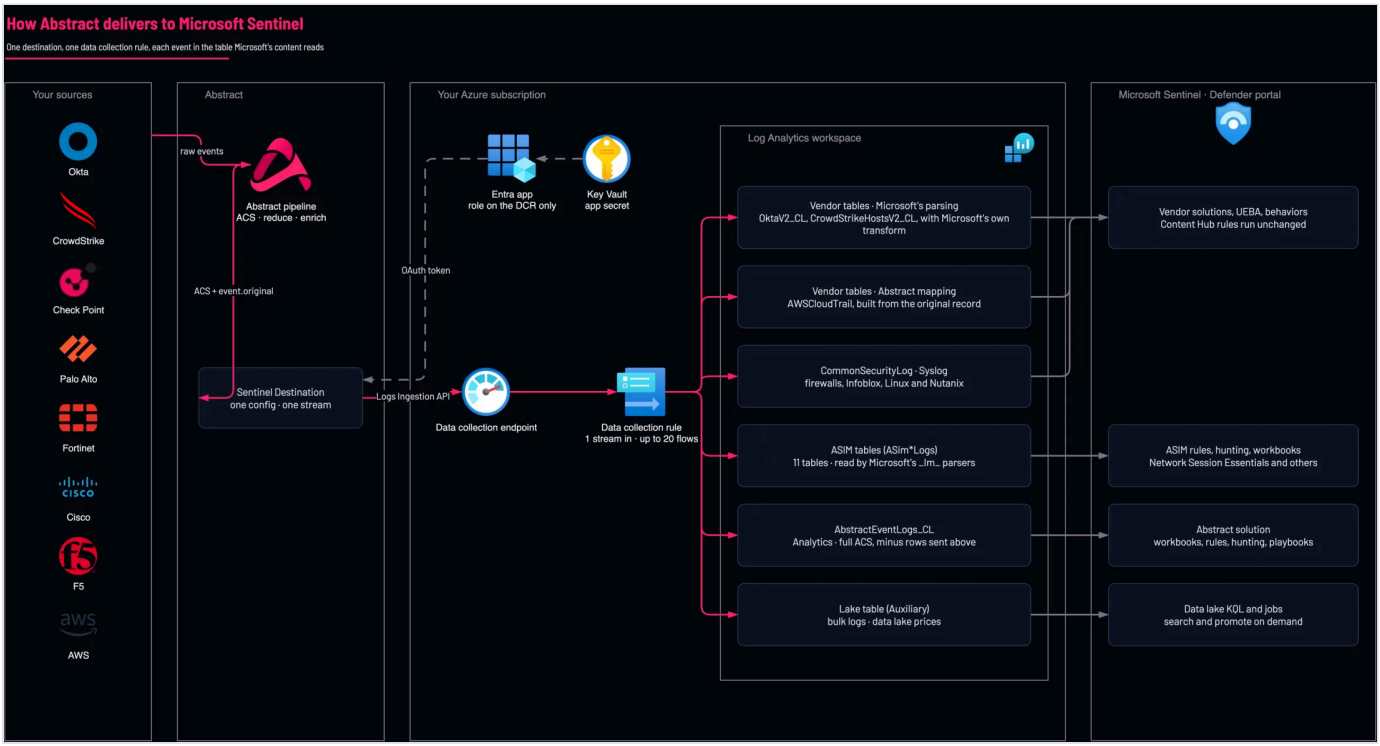

CONTENTS

00 START

01 DISCOVER

02 PLAN

03 BUILD

04 SOURCES

05 CONTENT

06 PROVE

07 HOW OTHERS DO IT

08 AUTOMATE

09 RESOURCES


00

START

ABSTRACT × MICROSOFT SENTINEL

OTHERS SHIP DATA. WE MAKE SENTINEL WORK.

Every source lands where Microsoft's own content expects it. You see what each choice gives and costs before you make it, deploy it once, and prove nothing was lost.

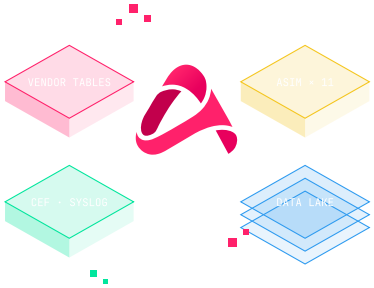

MEASURED IN ABSTRACT'S LAB

19

dataflows on one Data Collection Rule in Abstract's lab, inside Azure's limit of 20

11

ASIM tables routed by that same rule, each read by Microsoft's own parsers and rules

0

rows in DCRLogErrors after the lab run: nothing Azure refused

25/25

real Abstract findings sent, every one landed in ASimAlertEventLogs

WHY THIS IS DIFFERENT

MOST GUIDES HAND YOU A DESTINATION FIELD. THIS ONE HANDS YOU THE REASONS.

We read the public Sentinel documentation of the pipeline vendors on the How others do it tab. Each documents where the data goes. This playbook adds why: what each table gives you, what it costs, who does each step, and the query that proves nothing was lost.

THE USUAL WAY

WHICH TABLE	Cribl: one destination per table
AZURE SETUP	Edge Delta: 41 numbered portal steps
THE IDS	DataBahn: 8 values copied into its destination
DROPPED DATA	Bindplane ASIM mode: records with no mapping are dropped
MICROSOFT CONTENT	Tenzir: OCSF records not mapped to ASIM automatically

THE ABSTRACT WAY

WHICH TABLE	▸ A recommendation per source, with what it lights up and what it costs
AZURE SETUP	▸ One deployment, every step with the role that does it
THE IDS	▸ One script fills them in after the deployment, or read them from Outputs (Build step 11)
DROPPED DATA	▸ One query that must return nothing
MICROSOFT CONTENT	▸ Runs unchanged, and we say when to keep a source on Microsoft

THE PATH

FOUR MOVES. NO GUESSWORK.

READ-ONLY

01 DISCOVER

Run the discovery in your own subscription: tables, volumes, connectors, rules, cost, and the tables each rule reads.

YOUR CHOICES

02 PLAN

Pick where each source lands, with what it gives and costs, and the monthly estimate.

ONE DEPLOY

03 BUILD

One deployment, one route per source, a real screen for every click.

EVIDENCE

04 PROVE

Rows per table, nothing refused, and a drift check against your plan.

YOUR SCOPE

SWITCH OFF WHAT YOU DON'T RUN.

Every family starts in scope. Switch one off and the plan, the estimate, the parameters file and the printed playbook leave it out. Your switches stay in this browser.

FIREWALLS
IN SCOPE

Check Point, Palo Alto, Fortinet, Cisco ASA, F5 BIG-IP ASM

ENDPOINT
IN SCOPE

CrowdStrike hosts, CrowdStrike process

IDENTITY
IN SCOPE

Okta, Entra ID, User changes

CLOUD
IN SCOPE

AWS CloudTrail, Azure activity

NETWORK SERVICES
IN SCOPE

Infoblox DNS, Infoblox DHCP, Linux and Nutanix

WEB AND PROXY
IN SCOPE

Zscaler, Netskope, Squid

WINDOWS
IN SCOPE


Windows security events

ABSTRACT
IN SCOPE

Abstract findings, Everything else

ARCHITECTURE

ONE STREAM IN. EVERY TABLE MICROSOFT READS.

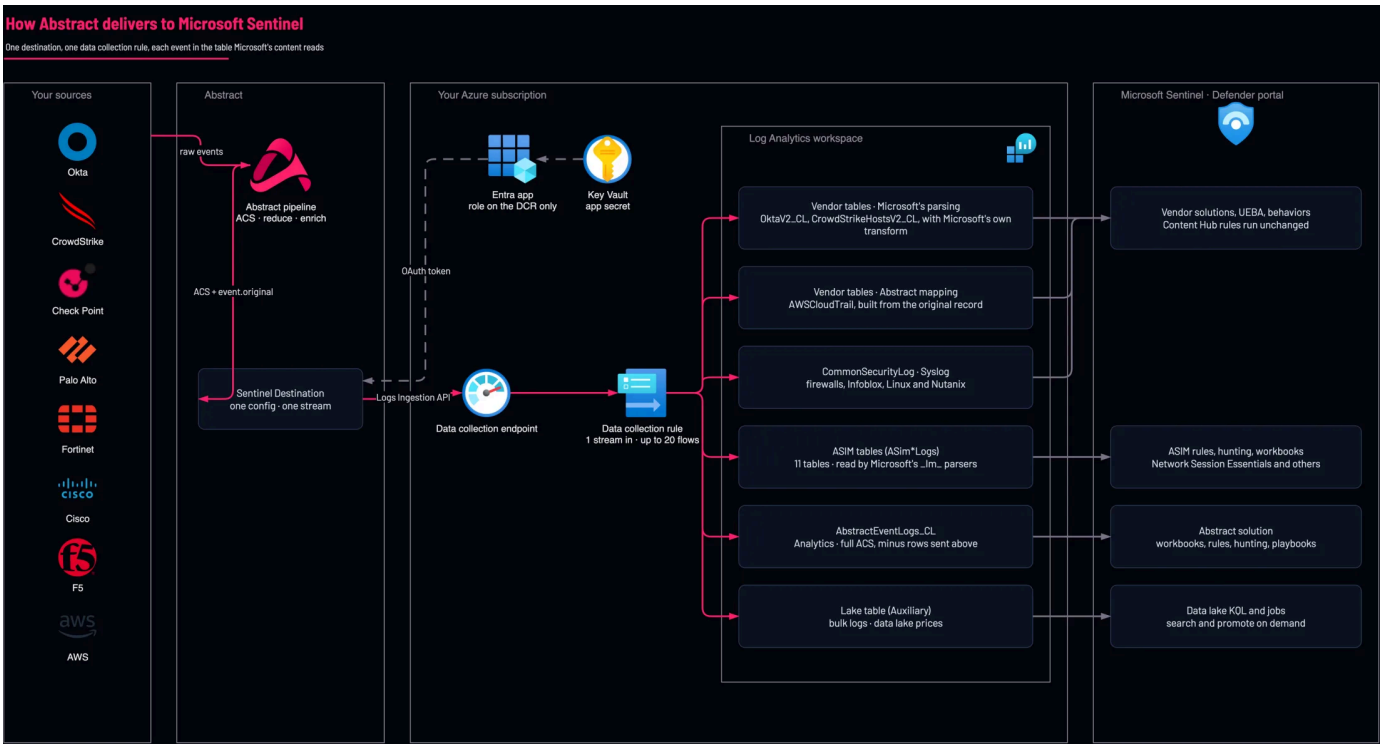

Each route the rule takes and the Sentinel table it writes, as run in Abstract's lab.

01

DISCOVER

A read-only report of your workspace's tables, cost, connectors and content, to choose routes from measured data.

01 · DISCOVER

KNOW WHAT YOU HAVE BEFORE YOU MOVE IT.

01 · DISCOVER

MEASURE THE WORKSPACE FIRST.

A read-only inventory of your Sentinel workspace: tables and their volume, connectors, data collection rules, content, cost, and the tables each rule reads.

ON ITS OWN

DEPLOY THE DISCOVERY

The discovery runs from inside your subscription and only reads. It never changes workspace settings, tables, rules, connectors, data collection rules or anything in Entra ID. The report goes to a storage account you own.

DEPLOY TO AZURE →

AS PART OF THE SOLUTION

TICK ONE BOX

The discovery can also run with the solution deployment: tick **Sentinel Discovery run (optional)** on the form's Content tab, and the report lands in the solution's resource group.

WHO Your Azure administrator, with Owner, or Contributor plus Role Based Access Control Administrator, on the discovery's resource group, on the workspace's resource group, and on its subscription for the subscription read.

RUN THE DISCOVERY

FOUR STEPS, ONE OWNER.

1 OPEN THE DISCOVERY TEMPLATE

☐ DONE

Your Azure administrator

`Deploy to Azure › Azure portal sign-in`

The discovery runs from inside your subscription and only reads. Deploy it into a new, dedicated resource group so clean-up is simple. It can also run as part of the solution: tick **Sentinel Discovery run (optional)** on the form's Content tab, and the report lands in the solution's resource group.

DEPLOY TO AZURE Opens the Azure portal in a new tab.

`Save abstract-sentinel-discovery.json`

Sentinel discovery template (azuredeploy.json): read-only inventory and report · 161 KB

FIELD	VALUE
Or	Deploy a custom template › Build your own template in the editor › Load file, with the discovery file

DONE WHEN The portal shows the discovery template's parameters.

2 FILL IN THE PARAMETERS

DONE

Your Azure administrator

`Custom deployment` › `Basics`

The person deploying needs Owner, or Contributor plus Role Based Access Control Administrator, on this resource group, on the workspace's resource group, and on its subscription for the subscription read.

PARAMETER	VALUE
Resource group	A new resource group for the discovery
Workspace Name	Your Sentinel workspace
Workspace Resource Group	The workspace's resource group, if it is another one
Workspace Subscription Id	The workspace's subscription, if it is another one
Send To Abstract	`false`, the default
Everything else	Leave the default
Then	**Review + create**, **Create**

DONE WHEN The deployment shows **Your deployment is complete** after 5 to 15 minutes.

3 OPEN THE REPORT

DONE

Your Azure administrator

`Storage accounts` › `the discovery account` › `Containers` › `sentinel-discovery` › `runs` › `your workspace` › `the run's time`

Select `report.html` and **Download**, then open it in a browser; it needs no network access. If the portal says you lack permission, switch **Authentication method** to **Microsoft Entra user account** at the top of the container. The deployment's output `reportBlobUrl` names the file.

FILE	WHAT IT IS
report.html	The report
inventory.zip	Everything below in one file
csv/*.csv	One file per area
summary.json	Totals and the status of each area
read_errors.csv	Anything that could not be read, why, and the role that would grant it

DONE WHEN The report opens and shows your workspace.

4 KEEP IT IN YOUR TENANT, OR SEND A COPY

☐ DONE

Your Azure administrator

`Custom deployment › Send To Abstract`

Off by default: with it off, nothing leaves your tenant. When you agree to send a copy, deploy again with **Send To Abstract** `true` and the SAS URL Abstract gives you. Exactly two files leave, over HTTPS: `inventory.zip` and `report.html`. They hold resource names and IDs, table volumes, computer names and IP addresses from Heartbeat, device vendor and product names, and rule and function KQL unless you leave it out. No log records, watchlist items or credentials.

PARAMETER	VALUE
Send To Abstract	`true`, only when agreed
Abstract Sas Url	The HTTPS SAS URL Abstract gave you

PARAMETER	VALUE
Skip Rule Query Text, Skip Content Query Text	`true` to leave the KQL text out

DONE WHEN The output `sentToAbstract` reads as you chose.


READ THE REPORT

WHAT THE REPORT HOLDS.

The deployment's output `reportBlobUrl` names the report. The run writes these files next to it:

FILE	WHAT IT IS
`report.html`	The report
`inventory.zip`	Everything below in one file
`csv/*.csv`	One file per area
`summary.json`	Totals and the status of each area
`read_errors.csv`	Anything that could not be read, why, and the role that would grant it

REPORT SHEET	WHAT IT SHOWS
Overview	Billable volume per day, tables with data, analytics rules enabled and the areas read
Tables	Each table's volume and plan, and what reads it
Tier and benefits	The workspace's tier and the benefits Microsoft applied
Connectors	Data connectors and data collection rules
Content	Analytics rules, hunting queries, workbooks and playbooks, and the tables each reaches
UEBA and SOC optimization	UEBA settings and Microsoft's SOC optimization recommendations
CEF and Syslog	Senders and their device vendors and products
Data lake	Tables on the lake tier
Readiness	What the Abstract routes would need in this workspace
TCO	Measured volume at list price, with each price's source and date
Not read	Anything the identity could not read

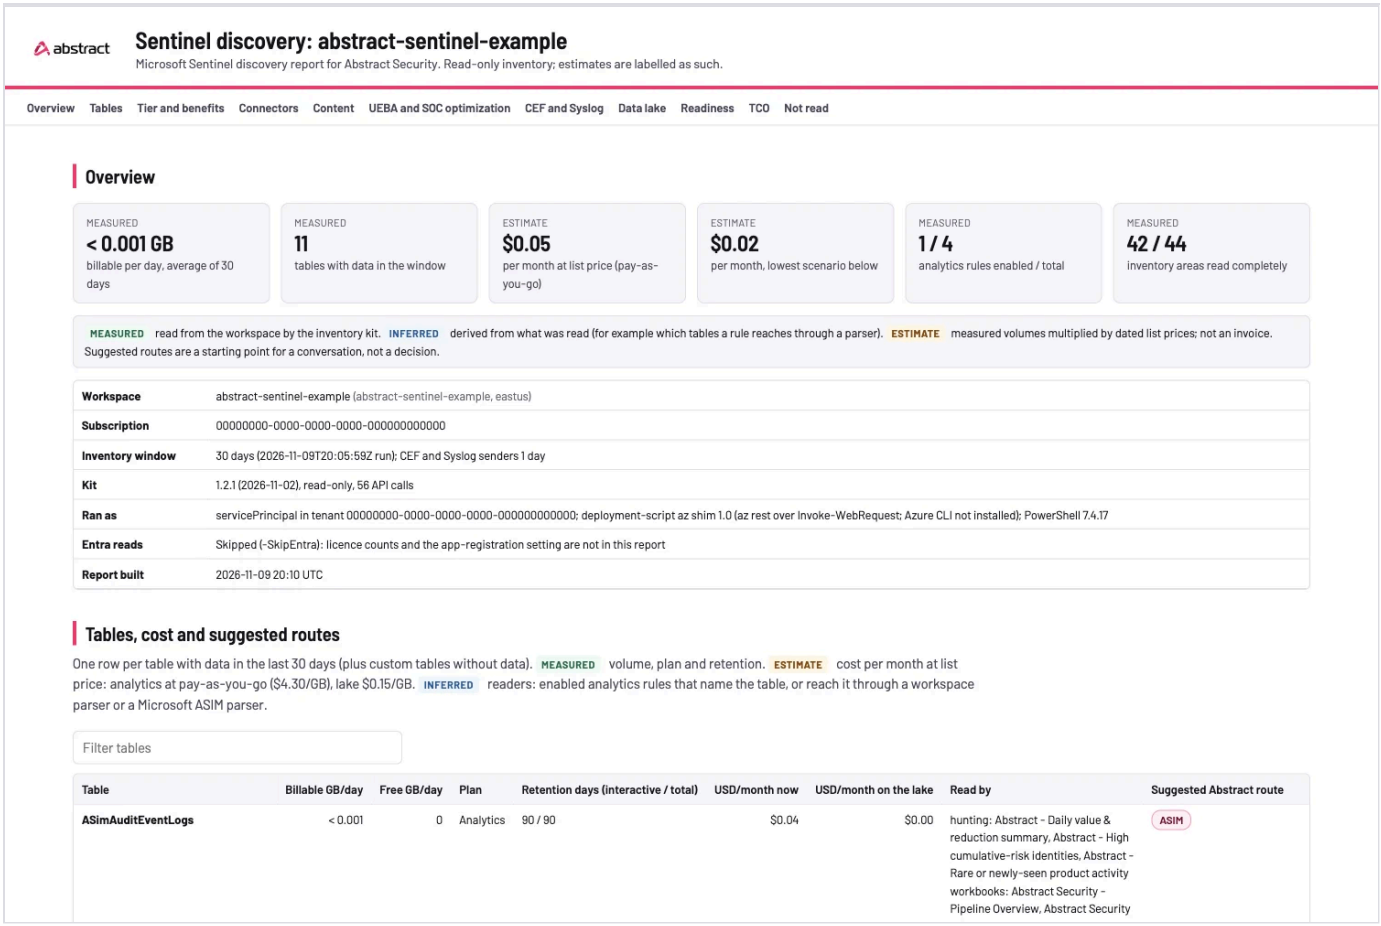

The report opened from the storage account: measured and estimated figures are labelled

---

LOAD YOUR REPORT

PLAN FROM YOUR NUMBERS.

Load the report's `tables.csv` and the Plan tab estimates from your own volumes instead of the example.

No report loaded. The plan shows example volumes, labelled example.

The file is read in this browser and kept only in this browser. Nothing is uploaded.

02

PLAN

Pick where each source lands. Every option says what it gives you and what it costs, and the estimate follows your choices.

02 · PLAN

CHOOSE WITH THE TRADE-OFFS IN VIEW.

02 · PLAN · YOUR SOURCES

EVERY SOURCE. ITS RIGHT TABLE.

Each tile shows where the source lands now. Select one to see every option, with what it gives and what it costs. Tiles that read Left on Microsoft stay on Microsoft's own connectors, and we say why.

No report loaded: the estimate uses **example** volumes. Load your report.

FIREWALLS

Check Point
`CommonSecurityLog`

Palo Alto
`CommonSecurityLog`

Fortinet
`CommonSecurityLog`

ENDPOINT

CrowdStrike hosts
`CrowdStrikeHostsV2_CL`

CrowdStrike process
`ASimProcessEventLogs`

Cisco ASA
CommonSecurityLog

F5 BIG-IP ASM
CommonSecurityLog

IDENTITY

Okta
OktaV2_CL

Entra ID
Left on Microsoft

User changes
ASimUserManagementActivityLogs

CLOUD

AWS CloudTrail
AWSCloudTrail

Azure activity
Left on Microsoft

NETWORK SERVICES

Infoblox DNS
Syslog

Infoblox DHCP
Syslog

Linux and Nutanix
Syslog

WEB AND PROXY

Zscaler
ASimWebSessionLogs

Netskope
ASimWebSessionLogs

Squid
ASimWebSessionLogs

WINDOWS

Windows security events
Left on Microsoft's agent

ABSTRACT

Abstract findings
ASimAlertEventLogs

Everything else
AbstractEventLogs_CL

02 · PLAN

WHERE SHOULD CHECK POINT LAND?

RECOMMENDED YOUR CHOICE

MICROSOFT'S COMMONSECURITYLOG

CommonSecurityLog

GIVES YOU

Microsoft's Check Point solution, the ASIM network parsers, and behaviour analytics keyed on the device vendor

COSTS YOU

Analytics-tier price per GB

Check Point solution

Network Session Essentials UEBA

Lab run: 15 of 15 rows landed in CommonSecurityLog, 0 refused.

ASIM NETWORK SESSIONS

ASimNetworkSessionLogs

GIVES YOU

Normalized rows every ASIM rule reads, alongside your other firewalls

COSTS YOU

Microsoft's solution for this vendor reads CommonSecurityLog, not this

ASIM rules

DATA LAKE

AbstractLake_CL

GIVES YOU

Allowed-traffic logs at about 1/50th of the price, which Microsoft rates suitable for the lake

COSTS YOU

No analytics rules run on it, so keep threat logs out

Hunting KQL jobs

WHAT IT COSTS.

Microsoft's list prices for ingestion, per month, before and after your plan. Retention and commitment tiers are left out.

EXAMPLE VOLUMES | ESTIMATE

ALL ON THE ANALYTICS TIER · ESTIMATE

$39,309

per month

WITH YOUR PLAN · ESTIMATE

$39,309

per month

DIFFERENCE · ESTIMATE

$0

per month

TABLE	GB PER DAY (EXAMPLE)	TIER	USD PER MONTH (ESTIMATE)
ASimAlertEventLogs	0.01	Analytics	$1
ASimDnsActivityLogs	30	Analytics	$3,922
ASimProcessEventLogs	25	Analytics	$3,268
ASimUserManagementActivityLogs	0.20	Analytics	$26
ASimWebSessionLogs	60	Analytics	$7,843
AWSCloudTrail	12	Analytics	$1,569
CommonSecurityLog	150	Analytics	$19,608
CrowdStrikeHostsV2_CL	0.50	Analytics	$65
OktaV2_CL	3.0	Analytics	$392
Syslog	20	Analytics	$2,614

No table in this plan moves to the data lake yet. Choose a Data lake option on a source, such as AWS CloudTrail, to see the difference.

List prices for eastus, read 2026-11-08 from the Azure Retail Prices API: Analytics $4.30 and data lake $0.15 per GB ingested, 30.4 days a month. Retention, commitment tiers and benefits are left out.

A shared table such as `CommonSecurityLog` counts all its sources together: the discovery reports volume per table, not per source, so a shared table moves to the lake only when every source that writes it chooses the lake.

02 · PLAN · EXPORT

TAKE IT WITH YOU.

Azure allows 20 dataflows on one Data Collection Rule. Your plan's count updates as you choose.

11 of 20 dataflows: 1 for the Abstract table, 2 ASIM, 0 lake, 8 native routes.

The parameters file sets the routes only. Deploy it with the solution template, as the Automate tab shows, and check the result with the drift check on the Prove tab.

03

BUILD

The Abstract app, the one-deploy solution and the destination that every route uses.

03 · BUILD

SET UP ONCE, PER WORKSPACE.

One deployment through a guided form, then the destination in Abstract. Under an hour across three people.

1 OPEN THE ABSTRACT SOLUTION IN THE AZURE PORTAL

☐ DONE

Your Azure administrator


`Deploy to Azure › Azure portal sign-in`

Select the button and sign in to the Azure portal. When the portal asks *Do you trust the authors code?*, select **Yes, I trust the authors**. The form reads your Azure resources to fill its lists. If you select No, the portal shows a plain parameter form with no lists or checks.


DEPLOY TO AZURE

Opens the Azure portal in a new tab.


FIELD	VALUE
Trust prompt	**Yes, I trust the authors**

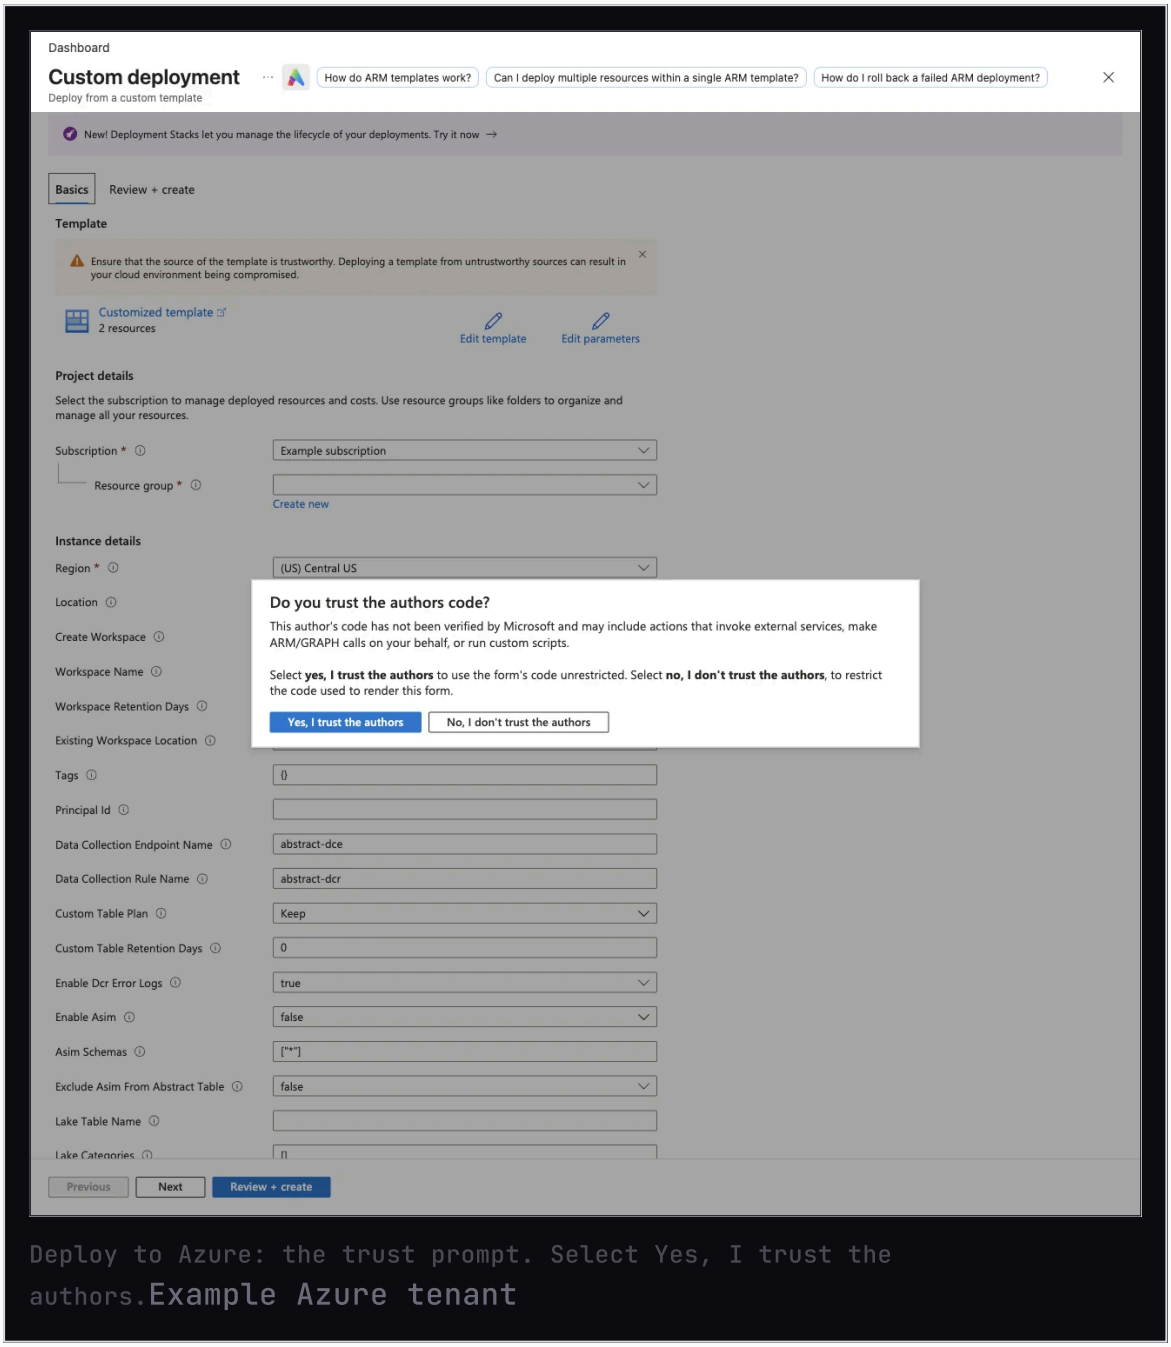

Deploy to Azure: the trust prompt. Select Yes, I trust the authors.Example Azure tenant

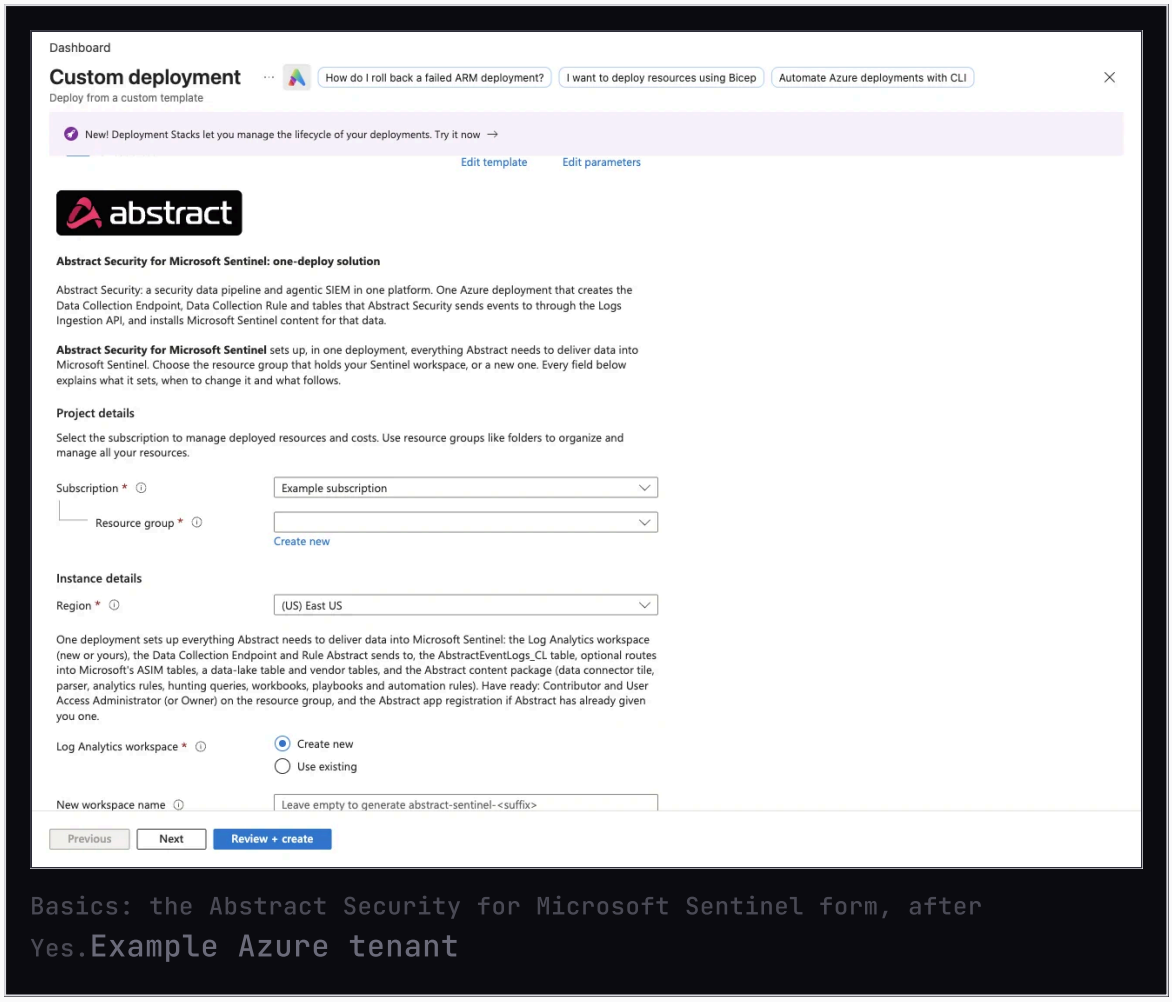

Basics: the Abstract Security for Microsoft Sentinel form, after Yes. Example Azure tenant

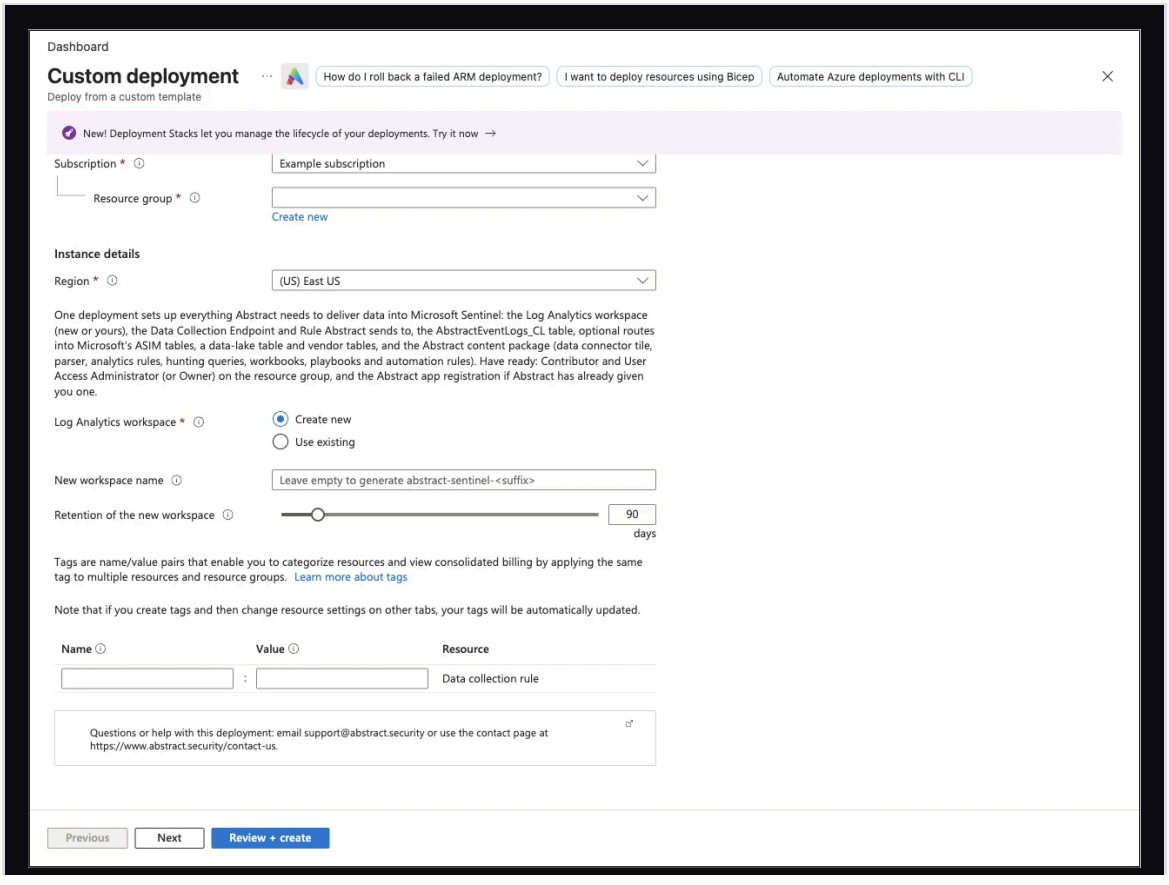

```
The foot of Basics: where to reach Abstract support.Example Azure
tenant
```

DONE WHEN The form opens on **Basics** with the Abstract logo and the tabs Basics, Abstract app, Data collection, ASIM, Data lake, Vendor tables, Content, Playbooks and Review + create.

2 BASICS: CHOOSE THE WORKSPACE


DONE

Your Azure administrator


Deploy to Azure › Basics

Choose the resource group that holds your Sentinel workspace. The list under **Use existing** shows only workspaces that run Microsoft Sentinel, and the form reads the workspace's region for you.

FIELD	VALUE
Subscription	The subscription of your Sentinel workspace
Resource group	The resource group that holds the workspace
Log Analytics workspace	**Use existing**, or **Create new** for a new Sentinel workspace
Existing Microsoft Sentinel workspace	Your workspace
Tags	Any tags your policy requires, for example `owner`

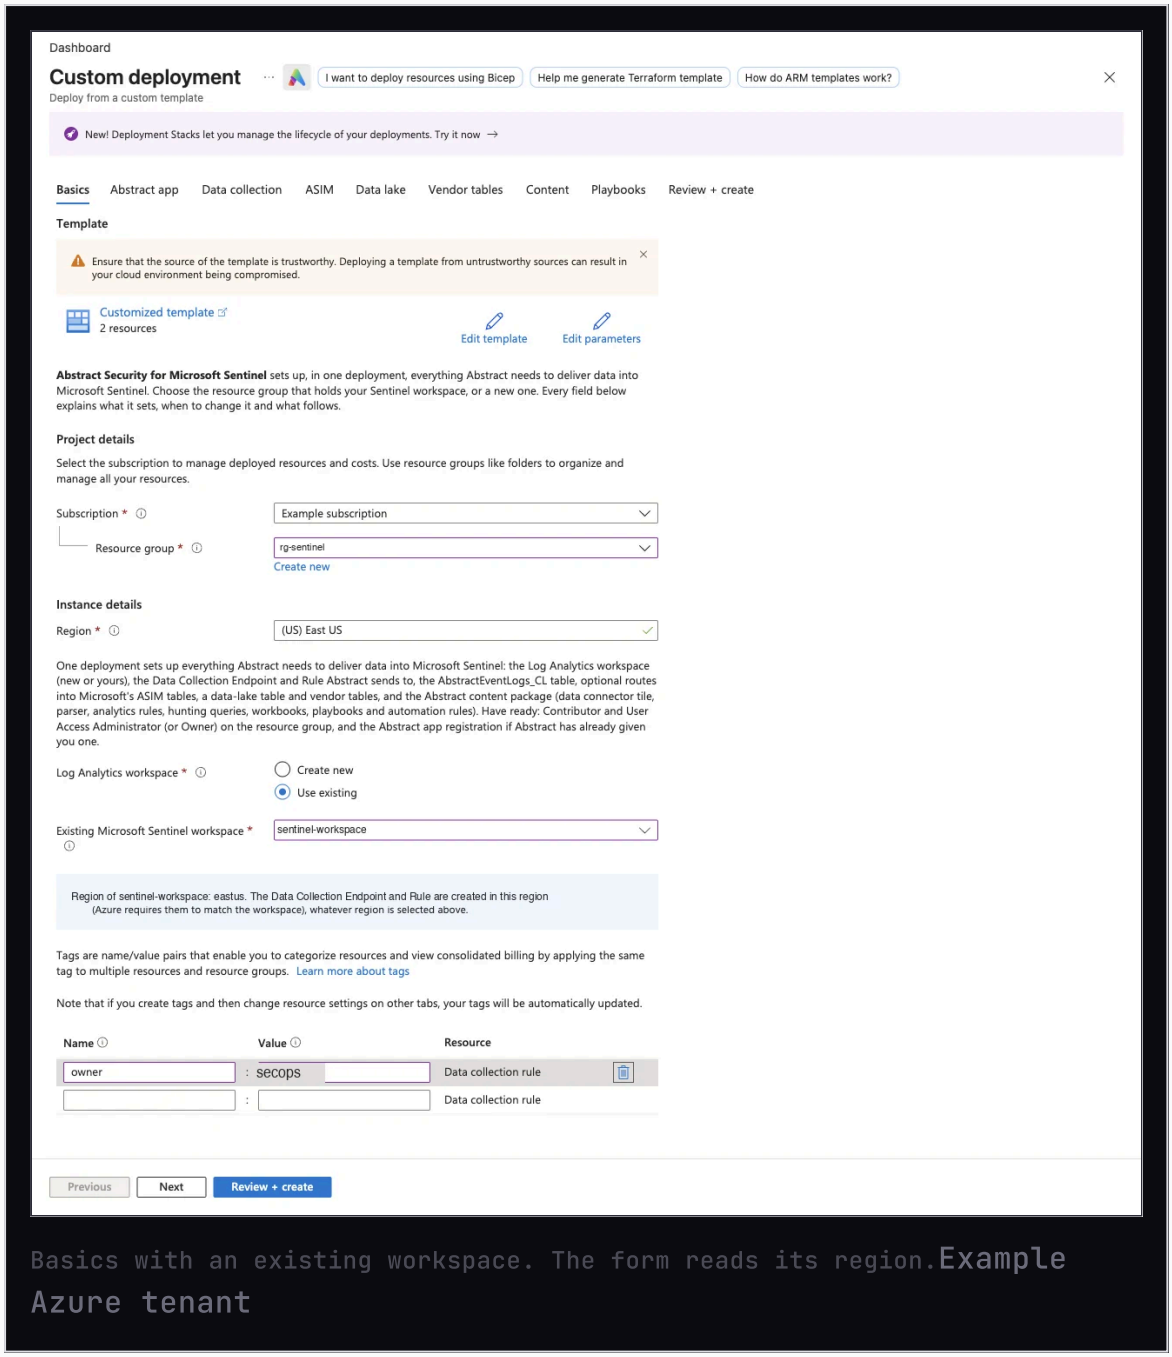

Basics with an existing workspace. The form reads its region.Example Azure tenant

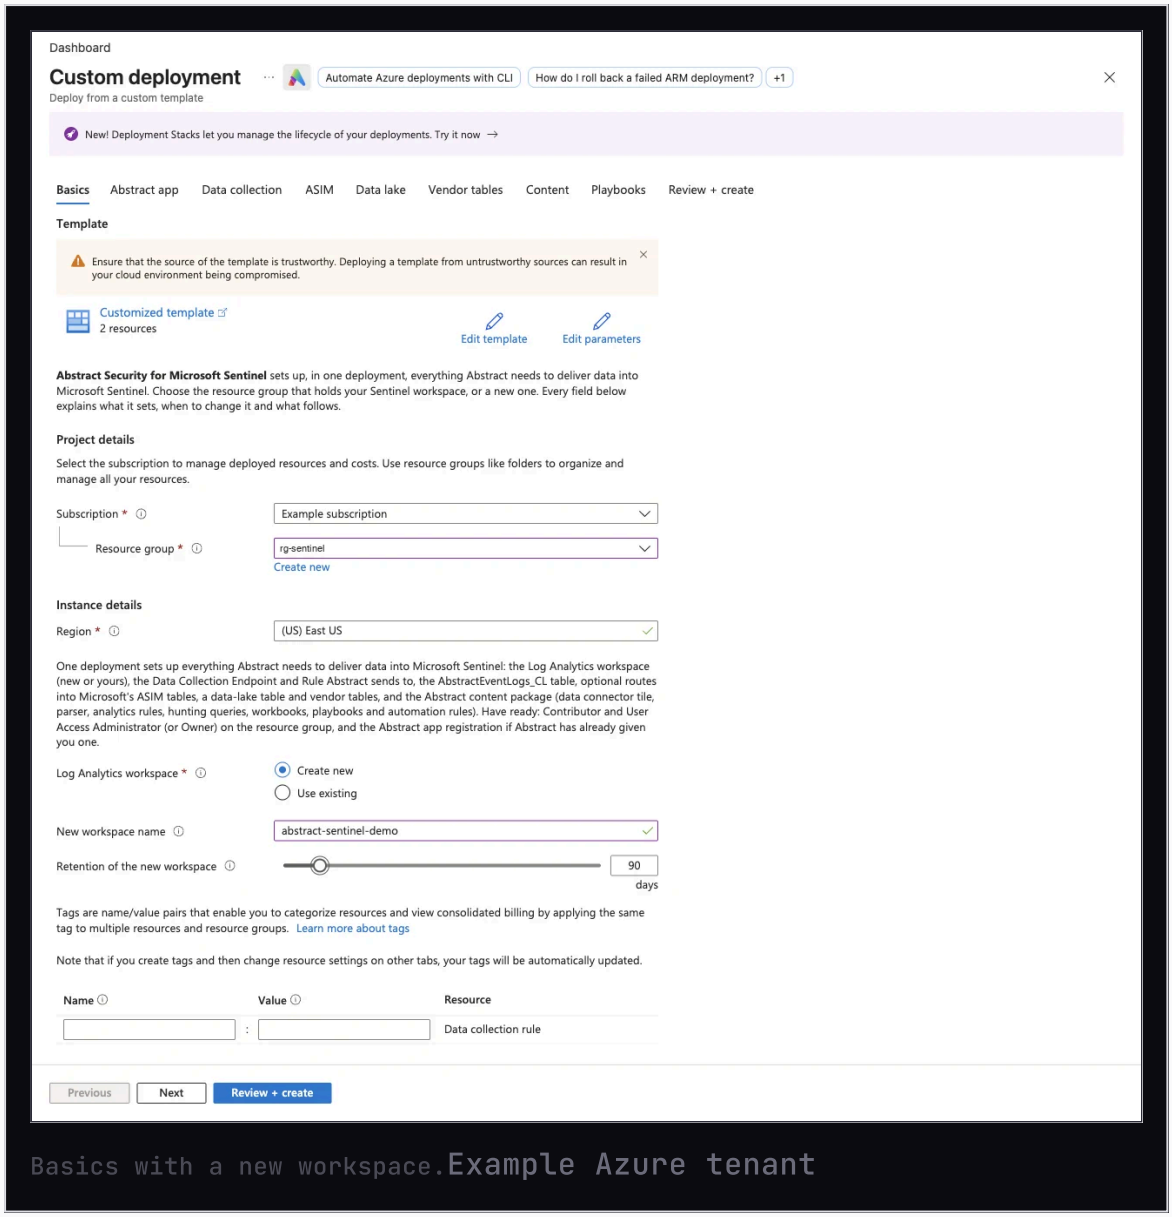

Basics with a new workspace.Example Azure tenant

DONE WHEN The workspace is selected and the form shows its region.

3 ABSTRACT APP: REGISTER THE APP ABSTRACT SENDS AS

☐ DONE

Your Azure administrator


`Deploy to Azure › Abstract app › Pick or register › Create new › Change selection`

To create the app here, select **Change selection**, enter a name, and set *Supported account types* to **Single tenant only**. The default option keeps **Register** disabled


until you add allowed tenants. After **Register**, Azure opens the app's *Certificates & secrets* page: select **New client secret**, copy the **Value** now, then close the page with **X** to return to the form. Enter that value in Abstract, not in the form's *Client secret* box, which this deployment does not use.

The deployment gives this app one role, Monitoring Metrics Publisher, on the data collection rule only.


FIELD	VALUE
How to identify the Abstract app	**Pick or register**
Service principal type	**Create new**
Name	`abstract-sentinel-destination`
Supported account types	**Single tenant only**
Then	**Register**; **New client secret**; copy **Value**; close with **X**
App already registered	**Select existing** and pick it, or **Enter the Object ID** of its enterprise application

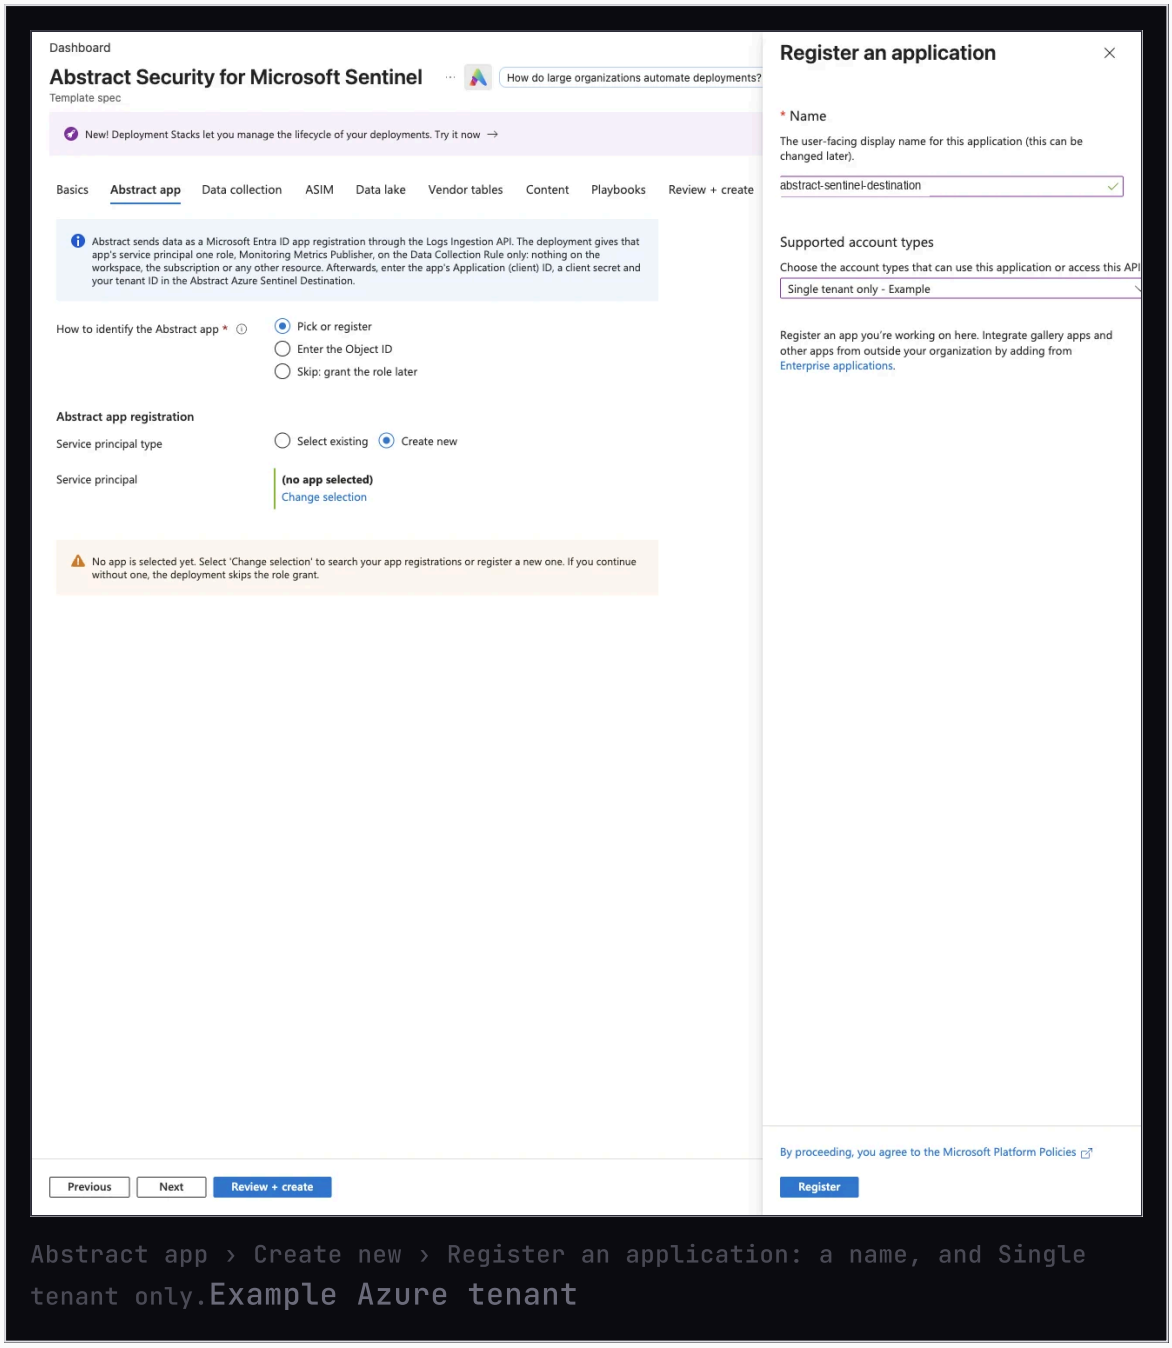


Abstract app › Create new › Register an application: a name, and Single tenant only.Example Azure tenant

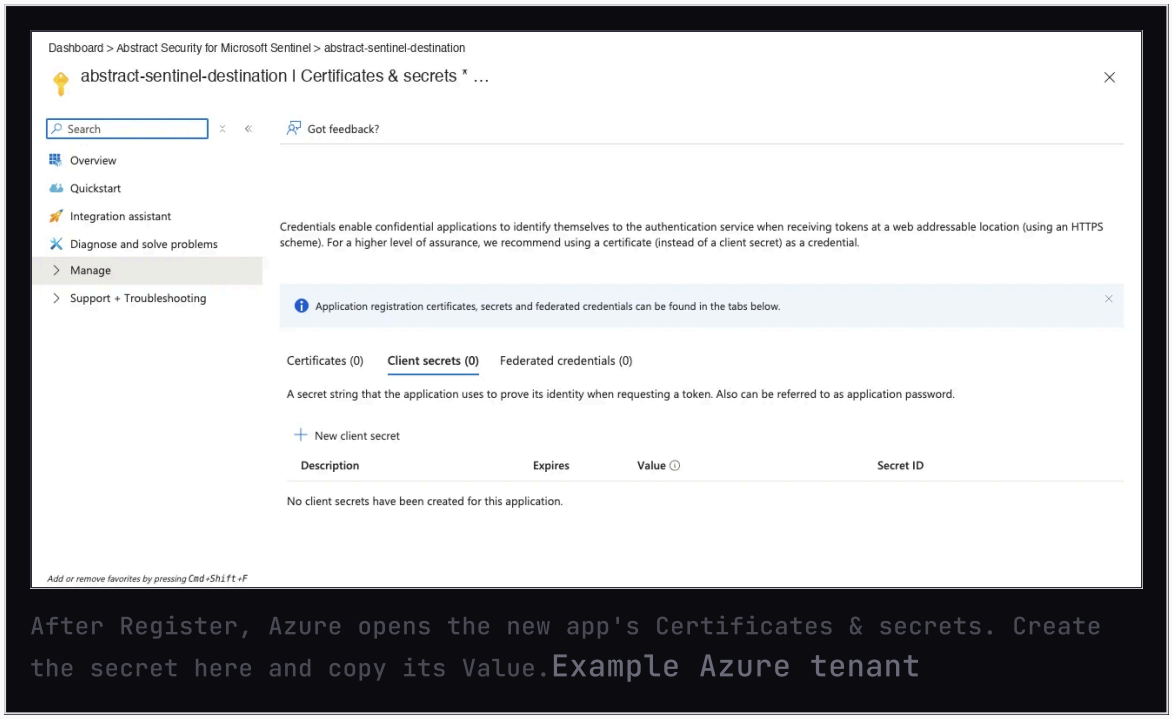

After Register, Azure opens the new app's Certificates & secrets. Create the secret here and copy its Value.Example Azure tenant

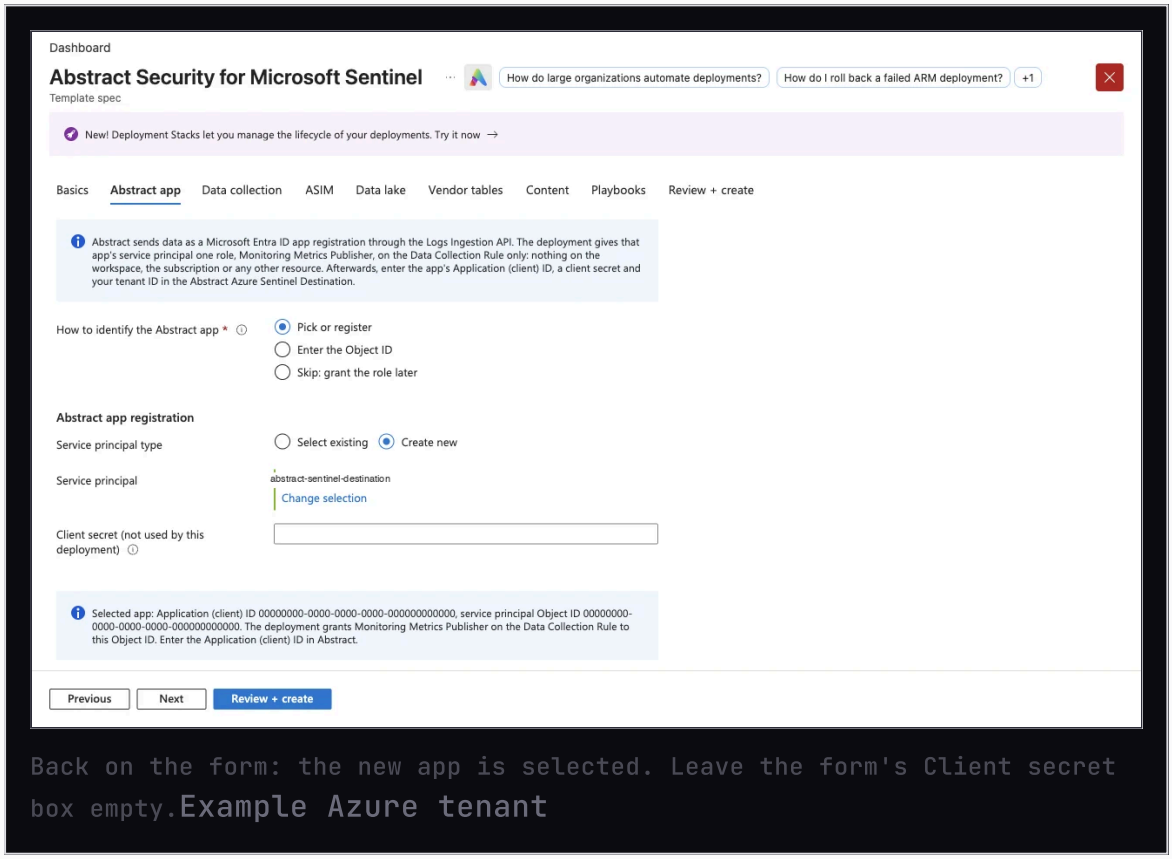

Back on the form: the new app is selected. Leave the form's Client secret box empty.Example Azure tenant

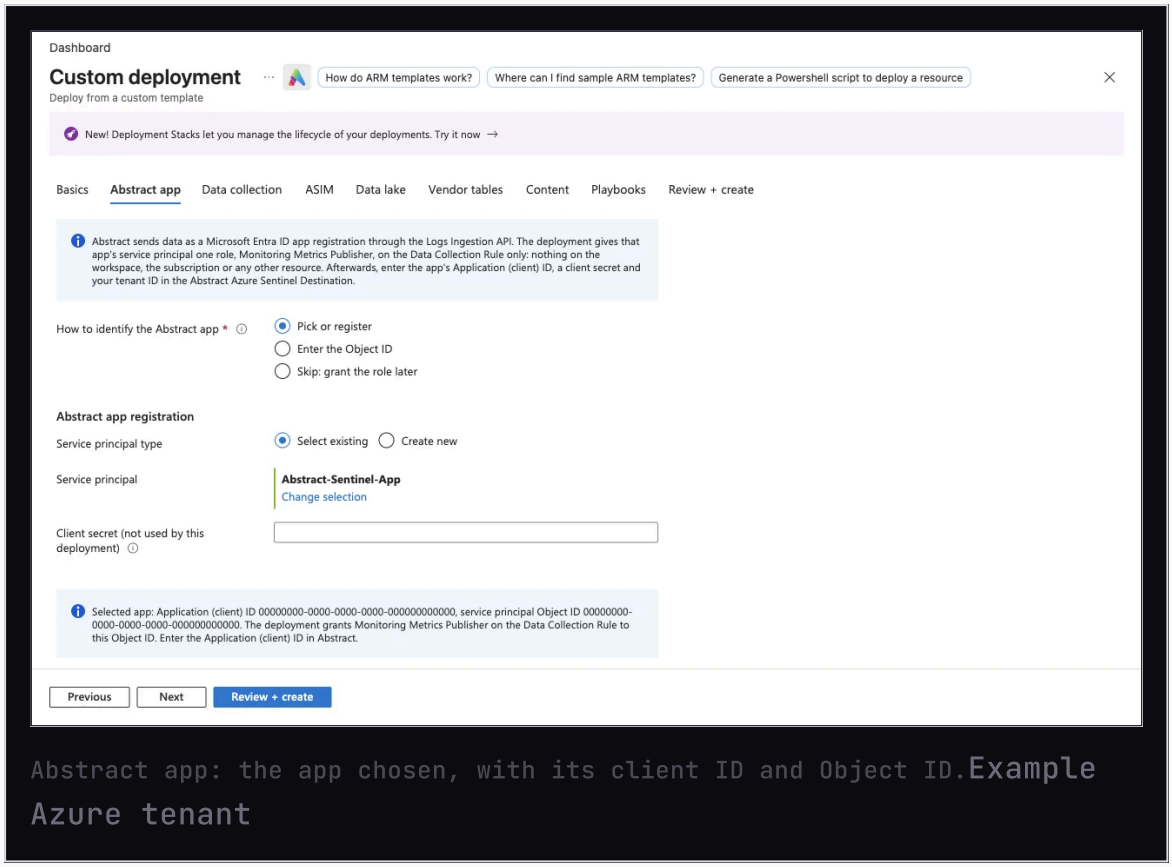

Abstract app: the app chosen, with its client ID and Object ID.Example Azure tenant

DONE WHEN The tab shows the selected app with its Application (client) ID, and the secret Value is saved in your password manager or Key Vault.

4 DATA COLLECTION: THE ENDPOINT AND RULE

☐ DONE


Your Azure administrator

`Deploy to Azure › Data collection`

Keep the default names on a first deployment. When you deploy again later, choose **Use existing** and the same endpoint and rule: the rule then keeps its ID and Abstract keeps sending.

FIELD	VALUE
Data Collection Endpoint	**Create new**, `abstract-dce`
Data Collection Rule	**Create new**, `abstract-dcr`
Plan of AbstractEventLogs_CL	Keep

FIELD	VALUE
Record ingestion errors in DCRLogErrors	On

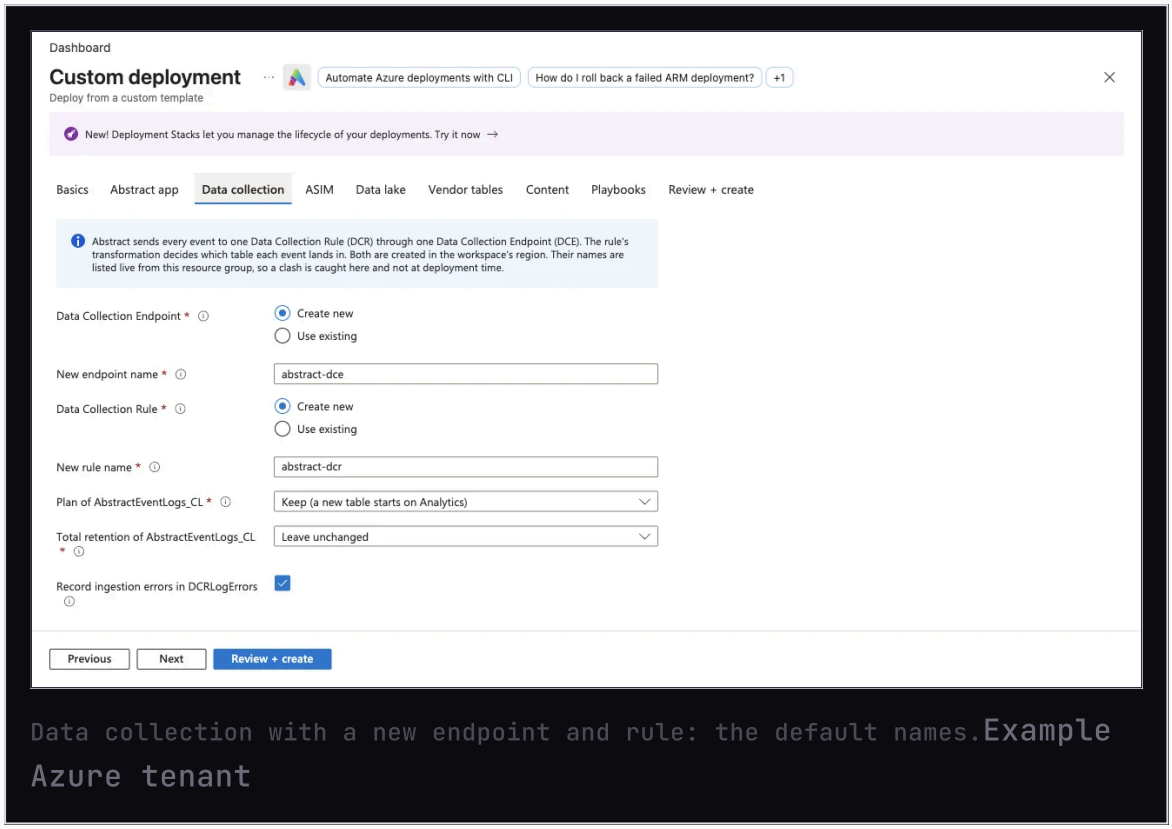

Data collection with a new endpoint and rule: the default names.Example Azure tenant

DONE WHEN The tab shows no message under either name.

5 ASIM: WRITE MICROSOFT'S ASIM TABLES

☐ DONE


Your Azure administrator

Deploy to Azure › ASIM


Recommended. Microsoft's ASIM rules, hunting queries and workbooks then read Abstract data. **One copy** stores each mapped event once, in its ASIM table. See the ASIM tables tab.

FIELD	VALUE
Write mapped events into Microsoft's ASIM tables	On
ASIM schemas	All eight

FIELD	VALUE
One copy: keep ASIM-mapped events out of AbstractEventLogs_CL	On

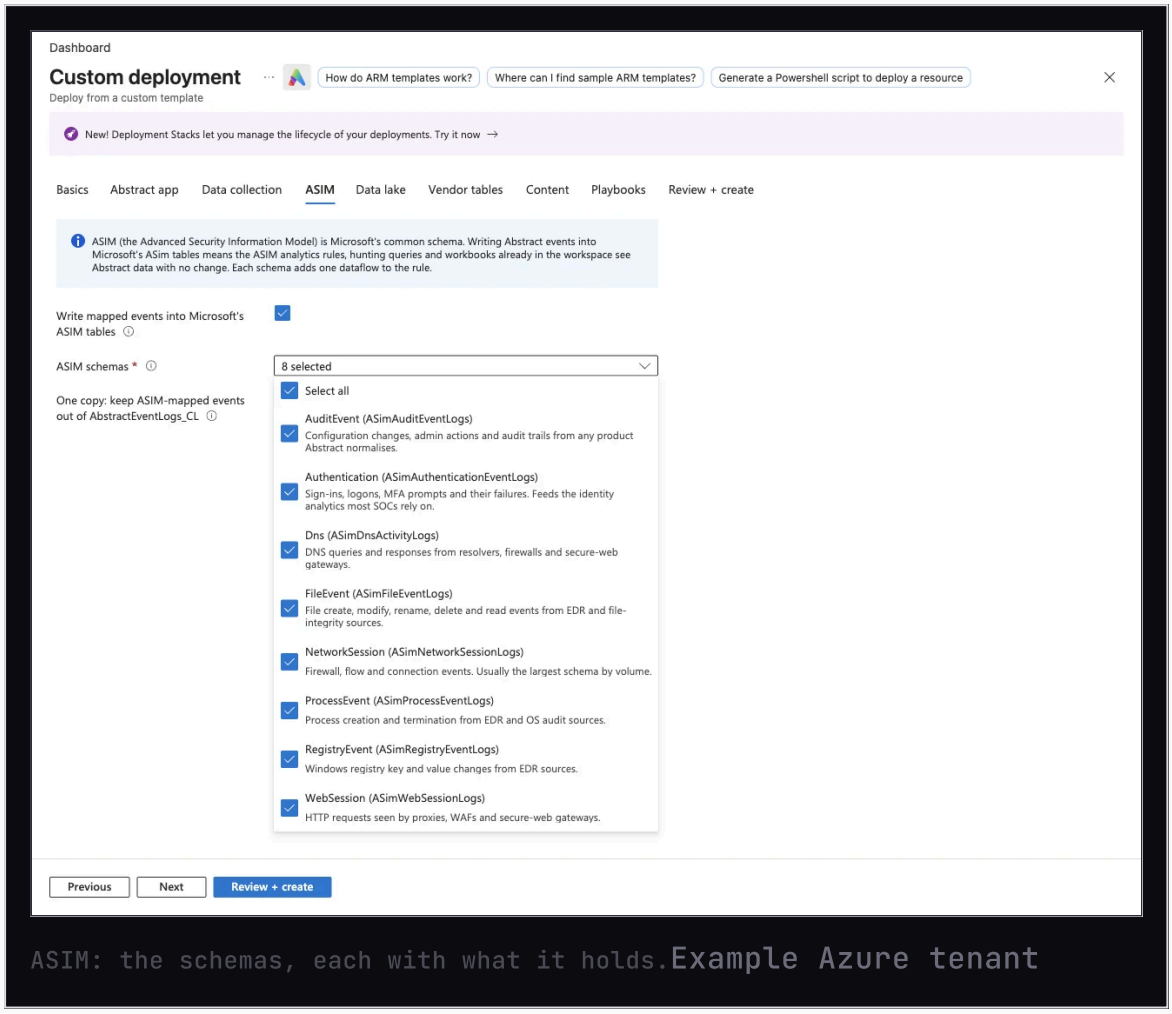

ASIM: the schemas, each with what it holds.Example Azure tenant

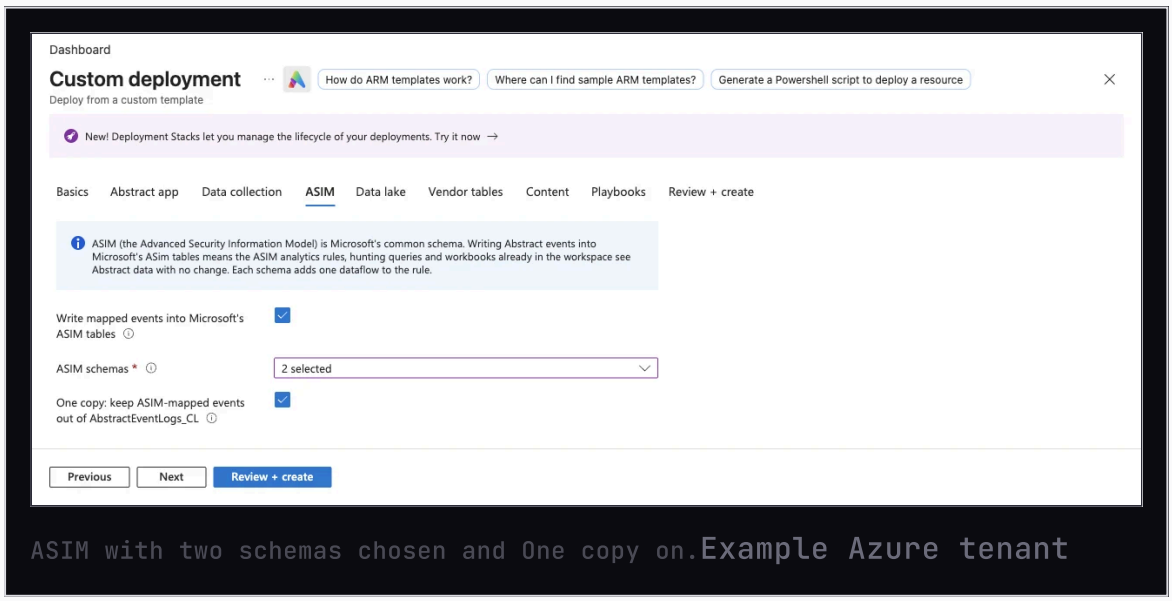

ASIM with two schemas chosen and One copy on.Example Azure tenant

DONE WHEN All eight schemas are listed and One copy is ticked.

6 DATA LAKE: OPTIONAL


DONE

Your Azure administrator

Deploy to Azure › Data lake

Leave it off for now, or see the Data lake tab.

FIELD	VALUE
Send chosen categories to a data-lake table	Off, or as the Data lake tab sets it

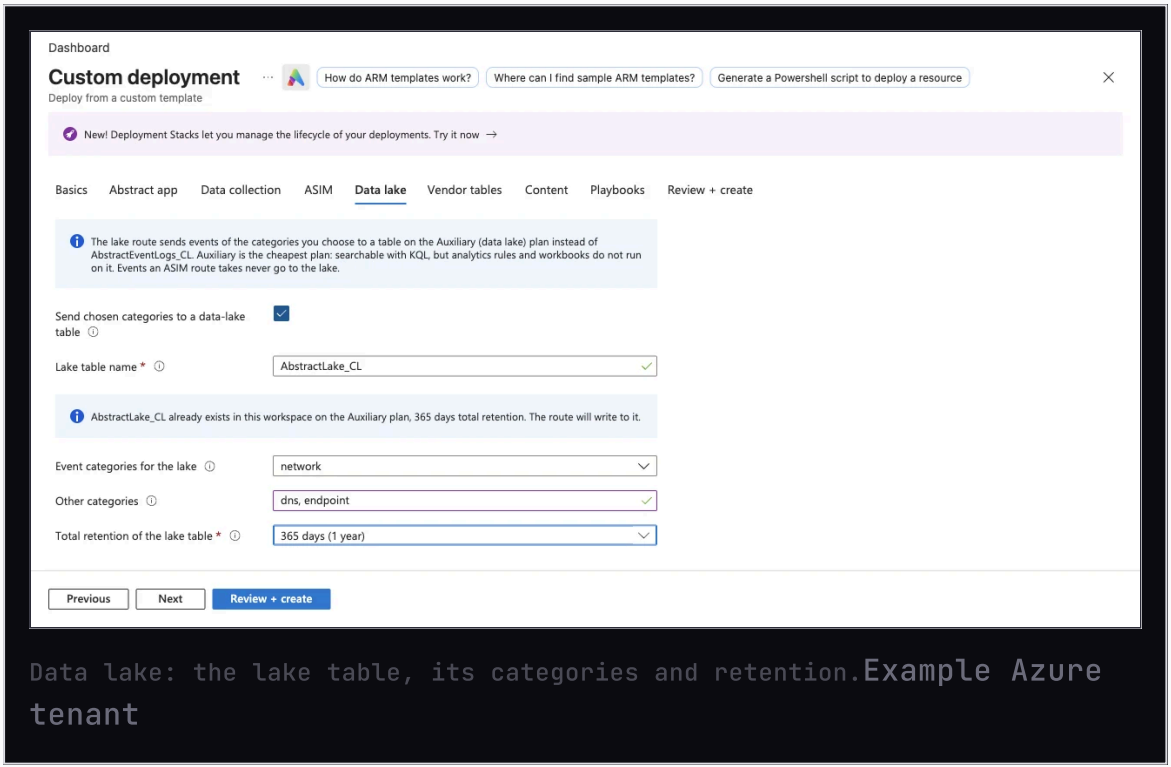

Data lake: the lake table, its categories and retention.Example Azure tenant

DONE WHEN The tab reads as you chose.

7 VENDOR TABLES: CHOOSE THE ROUTES


DONE

Your Azure administrator

Deploy to Azure › Vendor tables

Select a value for each source you send through Abstract. The tab shows, for this workspace, whether each table exists and whether Microsoft's solution for it is installed, and counts the rule's dataflows against the 20 Azure allows. See the tab for each route: Okta, Firewalls and CEF, Syslog, AWS CloudTrail, CrowdStrike, ASIM tables, Abstract findings.

FIELD	VALUE
Vendor tables	The values from each route tab, for example `Okta: OktaV2_CL`
Okta domain	With Okta: your Okta domain, for example `example.okta.com`
Store each vendor event once	On (the default)

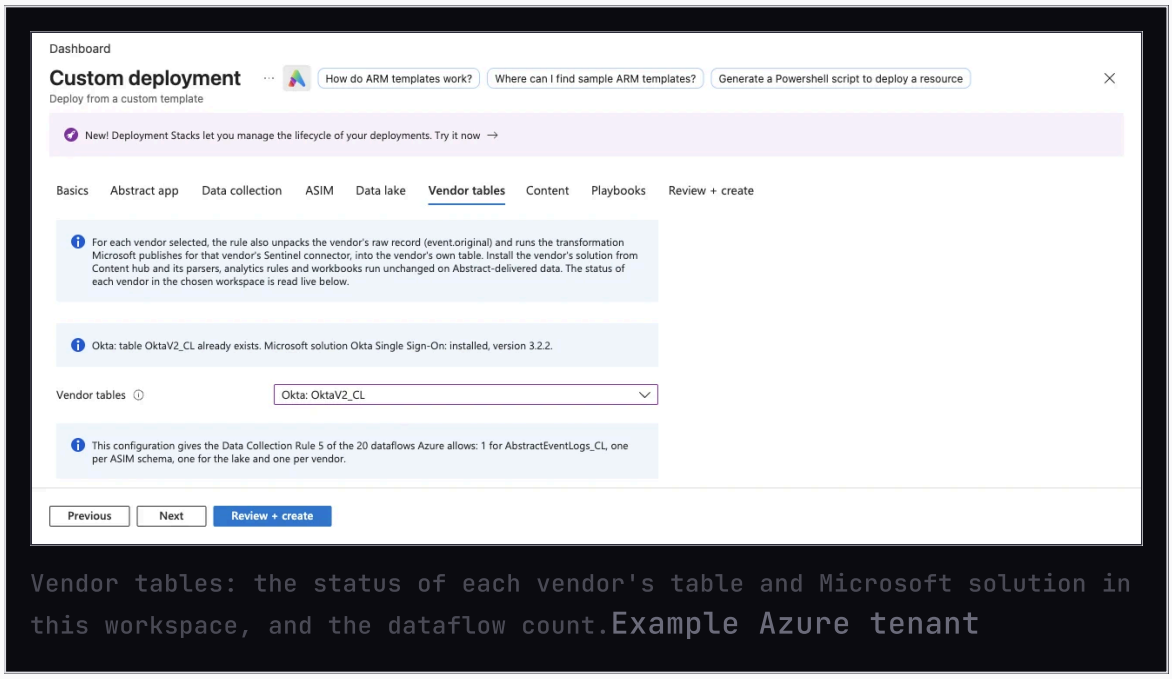

Vendor tables: the status of each vendor's table and Microsoft solution in this workspace, and the dataflow count.Example Azure tenant

DONE WHEN The dataflow count reads 20 or fewer.

8 CONTENT: KEEP THE ABSTRACT CONTENT


☐ DONE

Your Azure administrator

`Deploy to Azure › Content`

Keep every install switch on, and choose here which rules run. Every later deployment, including the ones that add a route, sets each rule on or off from this tab, so this is the place to turn rules on. See the Content tab.

FIELD	VALUE
Every install switch	On
Turn these rules on	**Abstract finding** once findings reach Sentinel (Abstract findings tab); add the others you want
Turn the automation rules on	On when you want Abstract incidents tagged and prioritised
Sentinel Discovery run (optional)	See the Discover tab

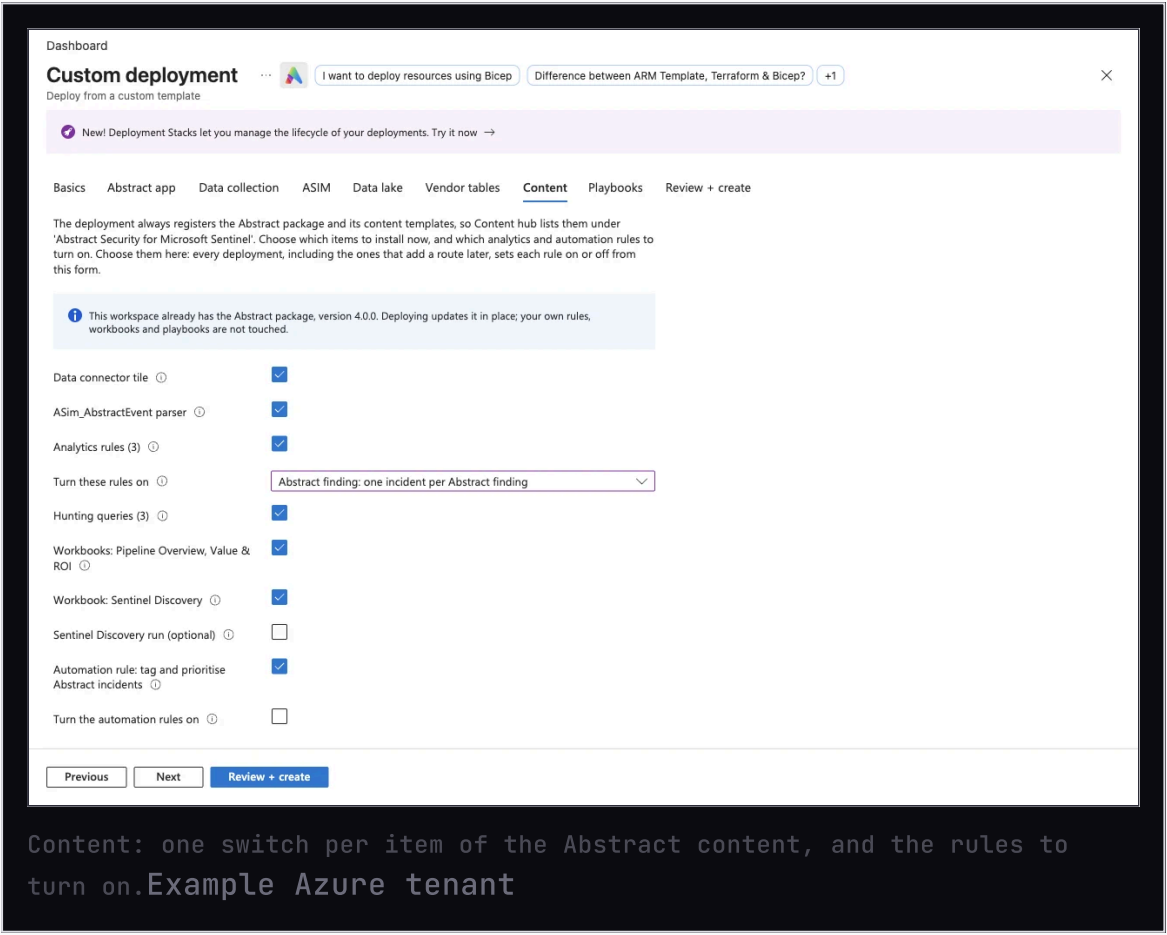

Content: one switch per item of the Abstract content, and the rules to turn on.Example Azure tenant

DONE WHEN The install switches are ticked and the rules you want are listed under **Turn these rules on**.

9 PLAYBOOKS: OPTIONAL


☐ DONE

Your Azure administrator

`Deploy to Azure › Playbooks`

The playbooks call the Abstract API with a key kept in your Key Vault. Leave **Automation rules that run Verdict and Tune at source** off on the first deployment; the Content tab turns them on.

FIELD	VALUE
Install the playbooks	On
Abstract environment	Abstract production
Abstract vendor account ID	Your Abstract tenant ID
Abstract API key in Key Vault	**Pick a secret**, or **Set later**

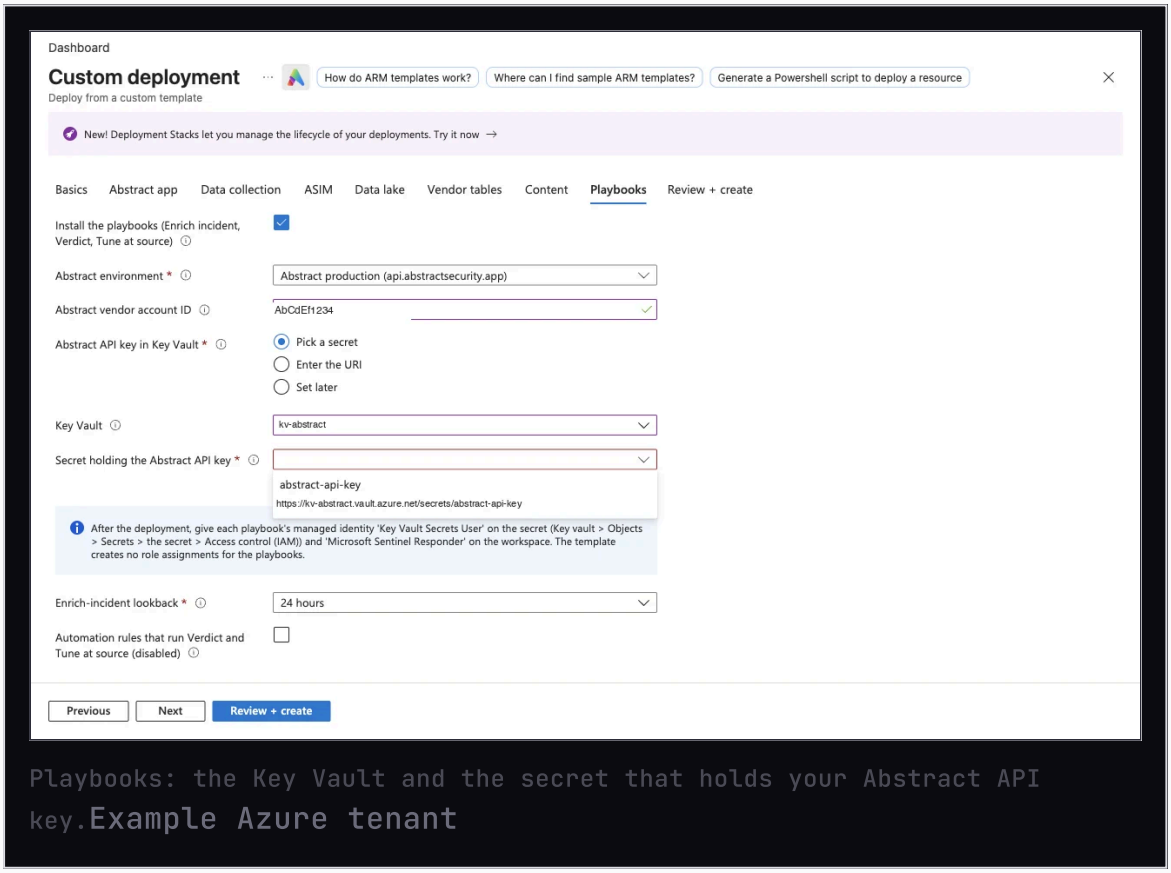

Playbooks: the Key Vault and the secret that holds your Abstract API key. Example Azure tenant

✓ DONE WHEN The tab shows your Key Vault and secret, or Set later.

10 REVIEW AND CREATE


DONE

Your Azure administrator


`Deploy to Azure › Next on every tab › Review + create › Create`

Use **Next** to go through every tab, even if you change nothing, then select **Review + create**. If you jump straight to Review + create, the page can stay greyed out with **Create** disabled. If that happens, close the form and start again.


FIELD	VALUE
Then	**Create**

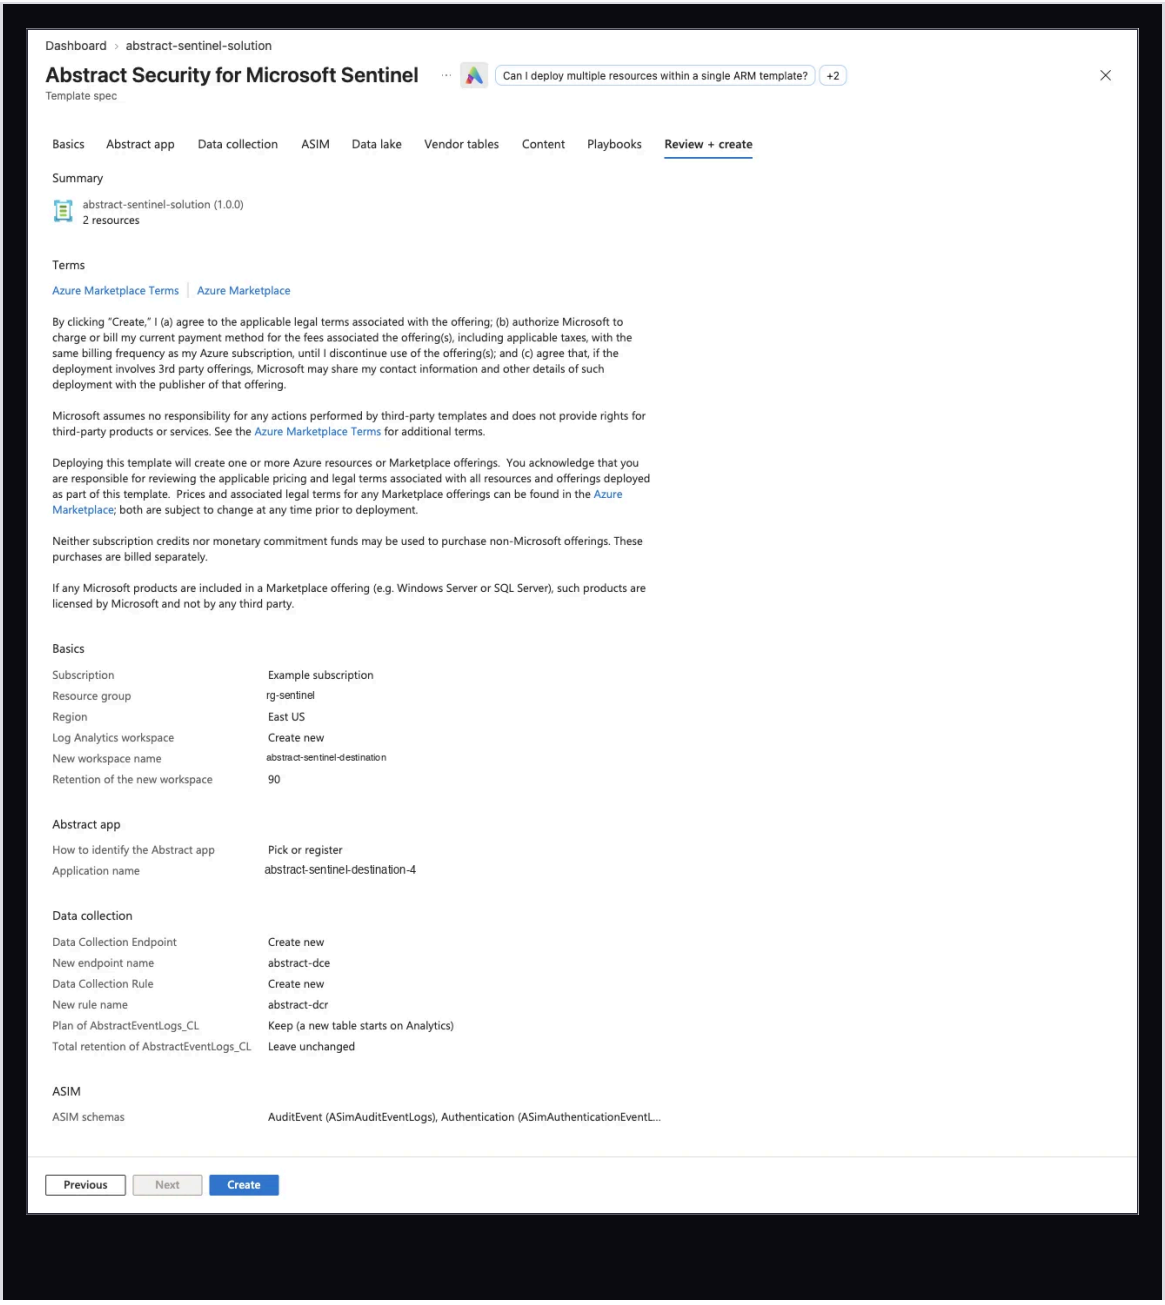

Review + create, after every tab was visited with Next.Example Azure tenant

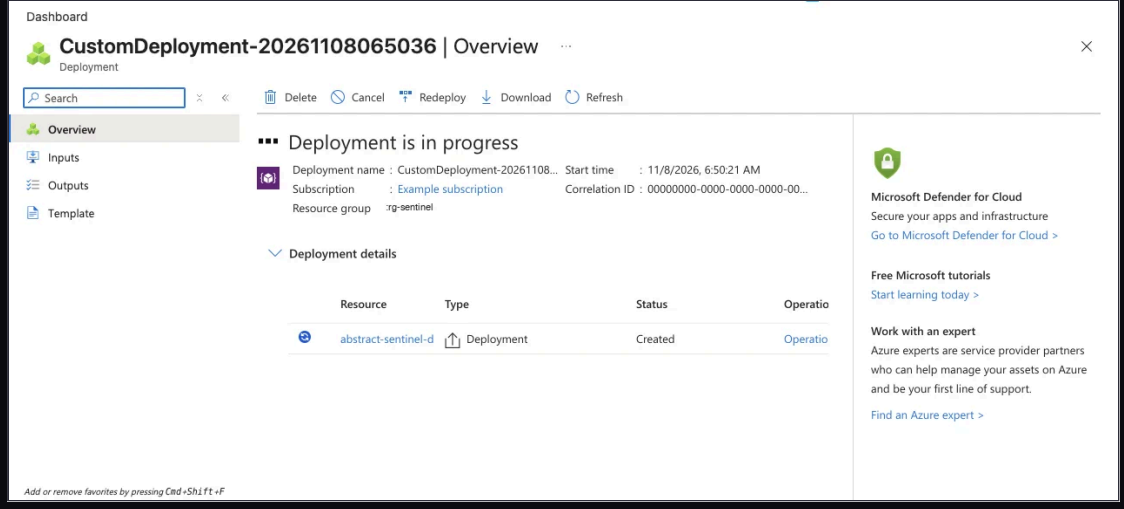

Create: the deployment in progress.Example Azure tenant

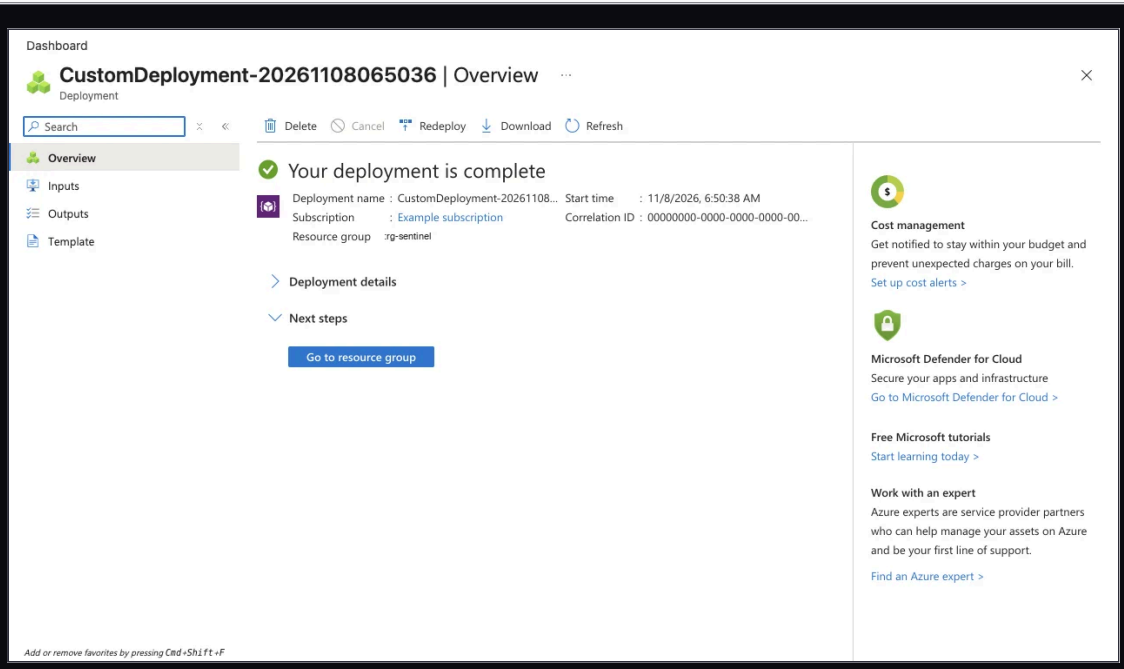

Your deployment is complete.Example Azure tenant

DONE WHEN The deployment shows **Your deployment is complete**. On a new workspace with ASIM on, if it stops with `InvalidOutputTable`, select **Redeploy** with the same values.

11 COPY THE THREE VALUES ABSTRACT NEEDS


☐ DONE

Your Azure administrator

`the deployment › Outputs`

Abstract needs these three values with the app's client ID, tenant ID and secret value.

FIELD	VALUE
dataCollectionRuleImmutableId	Starts with `dcr-`
dataCollectionEndpointUrl	Ends in `.ingest.monitor.azure.com`
logStreamName	`Custom-AbstractEventLogs_CL`

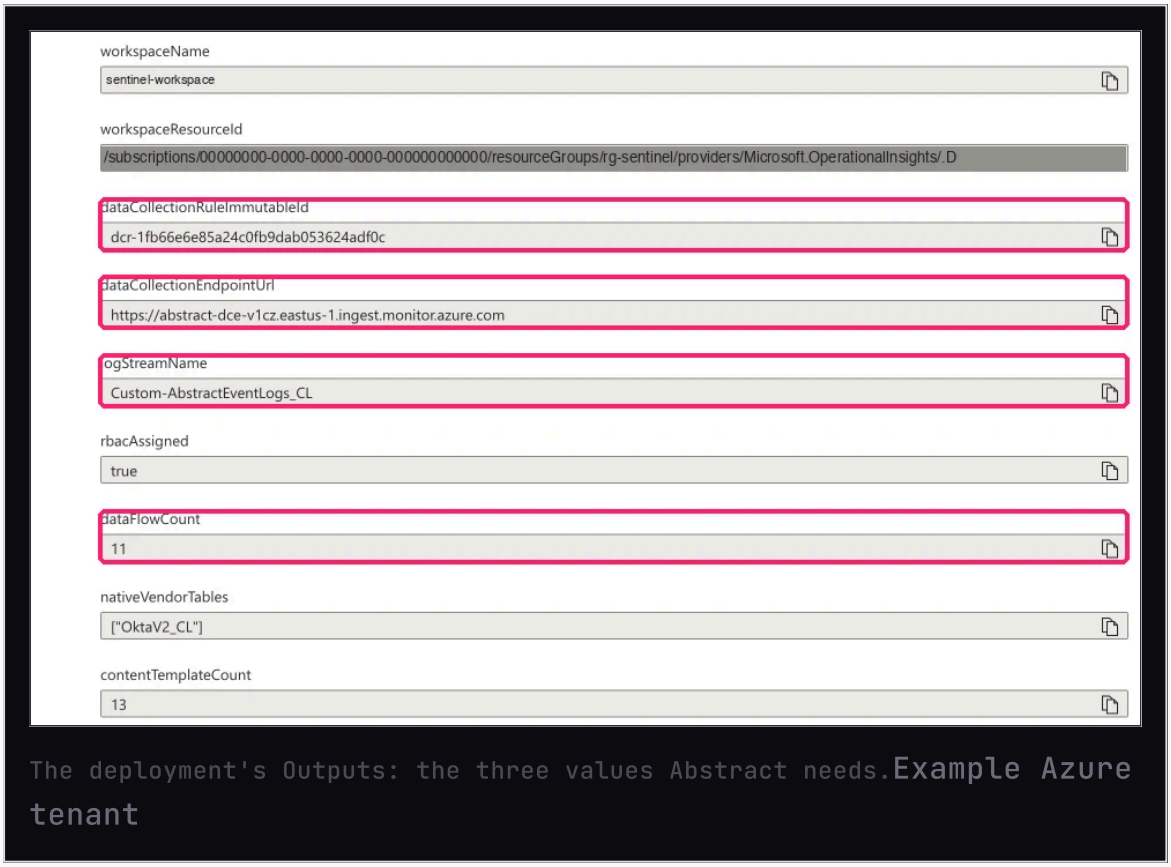

The deployment's Outputs: the three values Abstract needs.Example Azure tenant

✓ DONE WHEN You have the three output values.

11b CONNECT ABSTRACT WITH ONE SCRIPT

☐ DONE

Your Azure administrator or an Abstract implementation engineer, who can read the deployment and has an Abstract API key

`Azure Cloud Shell (Bash) › or any shell with az signed in`

An alternative to steps 11 to 13. Either way is complete: do this, or copy the values by hand. The script reads the three outputs from the deployment and creates the Sentinel destination in Abstract, so no endpoint or rule ID is copied. Download connect-abstract.sh, upload it to Cloud Shell, and run:

SHELL · AZURE CLOUD SHELL, OR ANY SHELL SIGNED IN WITH AZ LOGIN

```
bash connect-abstract.sh \
  --resource-group <resource-group> --deployment azure-destination-
sentinel-solution \
  --name "Microsoft Sentinel" --vendor-account <abstract-instance-id>
\
  --client-secret-uri <key-vault-secret-uri-of-the-app-secret> \
  --api-key-uri <key-vault-secret-uri-of-your-abstract-api-key>
```

FLAG	VALUE
`--resource-group`	The resource group the solution was deployed to.
`--deployment`	The deployment's name. `azure-destination-sentinel-solution` if you used `deploy.sh`; from the portal, the name under the resource group's Deployments.
`--name`	What the destination is called in Abstract. Use the same name to update it later.
`--vendor-account`	Your Abstract instance ID.
`--client-secret-uri`	The Key Vault secret that holds the app's secret value. Or set `AZURE_CLIENT_SECRET` in the shell.
`--api-key-uri`	The Key Vault secret that holds an Abstract API key. Or set `ABSTRACT_API_KEY` in the shell.

FLAG	VALUE
`--client-id`	Optional. The app's Application (client) ID; left out, the script looks it up from the deployment.
`--api`	Optional. Defaults to Abstract's production API; it must be https.
`--inactive, --dry-run`	Optional. `--inactive` creates the destination switched off; `--dry-run` prints the plan and writes nothing.

Add `--dry-run` first to read the plan. A real run prints the plan, creates the destination, then reads it back and says the endpoint, rule ID, stream name, tenant ID and client ID match the deployment. The secret is masked by Abstract, so it is not read back.

DONE WHEN the script prints `read back: verified` and the destination appears under Pipelines › Integrations › Enabled in Abstract (under Available if you used `--inactive`).

Undo, or change a value. Run it again with the same `--name`: it updates that destination in place, so there is still one. It refuses a name that belongs to anything other than an Azure Sentinel Destination. To remove the destination, delete it in Abstract.

12 COPY THE APP'S CLIENT ID AND TENANT ID


☐ DONE

Your Entra ID administrator

`Microsoft Entra admin center › Identity › Applications › App registrations › abstract-sentinel-destination › Overview`

The **Application (client) ID** also appears on the form's Abstract app tab.

FIELD	VALUE
Application (client) ID	Copy it
Directory (tenant) ID	Copy it

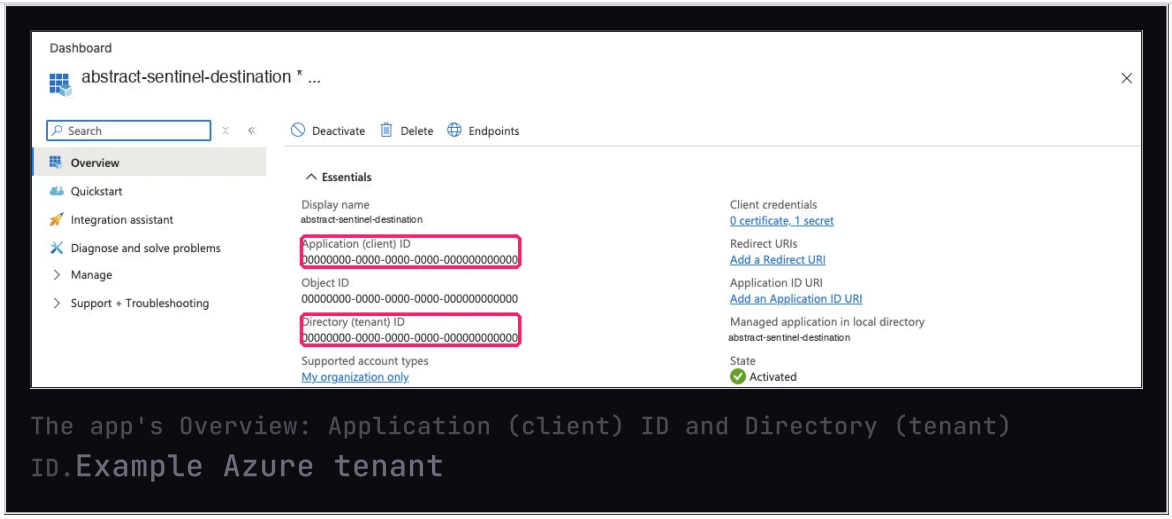

The app's Overview: Application (client) ID and Directory (tenant) ID.Example Azure tenant

DONE WHEN You have six values: client ID, secret value, tenant ID, rule ID, endpoint and stream name.

13 CREATE THE SENTINEL DESTINATION IN ABSTRACT

☐ DONE

Abstract implementation engineer

`Abstract › Pipelines › Integrations › Available › Azure Sentinel Destination`

Validation sends one test record, which lands in `AbstractEventLogs_CL` with only `message` filled.

FIELD	VALUE
Integration Name	`Microsoft Sentinel`
Client ID	Application (client) ID
Client Secret Value	The secret value
Application Tenant ID	Directory (tenant) ID
Data Collection Rule ID	`dataCollectionRuleImmutableId`
Data Collection Endpoint	`dataCollectionEndpointUrl`

FIELD	VALUE
Log Stream Name	`logStreamName`
Then	**Validate**, then **Finish**

DONE WHEN Validation passes and the destination appears under Pipelines › Integrations › Enabled.

14 ROUTE YOUR FIRST SOURCE

☐ DONE

Abstract implementation engineer

Abstract › Pipelines › Overview

Drag from the source to **Microsoft Sentinel** and connect. Start with one low-volume source, check it on the Prove tab, then add the rest one at a time.

DONE WHEN The route appears between the source and the destination, and rows appear in Sentinel within 20 minutes.

ALTERNATIVE

REGISTER THE APP IN ENTRA FIRST

When the person deploying cannot register applications, your Entra ID administrator registers it first.

1 REGISTER THE ABSTRACT APPLICATION


☐ DONE

Your Entra ID administrator


Microsoft Entra admin center › Identity › Applications › App registrations › New registration

Abstract signs in as this application to send data. It needs no API permissions.

FIELD	VALUE
Name	`abstract-sentinel-destination`
Supported account types	Single tenant only (accounts in this organizational directory)
Redirect URI	Leave empty
Then	**Register**

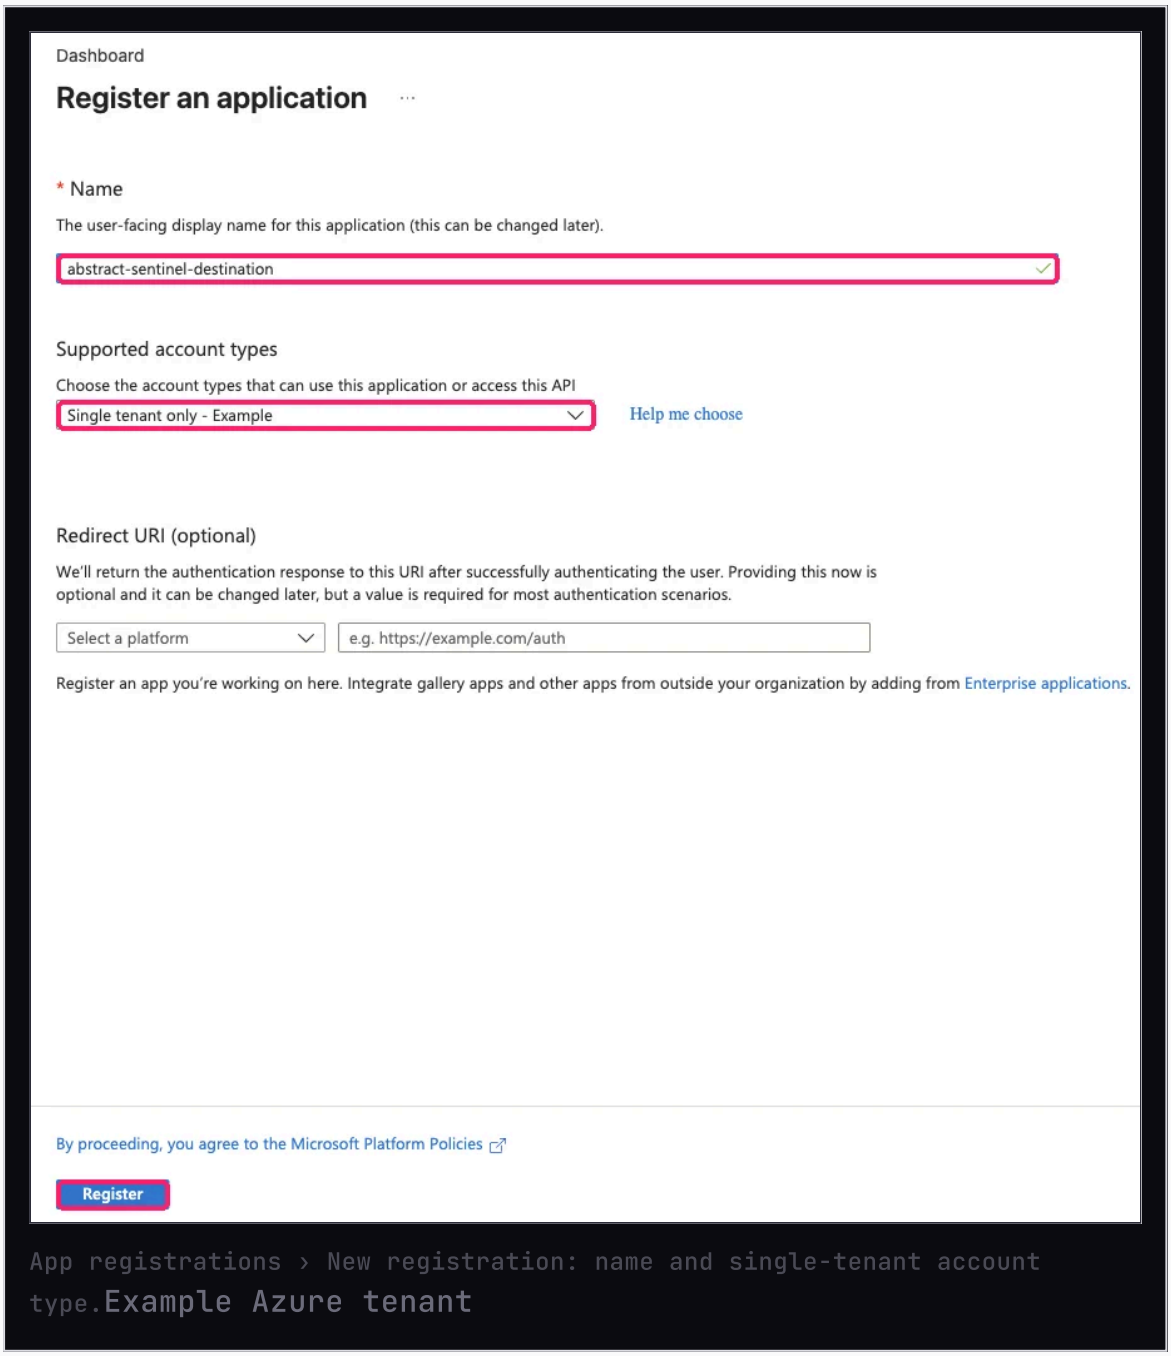

App registrations › New registration: name and single-tenant account type.Example Azure tenant

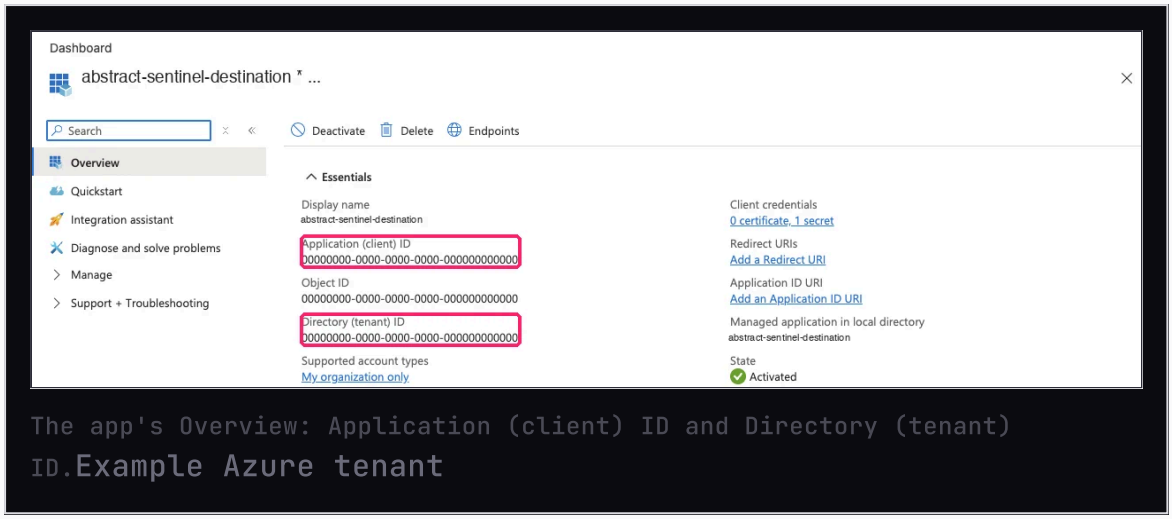

The app's Overview: Application (client) ID and Directory (tenant) ID.Example Azure tenant

DONE WHEN The app's Overview shows the **Application (client) ID** and **Directory (tenant) ID**. Copy both.

2 CREATE A CLIENT SECRET


☐ DONE

Your Entra ID administrator

`the app › Certificates & secrets › Client secrets › New client secret`

Copy the secret's **Value** as soon as it appears: the portal shows it only once. The **Secret ID** is not the value.

FIELD	VALUE
Description	`abstract-sentinel`
Expires	12 months, or your policy's maximum
Then	**Add**, then copy **Value**

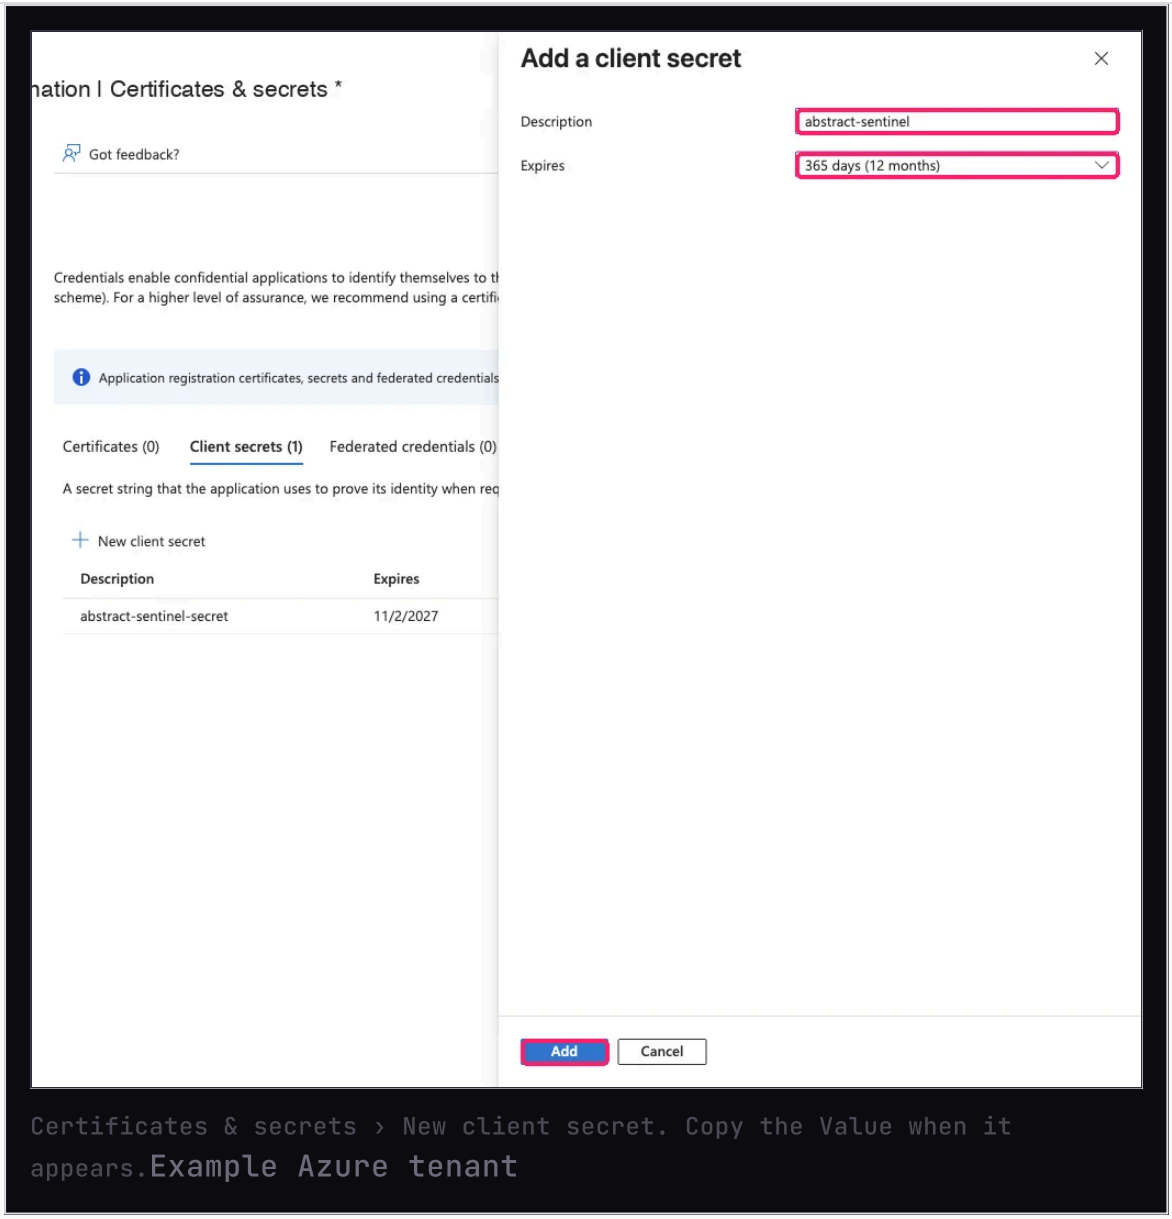

Certificates & secrets › New client secret. Copy the Value when it appears.Example Azure tenant

DONE WHEN The secret value is stored in your password manager or Key Vault, with a renewal date in your calendar.

3 PICK THE APP IN THE FORM


☐ DONE

Your Azure administrator


`Deploy to Azure › Abstract app`

In Build step 3 choose **Select existing** and pick the app, or choose **Enter the Object ID** and paste the **Object ID** from Enterprise applications › the app. That Object ID is different from the Application (client) ID.

FIELD	VALUE
Service principal type	**Select existing**
Or	**Enter the Object ID**

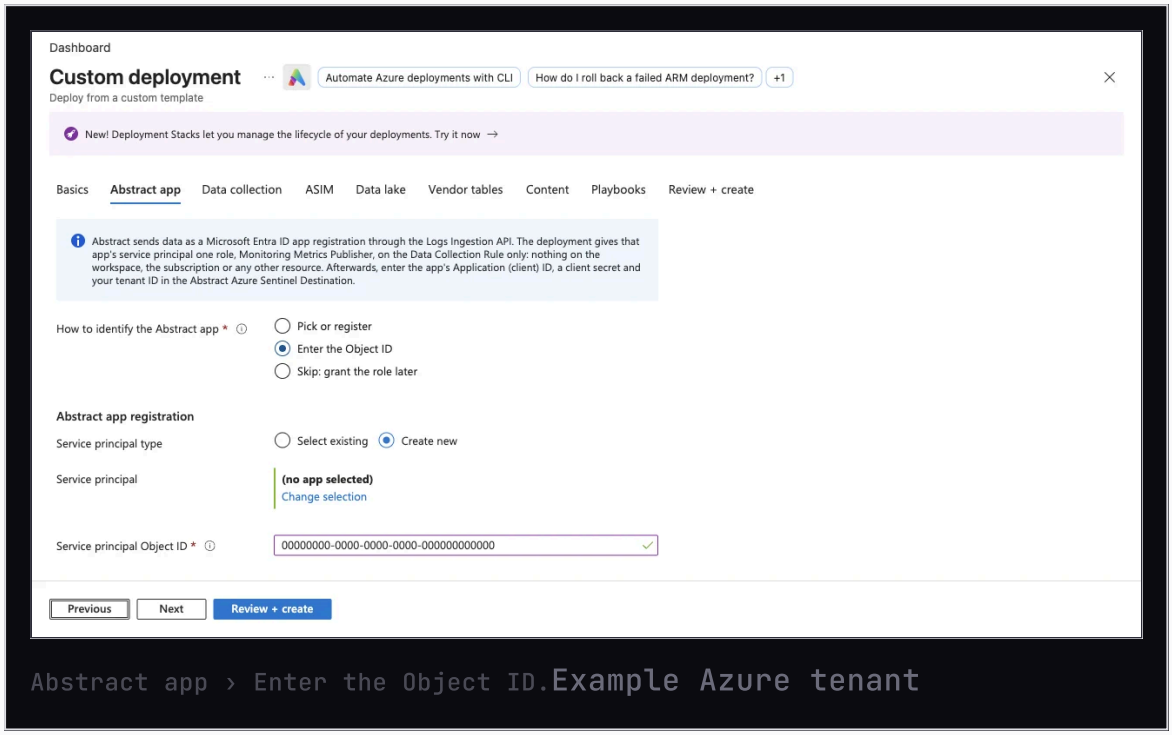

Abstract app › Enter the Object ID.Example Azure tenant

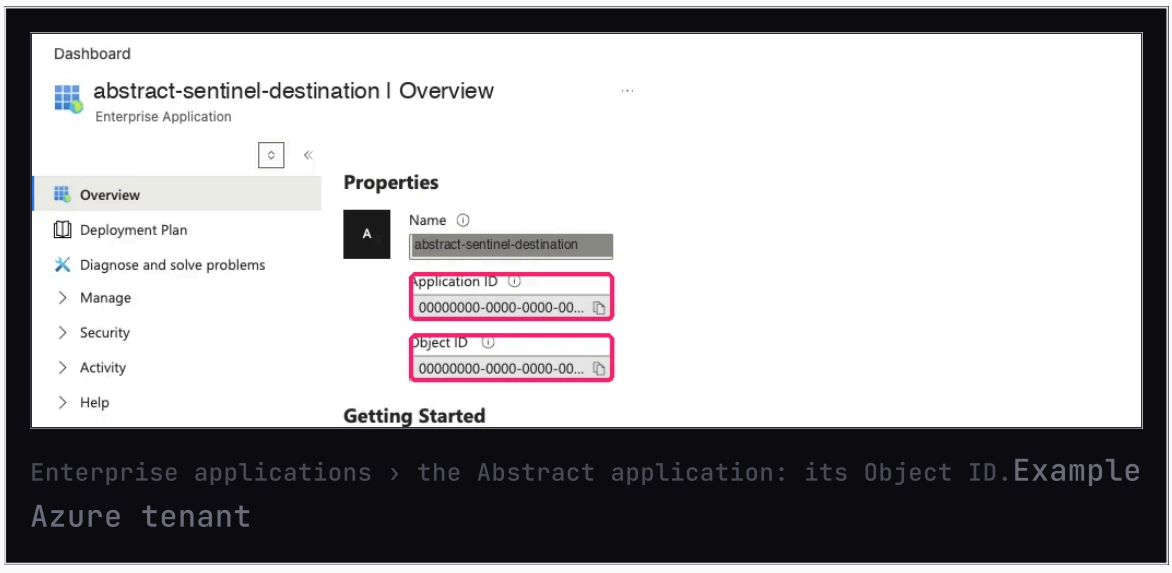

Enterprise applications › the Abstract application: its Object ID.Example Azure tenant

DONE WHEN The tab shows the app with its Object ID.

ALTERNATIVE

LOAD THE FILE INSTEAD OF THE BUTTON

The same template, deployed from a saved copy.

The guided form that Deploy to Azure opens (createUiDefinition.json) · 96 KB

The guided form's definition is the second file. You can preview it in the portal's **Create UI Definition sandbox**.

1 LOAD THE SOLUTION FILE INTO THE PORTAL

☐ DONE

Your Azure administrator


Azure portal › Deploy a custom template ›
Build your own template in the editor › Load file › Save

Use this when the Deploy to Azure button cannot be used. The portal then shows the template's plain parameter form.

Save abstract-sentinel-solution.json

Abstract solution template (azuredeploy.json): data routes and Sentinel content in one deployment · 709 KB

FIELD	VALUE
File	`abstract-sentinel-solution.json`

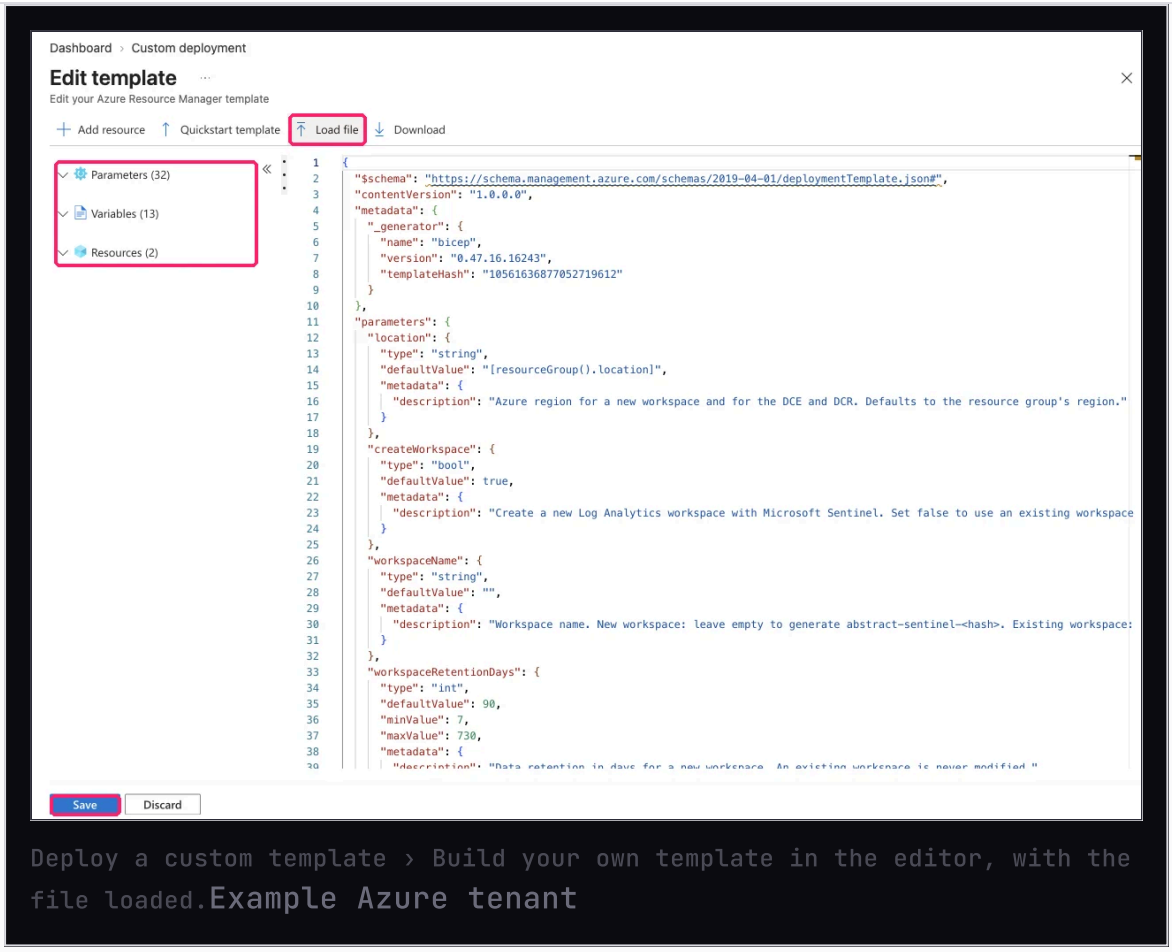

Deploy a custom template › Build your own template in the editor, with the file loaded.Example Azure tenant

DONE WHEN The editor shows the template and **Save** opens the parameter form.

2 FILL IN THE PARAMETERS

☐ DONE


Your Azure administrator

`Custom deployment › Basics`


The names below are the ones the form fills for you. Arrays are typed as JSON.

PARAMETER	VALUE
Resource group	The resource group that holds your Sentinel workspace
Create Workspace	`false`

PARAMETER	VALUE
Workspace Name	Your Sentinel workspace name
Principal Id	The Object ID of the Abstract app's enterprise application
Enable Asim, Asim Schemas, Exclude Asim From Abstract Table	`true`, `["*"]`, `true`
Native Vendors	The route values as a JSON array, for example `["okta","csl-cef"]`
Okta Domain	With okta: your Okta domain
Exclude Native Vendors From Asim	`true`
Lake Table Name, Lake Categories	See the Data lake tab, or leave empty
Everything else	Leave the default
Then	**Review + create**, **Create**, then continue at Build step 11

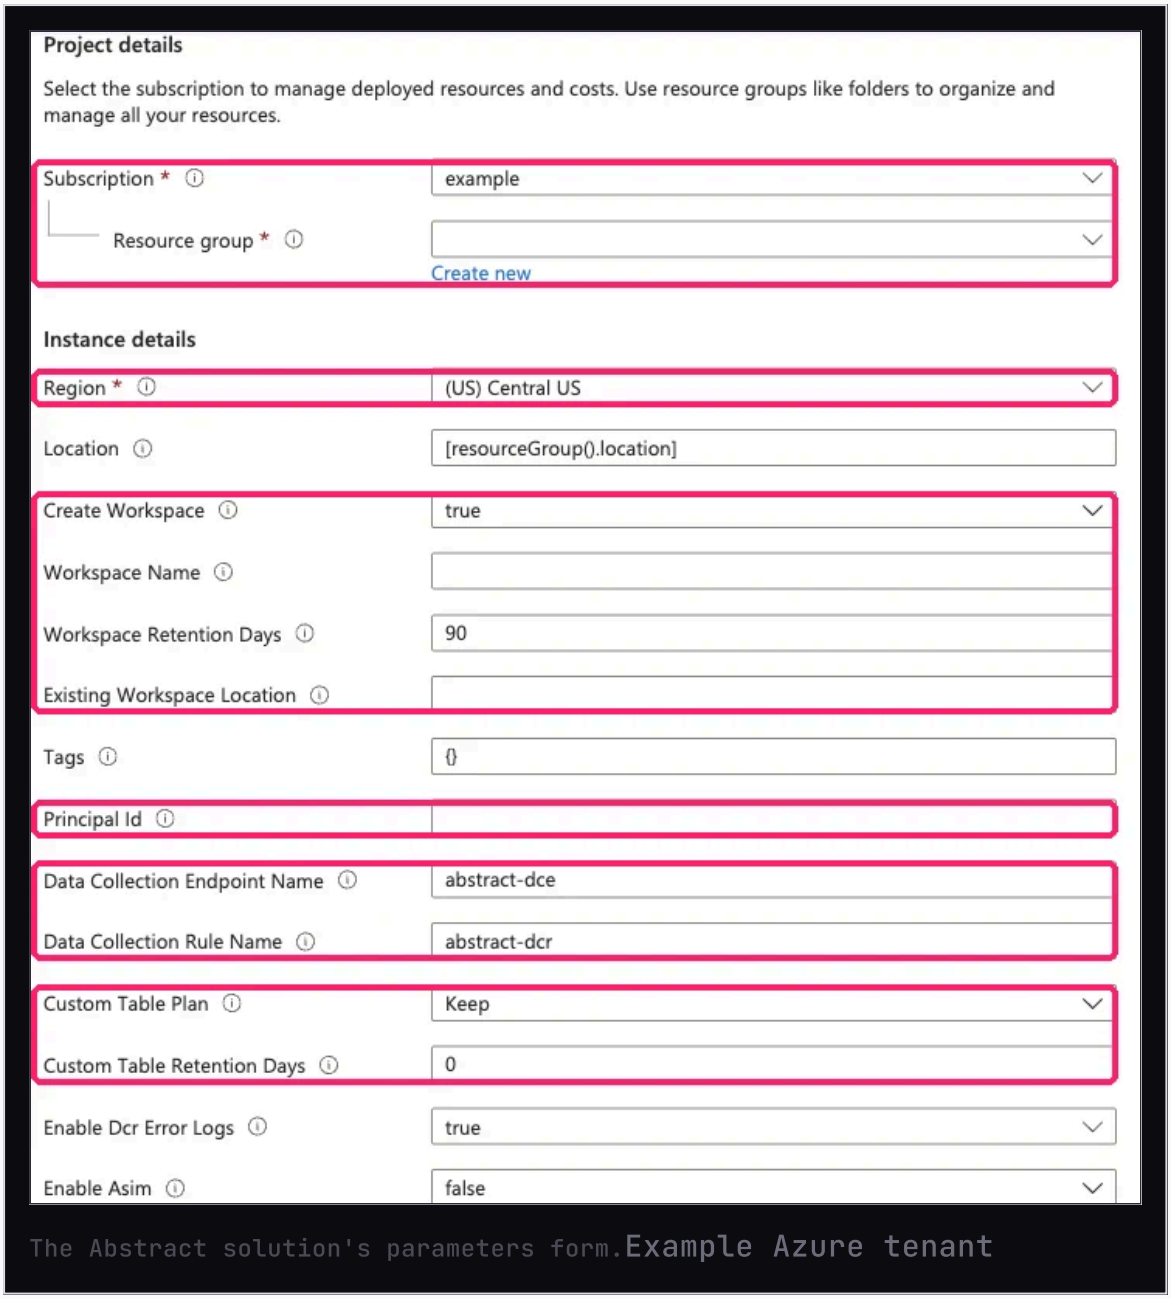

The Abstract solution's parameters form.Example Azure tenant

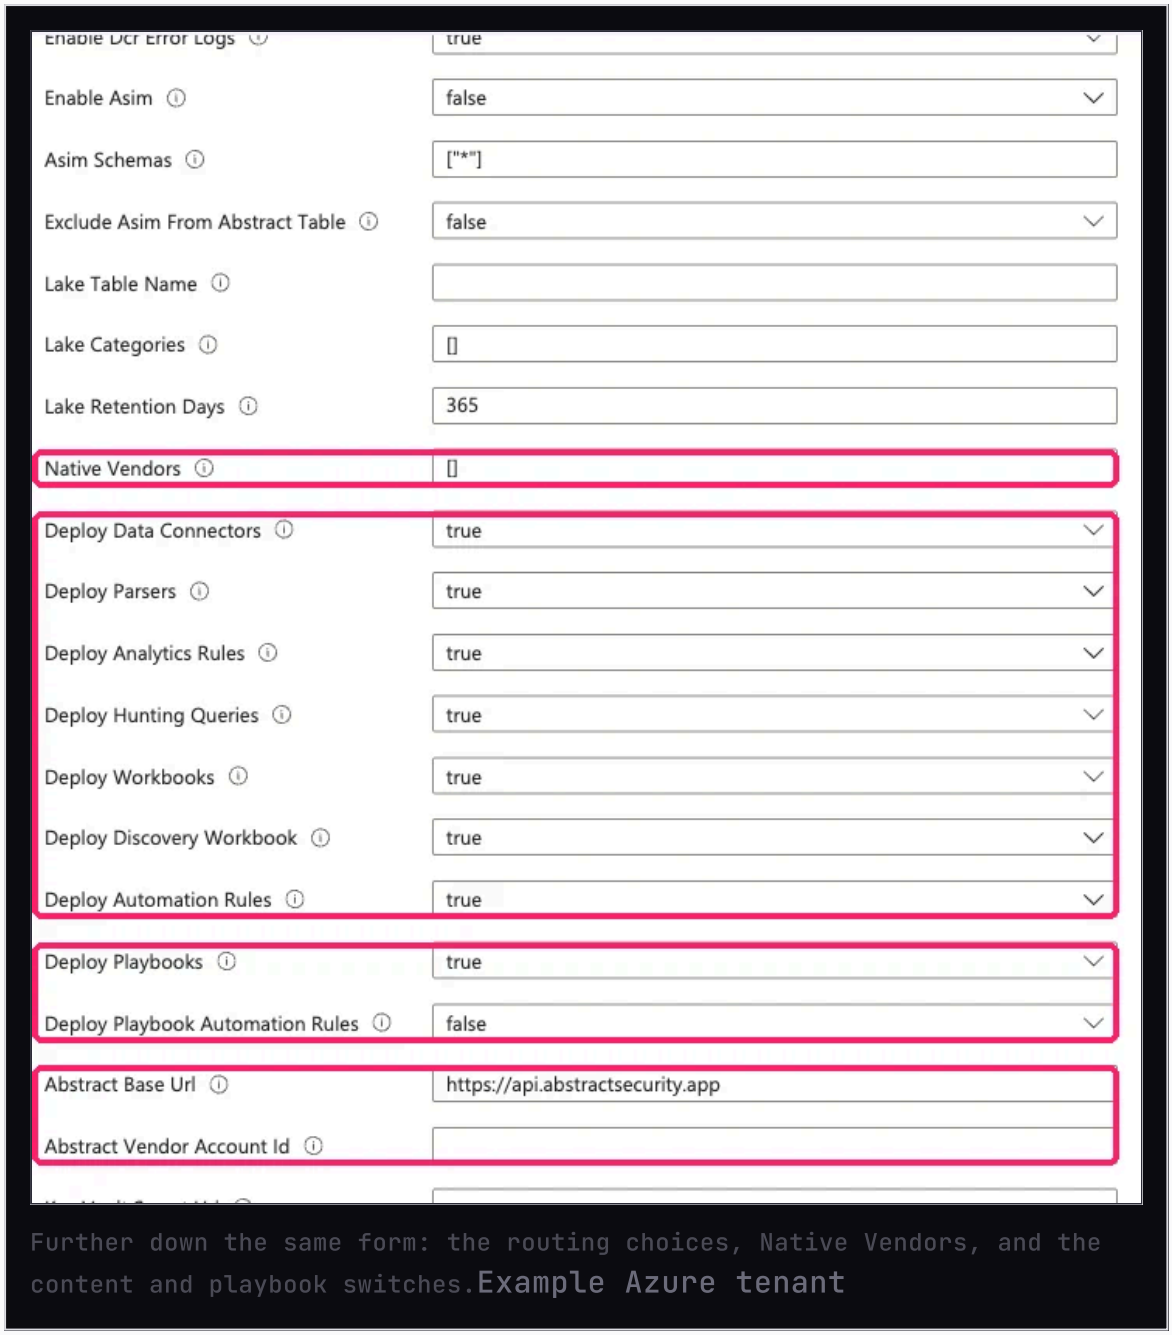

Further down the same form: the routing choices, Native Vendors, and the content and playbook switches.Example Azure tenant

DONE WHEN The deployment shows **Your deployment is complete**.

ALTERNATIVE

WITHOUT A TEMPLATE

BUILD THE ABSTRACT TABLE BY HAND IN THE PORTAL INSTEAD (OPTIONAL)

STEPS

Use this only where templates cannot be deployed. It builds the Abstract table alone; the ASIM, vendor and lake routes need the solution.


1. Monitor › Data Collection Endpoints › Create: name abstract-dce, the workspace's resource group and region.
2. Workspace › Tables › + Create (opens the custom log wizard): table AbstractEventLogs, table plan Analytics,
   Create a new data collection rule abstract-dcr, endpoint abstract-dce.
   Next: Browse for files › all_fields.json; Transformation editor: paste all_fields.transform.txt, Run, Apply; Next, Create.
3. Monitor › Data Collection Rules › abstract-dcr › Access control (IAM) › Add role assignment:
   Monitoring Metrics Publisher › User, group, or service principal › abstract-sentinel-destination › Review + assign.
4. abstract-dcr › Diagnostic settings › Add diagnostic setting: Log Errors › Send to Log Analytics workspace › Save.
5. abstract-dcr › Overview › JSON View: copy immutableId and the stream name Custom-AbstractEventLogs_CL;
   abstract-dce › Overview: copy the Logs Ingestion URL. Then continue at Build step 12.




Sample record that defines the Abstract table's columns · 3 KB



Transformation for the Abstract table · 126 bytes

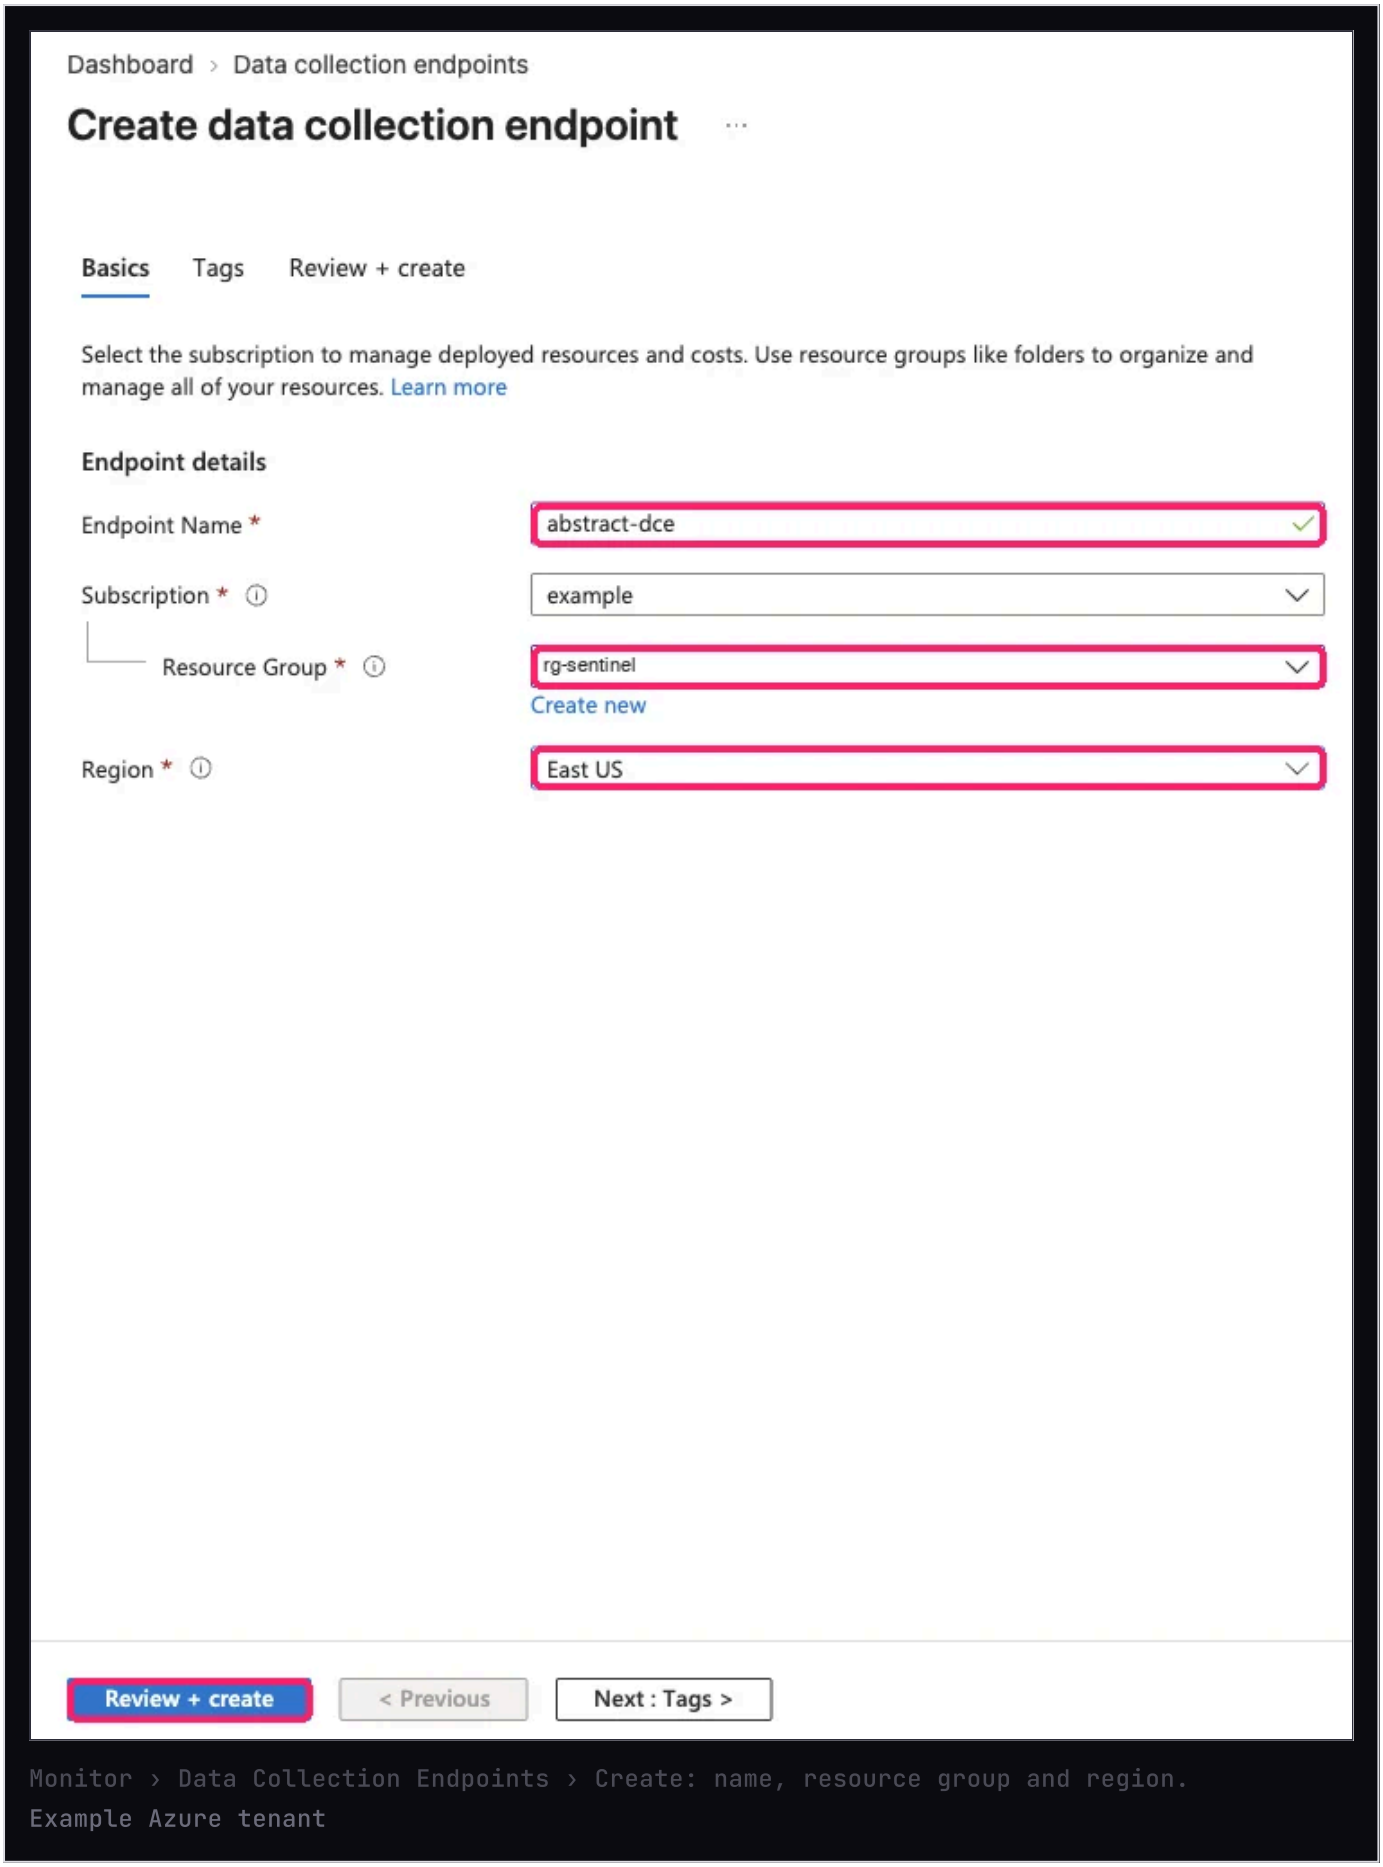


Monitor › Data Collection Endpoints › Create: name, resource group and region.
Example Azure tenant

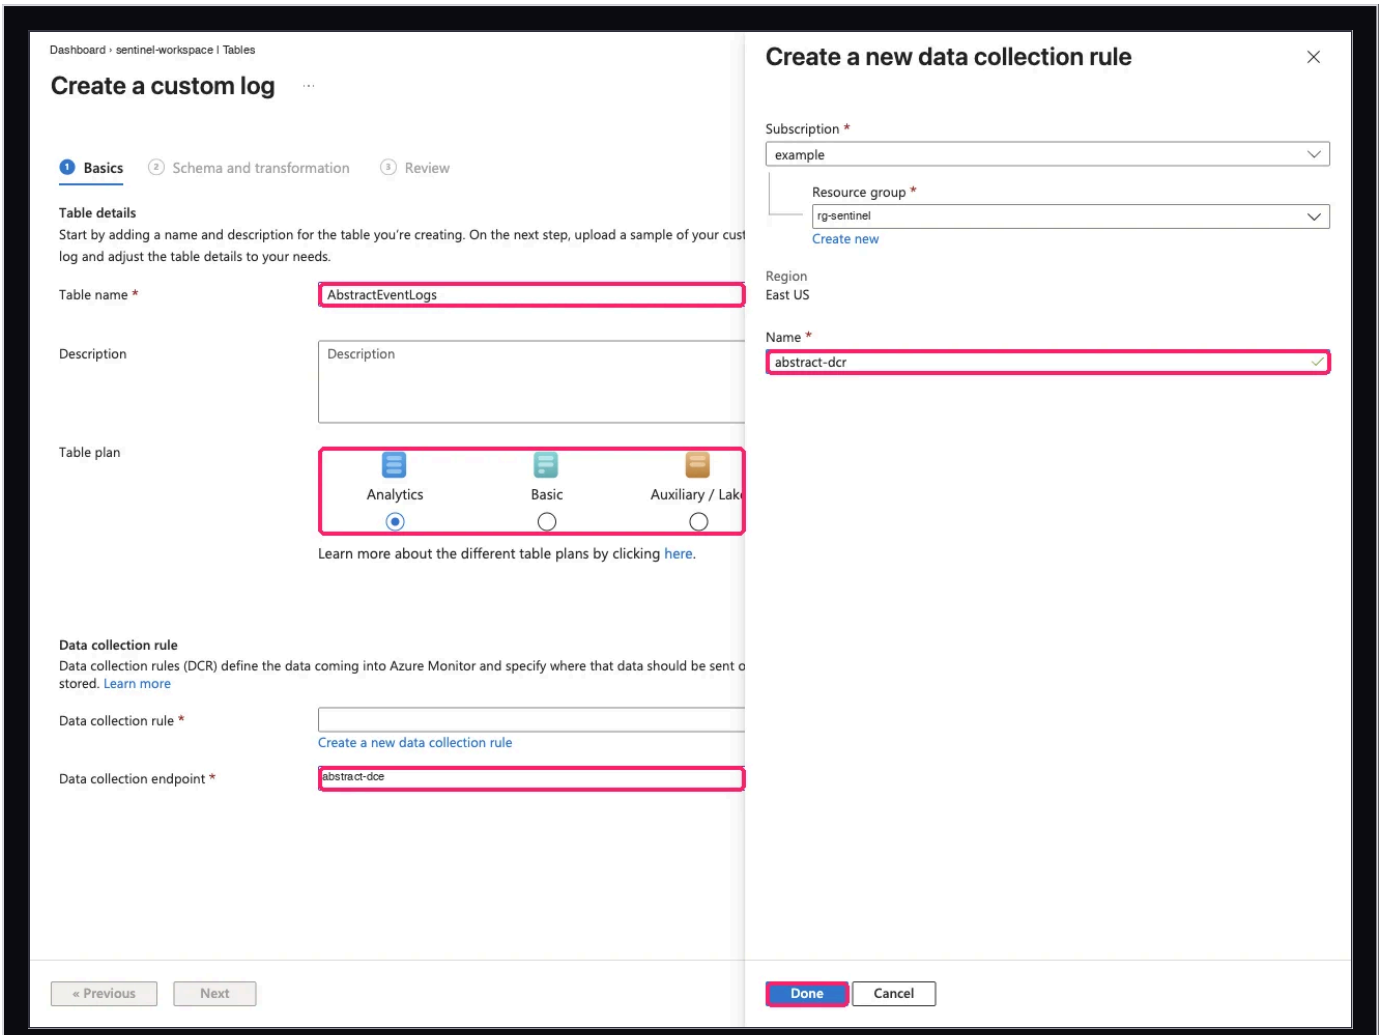


Basics: table name, a new data collection rule, and the endpoint.
Example Azure tenant



Schema and transformation, after uploading all_fields.json.
Example Azure tenant

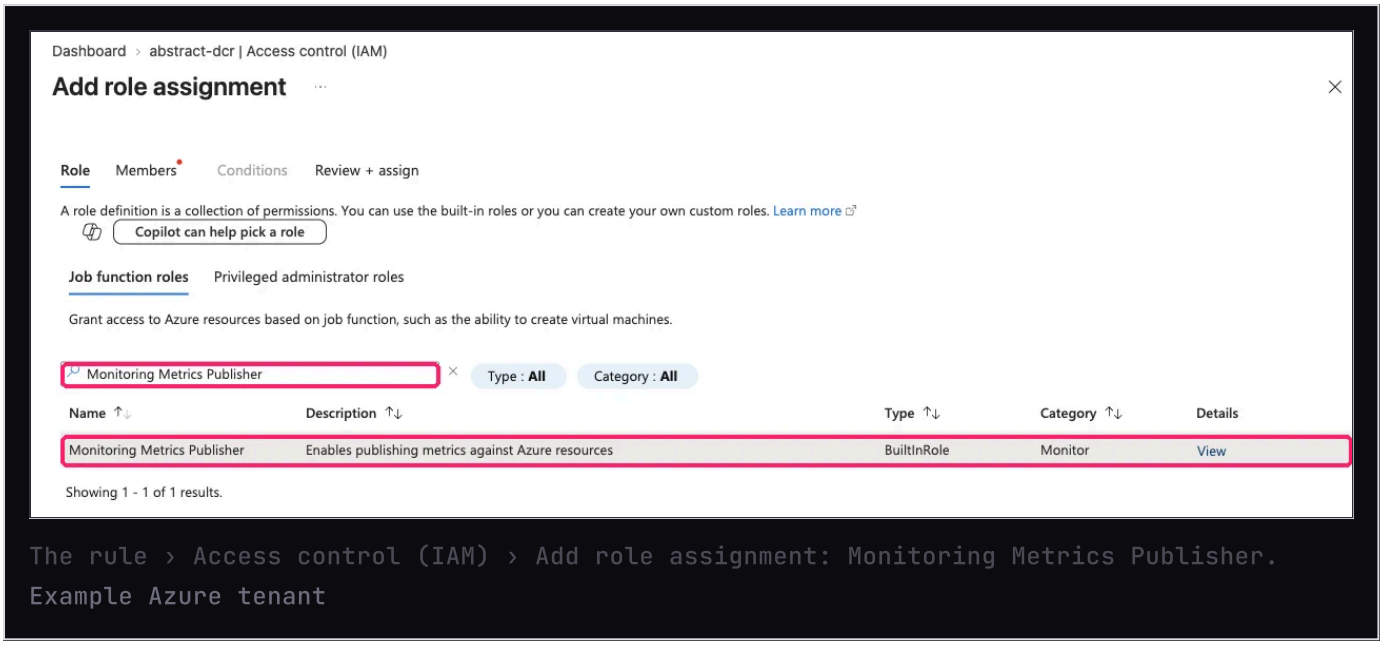

The rule › Access control (IAM) › Add role assignment: Monitoring Metrics Publisher.
Example Azure tenant

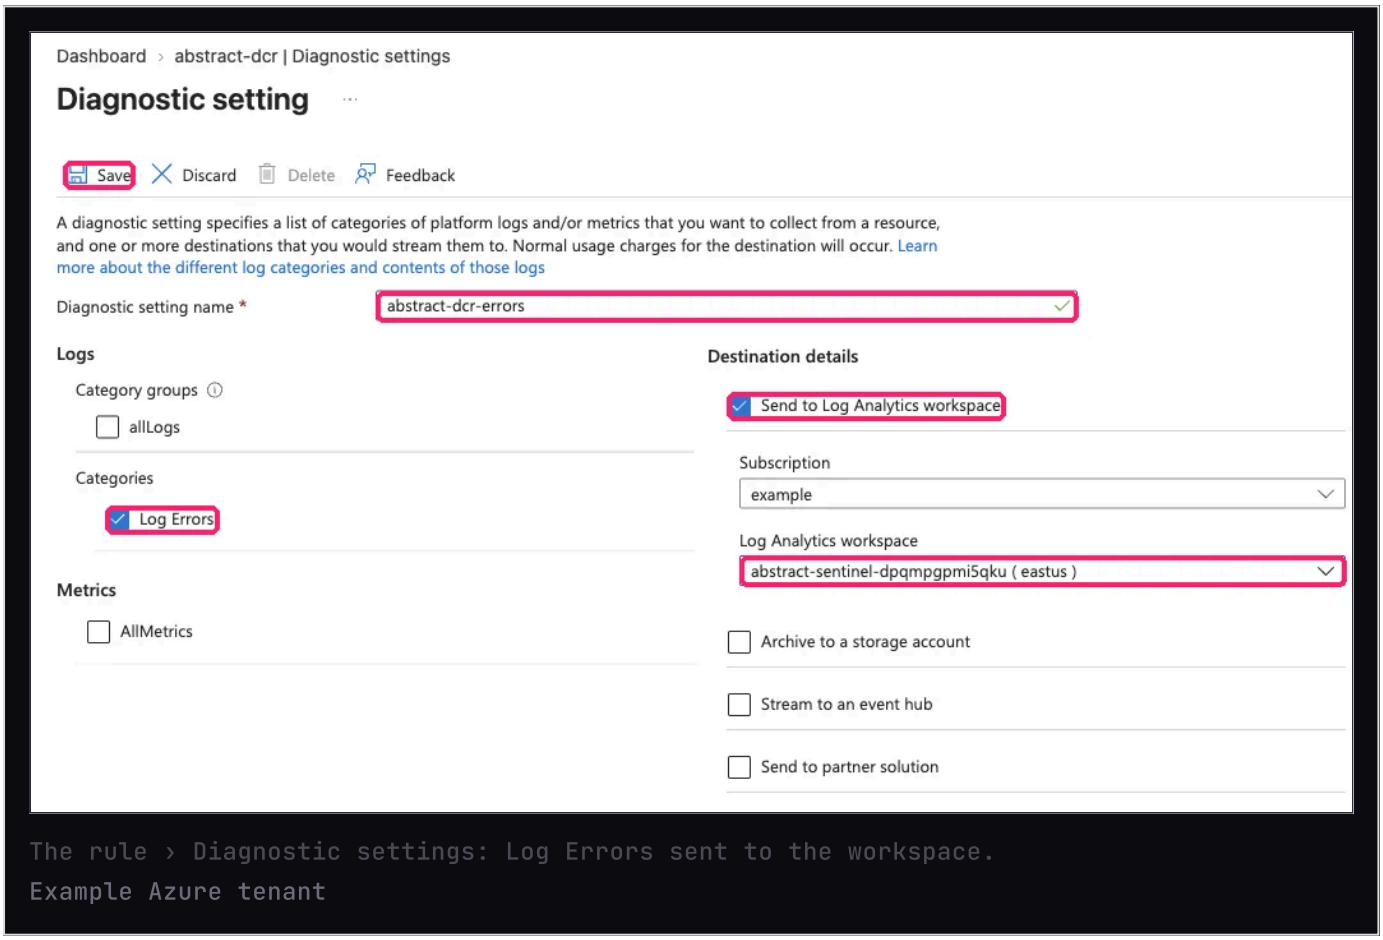

The rule › Diagnostic settings: Log Errors sent to the workspace.
Example Azure tenant

04

SOURCES

One part for each source Abstract sends to Microsoft Sentinel: the steps, the fields to fill and the check that it arrived.

03 · BUILD · SOURCES

ONE ROUTE PER SOURCE, EACH PROVEN.

IDENTITY

OKTA

Okta System Log events land in OktaV2_CL, shaped by Microsoft's own Okta logic.

The rule runs Microsoft's own Okta connector transformation on Okta's original record, so Okta's Content hub rules and workbook run with no edits.

1

INSTALL MICROSOFT'S OKTA SINGLE SIGN-ON SOLUTION

☐ DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Content management › Content hub`

Search **Okta Single Sign-On** and install it. It brings the parsers, analytics rule templates and workbooks that read this table. Do not configure Microsoft's own Okta

connector: Abstract fills the table.

FIELD	VALUE
Solution	Okta Single Sign-On
Then	**Install**

DONE WHEN The solution shows Installed. The **Vendor tables** tab also reads its form's status.

2 ADD THE ROUTE TO THE DEPLOYMENT


☐ DONE

Your Azure administrator


`Azure portal › Deploy to Azure (Build step 1) › Vendor tables`

Open the deployment again with the **Deploy to Azure** button on the Build tab. A rule change reaches ingestion within 20 minutes.

FORM TAB	VALUE
Basics	The same subscription, resource group and workspace (**Use existing**)
Data collection	**Use existing**: the same endpoint and rule, so the rule keeps its ID and Abstract keeps sending
Vendor tables	Add `okta` to the values you already chose
Store each vendor event once	On (the default)
Okta domain	Your Okta domain, for example `example.okta.com`
Every other tab	The same choices as your first deployment. The deployment writes the rule exactly as the form describes it
Then	**Next** through every tab, **Review + create**, **Create**

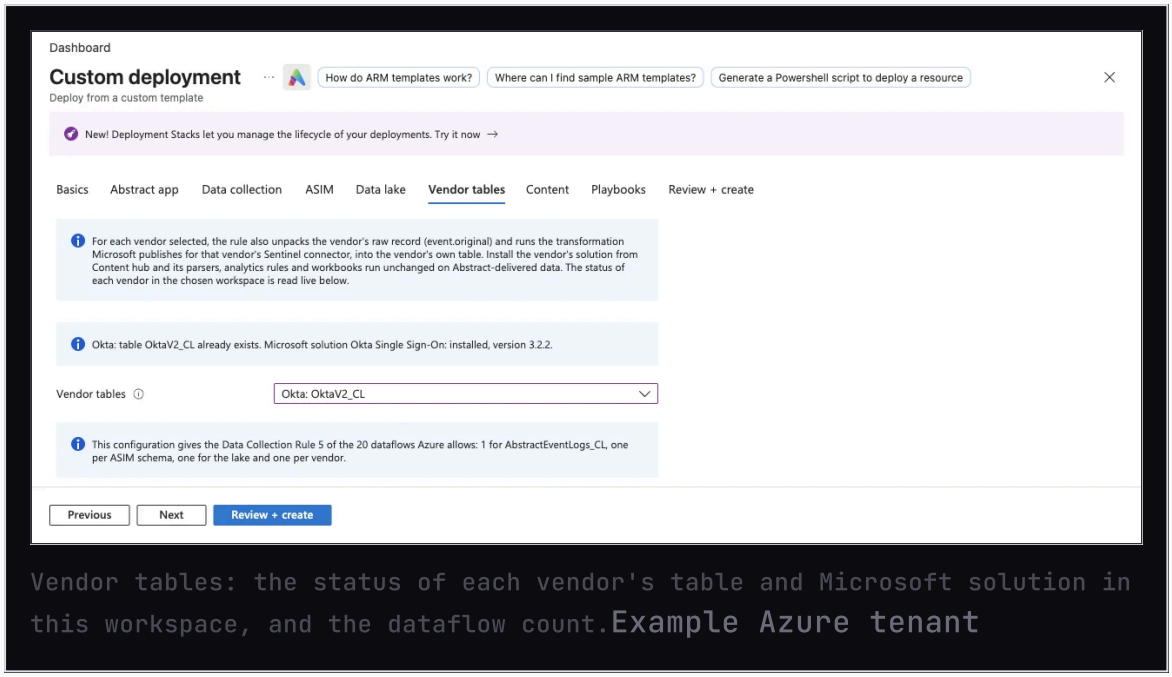

Vendor tables: the status of each vendor's table and Microsoft solution in this workspace, and the dataflow count.Example Azure tenant

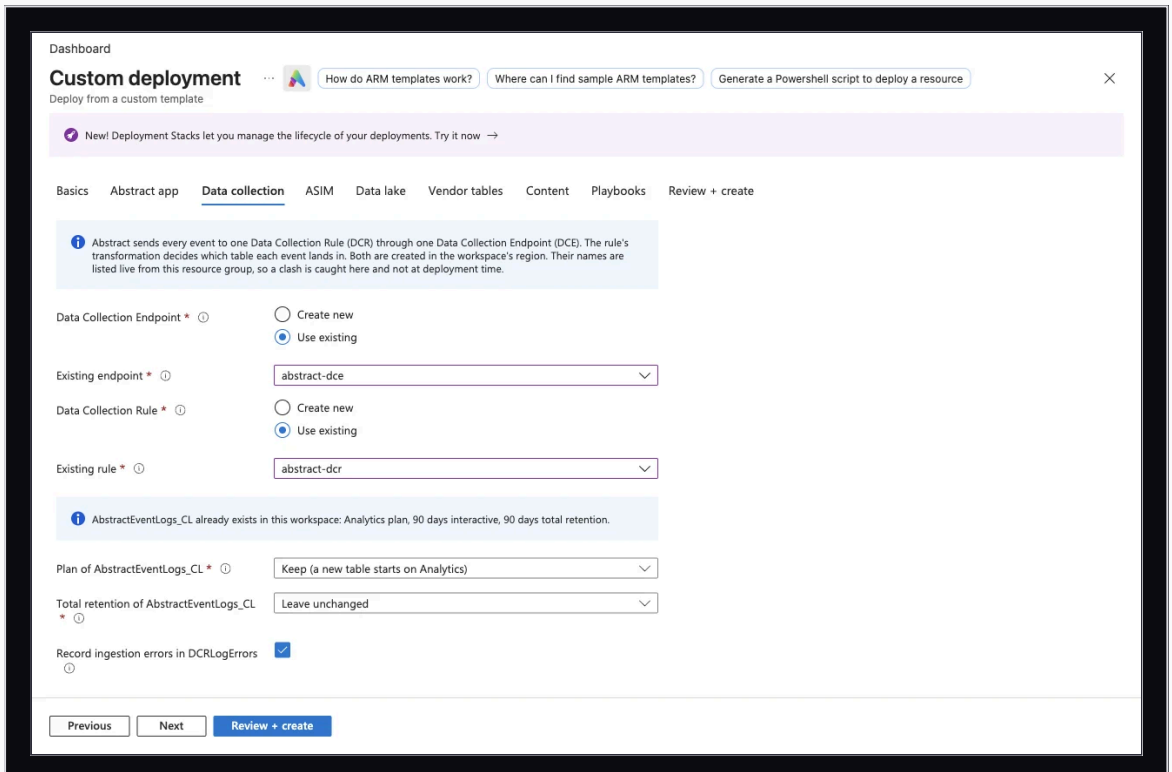

Data collection with the existing endpoint and rule, and the table's current plan and retention.Example Azure tenant

DONE WHEN The deployment shows **Your deployment is complete**, and the rule's JSON View lists a dataflow with output stream `Custom-OktaV2_CL`.

3 KEEP THE ORIGINAL RECORD IN ABSTRACT

☐ DONE

Abstract implementation engineer

`Abstract › Pipelines › Integrations › Enabled › your Okta source › Integration Config`

This route reads the source's original record and builds the row Microsoft's content expects from it, so the source must keep it.

FIELD	VALUE
Store Raw Events	On

✓ DONE WHEN Store Raw Events reads On.

4 ROUTE THE SOURCE TO SENTINEL

☐ DONE

Abstract implementation engineer

`Abstract › Pipelines › Overview`

Drag from the Okta source to **Microsoft Sentinel** and connect. If it is routed already, nothing changes here.

✓ DONE WHEN Rows appear in `OktaV2_CL` within 20 minutes.


5 CHECK IT

☐ DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Logs (KQL mode)`

Microsoft's `OktaSSO` parser returns the same rows. In Abstract's tests an Okta System Log record landed in `OktaV2_CL` with its domain, and `OktaSSO` returned it.

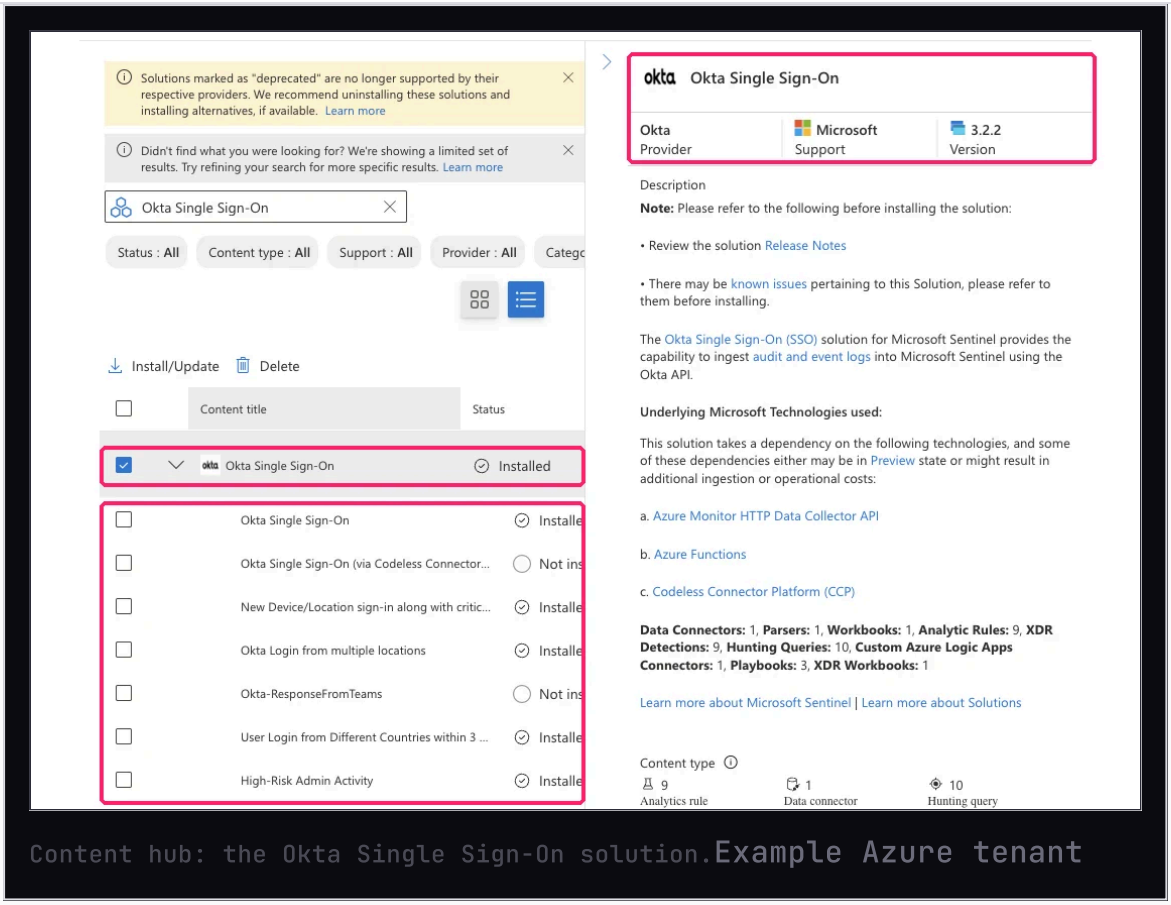

Content hub: the Okta Single Sign-On solution.Example Azure tenant

CHECK IT

KQL

```
OktaV2_CL
| where TimeGenerated > ago(1h)
| summarize Rows = count() by DomainName, EventOriginalType

// Microsoft's Okta parser over the same rows
OktaSSO
| where TimeGenerated > ago(1h)
| take 20
```

DONE WHEN Both queries return rows.

6 TURN ON THE OKTA RULES

☐ DONE

Your Sentinel administrator

Defender portal › Microsoft Sentinel › Configuration › Analytics ›

Rule templates

Filter **Data sources** to Okta. Open each template and choose **Create rule**, keeping the defaults.

DONE WHEN The rules are listed under Active rules with status Enabled.

FIREWALLS

FIREWALLS AND CEF

Palo Alto, Fortinet, Check Point, Cisco ASA, F5 and Trend Micro events land in CommonSecurityLog with the vendor strings Microsoft's content reads.

Microsoft's firewall content filters on `DeviceVendor` and `DeviceProduct` first. The rule writes the strings Microsoft's content expects. A CEF source is rebuilt from its original CEF line; Cisco ASA, FortiGate and F5 ASM are mapped from Abstract's parsed fields.

FIREWALL	ARRIVES IN ABSTRACT AS	VENDOR TABLES VALUE	DEVICEVENDOR	DEVICEPRODUCT
Palo Alto Networks	CEF	`csl-cef`	Palo Alto Networks	PAN-OS, Prisma Access
Check Point	CEF	`csl-cef`	Check Point	VPN-1 & FireWall-1, Application Control, HTTPS Inspection, SmartDefense, URL Filtering
Trend Micro Deep Security	CEF	`csl-cef`	Trend Micro	Deep Security Agent, Deep Security Manager
Any other CEF source	CEF	`csl-cef`	From its CEF header	From its CEF header

FIREWALL	ARRIVES IN ABSTRACT AS	VENDOR TABLES VALUE	DEVICEVENDOR	DEVICEPRODUCT
Cisco ASA	Not CEF: mapped from Abstract's parsed fields	`csl-acs`	Cisco	ASA
Fortinet FortiGate	Not CEF: mapped from Abstract's parsed fields	`csl-acs`	Fortinet	Fortigate
F5 BIG-IP ASM	Not CEF: mapped from Abstract's parsed fields	`csl-acs`	F5	ASM

1 INSTALL MICROSOFT'S COMMON EVENT FORMAT SOLUTION

☐ DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Content management › Content hub`

Search **Common Event Format** and install it. It brings the parsers, analytics rule templates and workbooks that read this table. Then search Content hub for your firewall's vendor, for example Palo Alto, Fortinet, Check Point, Cisco ASA, F5 or Trend Micro, and install its solution too.

FIELD	VALUE
Solution	Common Event Format
Then	**Install**

✓ DONE WHEN The solution shows Installed. The **Vendor tables** tab also reads its form's status.

2 ADD THE ROUTE TO THE DEPLOYMENT


☐ DONE

Your Azure administrator


`Azure portal › Deploy to Azure (Build step 1) › Vendor tables`

Open the deployment again with the **Deploy to Azure** button on the Build tab. A rule change reaches ingestion within 20 minutes.

FORM TAB	VALUE
Basics	The same subscription, resource group and workspace (**Use existing**)
Data collection	**Use existing**: the same endpoint and rule, so the rule keeps its ID and Abstract keeps sending
Vendor tables	Add `csl-cef` , `csl-acs` to the values you already chose
Store each vendor event once	On (the default)
Every other tab	The same choices as your first deployment. The deployment writes the rule exactly as the form describes it
Then	**Next** through every tab, **Review + create**, **Create**

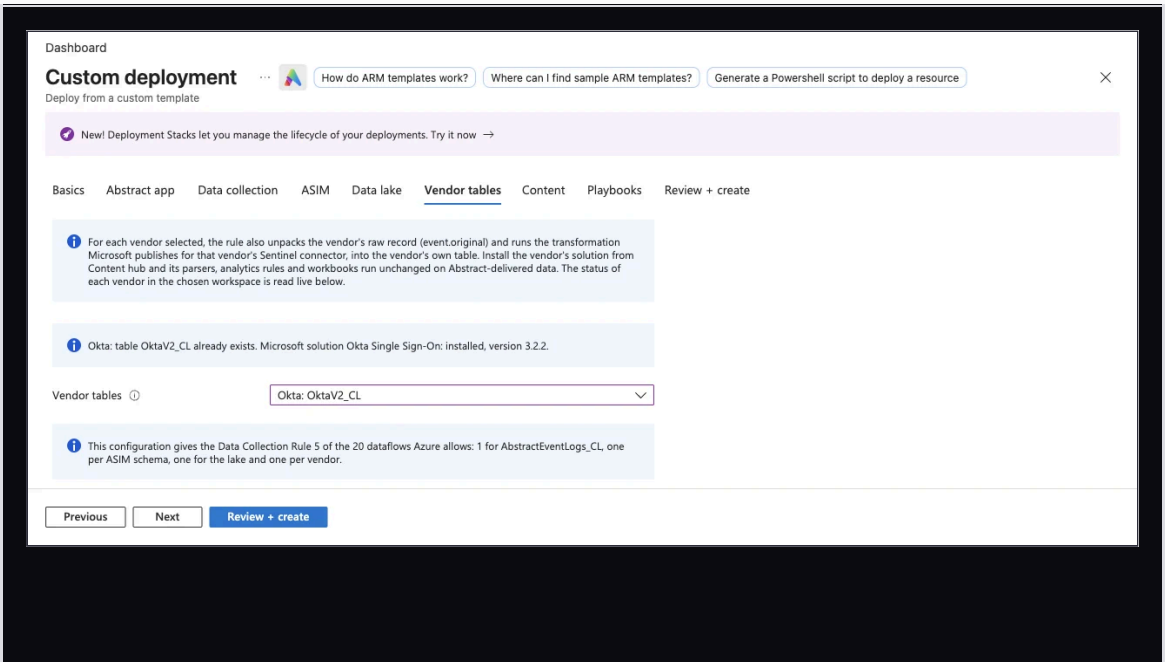

Vendor tables: the status of each vendor's table and Microsoft solution in this workspace, and the dataflow count.Example Azure tenant

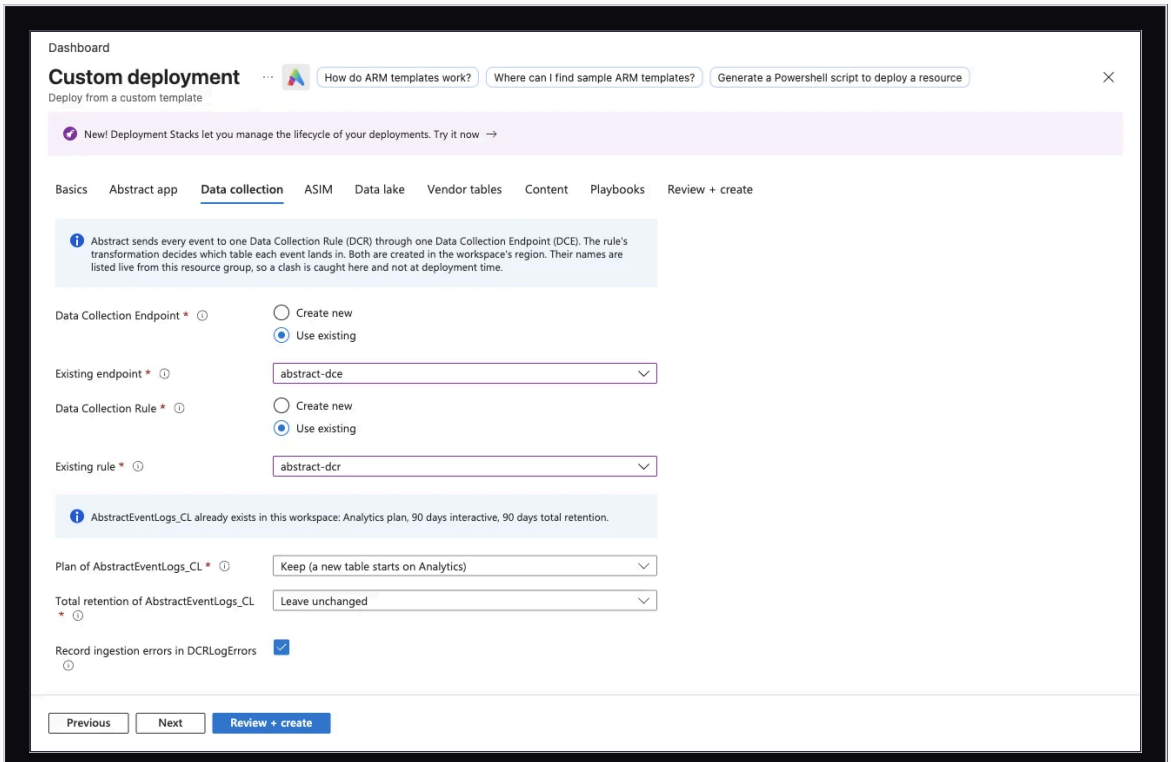

Data collection with the existing endpoint and rule, and the table's current plan and retention.Example Azure tenant

DONE WHEN **Your deployment is complete** The deployment shows , and the rule's JSON View lists a dataflow with output stream `Microsoft-CommonSecurityLog` .

3 KEEP THE ORIGINAL RECORD IN ABSTRACT

☐ DONE

Abstract implementation engineer

`Abstract › Pipelines › Integrations › Enabled › each firewall source › Integration Config`

This route reads the source's original record and builds the row Microsoft's content expects from it, so the source must keep it.

FIELD	VALUE
Store Raw Events	On

DONE WHEN Store Raw Events reads On.

4 ROUTE THE SOURCE TO SENTINEL

☐ DONE

Abstract implementation engineer

`Abstract › Pipelines › Overview`

Drag from each firewall source to **Microsoft Sentinel** and connect. If it is routed already, nothing changes here.

DONE WHEN Rows appear in `CommonSecurityLog` within 20 minutes.

5 CHECK IT

☐ DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Logs (KQL mode)`

Abstract's rows carry `CollectorHostName` `Abstract`. The vendor and product strings match the table above. In Abstract's tests every vendor in the table landed with those strings, and Microsoft's `_Im_NetworkSession` parser returned the Check Point, Palo Alto and Cisco ASA traffic rows.

CHECK IT

KQL

```
CommonSecurityLog
| where TimeGenerated > ago(1h) and CollectorHostName ==
"Abstract"
| summarize Rows = count(), WithSourceIP =
countif(isnotempty(SourceIP)) by DeviceVendor, DeviceProduct

// Microsoft's ASIM network parser over the same rows
_Im_NetworkSession(starttime = ago(1h))
| summarize Rows = count() by EventVendor, EventProduct
```

DONE WHEN Each of your firewalls appears with the DeviceVendor and DeviceProduct in the table.

6 TURN ON THE VENDOR RULES

☐ DONE

Your Sentinel administrator

Defender portal › Microsoft Sentinel › Configuration › Analytics › Rule templates

Filter **Data sources** to your firewall's connector. Open each template and choose **Create rule**, keeping the defaults.

DONE WHEN The rules are listed under Active rules with status Enabled.

NETWORK SERVICES

SYSLOG

Linux, Nutanix and Infoblox lines land in Syslog, where Microsoft's Syslog content and ASIM parsers read them.

Microsoft's Syslog parsers read the original line, so the rule writes it unchanged. CEF lines from the same hosts go to CommonSecurityLog instead. With Syslog on, Infoblox DHCP lines stay in `Syslog` and are not also written to the ASIM DHCP table.

1 INSTALL MICROSOFT'S SYSLOG SOLUTION

☐ DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Content management › Content hub`

Search **Syslog** and install it. It brings the parsers, analytics rule templates and workbooks that read this table. For an appliance with its own solution, such as Infoblox, install that solution too.

FIELD	VALUE
Solution	Syslog
Then	**Install**

✓ DONE WHEN The solution shows Installed. The **Vendor tables** tab also reads its form's status.

2 ADD THE ROUTE TO THE DEPLOYMENT

☐ DONE


Your Azure administrator

`Azure portal › Deploy to Azure (Build step 1) › Vendor tables`


Open the deployment again with the **Deploy to Azure** button on the Build tab. A rule change reaches ingestion within 20 minutes.

FORM TAB	VALUE
Basics	The same subscription, resource group and workspace (**Use existing**)

FORM TAB	VALUE
Data collection	**Use existing**: the same endpoint and rule, so the rule keeps its ID and Abstract keeps sending
Vendor tables	Add `syslog` to the values you already chose
Store each vendor event once	On (the default)
Every other tab	The same choices as your first deployment. The deployment writes the rule exactly as the form describes it
Then	**Next** through every tab, **Review + create**, **Create**

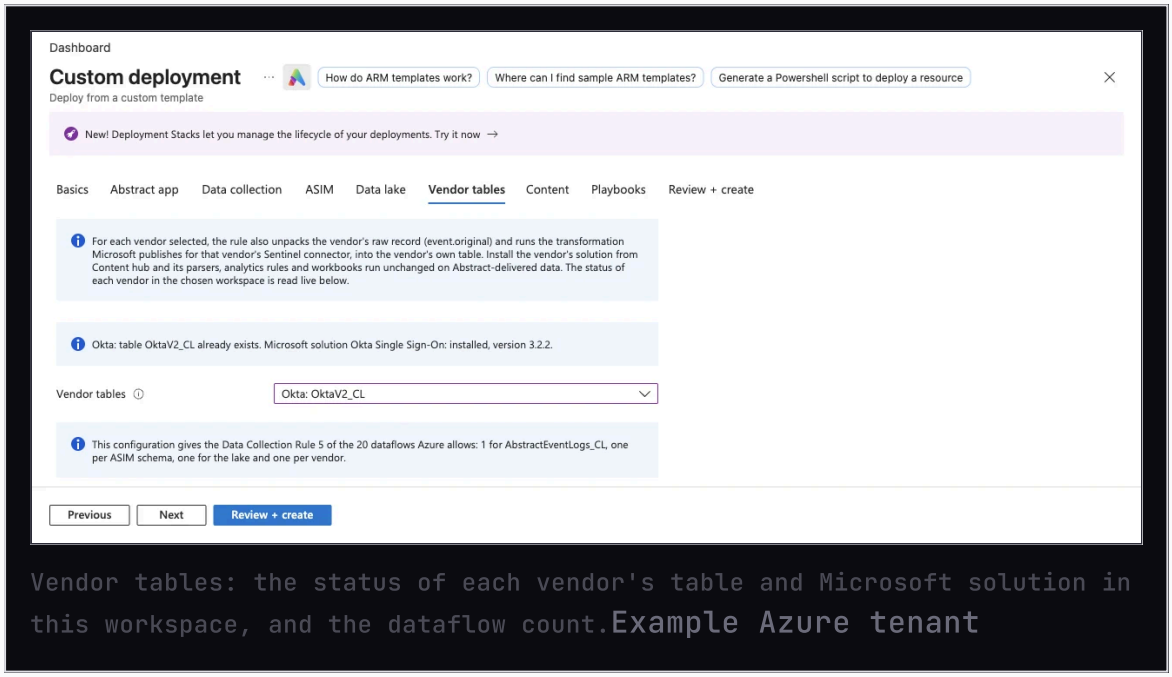

Vendor tables: the status of each vendor's table and Microsoft solution in this workspace, and the dataflow count.Example Azure tenant

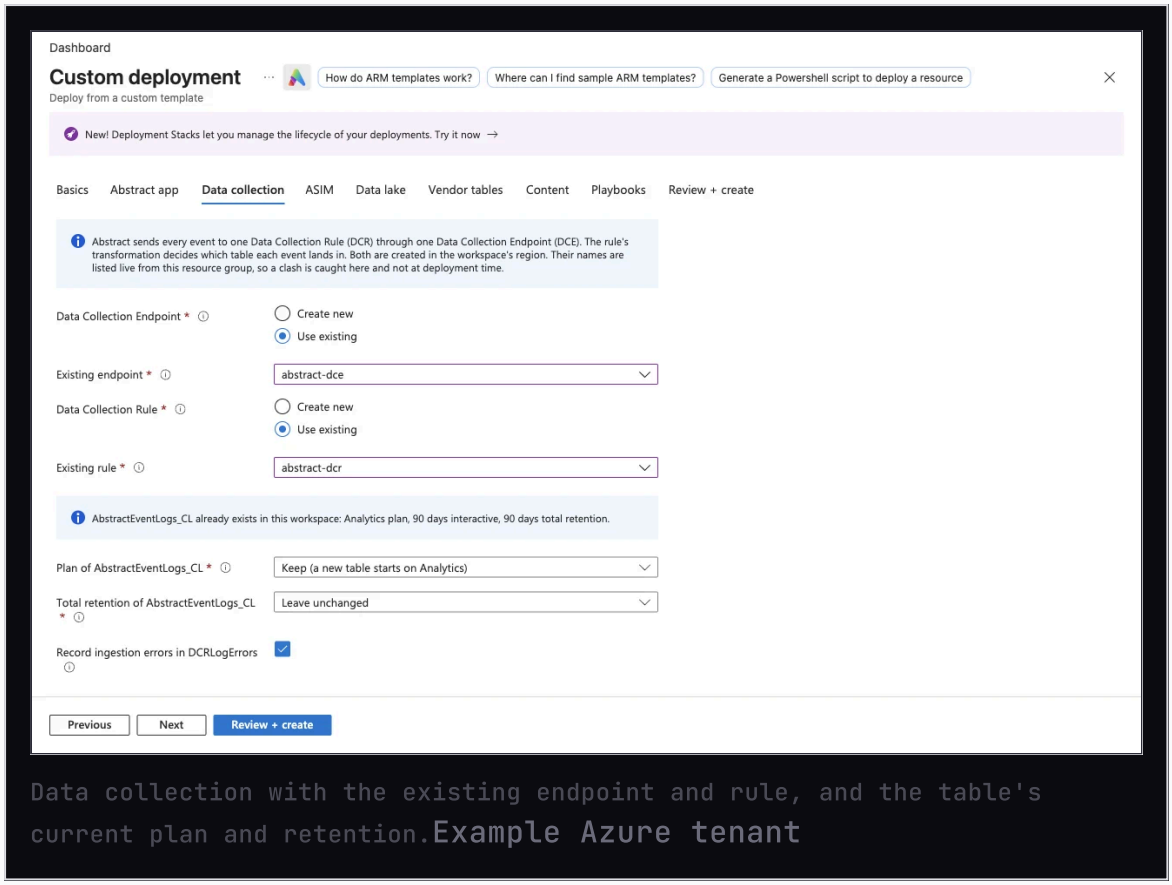

Data collection with the existing endpoint and rule, and the table's current plan and retention.Example Azure tenant

DONE WHEN The deployment shows **Your deployment is complete**, and the rule's JSON View lists a dataflow with output stream `Microsoft-Syslog`.

3 KEEP THE ORIGINAL RECORD IN ABSTRACT

☐ DONE

Abstract implementation engineer

`Abstract › Pipelines › Integrations › Enabled › each Linux, Nutanix or Infoblox source › Integration Config`

This route reads the source's original record and builds the row Microsoft's content expects from it, so the source must keep it.

FIELD	VALUE
Store Raw Events	On

DONE WHEN Store Raw Events reads On.

4 ROUTE THE SOURCE TO SENTINEL

☐ DONE

Abstract implementation engineer

`Abstract › Pipelines › Overview`

Drag from each Linux, Nutanix or Infoblox source to **Microsoft Sentinel** and connect. If it is routed already, nothing changes here.

DONE WHEN Rows appear in `Syslog` within 20 minutes.

5 CHECK IT

☐ DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Logs (KQL mode)`

Abstract's rows carry `CollectorHostName` `Abstract`, with the original line in `SyslogMessage` and its program in `ProcessName`. In Abstract's tests Linux `sshd` and `sudo`, Nutanix and Infoblox `dhcpd` and `named` lines landed this way; Microsoft's `_Im_Authentication` parser returned the `sshd` sign-in and `_Im_Dns` returned the Infoblox DNS lines.

CHECK IT

KQL

```
Syslog
| where TimeGenerated > ago(1h) and CollectorHostName ==
"Abstract"
| summarize Rows = count() by Computer, ProcessName

// Microsoft's ASIM parsers over the same rows
_Im_Authentication(starttime = ago(1h))
| where EventProduct has "OpenSSH"
| summarize Rows = count() by EventResult

_Im_Dns(starttime = ago(1h))
| summarize Rows = count() by EventVendor, EventProduct
```

DONE WHEN Your hosts appear by ProcessName.

CLOUD

AWS CLOUDTRAIL

CloudTrail records land in AWSCloudTrail, the table Microsoft's AWS content reads.

Microsoft's Amazon Web Services solution reads `AWSCloudTrail`. Its rules, hunting queries and workbooks run on Abstract's CloudTrail events unchanged.

1 INSTALL MICROSOFT'S AMAZON WEB SERVICES SOLUTION

☐ DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Content management › Content hub`

Search **Amazon Web Services** and install it. It brings the parsers, analytics rule templates and workbooks that read this table.

FIELD	VALUE
Solution	Amazon Web Services
Then	**Install**

DONE WHEN The solution shows Installed. The **Vendor tables** form's tab also reads its status.

2 ADD THE ROUTE TO THE DEPLOYMENT


☐ DONE

Your Azure administrator


`Azure portal › Deploy to Azure (Build step 1) › Vendor tables`

Open the deployment again with the **Deploy to Azure** button on the Build tab. A rule change reaches ingestion within 20 minutes.

FORM TAB	VALUE
Basics	The same subscription, resource group and workspace (**Use existing**)
Data collection	**Use existing**: the same endpoint and rule, so the rule keeps its ID and Abstract keeps sending
Vendor tables	Add `aws-cloudtrail` to the values you already chose
Store each vendor event once	On (the default)
Every other tab	The same choices as your first deployment. The deployment writes the rule exactly as the form describes it
Then	**Next** through every tab, **Review + create**, **Create**

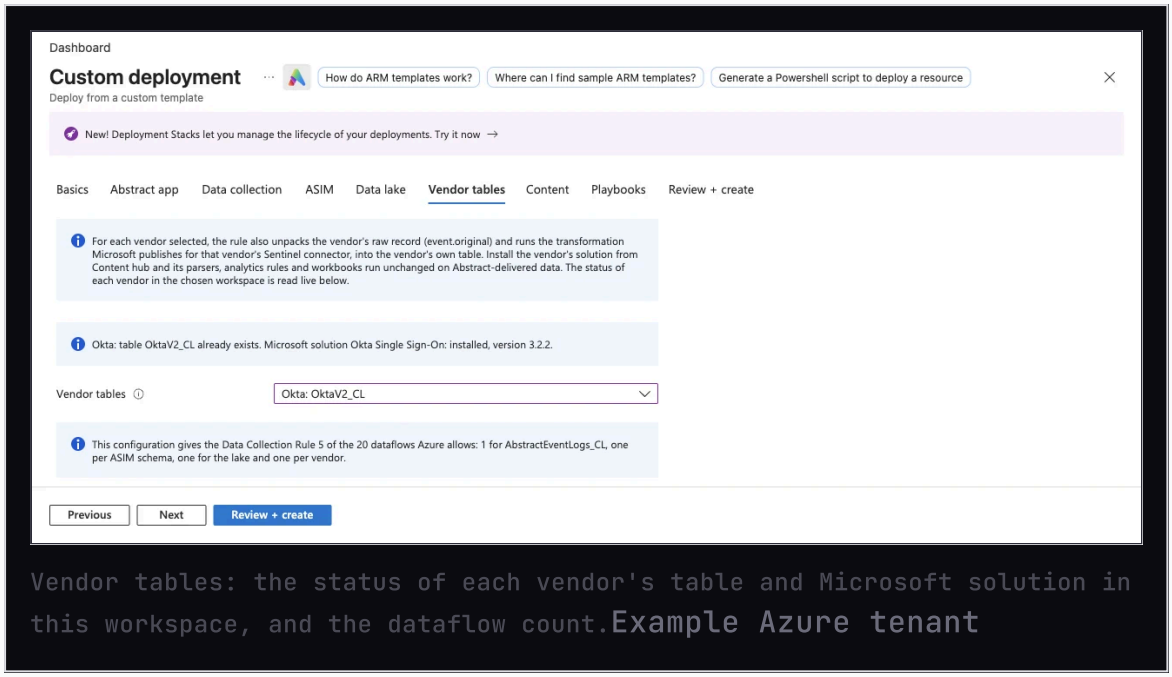

Vendor tables: the status of each vendor's table and Microsoft solution in this workspace, and the dataflow count.Example Azure tenant

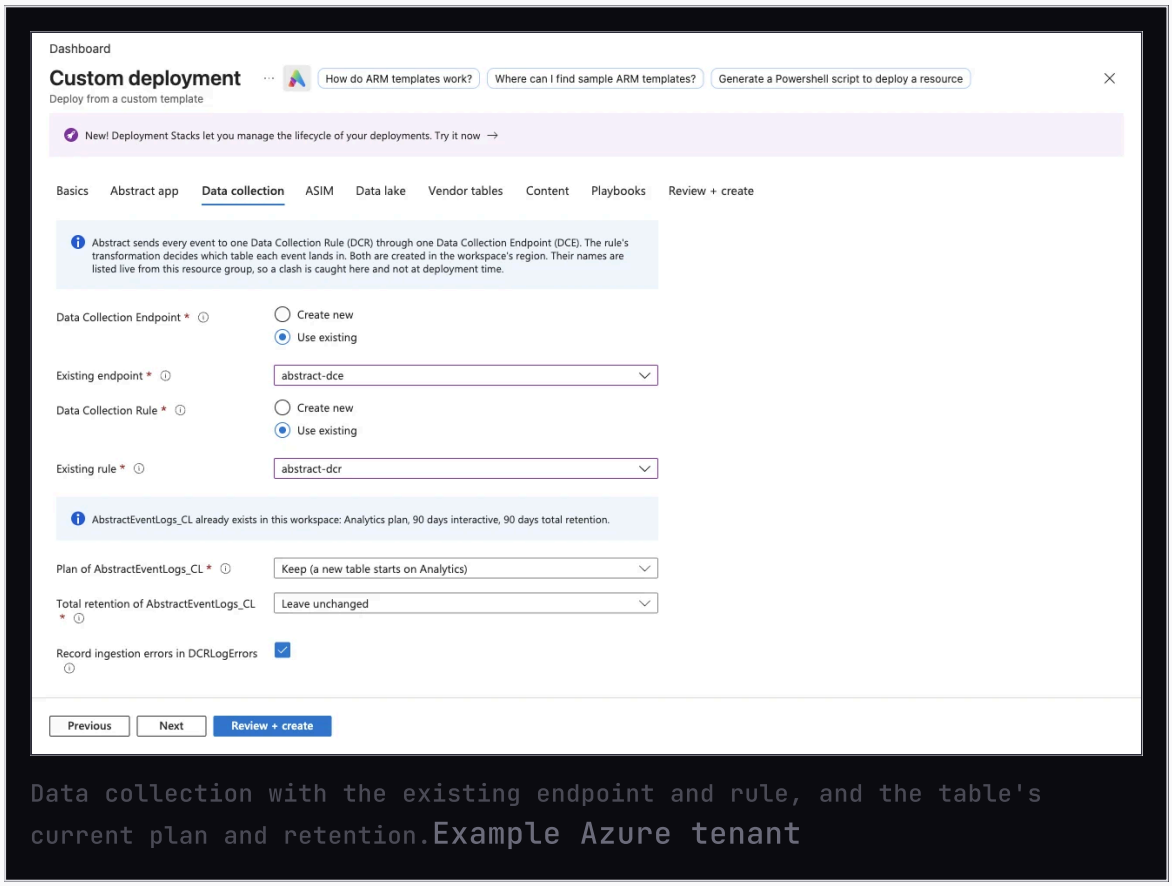

Data collection with the existing endpoint and rule, and the table's current plan and retention.Example Azure tenant

DONE WHEN The deployment shows **Your deployment is complete**, and the rule's JSON View lists a dataflow with output stream `Microsoft-AWSCloudTrail`.

3 KEEP THE ORIGINAL RECORD IN ABSTRACT

☐ DONE

Abstract implementation engineer

`Abstract › Pipelines › Integrations › Enabled › your AWS CloudTrail source › Integration Config`

This route reads the source's original record and builds the row Microsoft's content expects from it, so the source must keep it.

FIELD	VALUE
Store Raw Events	On

✓ DONE WHEN Store Raw Events reads On.

4 ROUTE THE SOURCE TO SENTINEL

☐ DONE

Abstract implementation engineer

`Abstract › Pipelines › Overview`

Drag from the AWS CloudTrail source to **Microsoft Sentinel** and connect. If it is routed already, nothing changes here.

✓ DONE WHEN Rows appear in `AWSCloudTrail` within 20 minutes.

5 CHECK IT

☐ DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Logs (KQL mode)`

The rule builds each row from the original CloudTrail record. In Abstract's tests every CloudTrail record landed in `AWSCloudTrail`; a record whose original is not CloudTrail JSON stays in `AbstractEventLogs_CL`. The conditions of Microsoft's rule *Login to AWS Management Console without MFA* matched the test console sign-ins.

CHECK IT

KQL

```
AWSCloudTrail
| where ingestion_time() > ago(1h)
| summarize Rows = count() by EventSource, EventName,
UserIdentityType
| order by Rows desc
```

DONE WHEN Your accounts' events appear by EventName.

6 TURN OFF MICROSOFT'S AWS CONNECTOR FOR THE SAME TRAIL

DONE

Your Sentinel administrator

Defender portal › Microsoft Sentinel › Configuration › Data connectors › Amazon Web Services

Only if Microsoft's own S3 connector already reads this trail. Run both for a day, compare the counts, then remove the trail from Microsoft's connector, or every event is stored twice.

DONE WHEN One copy of each event arrives.

ENDPOINT

CROWDSTRIKE

CrowdStrike Falcon host records land in CrowdStrikeHostsV2_CL, shaped by Microsoft's own CrowdStrike logic.

The table Microsoft's CrowdStrike Falcon Endpoint Protection solution reads for its host inventory. The deployment creates it if it is missing.

1 INSTALL MICROSOFT'S CROWDSTRIKE FALCON ENDPOINT PROTECTION SOLUTION

☐ DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Content management › Content hub`

Search **CrowdStrike Falcon Endpoint Protection** and install it. It brings the parsers, analytics rule templates and workbooks that read this table.

FIELD	VALUE
Solution	CrowdStrike Falcon Endpoint Protection
Then	**Install**

✓ DONE WHEN The solution shows Installed. The **Vendor tables** form's tab also reads its status.

2 ADD THE ROUTE TO THE DEPLOYMENT

☐ DONE


Your Azure administrator

`Azure portal › Deploy to Azure (Build step 1) › Vendor tables`


Open the deployment again with the **Deploy to Azure** button on the Build tab. A rule change reaches ingestion within 20 minutes.

FORM TAB	VALUE
Basics	The same subscription, resource group and workspace (**Use existing**)
Data collection	**Use existing**: the same endpoint and rule, so the rule keeps its ID and Abstract keeps sending
Vendor tables	Add `crowdstrike-hosts` to the values you already chose

FORM TAB	VALUE
Store each vendor event once	On (the default)
Every other tab	The same choices as your first deployment. The deployment writes the rule exactly as the form describes it
Then	**Next** through every tab, **Review + create**, **Create**

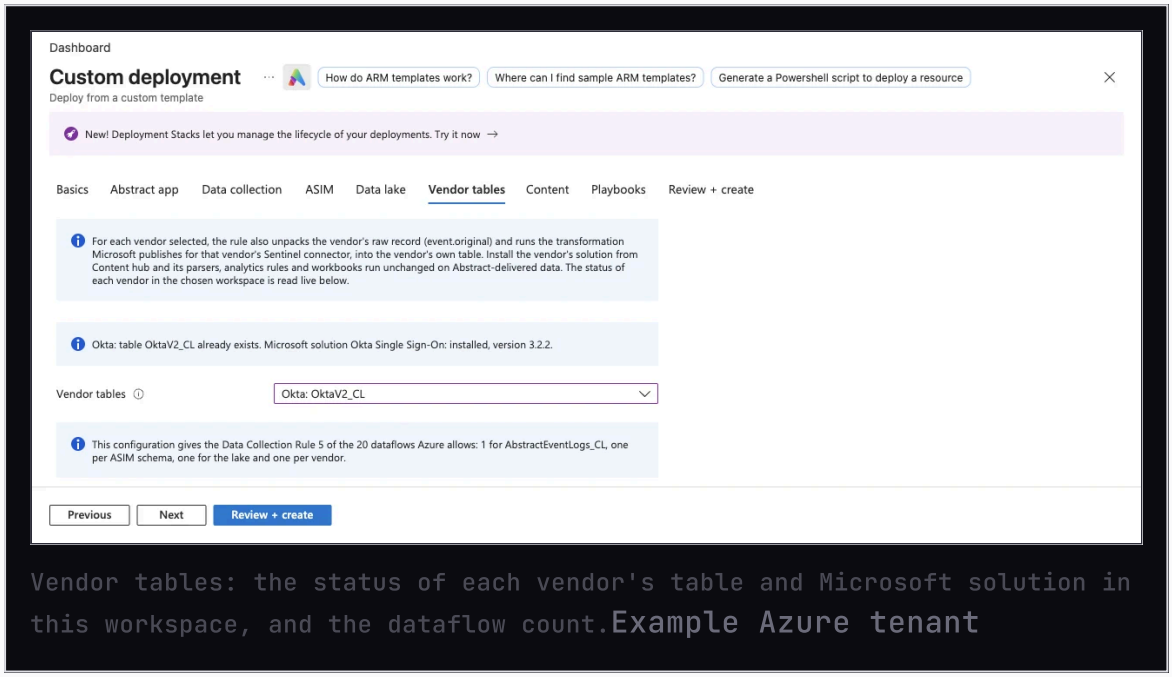

Vendor tables: the status of each vendor's table and Microsoft solution in this workspace, and the dataflow count.Example Azure tenant

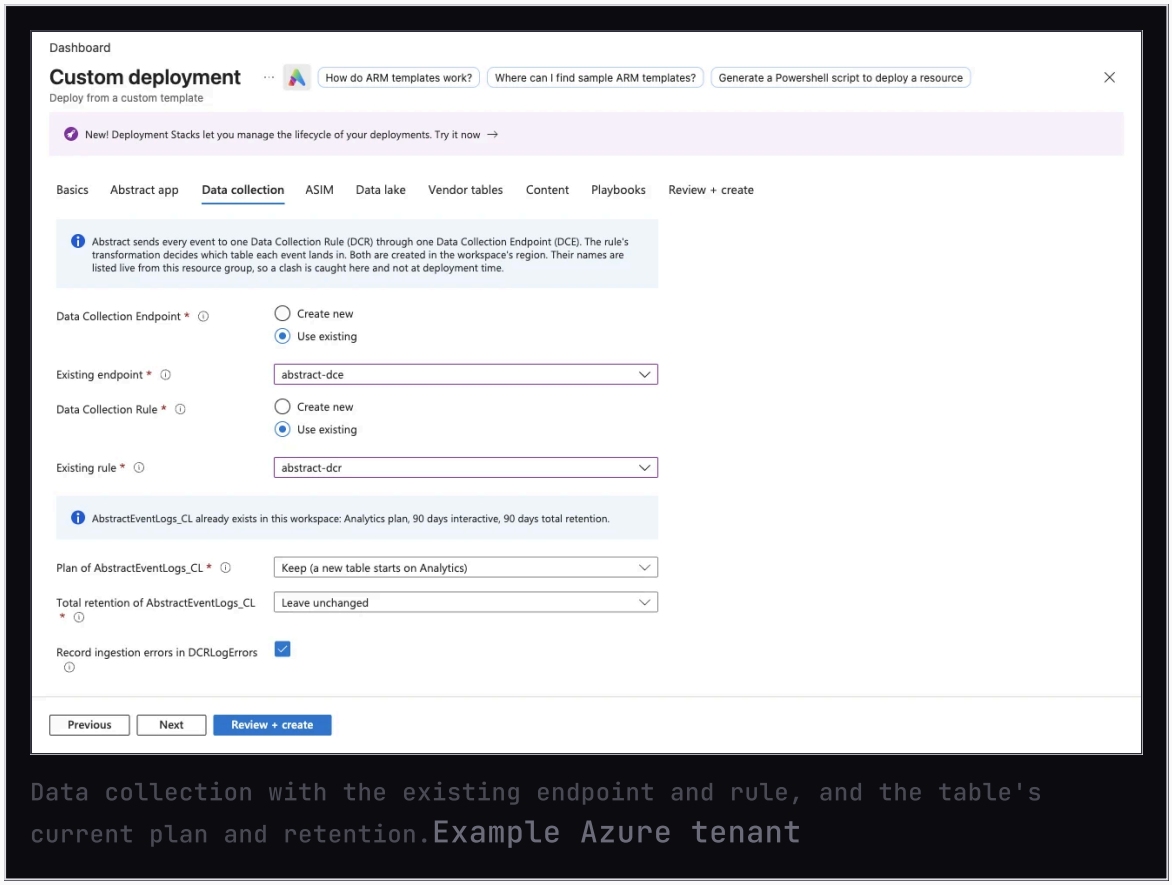

Data collection with the existing endpoint and rule, and the table's current plan and retention.Example Azure tenant

DONE WHEN The deployment shows **Your deployment is complete**, and the rule's JSON View lists a dataflow with output stream `Custom-CrowdStrikeHostsV2_CL`.

3 KEEP THE ORIGINAL RECORD IN ABSTRACT

☐ DONE

Abstract implementation engineer

Abstract › Pipelines › Integrations › Enabled › your CrowdStrike Falcon source › Integration Config

This route reads the source's original record and builds the row Microsoft's content expects from it, so the source must keep it.

FIELD	VALUE
Store Raw Events	On

DONE WHEN Store Raw Events reads On.

4 ROUTE THE SOURCE TO SENTINEL

DONE

Abstract implementation engineer

`Abstract › Pipelines › Overview`

Drag from the CrowdStrike Falcon source that collects host records to **Microsoft Sentinel** and connect. If it is routed already, nothing changes here.

DONE WHEN Rows appear in `CrowdStrikeHostsV2_CL` within 20 minutes.

5 CHECK IT

DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Logs (KQL mode)`

The rule runs Microsoft's own CrowdStrike connector transformation on each host record. In Abstract's tests 30 host records landed, each with its hostname.

CHECK IT

KQL

```
CrowdStrikeHostsV2_CL
| where TimeGenerated > ago(1d)
| summarize Rows = count(), Hosts = dcount(Hostname)
```

DONE WHEN Your hosts appear with their hostnames.

ASIM SCHEMAS

ASIM TABLES

Audit, authentication, DNS, file, network, process, registry, web, alert, DHCP and user-management events land in Microsoft's normalized ASIM tables.

Abstract maps each event to the ASIM schema it belongs to. The eight event schemas come from the form's ASIM tab; Alert, Dhcp and UserManagement come from the Vendor tables tab. Microsoft's `_Im_` parsers read all of them.

SCHEMA	TABLE	TYPICAL EVENTS	TURNED ON BY
AuditEvent	`ASimAuditEventLogs`	Audit events	ASIM schemas
Authentication	`ASimAuthenticationEventLogs`	Sign-ins and logons	ASIM schemas
Dns	`ASimDnsActivityLogs`	DNS queries	ASIM schemas
FileEvent	`ASimFileEventLogs`	File activity	ASIM schemas
NetworkSession	`ASimNetworkSessionLogs`	Firewall and flow sessions	ASIM schemas
ProcessEvent	`ASimProcessEventLogs`	Process starts	ASIM schemas
RegistryEvent	`ASimRegistryEventLogs`	Windows registry changes	ASIM schemas
WebSession	`ASimWebSessionLogs`	Proxy and web traffic	ASIM schemas
Alert	`ASimAlertEventLogs`	Abstract findings	Vendor tables › `asim-alert`
Dhcp	`ASimDhcpEventLogs`	DHCP leases	Vendor tables › `asim-dhcp`

SCHEMA	TABLE	TYPICAL EVENTS	TURNED ON BY
UserManagement	`ASimUserManagementActivityLogs`	Users created, deleted, added to or removed from groups	Vendor tables › `asim-user-management`

1 INSTALL THE ASIM CONTENT YOU WANT

☐ DONE


Your Sentinel administrator

`Defender portal` › `Microsoft Sentinel` › `Content management` › `Content hub`

ASIM solutions read every source that writes the ASIM tables, so one install covers all your vendors for that kind of activity. Good first picks:

- 01 Network Session Essentials
- 02 DNS Essentials
- 03 Web Session Essentials

FIELD	VALUE
Then	**Install** each one

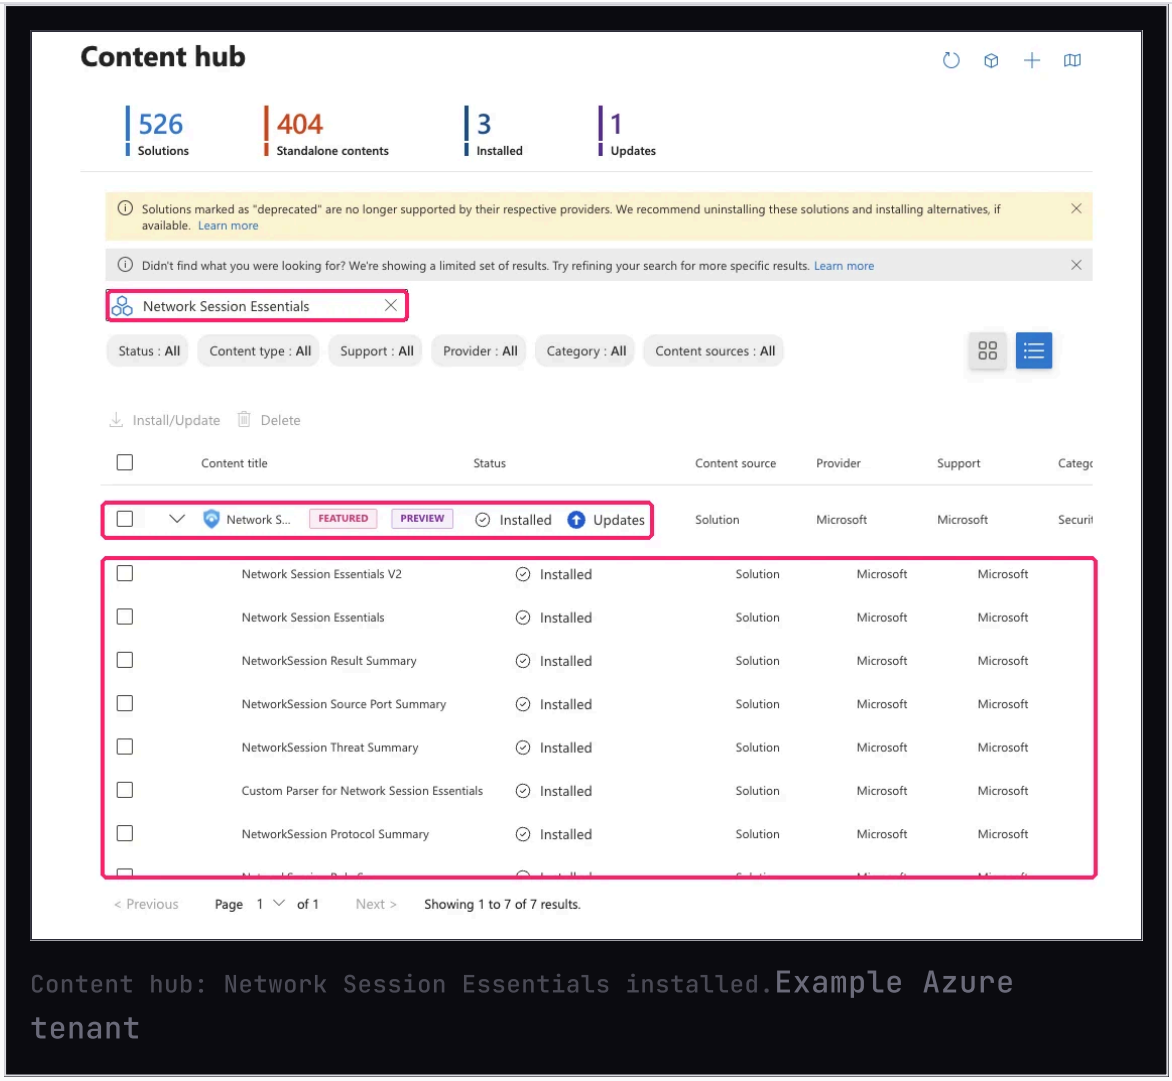

Content hub: Network Session Essentials installed.Example Azure tenant

DONE WHEN Each solution shows Installed.

2 TURN ON ASIM IN THE DEPLOYMENT

☐ DONE


Your Azure administrator

Azure portal › Deploy to Azure (Build step 1) › ASIM and Vendor tables


Set the ASIM tab as below, and add the three ASIM values under Vendor tables. Everything else stays as in your first deployment, with **Use existing** on Basics and Data collection.

FORM FIELD	VALUE
Write mapped events into Microsoft's ASIM tables	On

FORM FIELD	VALUE
ASIM schemas	All eight, or the schemas you want
One copy	On, to store each ASIM event once, in its ASIM table
Vendor tables	`asim-alert`, `asim-dhcp`, `asim-user-management`
Then	**Next** through every tab, **Review + create**, **Create**

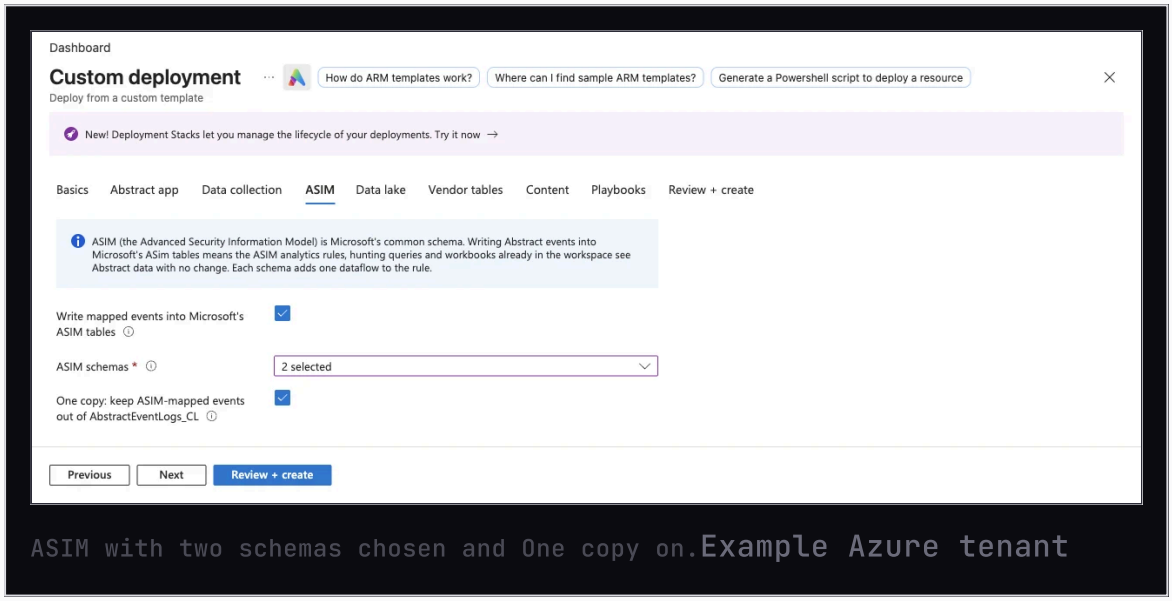

ASIM with two schemas chosen and One copy on.Example Azure tenant

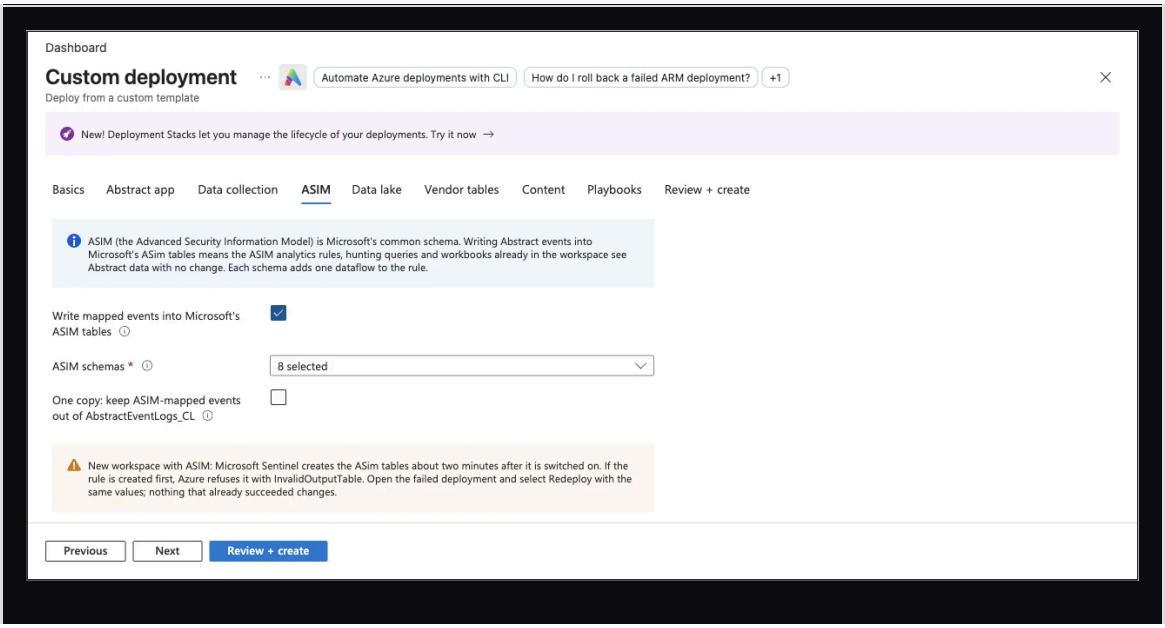

```
ASIM on a new workspace: the form explains the second run.Example Azure
tenant
```


DONE WHEN The deployment succeeds and the ASIM tables you chose are listed under the workspace's Tables. On a new workspace, if it stops with `InvalidOutputTable`, **Redeploy**.

3 NOTHING CHANGES IN ABSTRACT

DONE

Abstract implementation engineer

Every source already routed to **Microsoft Sentinel** now also reaches the ASIM table that matches each event. New sources need only their route.

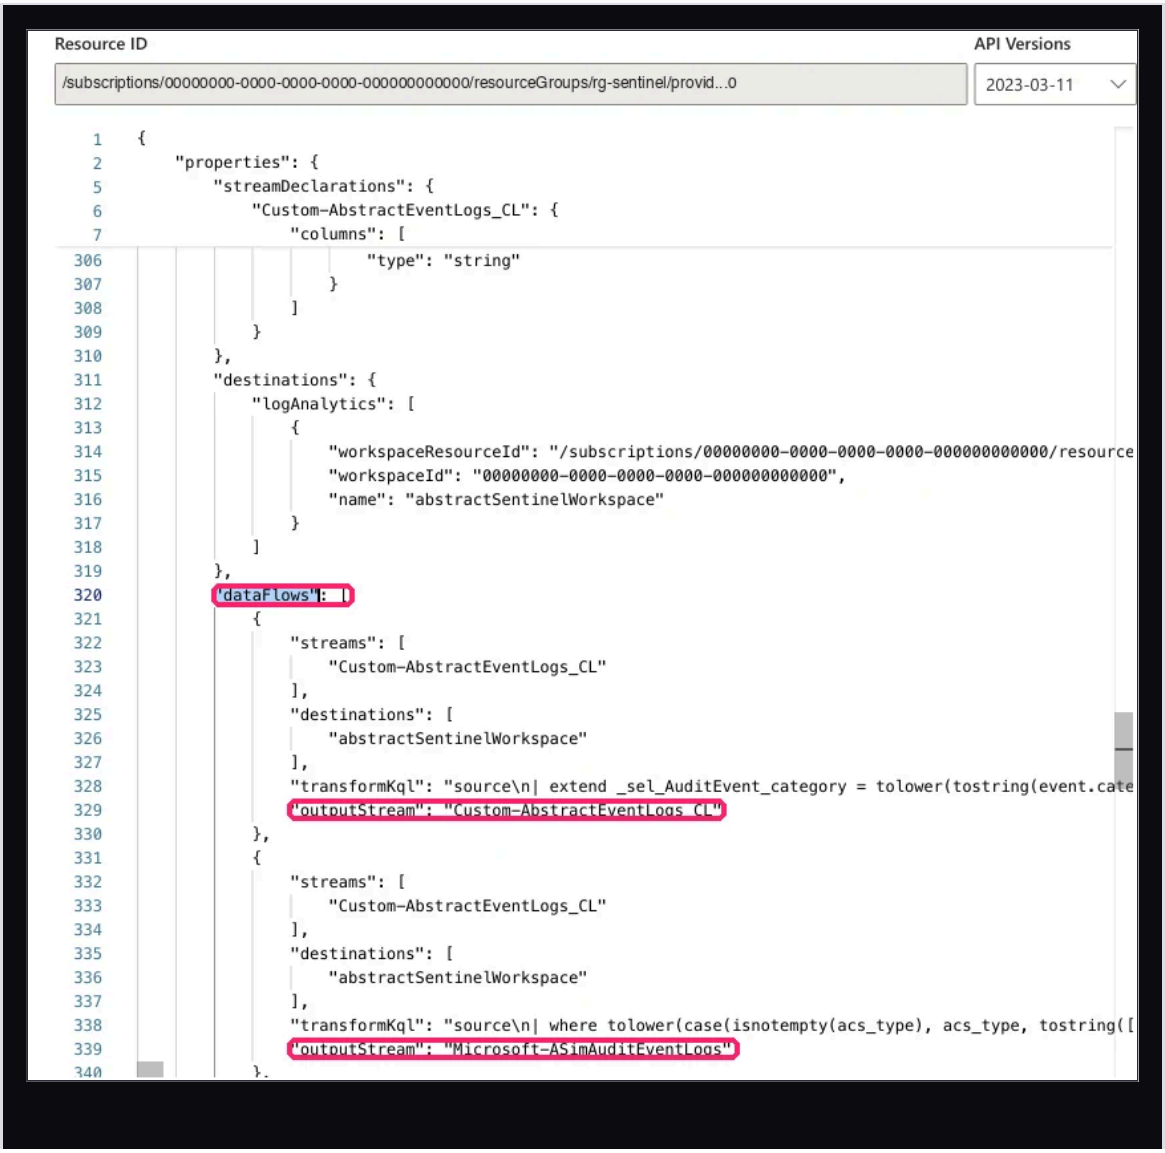

The rule's JSON View: one input stream, several dataflows to Microsoft's tables.Example Azure tenant

DONE WHEN Rows appear in the ASIM tables within 20 minutes of the deployment.


4 CHECK IT

DONE

Your Sentinel administrator

Defender portal › Microsoft Sentinel › Logs (KQL mode)

Abstract's rows carry their Abstract event ID in `AdditionalFields.AbstractEventId`. In Abstract's tests Microsoft's own parsers returned them: `_Im_NetworkSession`, `_Im_Authentication`, `_Im_UserManagement` and `_Im_DhcpEvent`.

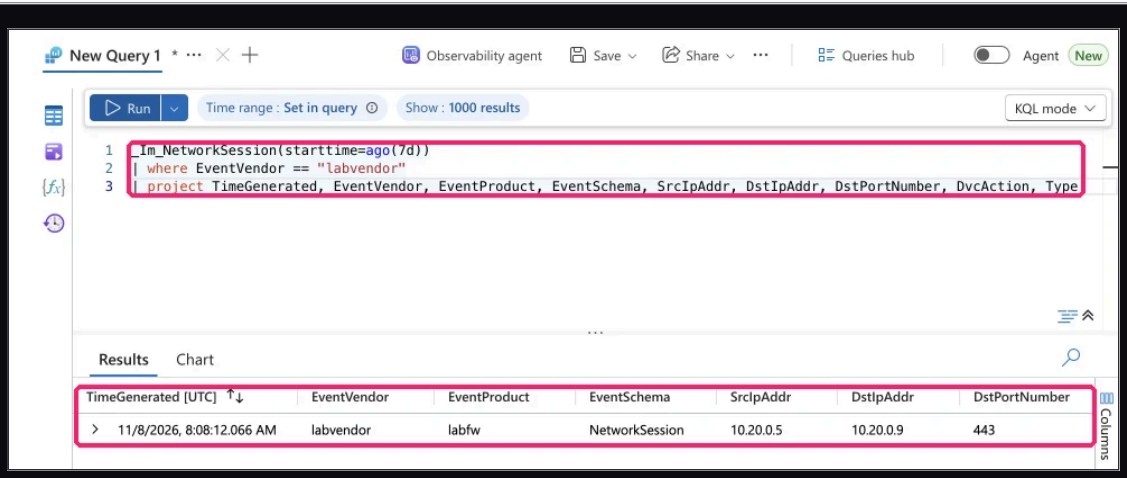

Logs: Microsoft's _Im_NetworkSession parser returning rows from the ASIM network table.Example Azure tenant

CHECK IT

KQL

```
// What reached each ASIM table in the last hour, by vendor and
product
union withsource = Table ASim*Logs
| where TimeGenerated > ago(1h) and
isnotempty(tostring(AdditionalFields.AbstractEventId))
| summarize Rows = count() by Table, EventVendor, EventProduct

// Microsoft's own parsers return the same rows
_Im_NetworkSession(starttime = ago(1h))
| summarize Rows = count() by EventVendor, EventProduct

_Im_UserManagement(starttime = ago(1h))
| summarize Rows = count() by EventVendor, EventType
```

DONE WHEN Each ASIM table you chose holds rows for your sources.

Turn Sentinel on first. The ASIM tables appear a few minutes after Sentinel is turned on for a workspace. On a brand-new workspace the first deployment can stop once with `InvalidOutputTable`; run it again with the same values.

ABSTRACT

ABSTRACT FINDINGS AS SENTINEL INCIDENTS

Each Abstract finding lands in ASimAlertEventLogs and becomes a Sentinel incident.

Abstract's findings land in Microsoft's ASIM alert table, and the Abstract solution's *Abstract Security - Finding* rule turns each one into an alert and an incident.

1 ADD THE ROUTE TO THE DEPLOYMENT


☐ DONE

Your Azure administrator


`Azure portal › Deploy to Azure (Build step 1) › Vendor tables`

Open the deployment again with the **Deploy to Azure** button on the Build tab. A rule change reaches ingestion within 20 minutes.

FORM TAB	VALUE
Basics	The same subscription, resource group and workspace (**Use existing**)
Data collection	**Use existing**: the same endpoint and rule, so the rule keeps its ID and Abstract keeps sending
Vendor tables	Add `asim-alert` to the values you already chose
Store each vendor event once	On (the default)
Every other tab	The same choices as your first deployment. The deployment writes the rule exactly as the form describes it
Then	**Next** through every tab, **Review + create**, **Create**

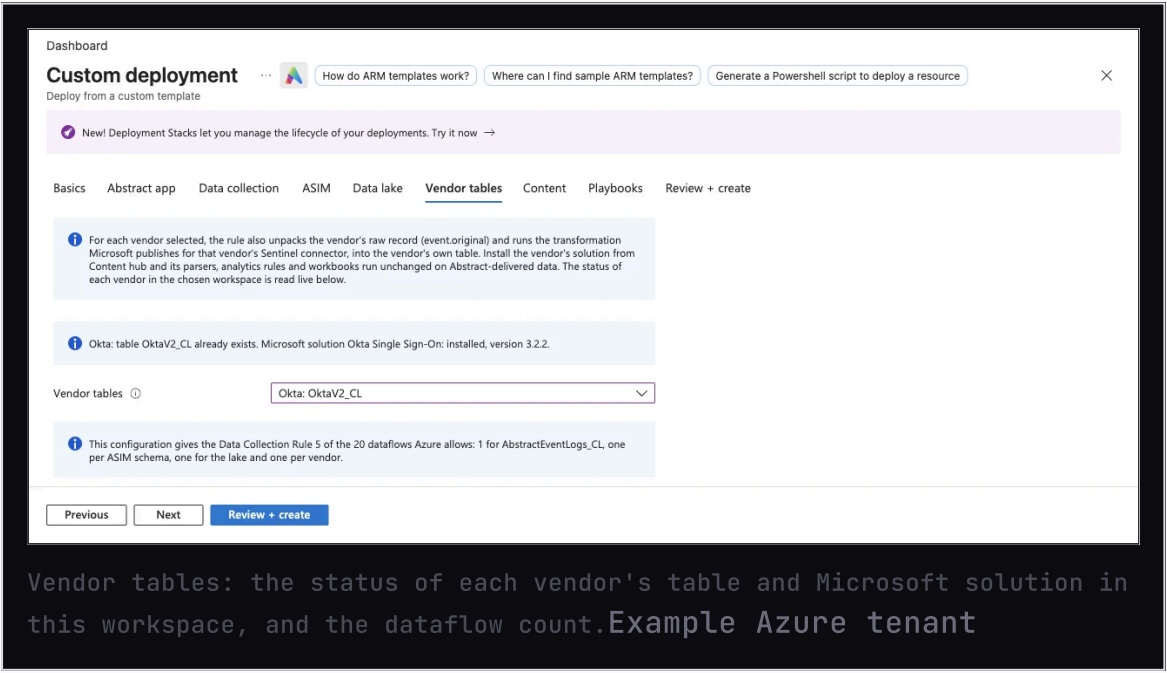

Vendor tables: the status of each vendor's table and Microsoft solution in this workspace, and the dataflow count.Example Azure tenant

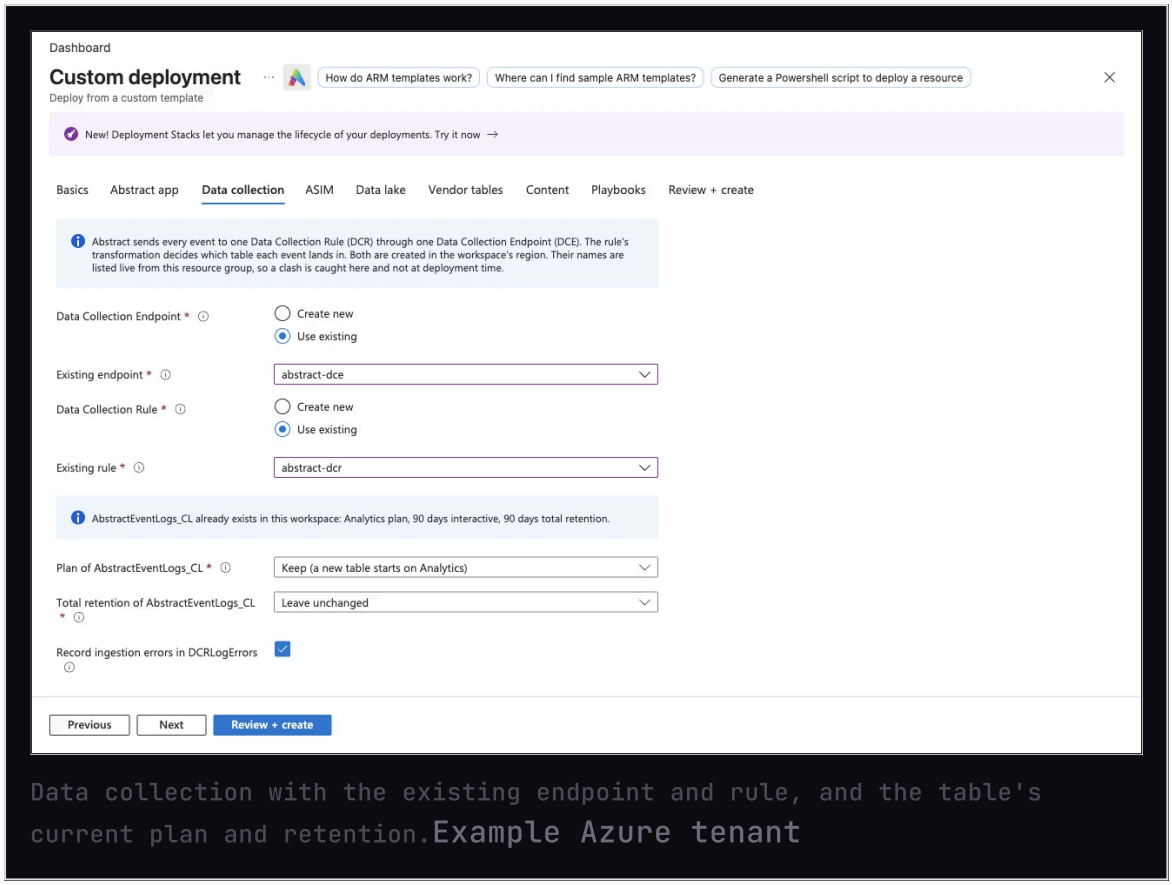

Data collection with the existing endpoint and rule, and the table's current plan and retention.Example Azure tenant

DONE WHEN The deployment shows **Your deployment is complete**, and the rule's JSON View lists a dataflow with output stream `Microsoft-ASimAlertEventLogs`.

2 FINDINGS REACH SENTINEL THROUGH THE DESTINATION

☐ DONE

Abstract implementation engineer

Abstract › Pipelines › Overview

Every Abstract finding that the **Microsoft Sentinel** destination sends takes this route first, ahead of every vendor table, so a finding about an Okta or CloudTrail record still lands here.

DONE WHEN The route to **Microsoft Sentinel** carries your findings.

3 CHECK THE FINDINGS TABLE

DONE

Your Sentinel administrator

`Defender portal › Microsoft Sentinel › Logs (KQL mode)`

Each finding is one row, with Abstract as the vendor, its severity and the rule that raised it.

CHECK IT

KQL

```
ASimAlertEventLogs
| where TimeGenerated > ago(1d) and EventVendor == "Abstract
Security"
| summarize Findings = count() by EventSeverity, AlertName
| order by Findings desc
```

DONE WHEN Your findings appear by severity.

4 TURN ON THE FINDING RULE


DONE

Your Azure administrator

`Azure portal › Deploy to Azure (Build step 1) › Content › Turn these rules on`

Choose **Abstract finding** in the deployment you run for the route above. The rule runs hourly and raises one alert per finding. With **One copy** on, findings are only in this table, so this rule is how they become incidents. Use it, or the *High or Critical event* rule, for findings, not both.

FIELD	VALUE
Turn these rules on	**Abstract finding**
Then	**Next** through every tab, **Review + create**, **Create**

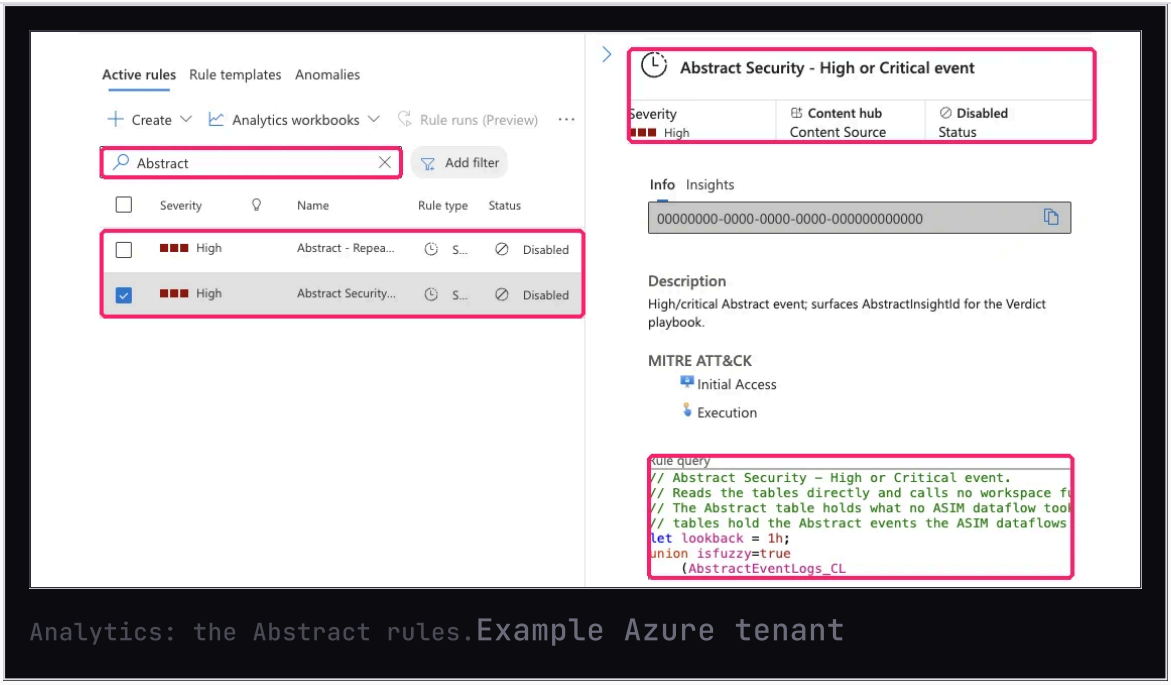

Analytics: the Abstract rules.Example Azure tenant

DONE WHEN Microsoft Sentinel › Analytics shows *Abstract Security – Finding* Enabled.

5 CHECK THE INCIDENTS

☐ DONE

Your Sentinel administrator

Defender portal › Investigation & response › Incidents

Incidents are titled *Abstract finding:* followed by the Abstract rule's name. In Abstract's tests the rule turned the test findings into seven incidents, such as *Abstract finding: AWS CloudTrail StopLogging*.

CHECK IT

KQL

```
SecurityIncident
| where TimeGenerated > ago(1d) and Title startswith "Abstract
finding:"
| summarize arg_max(TimeGenerated, Severity, Status) by
IncidentNumber, Title
```

DONE WHEN Incidents titled *Abstract finding:* appear within an hour of the next finding.

DATA LAKE

DATA LAKE

Send bulk categories to a lake table that stays searchable.

Analytics rules, ASIM parsers and the Abstract content do not run on the lake table. Use it for categories no rule, workbook or UEBA reads, such as raw flow records.

1 TURN ON THE LAKE IN THE DEPLOYMENT


☐ DONE

Your Azure administrator

`Azure portal › Deploy to Azure (Build step 1) › Data lake`

Everything else stays as in your first deployment, with **Use existing** on Basics and Data collection.

FORM FIELD	VALUE
Send chosen categories to a data-lake table	On
Lake table name	`AbstractLake_CL`
Event categories for the lake	`network`, or the categories no rule of yours reads
Total retention of the lake table	365 days, or your policy
Then	**Next** through every tab, **Review + create**, **Create**

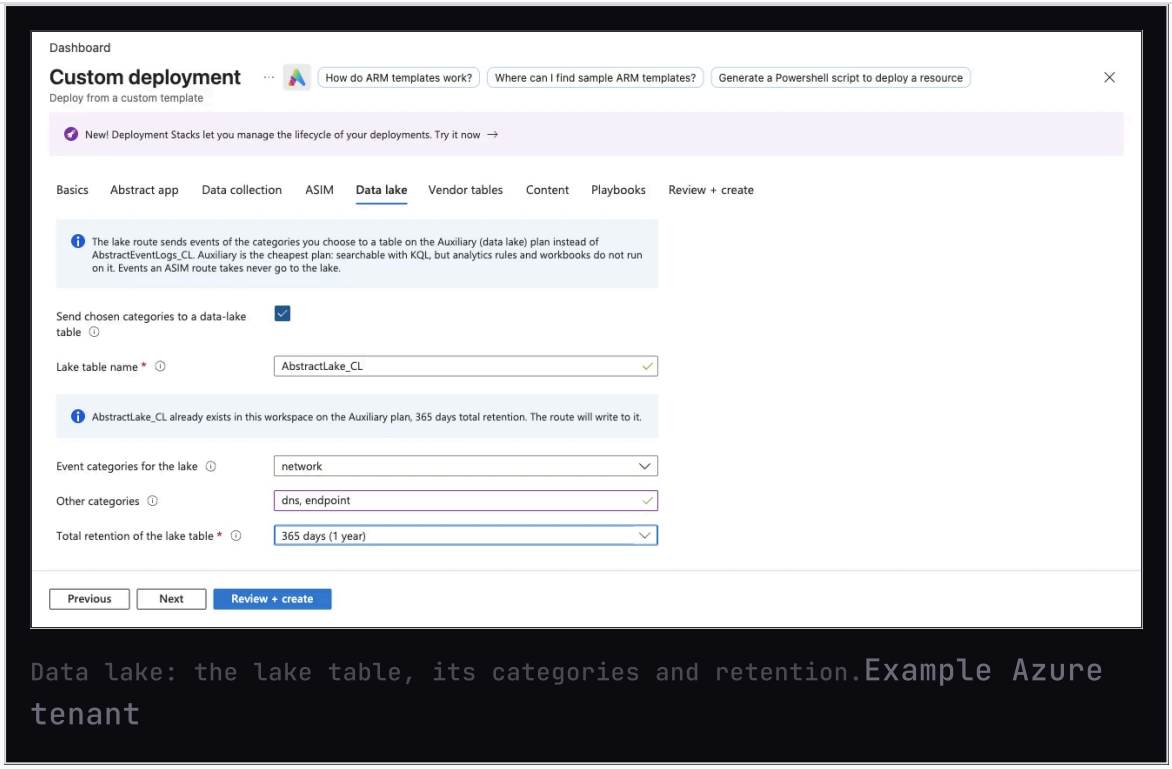

Data lake: the lake table, its categories and retention.Example Azure tenant


DONE WHEN The workspace's Tables list shows `AbstractLake_CL` on the Auxiliary plan.

2 NOTHING CHANGES IN ABSTRACT

DONE

Abstract implementation engineer

Events in the lake categories now land in the lake table instead of `AbstractEventLogs_CL`. Events an ASIM or vendor table takes never go to the lake.

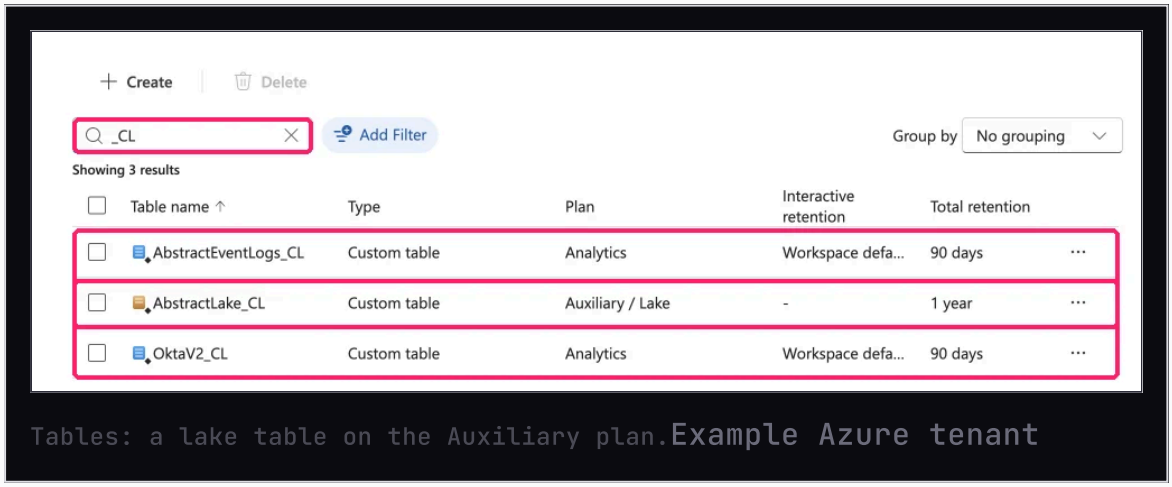

Tables: a lake table on the Auxiliary plan.Example Azure tenant

DONE WHEN Rows reach the lake table within 20 minutes.

3 CHECK IT WITH THE SEARCH API

DONE

Your Sentinel administrator

Azure Cloud Shell or any shell with the Azure CLI

Auxiliary tables answer through the workspace's search API and KQL jobs. Use the workspace ID from the workspace's Overview. In Abstract's tests the lake event was counted this way.

CHECK IT

AZURE CLI

```
az rest --method post --resource https://api.loganalytics.io \
  --url "https://api.loganalytics.io/v1/workspaces/<workspace-
id>/search?timespan=P1D" \
  --body '{"query":"AbstractLake_CL | count"}'
```

DONE WHEN The count is above zero.

05

CONTENT

Abstract's own Sentinel content, installed by the Build deployment.

03 · BUILD · CONTENT

RULES, WORKBOOKS AND PLAYBOOKS, ON.

ABSTRACT SOLUTION

WORKBOOKS, RULES, HUNTING QUERIES AND PLAYBOOKS

1 SEE WHAT THE BUILD DEPLOYMENT INSTALLED

☐ DONE

Your Sentinel administrator

`Defender portal` › `Microsoft Sentinel`

The Build deployment installed the Abstract content as one solution, *Abstract Security for Microsoft Sentinel*. You find each item in its usual place.

ITEM	WHAT IT IS
Data connector	**Abstract Security (Security Data Pipeline)**: its status counts Abstract rows in the tables the routes write
Parser	`ASim_AbstractEvent` : every Abstract event, wherever the routes stored it, with ASIM column names

ITEM	WHAT IT IS
Analytics rules	*Abstract Security - High or Critical event*, *Abstract - Repeated auth failures followed by success* and *Abstract Security - Finding*, each on or off as the form's Content tab chose
Hunting queries	Rare or newly-seen product activity, High cumulative-risk identities, Daily value & reduction summary
Workbooks	Pipeline Overview, Value & ROI, Sentinel Discovery
Playbooks	Abstract-Enrich-Incident, Abstract-Verdict, Abstract-Tune-At-Source
Automation rules	Tag & prioritize Abstract-originated incidents, on or off as the form's Content tab chose

DONE WHEN Analytics, Hunting, Workbooks and Data connectors each list the Abstract items.

2 TURN ON THE ABSTRACT RULES

☐ DONE


Your Azure administrator

`Azure portal › Deploy to Azure (Build step 1) › Content › Turn these rules on`

Choose the rules in the deployment, not in Analytics: every deployment sets each Abstract rule on or off from the form, so a rule turned on only in Analytics is off again after the next deployment. The rules read the tables directly, so they see events in the Abstract table and in the ASIM tables. For findings, see the Abstract findings tab.

FORM FIELD	VALUE
Turn these rules on	The rules you want
Turn the automation rules on	On when you want them

FORM FIELD	VALUE
Then	**Next** through every tab, **Review + create**, **Create**

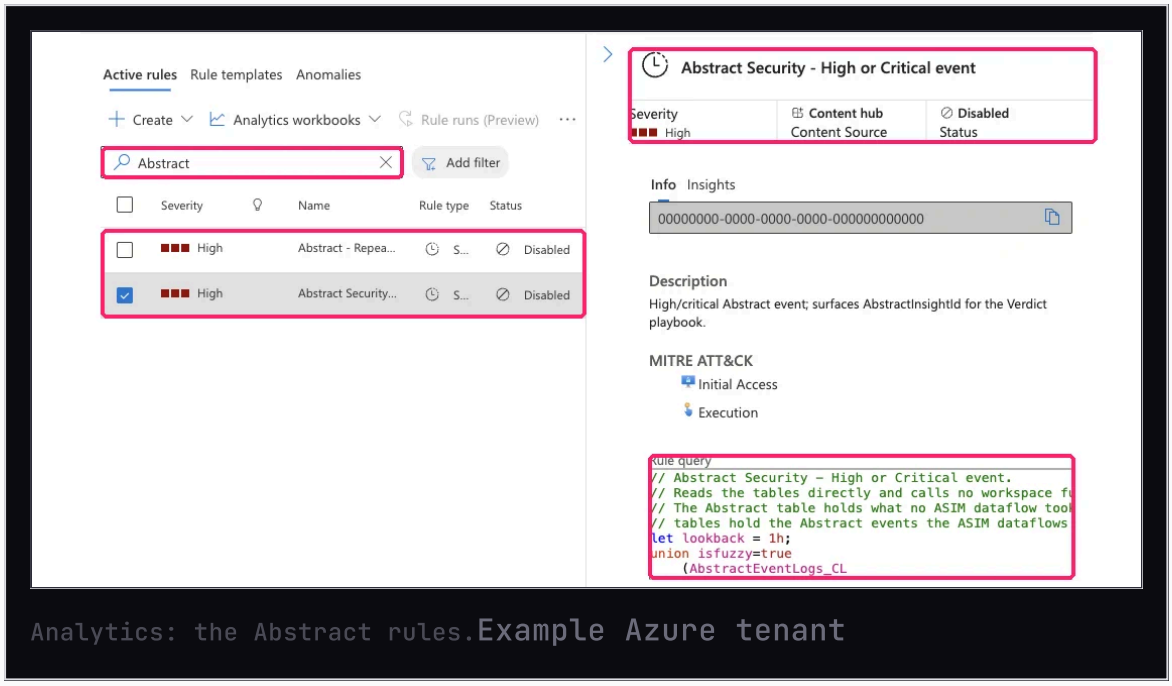

Analytics: the Abstract rules.Example Azure tenant


DONE WHEN Microsoft Sentinel › Analytics shows the rules you chose Enabled.

3 OPEN THE WORKBOOKS


☐ DONE

Your Sentinel administrator

Defender portal › Microsoft Sentinel › Threat management › Workbooks › My workbooks

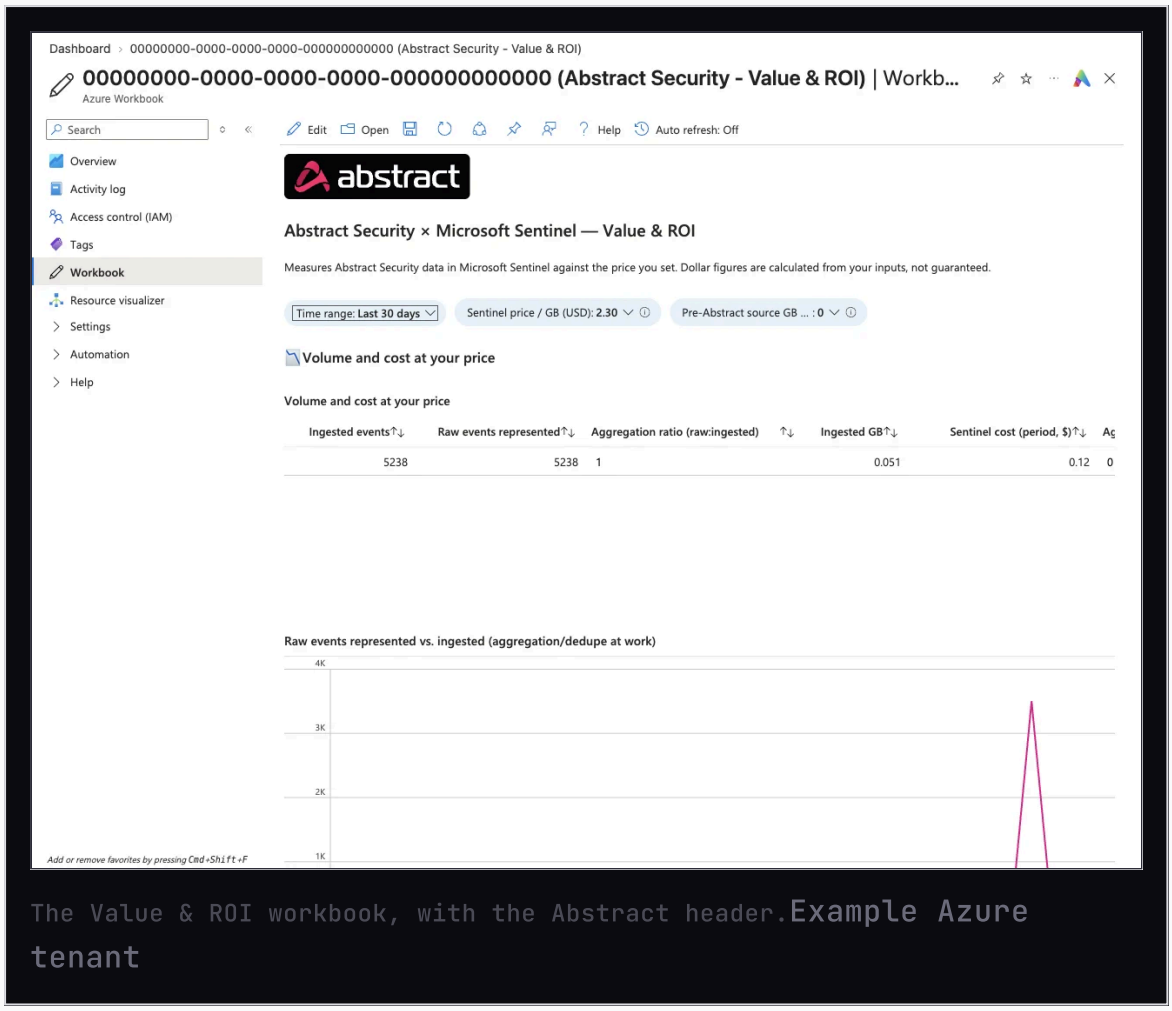

The Value & ROI workbook, with the Abstract header.Example Azure tenant

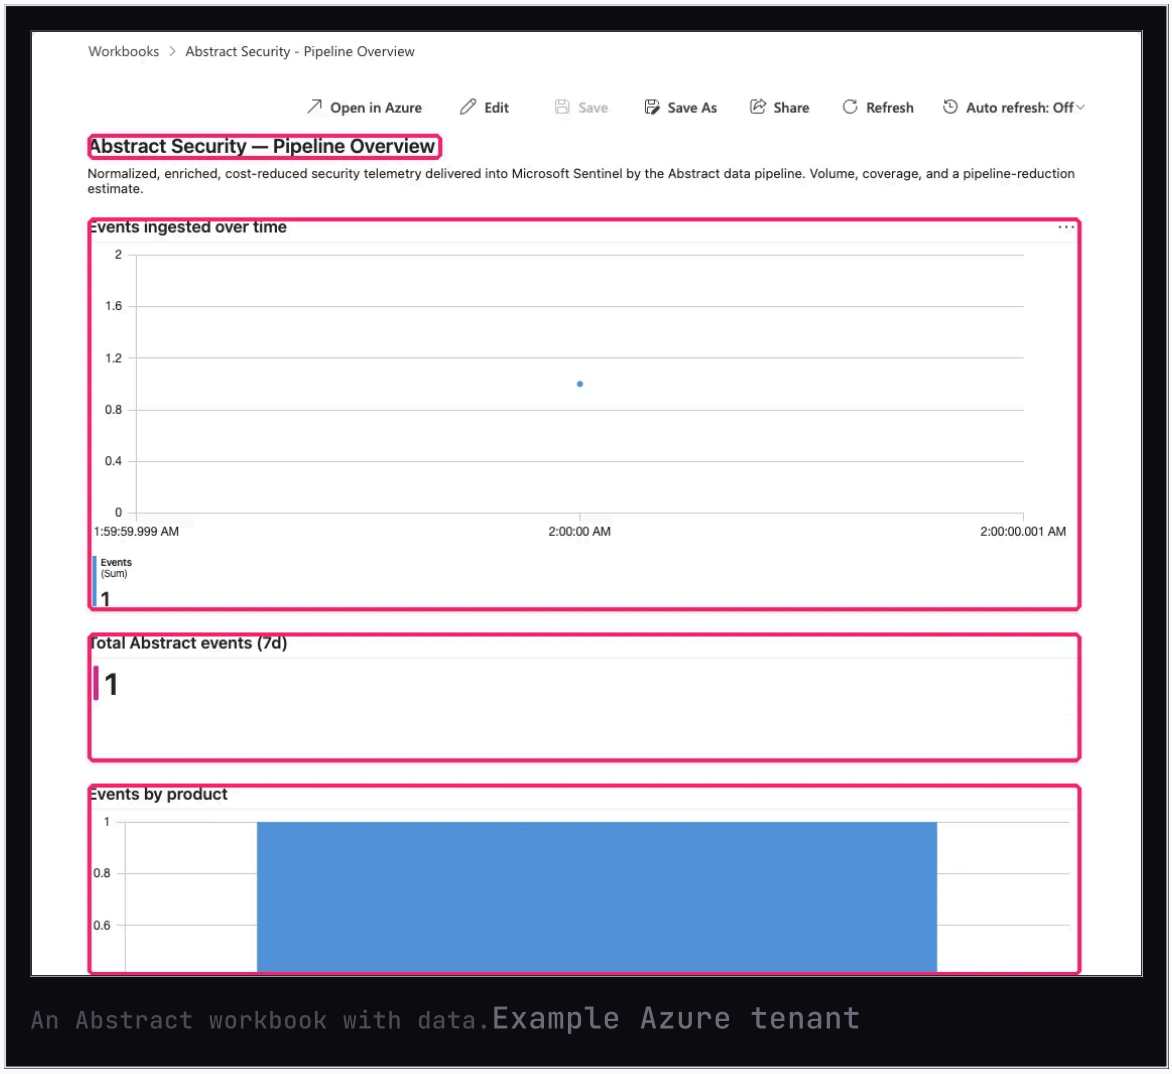

An Abstract workbook with data.Example Azure tenant

DONE WHEN Data connectors lists **Abstract Security** as Connected, and the Sentinel Discovery workbook lists your tables.

4 GIVE THE PLAYBOOKS THEIR ACCESS

☐ DONE

Your Azure administrator

`Key vaults › the vault › Secrets › the secret › Access control (IAM); the workspace › Access control (IAM)`

Each playbook's managed identity reads the Abstract API key at run time and updates incidents. The deployment creates no role assignments for the playbooks.

ROLE	WHERE
Key Vault Secrets User	On the API-key secret, for each playbook's managed identity
Microsoft Sentinel Responder	On the workspace, for each playbook's managed identity

DONE WHEN Both roles list the three playbooks.

5 ALLOW SENTINEL TO RUN THE PLAYBOOKS

DONE

Your Azure administrator

`Resource groups › the workspace's resource group › Access control (IAM) › Add role assignment`

Needed only for the automation rules that run the Verdict and Tune-at-source playbooks. Grant it about ten minutes before the next step.

FIELD	VALUE
Role	Microsoft Sentinel Automation Contributor
Members	Azure Security Insights (`98785600-1bb7-4fb9-b9fa-19afe2c8a360` , the same in every tenant)
Then	**Review + assign**

DONE WHEN Role assignments lists Azure Security Insights with that role.

6 ADD THE AUTOMATION RULES TO THE DEPLOYMENT


DONE

Your Azure administrator

`Azure portal › Deploy to Azure (Build step 1) › Playbooks`

Everything else stays as in your first deployment. The form checks the permission from the previous step before you create.

FORM FIELD	VALUE
Automation rules that run Verdict and Tune at source	On
Abstract vendor account ID	Your Abstract tenant ID
Secret holding the Abstract API key	Your Key Vault secret
Then	**Next** through every tab, **Review + create**, **Create**

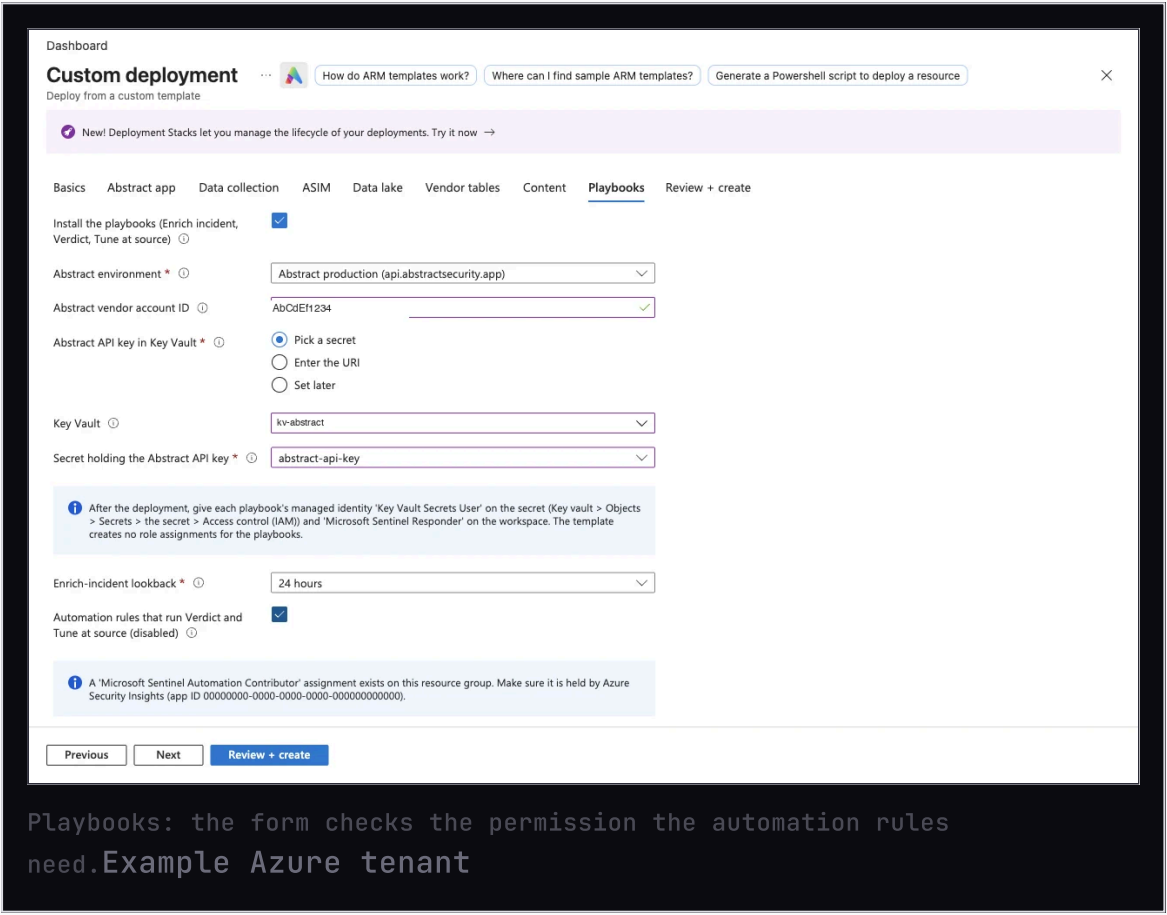

Playbooks: the form checks the permission the automation rules need.Example Azure tenant


DONE WHEN

Automation lists Run ASTRO Verdict and Tune at source, on when **Turn the automation rules on** is ticked on the Content tab.


Two workbooks to watch the feed

Open them in **Microsoft Sentinel** › **Workbooks** › **My workbooks**.

- **Abstract Security - Data Health** shows the rows Abstract wrote to each table every hour, across the Abstract table, the ASim tables and the vendor tables, and what Azure refused, by operation and stream. A tile at the top is green when nothing was refused. A table that stops growing while Abstract still sends is the first sign of a problem.
- **Abstract Security - Cost by Table** shows what each table ingested, from the `Usage` table, and an estimate of what that costs at Azure list prices for East US. It cannot read a table's plan, so choose the plan at the top (Analytics by default). Every dollar figure is an estimate.

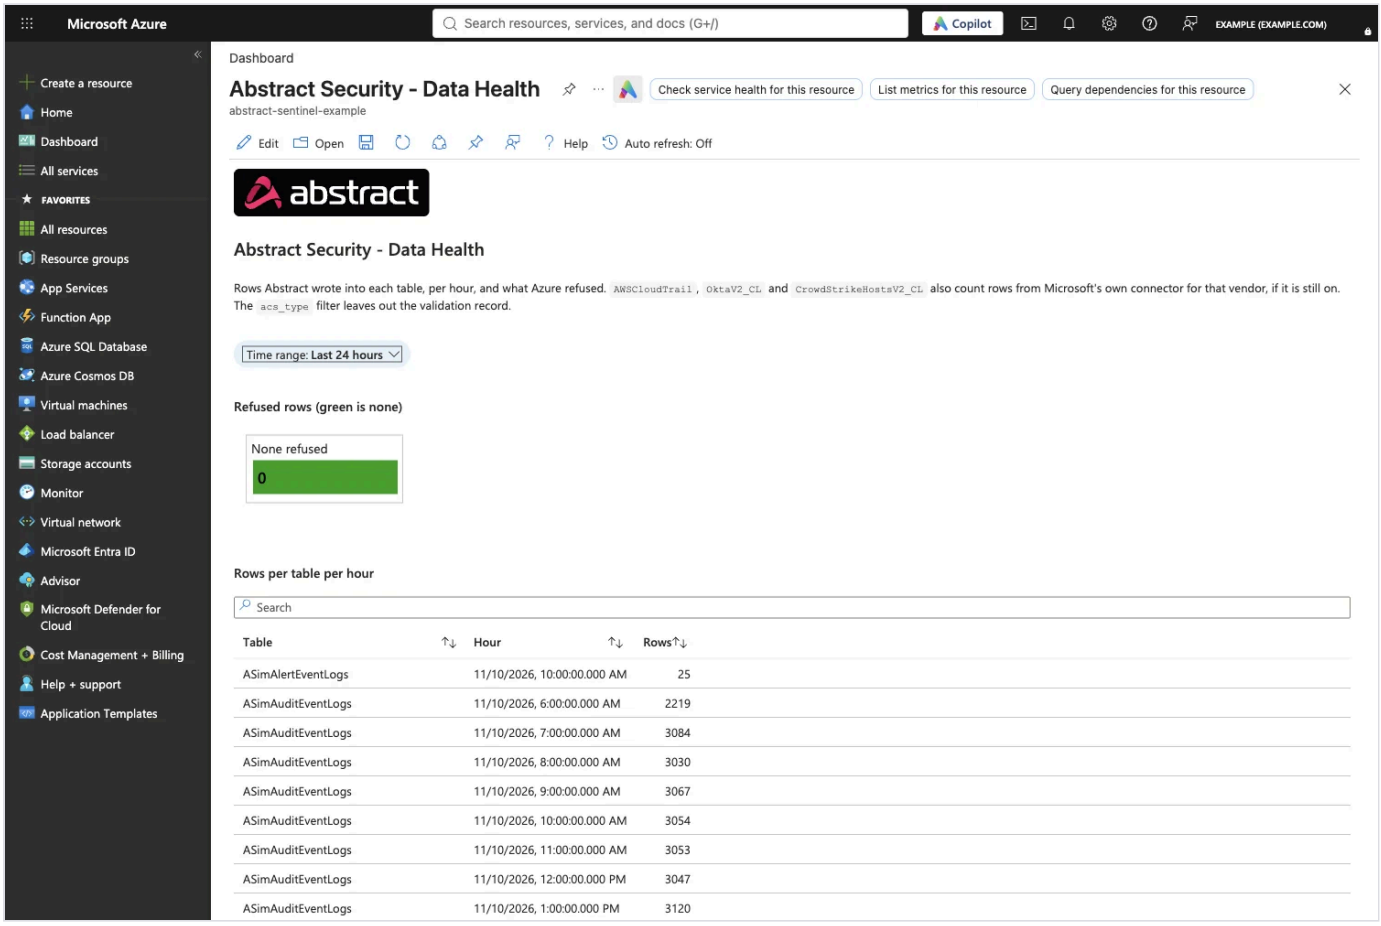

Data Health: the refused-rows tile and rows per table per hour

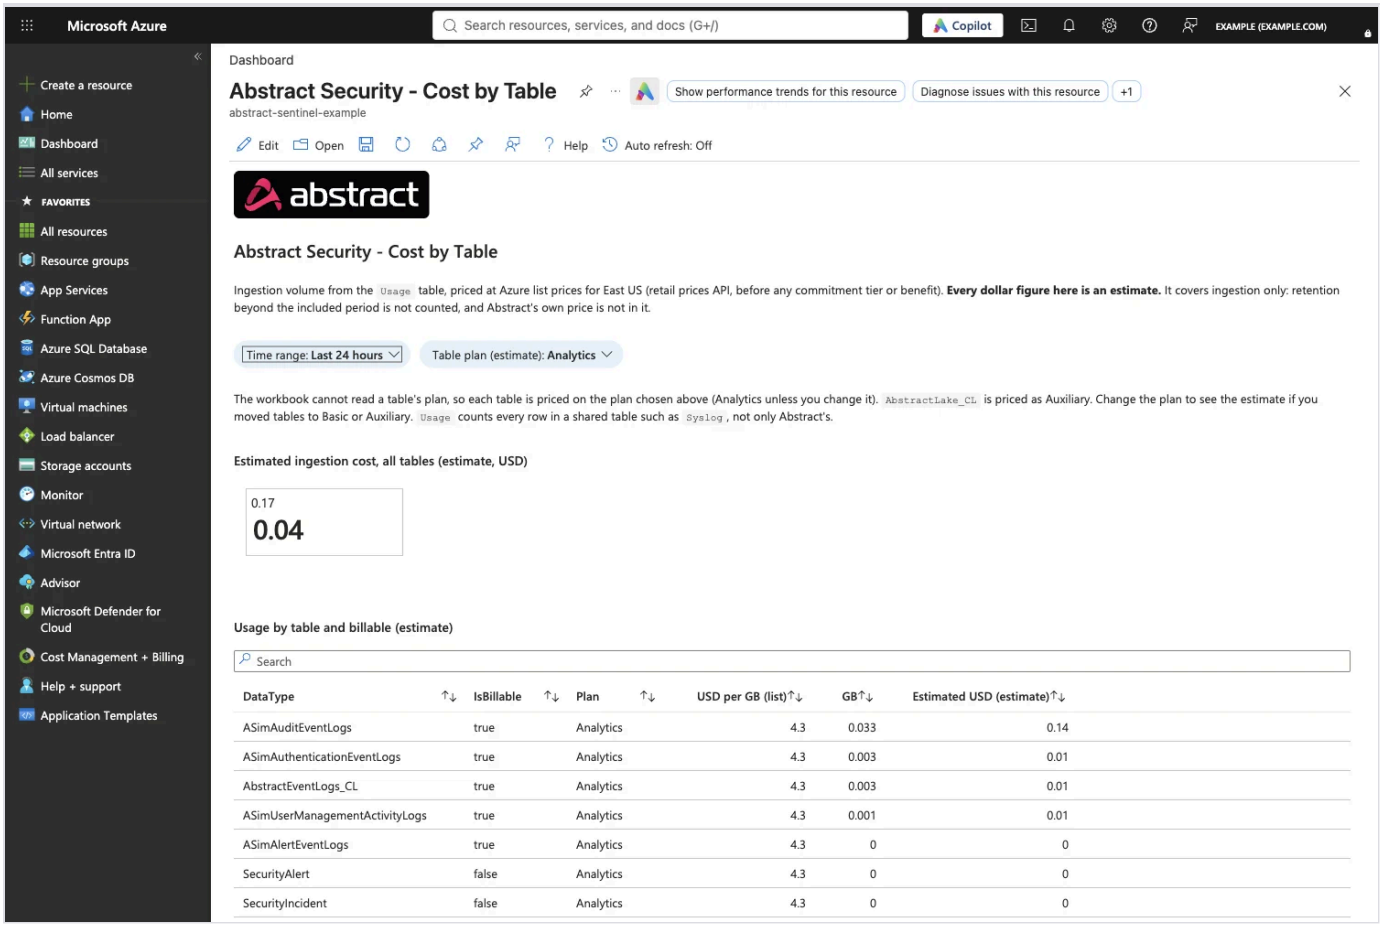

Cost by Table: ingestion by table, with the plan chosen at the top (estimates)

06

PROVE

One rule, two queries and a drift check: every event the destination sent is a row in a table, and Azure refused none.

04 · PROVE

PROVE NOTHING WAS LOST.

04 · PROVE

NOTHING LOST, COUNTED.

Σ sent
Total sent by the destination

=

Σ rows
Total rows across the tables

0
Rows in `DCRLogErrors`

The rule: total sent by the destination equals total rows across the tables, and the DCRLogErrors table is empty. Each event is counted once: with **One copy** and **Store each vendor event once** on, every event sits in exactly one table.

ACCEPTANCE CHECK

RUN IT IN LOGS.

01 OPEN LOGS IN KQL MODE

Open Logs on your Sentinel workspace. If it opens in chat mode, switch it to KQL mode first.

02 RUN THE ACCEPTANCE QUERIES

The first query lists Abstract rows per table for the last hour. The second must return nothing.

03 ADD UP AND COMPARE


Add the rows across the tables, plus `AbstractLake_CL` if your plan uses the lake, and compare with the events Abstract sent to the destination in the same hour.

04 DONE WHEN

The two totals match and `DCRLogErrors` returns no rows.



Example Azure tenant · Logs in KQL mode, Abstract rows

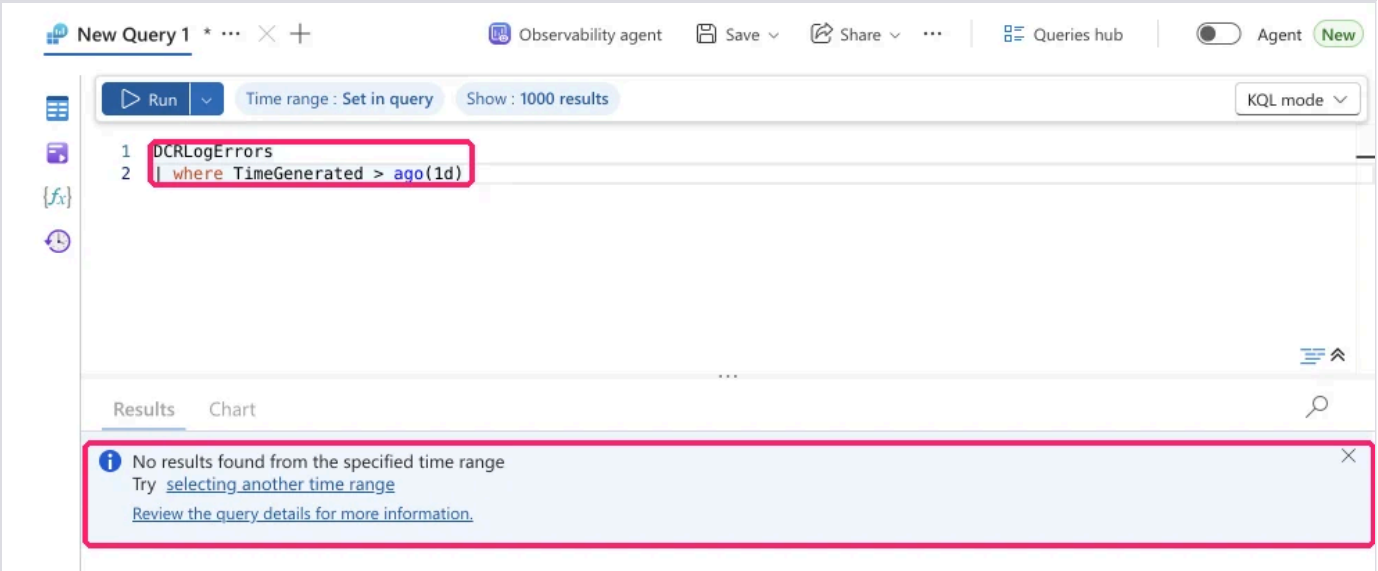

Example Azure tenant · DCRLogErrors, no rows

KQL · ACCEPTANCE QUERIES

```
// Abstract rows that arrived in the last hour, in every table the routes write
let since = ago(1h);
union isfuzzy=true
 (AbstractEventLogs_CL | where ingestion_time() > since and isnotempty(acs_type) |
summarize Rows = count() by Table = "AbstractEventLogs_CL"),
 (union withsource = Table ASim*Logs | where ingestion_time() > since and
isnotempty(tostring(AdditionalFields.AbstractEventId)) | summarize Rows = count()
by Table),
 (CommonSecurityLog | where ingestion_time() > since and CollectorHostName ==
"Abstract" | summarize Rows = count() by Table = "CommonSecurityLog"),
 (Syslog | where ingestion_time() > since and CollectorHostName == "Abstract" |
summarize Rows = count() by Table = "Syslog"),
 (AWSCloudTrail | where ingestion_time() > since | summarize Rows = count() by
Table = "AWSCloudTrail"),
 (OktaV2_CL | where ingestion_time() > since | summarize Rows = count() by Table =
"OktaV2_CL"),
 (CrowdStrikeHostsV2_CL | where ingestion_time() > since | summarize Rows = count()
by Table = "CrowdStrikeHostsV2_CL")
| order by Table asc

// Anything Azure refused or dropped, last 4 hours (must be empty)
DCRLogErrors
| where TimeGenerated > ago(4h)
| summarize Rows = count() by OperationName, Message
```

`AWSCloudTrail`, `OktaV2_CL` and `CrowdStrikeHostsV2_CL` also count rows from Microsoft's own connector for that vendor, if it is still on. The `isnotempty(acs_type)` filter leaves out the validation record.

ONE VIEW

EVERY ABSTRACT EVENT, WHEREVER IT LANDED.

The Abstract solution's parser reads every route's table and names the table each event came from.

KQL

```
ASim_AbstractEvent
| where TimeGenerated > ago(1h)
| summarize Rows = count() by AbstractSourceTable, EventVendor, EventProduct
```

DRIFT CHECK

THE RULE STILL MATCHES THE PLAN.

Someone can edit a Data Collection Rule after the deployment. Compare the live rule's dataflows with the parameters file your plan exported.


01 **READ THE LIVE RULE**
Run the command with your resource group and rule name. It prints the rule's dataflows.

02 **PASTE IT HERE**
The check reads the output streams and compares them with the plan, one stream per dataflow.

03 **CHOOSE THE PLAN**
The parameters file you deployed, or leave it empty to use the plan in this browser.

AZURE CLI

```
az monitor data-collection rule show \
  --resource-group <resource-group> --name <data-collection-rule> \
  --query dataFlows -o json > dataflows.json
```

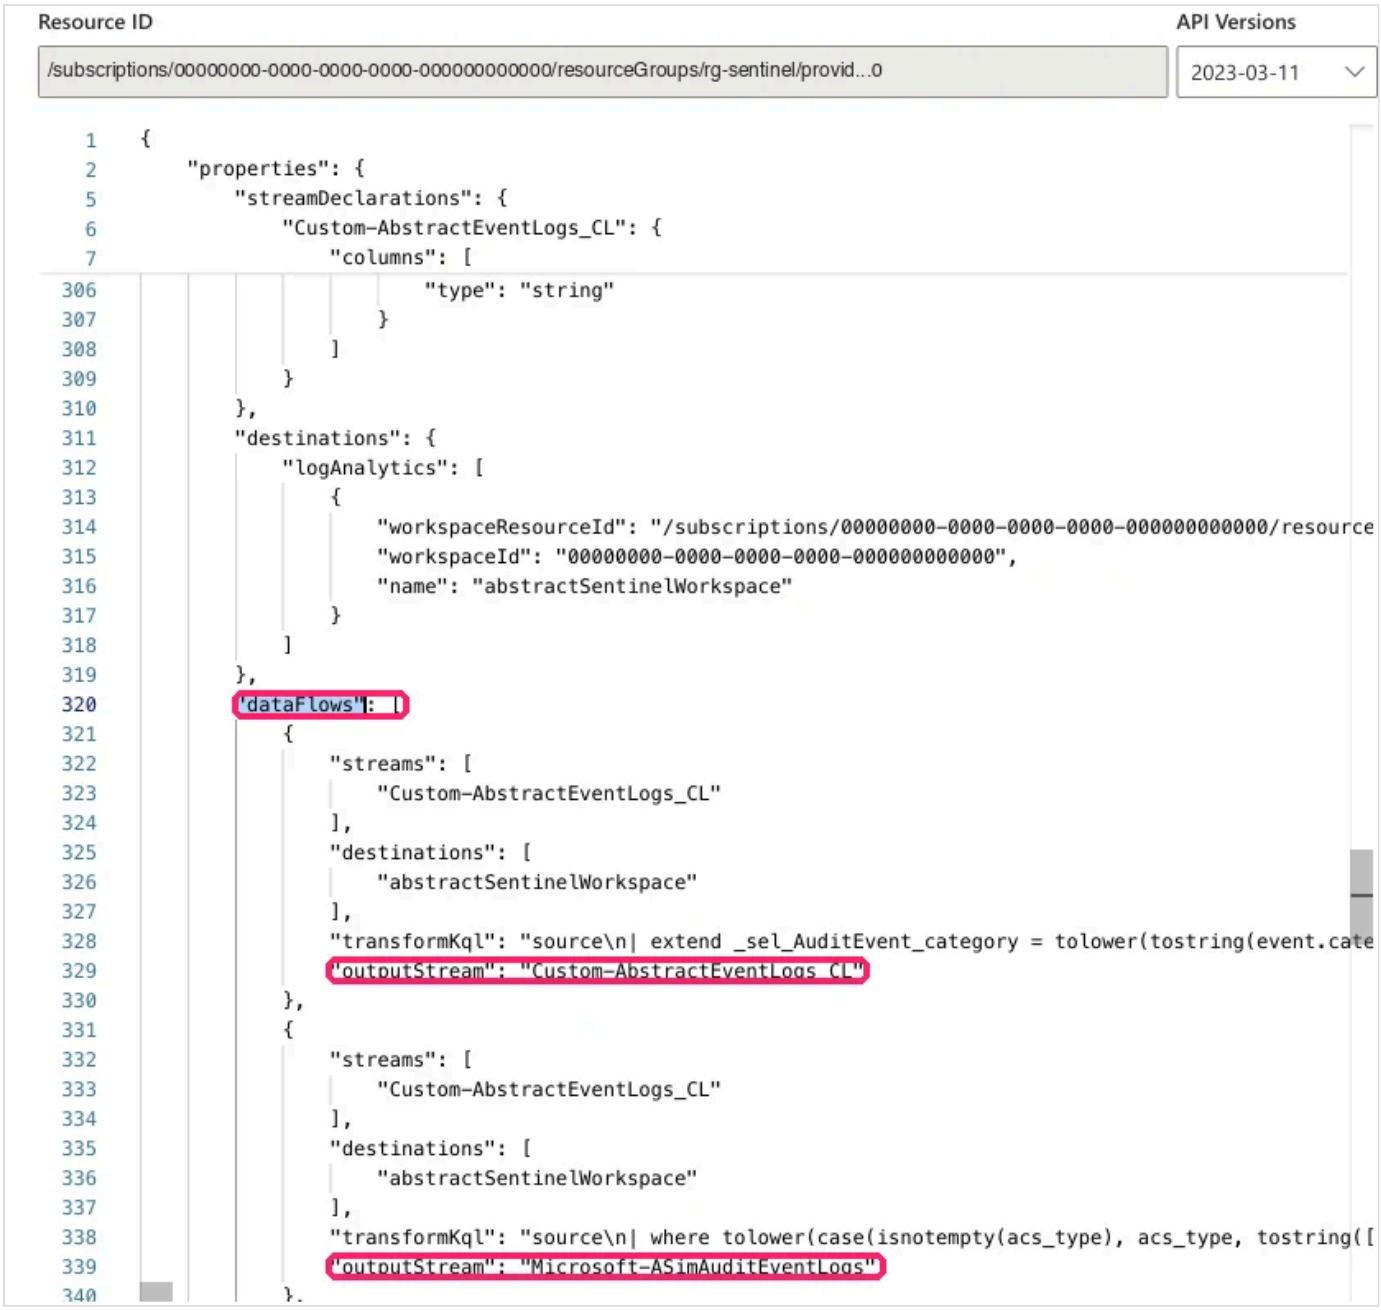

Example Azure tenant · the rule's JSON view

MOVING A SOURCE

TURNING OFF MICROSOFT'S OWN CONNECTOR.

If a Microsoft connector already collects a source you route through Abstract, run both for a day, compare the counts, then turn the Microsoft connector off. Until then the same events are stored twice.

07

HOW OTHERS DO IT

What the pipeline vendors document for Microsoft Sentinel, topic by topic, next to what this playbook does.

HOW OTHERS DO IT

THE SAME JOB, SIDE BY SIDE.

HOW OTHERS DO IT

WHAT EACH VENDOR'S DOCUMENTATION SAYS.

Every row is a documented statement, quoted where the source quotes, with the link and the date we read it. Vendors whose documentation is not public are left out.

AZURE SETUP

VENDOR	WHAT THE DOCUMENTATION SAYS	SOURCE
Cribl	The manual Azure path is 28 portal steps, plus 8 when a Data Collection Endpoint is used, with 5 screenshots. The customer then fills in the destination form in Cribl.	[docs] (https://docs.cribl.io/stream/usecase-azure-workspace/) Counted by Abstract from the vendor's page 2026-11-11
DataBahn	8 values to copy into the DataBahn destination: tenant ID, app ID, app secret, Data Collection Endpoint, Data Collection Rule ID and 3 stream names. The connector's Deploy creates the tables, the Data Collection Rule and the Entra app first.	[docs] (https://raw.githubusercontent.com/Azure/Azure-Sentinel/6acbb1dc/Solutions/Databahn/Data%20Connectors/DataBahn_PUSH_CCP/DataBahn_connectorDefinition.json) Counted by Abstract from the vendor's page 2026-11-11
Bindplane	Basic mode is about 8 steps.	[docs] (https://docs.bindplane.com/integrations/destinations/microsoft-sentinel) Counted by Abstract from the vendor's page 2026-11-11
Bindplane	ASIM mode: a wizard generates an ARM template, the customer deploys it, then uploads the deployment output, which fills in the endpoint, rule ID and tenant.	[docs] (https://bindplane.com/blog/native-asim-ingestion-for-microsoft-sentinel-now-in-bindplane) Summary of the vendor's page 2026-11-11
Tenzir	6 prerequisite steps, each pointing to a Microsoft guide, with no screenshots.	[docs] (https://tenzir.com/integrations/microsoft/azure-log-analytics) Counted by Abstract from the vendor's page 2026-11-11
Edge Delta	41 numbered portal steps and one diagram.	[docs] (https://docs.edgedelta.com/how-to-sentinel/) Counted by Abstract from the vendor's page 2026-11-11
VirtualMetric	Install the solution from the Content hub, then add the target.	[docs] (https://virtualmetric-docs.pages.dev/configuration/targets/azure/microsoft-sentinel)

VENDOR	WHAT THE DOCUMENTATION SAYS	SOURCE
		Summary of the vendor's page 2026-11-11
Datadog Observability Pipelines	About 6 prerequisites. The native-table path uses the az CLI; the custom-table path is 8 portal steps. No screenshots.	[docs] (https://docs.datadoghq.com/observability_pipelines/destinations/microsoft_sentinel/) Counted by Abstract from the vendor's page 2026-11-11
Abstract	One deployment from Deploy to Azure, with a screen for every step.	Build tab

ROLES NAMED

VENDOR	WHAT THE DOCUMENTATION SAYS	SOURCE
Cribl	“Sign in as an Administrator”	[docs] (https://docs.cribl.io/stream/usecase-azure-workspace/) Quote 2026-11-11
VirtualMetric	Monitoring Metrics Publisher and Monitoring Reader; a managed identity is recommended.	[docs] (https://virtualmetric-docs.pages.dev/configuration/targets/azure/microsoft-sentinel) Summary of the vendor's page 2026-11-11
Abstract	Every step names who does it: your Azure administrator, your Entra ID administrator or your Sentinel administrator.	Build tab

TABLES WRITTEN

VENDOR	WHAT THE DOCUMENTATION SAYS	SOURCE
Cribl	“some native tables”	[docs] (https://docs.cribl.io/stream/usecase-azure-sentinel/) Quote 2026-11-11
Cribl	A 2024 blog lists four: CommonSecurityLog, SecurityEvent, Syslog and WindowsEvent, with one destination per table.	[docs] (https://cribl.io/blog/integrating-cribl-stream-with-the-built-in-tables-of-microsoft-sentinel/) Summary of the vendor's page 2026-11-11
Cribl	The Cribl-Microsoft repository holds 100 ARM templates covering 50 native tables. Custom _CL tables are also supported.	[docs] (https://github.com/criblio/Cribl-Microsoft) Counted by Abstract from the vendor's page 2026-11-11
DataBahn	“standard or custom Sentinel table formats”	[docs] (https://techcommunity.microsoft.com/t5/microsoft-sentinel-blog/microsoft-partners-with-databahn-to-accelerate-enterprise/ba-p/4501055) Quote 2026-11-11
DataBahn	The push connector writes databahn_audit_logs_CL, databahn_alerts_CL and databahn_device_inventory_CL.	[docs] (https://raw.githubusercontent.com/Azure/Azure-Sentinel/6acbb1dc/Solutions/Databahn/Data%20Connectors/DataBahn_PUSH_CCP/DataBahn_connectorDefinition.json) Summary of the vendor's page 2026-11-11
Bindplane	Basic mode writes Custom- streams. ASIM mode writes ten native ASIM tables, routed per record.	[docs] (https://bindplane.com/blog/native-asim-ingestion-for-microsoft-sentinel-now-in-bindplane) Summary of the vendor's page 2026-11-11

VENDOR	WHAT THE DOCUMENTATION SAYS	SOURCE
Bindplane	Bindplane's ASIM mode drops records with no mapping.	[docs] (https://docs.bindplane.com/integrations/processors/asim-standardization) Summary of the vendor's page 2026-11-11
Tenzir	“ingestion does not automatically map OCSF records to ASIM”	[docs] (https://tenzir.com/integrations/microsoft/sentinel) Quote 2026-11-11
Edge Delta	CommonSecurityLog, through its CEF and Sentinel packs.	[docs] (https://docs.edgedelta.com/how-to-sentinel/) Summary of the vendor's page 2026-11-11
VirtualMetric	WindowsEvent, SecurityEvent, Syslog and CommonSecurityLog, chosen by input type, plus ASIM and custom tables.	[docs] (https://virtualmetric-docs.pages.dev/configuration/targets/azure/microsoft-sentinel) Summary of the vendor's page 2026-11-11
Abstract	A recommendation per source, into the table Microsoft's content reads, with what each option gives and costs.	Plan tab

AZURE AUTOMATION

VENDOR	WHAT THE DOCUMENTATION SAYS	SOURCE
Cribl	Data Collection Rule ARM templates, deployed by hand with Deploy a custom template.	[docs] (https://docs.cribl.io/stream/usecase-azure-workspace/) Summary of the vendor's page 2026-11-11
Cribl	A SOC Optimization Toolkit app deploys the rules, the destination and a generated pack, and creates _CL tables on deploy.	[docs] (https://github.com/criblio/Cribl-Microsoft) Summary of the vendor's page 2026-11-11
DataBahn	“Automated table and DCR management”	[docs] (https://techcommunity.microsoft.com/t5/microsoft-sentinel-blog/microsoft-partners-with-databahn-to-accelerate-enterprise/ba-p/4501055) Quote 2026-11-11
Bindplane	An ARM template creates one consolidated Data Collection Rule plus the role assignment.	[docs] (https://bindplane.com/blog/native-asim-ingestion-for-microsoft-sentinel-now-in-bindplane) Summary of the vendor's page 2026-11-11
Tenzir	The setup page describes no Azure automation.	[docs] (https://tenzir.com/integrations/microsoft/azure-log-analytics) Summary of the vendor's page 2026-11-11
Edge Delta	A Data Collection Rule template, deployed by hand.	[docs] (https://docs.edgedelta.com/how-to-sentinel/) Summary of the vendor's page 2026-11-11
VirtualMetric	The Content hub solution creates one Data Collection Endpoint and two Data Collection Rules; streams are rediscovered every 300 seconds.	[docs] (https://virtualmetric-docs.pages.dev/configuration/targets/azure/microsoft-sentinel) Summary of the vendor's page 2026-11-11

VENDOR	WHAT THE DOCUMENTATION SAYS	SOURCE
VirtualMetric	A Microsoft Sentinel data lake target.	[docs] (https://virtualmetric-docs.pages.dev/configuration/targets/azure/microsoft-sentinel-data-lake) Summary of the vendor's page 2026-11-11
Abstract	Bicep or ARM, with a parameters file exported from your plan.	Automate tab

DISCOVERY

VENDOR	WHAT THE DOCUMENTATION SAYS	SOURCE
Cribl	The toolkit inventories Data Collection Rules, previews schema drift, and checks analytic-rule and workbook coverage.	[docs] (https://github.com/cribl io/Cribl-Microsoft) Summary of the vendor's page 2026-11-11
Cribl	“in development”	[docs] (https://github.com/cribl io/Cribl-Microsoft) Quote 2026-11-11
DataBahn	“detection-dependency clashes”	[docs] (https://techcommunity.microsoft.com/t5/microsoft-sentinel-blog/microsoft-partners-with-databahn-to-accelerate-enterprise/ba-p/4501055) Quote 2026-11-11
Abstract	A read-only report from inside your subscription, loaded straight into the plan.	Discover tab

SENTINEL CONTENT

VENDOR	WHAT THE DOCUMENTATION SAYS	SOURCE
Cribl	Content hub solution Cribl, version 3.0.1 (August 2025).	[docs] (https://github.com/Azure/Azure-Sentinel/tree/master/Solutions/Cribl) Summary of the vendor's page 2026-11-11
Cribl	The Sentinel pack maps Palo Alto, Syslog, Windows, Fortinet and CEF.	[docs] (https://cribl.io/blog/integrating-cribl-stream-with-the-built-in-tables-of-microsoft-sentinel/) Summary of the vendor's page 2026-11-11
DataBahn	The Content hub solution holds one item: the push connector.	[docs] (https://github.com/Azure/Azure-Sentinel/tree/master/Solutions/Databahn) Summary of the vendor's page 2026-11-11
Datadog Observability Pipelines	Packs map Palo Alto, Fortinet and Cisco ASA to CommonSecurityLog, and Meraki to Syslog.	[docs] (https://www.datadoghq.com/blog/observability-pipelines-microsoft-sentinel-packs/) Summary of the vendor's page 2026-11-11
Abstract	Microsoft's content reads the native tables unchanged, and Abstract's own content installs with the deployment: in Abstract's lab, 3 analytics rules, 3 automation rules, 5 workbooks, 3 playbooks, 3 hunting queries, 1 parser and 1 data connector.	Content tab

WHAT MICROSOFT OFFERS NATIVELY.

Microsoft's own building blocks, which every pipeline, Abstract included, works with.

WHAT MICROSOFT OFFERS NATIVELY

FROM	WHAT THE DOCUMENTATION SAYS	SOURCE
Microsoft	Microsoft Sentinel in the Azure portal is supported until 31 March 2027.	[docs] (https://learn.microsoft.com/en-us/azure/sentinel/microsoft-sentinel-defender-portal) Summary of Microsoft's page 2026-11-11
Microsoft	Codeless Connector Framework push connectors are in preview; the table must end with _CL, and deployment requires the Microsoft Sentinel experience in the Azure portal.	[docs] (https://learn.microsoft.com/en-us/azure/sentinel/create-push-codeless-connector) Summary of Microsoft's page 2026-11-11
Microsoft	Data and connectors in the Defender portal (preview): ingestion per table by tier, an estimated cost, and Filter and Split transformations.	[docs] (https://learn.microsoft.com/en-us/azure/sentinel/manage-data-overview) Summary of Microsoft's page 2026-11-11
Microsoft	Analytics-tier data is mirrored to the data lake at no extra cost; lake-only is a switch per table.	[docs] (https://learn.microsoft.com/en-us/azure/sentinel/datalake/sentinel-lake-connectors) Summary of Microsoft's page 2026-11-11
Microsoft	Lake-only data runs no analytics rules. Microsoft's own table rates firewall traffic Suitable for the lake and firewall threat or IPS logs a Poor fit.	[docs] (https://learn.microsoft.com/en-us/azure/sentinel/datalake/sentinel-lake-log-ingestion-guidance) Summary of Microsoft's page 2026-11-11

08

AUTOMATE

Three ways to build the Azure side, each with its own steps: the one-deploy solution from the command line, the Codeless Connector push connector, and the Logs Ingestion API directly.

AUTOMATE

EVERY CLICK, AS CODE.

AUTOMATE · THREE WAYS IN

CHOOSE HOW AZURE GETS BUILT.

Each way builds a Data Collection Rule that writes each event to its table through the Logs Ingestion API. The figures on the Start tab were measured on the one-deploy solution; the push connector's figures come from a separate lab run.

DEFAULT

ONE-DEPLOY SOLUTION

azuredeploy.json · main.bicep

GIVES YOU

The data plane and the Abstract content in one deployment, every route a parameter, from the portal form or the command line, with DCR error logging on.

COSTS YOU

An Entra app for Abstract, created by you or by the app template.

Bicep | ARM | az CLI

CODELESS CONNECTOR PUSH

Content hub data connector

GIVES YOU

One Deploy click on the connector page. In Abstract's lab it created the Entra app and secret, the endpoint, a rule with 12 dataflows, the tables and the role.

COSTS YOU

Preview, deployed from Microsoft Sentinel in the Azure portal. The routes are set when the package is built, not at Deploy, and the secret the portal creates lasts 2 years.

Azure portal | Preview

LOGS INGESTION API

DCE · DCR · stream

GIVES YOU

The API the Abstract destination sends with: one endpoint, one rule, one stream, and the rule's dataflows decide each table.

COSTS YOU

You create and keep the endpoint, rule, tables and role yourself.

REST | Monitoring Metrics Publisher

AUTOMATE · COMMAND LINE

DEPLOY YOUR PLAN FROM A SHELL.

The solution is one Bicep file, compiled to one ARM template. Your plan's parameters file sets its routes.

01 EXPORT THE PLAN

On the Plan tab, select **Download parameters**. It saves `plan.parameters.json`.

02 PREVIEW THE CHANGE

`what-if` shows what the deployment would create or change, and changes nothing.

03 DEPLOY

`create` runs the same deployment. A second `--parameters` adds the values the plan does not set.

04 READ THE OUTPUTS

The deployment's outputs carry the values the Abstract destination needs.

AZURE CLI · PREVIEW

```
az deployment group what-if \
  --resource-group <resource-group> --name azure-destination-sentinel-solution \
  --template-file azuredeploy.json \
  --parameters @plan.parameters.json \
  --parameters workspaceName=<workspace> principalId=<abstract-app-object-id>
```

AZURE CLI · DEPLOY THE ARM TEMPLATE

```
az deployment group create \
  --resource-group <resource-group> --name azure-destination-sentinel-solution \
  --template-file azuredeploy.json \
  --parameters @plan.parameters.json \
  --parameters workspaceName=<workspace> principalId=<abstract-app-object-id>
```

AZURE CLI · OR DEPLOY THE BICEP SOURCE

```
az deployment group create \
  --resource-group <resource-group> --name azure-destination-sentinel-solution \
  --template-file main.bicep \
  --parameters @plan.parameters.json \
  --parameters workspaceName=<workspace> principalId=<abstract-app-object-id>
```

AZURE CLI · READ THE OUTPUTS

```
az deployment group show \
  --resource-group <resource-group> --name azure-destination-sentinel-solution \
  --query properties.outputs
```

The template folder also carries `deploy.sh`, which runs the preview, and the deployment with `--yes`. It runs from its own folder, so put `plan.parameters.json` next to it. On a new workspace with ASIM on, Azure can refuse the first rule with `InvalidOutputTable` while Microsoft Sentinel creates the ASIM tables; the script then waits 3 minutes and deploys once more.

SHELL

```
./deploy.sh <resource-group> --parameters @plan.parameters.json
./deploy.sh <resource-group> --yes --parameters @plan.parameters.json
```

AUTOMATE · TERRAFORM

THE SAME DEPLOYMENT, FROM TERRAFORM.

A thin wrapper in the template's `terraform` folder. Terraform tracks the deployment; the resources are the template's.

01 **INITIALISE**
Downloads the `azurerm` provider. Sign in to Azure first (`az login`).

02 **PLAN**
Every variable is a parameter of the solution, by the same name. `resource_group_name` is the only one with no default: the resource group must already exist.

03 APPLY

Terraform runs the solution's own `azuredeploy.json` as one deployment, so it deploys what the Deploy to Azure button does. Anything without its own variable goes in `extra_parameters`, by its exact name.

SHELL

```
cd templates/azure/azure-destination-sentinel-solution/terraform
terraform init
```

TERRAFORM · PREVIEW

```
terraform plan \
  -var resource_group_name=<resource-group> \
  -var workspaceName=<workspace> \
  -var principalId=<abstract-app-object-id> \
  -var 'nativeVendors=["okta"]'
```

TERRAFORM · DEPLOY

```
terraform apply \
  -var resource_group_name=<resource-group> \
  -var workspaceName=<workspace> \
  -var principalId=<abstract-app-object-id> \
  -var 'nativeVendors=["okta"]'
```

What is proven. `terraform test`, run offline with a mock provider, passes its 3 checks: the plan carries your choices into the template parameters, deploys the solution template, and lets `extra_parameters` override a variable. Run `plan` and read it before the first `apply`.

SHELL · OFFLINE CHECK, NO AZURE LOGIN


```
terraform init -backend=false
terraform test
```

AUTOMATE · OUTPUTS

THE VALUES THE DESTINATION NEEDS.

DESTINATION FIELD	WHERE IT COMES FROM
`dataCollectionEndpointUrl`	Output of the deployment
`dataCollectionRuleImmutableId`	Output of the deployment
`logStreamName`	Output of the deployment: Custom-AbstractEventLogs_CL
`Client ID, secret, tenant ID`	The Abstract app's Entra registration

The Abstract app needs **Monitoring Metrics Publisher** on the Data Collection Rule only: all the Logs Ingestion API needs. It cannot read data or change the rule. The deployment grants it when `principalId` is set.

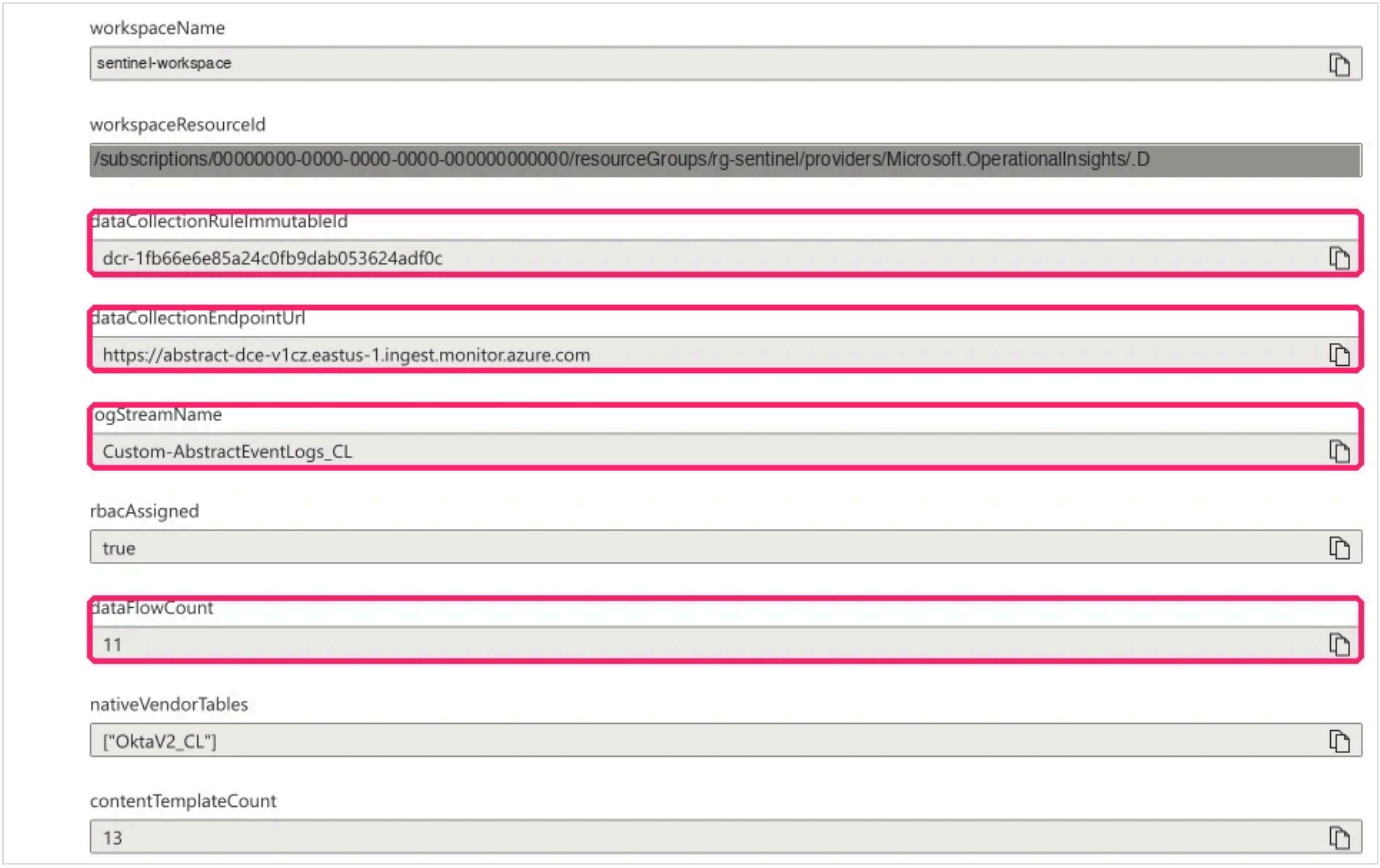

Example Azure tenant · the deployment's Outputs

AUTOMATE · CONNECT ABSTRACT

CREATE THE DESTINATION FROM THE OUTPUTS.

One script turns the deployment's outputs into the Sentinel destination in Abstract. It is the alternative to copying the values by hand in Build, step 11.

01 READ THE OUTPUTS

It runs `az deployment group show` and takes the Data Collection Endpoint, the Data Collection Rule ID, the log stream name and the tenant ID from the deployment. It finds the app's client ID from the deployment unless you pass `--client-id`.

02 LOOK THE DESTINATION UP

It finds an existing destination by name, across every page of results. Two with the same name, or one that is not an Azure Sentinel Destination, stops the run before anything is written.

03 CREATE OR UPDATE

No match creates the destination; a match updates it in place, so a second run leaves one. An update keeps whether the destination is switched on or off.

04 VERIFY

It reads the destination back and checks every value that is not a secret against the deployment. Abstract masks the secret, so that one cannot be read back.

SHELL

```
bash connect-abstract.sh \
  --resource-group <resource-group> --deployment azure-destination-sentinel-
solution \
  --name "Microsoft Sentinel" --vendor-account <abstract-instance-id> \
  --client-secret-uri <key-vault-secret-uri-of-the-app-secret> \
  --api-key-uri <key-vault-secret-uri-of-your-abstract-api-key>
```

Secrets. The app's secret and the Abstract API key come from Key Vault (`--client-secret-uri`, `--api-key-uri`) or from the environment (`AZURE_CLIENT_SECRET`, `ABSTRACT_API_KEY`). They are held in shell variables and sent through a private temporary file that is removed on exit, never on a command line, and the script does not print them. `--api` must be https. `--dry-run` prints the plan and writes nothing, and it does not read the app's secret.

What is proven. Created a destination (HTTP 201) and read it back with every non-secret value equal to the deployment's outputs; a second run took the update path and left exactly one; then the test destination was deleted, in Abstract's lab on 2026-11-11. The offline tests also cover a name that belongs to another kind of destination, an http API, and a duplicate name on a later page.

Download connect-abstract.sh

AUTOMATE · CODELESS CONNECTOR PUSH

ONE CLICK ON THE CONNECTOR PAGE.

A Microsoft Sentinel data connector that builds the Azure side for you, app included. It writes the same stream the Abstract destination sends, so nothing changes in Abstract.

01 INSTALL THE PACKAGE

Select **Install the connector**. On **Basics**, pick the workspace's subscription and resource group, type the workspace's name in **Workspace** and its region in **Workspace-location**, then **Review + create** and **Create**. It adds the connector, its content and the lake table. It sends nothing and creates no app. Or download abstract-sentinel-push-connector.json and load it in **Deploy a custom template** › **Build your own template in the editor** › **Load file**.

`Deploy to Azure › Basics › Review + create`

02 OPEN THE CONNECTOR PAGE

Microsoft Sentinel in the Azure portal, then **Data connectors**. Select **Abstract Security (Push, one-click lanes)** and **Open connector page**.

`Azure portal › Microsoft Sentinel › Configuration › Data connectors`

03 DEPLOY

The person who clicks needs Application Developer in Entra ID, to create the app, and Owner or User Access Administrator, to grant its role on the rule. Select **Deploy Abstract Security push connector resources**, then **OK**. Close the notifications pane first: while it is open, the click does not raise the confirmation.

`Connector page › Configuration › 1`


04 COPY THE VALUES

The page fills in the tenant, the new app's client ID and secret, the endpoint and the rule. Copy the secret now: the page shows it once.


`Connector page › Configuration › 2`

05 CREATE THE DESTINATION IN ABSTRACT


Paste them into the Azure Sentinel destination, as in Build, step 13. Then send one test event, below, to see it land.

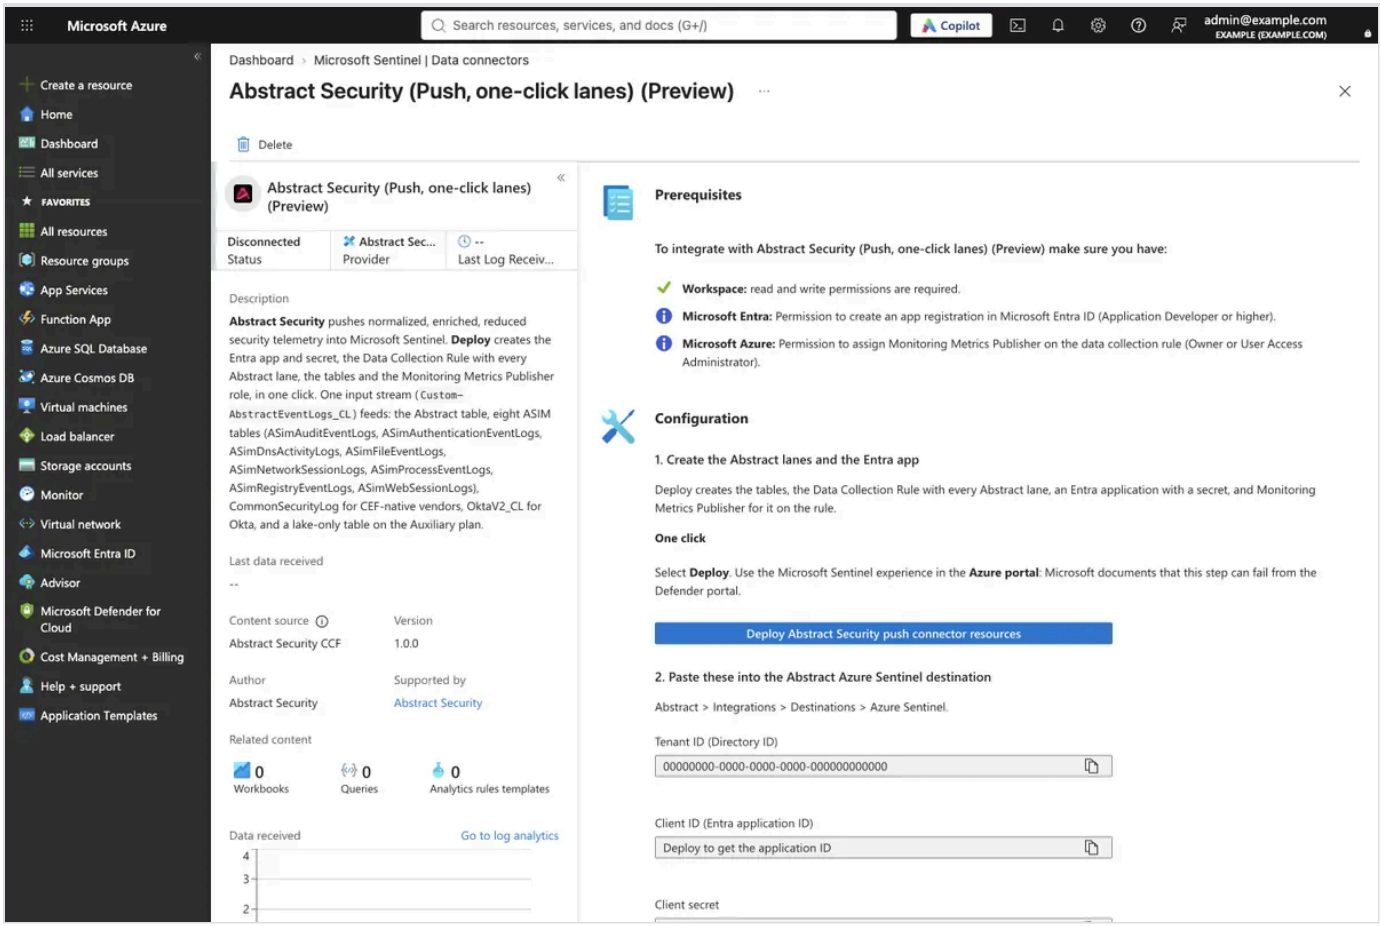


Example Azure tenant · the connector page before Deploy

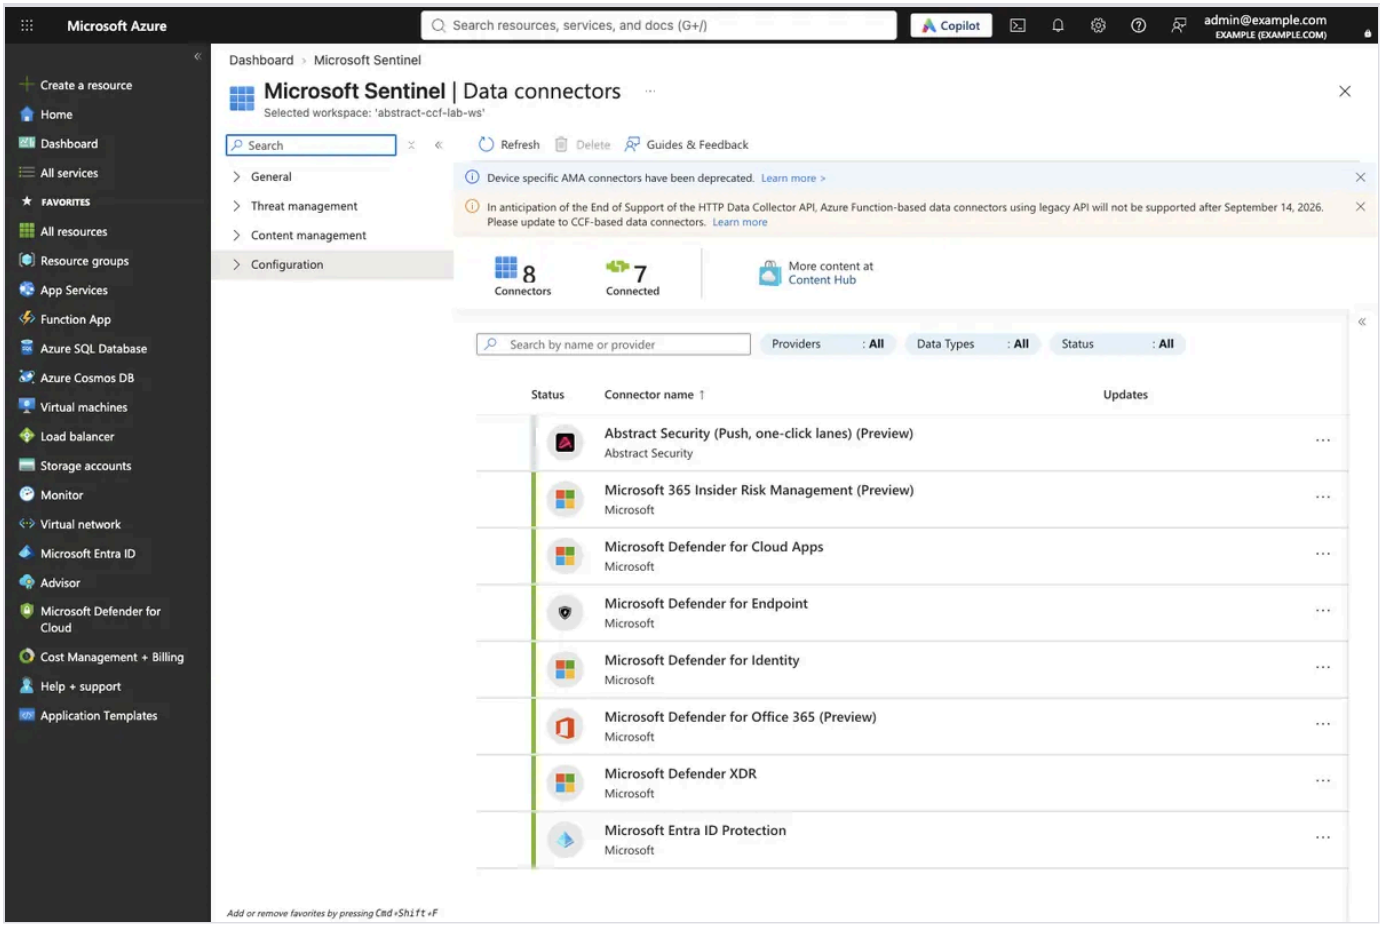

Data connectors · the installed connector

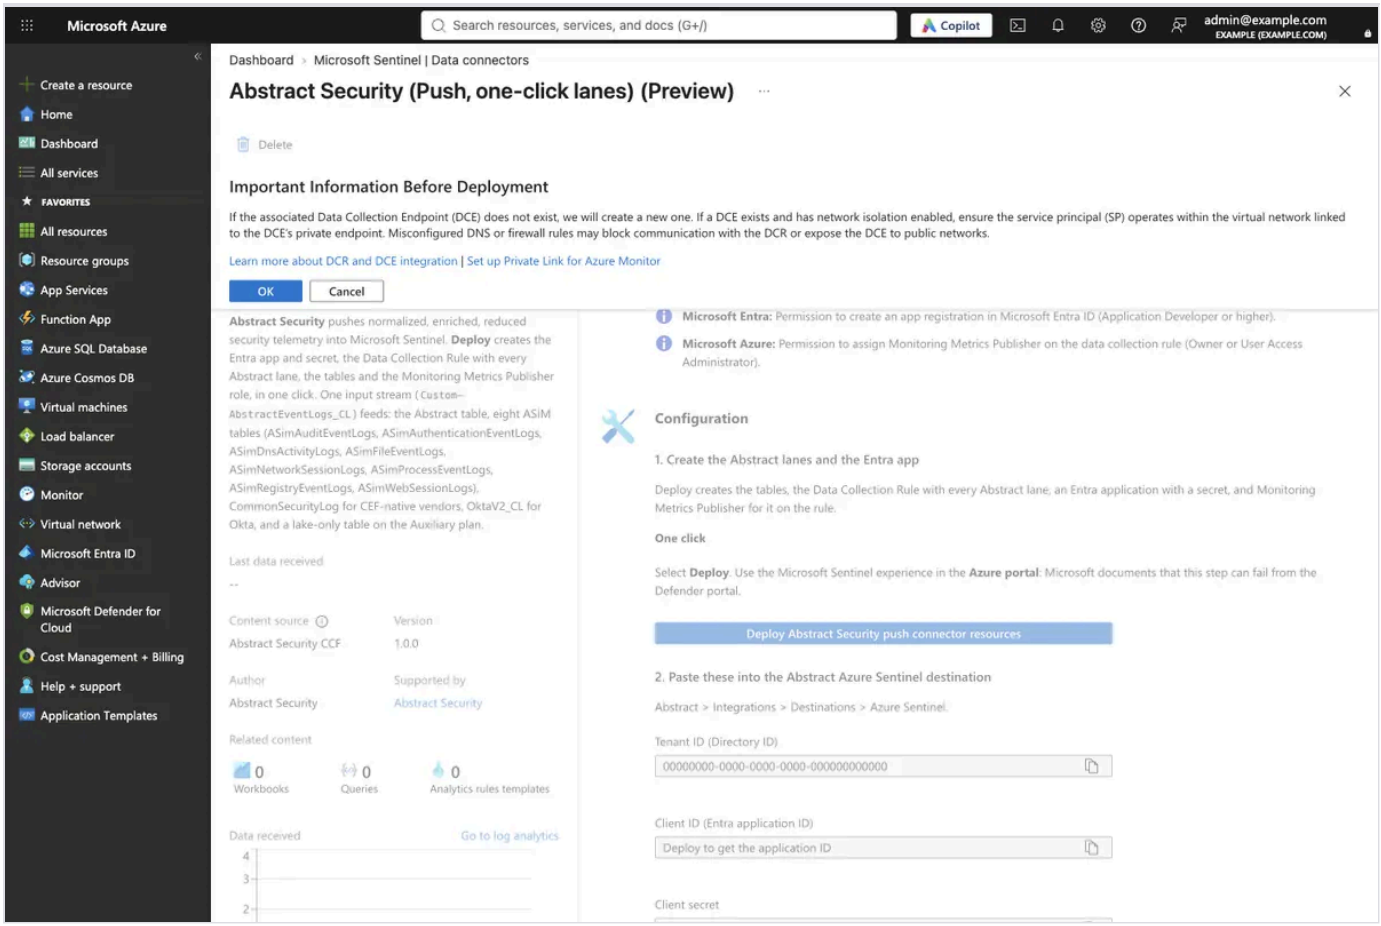

Deploy › Microsoft's confirmation

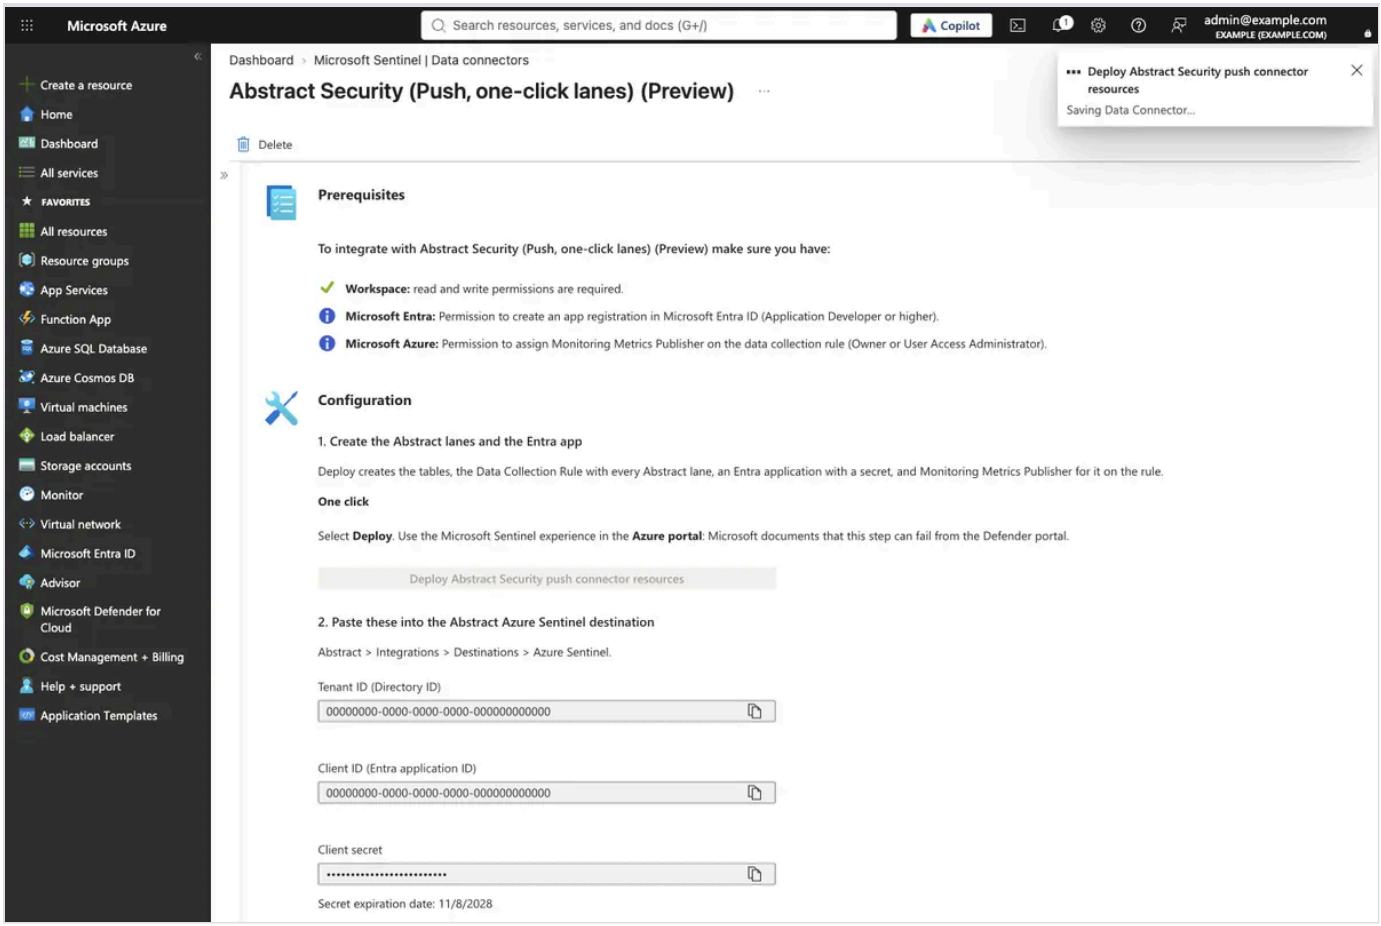

After Deploy · the values, secret masked

ON THE CONNECTOR PAGE	IN THE ABSTRACT DESTINATION
Tenant ID (Directory ID)	`tenant_id`
Client ID (Entra application ID)	`client_id`
Client secret	`client_secret`: shown once, copy it before you leave the page
Data Collection Endpoint URI	`data_collection_endpoint`
DCR Immutable ID	`data_collection_rule_id`
Log Stream Name	`log_stream_name`: Custom-AbstractEventLogs_CL

Before you choose it

- **Preview, Azure portal only.** Microsoft documents that the Deploy step needs the Microsoft Sentinel experience in the Azure portal, and that experience is supported until 31 March 2027. Abstract has not run it from the Defender portal.

- **Routes fixed in the package.** Deploy takes no parameters. Every lane in the package is created, and every event that goes to an ASIM, Okta or CEF table is also kept in the Abstract table, so it is stored twice. The one-deploy solution has a switch for each.
- **One secret, no rotation.** The portal creates the secret with an expiry it sets. Rotate it in Entra and enter the new one in Abstract.
- **No DCR error log.** The portal creates the rule without the diagnostic setting the one-deploy solution adds, so rows Azure refuses are not recorded in DCRLogErrors.

What is proven. In Abstract's lab on 2026-11-08, one Deploy click on a clean workspace created the app, its secret, the endpoint, a rule with 12 dataflows, the tables and the role, with no error. Test events sent with those credentials landed in each of the 7 tables they were routed to. On 2026-11-11 the Abstract destination's own send call, run outside Abstract against the package's rule, was accepted for its validation message and for one record per lane, and the rows landed in the Abstract table, three ASIM tables, CommonSecurityLog and OktaV2_CL.

AUTOMATE · LOGS INGESTION API

BUILD IT YOURSELF, THEN TEST IT.

The API underneath every way in. The Abstract destination sends to one stream on one rule; the rule decides each table. This path builds the Abstract table alone, so the ASIM, vendor and lake routes need the one-deploy solution or the connector.

01 CREATE THE ENDPOINT, TABLE AND RULE

Deploy the data plane on its own with **Deploy the data plane**, or build it by hand in the portal: Build › Without a template. The table's columns come from all_fields.json and its transformation from all_fields.transform.txt.

02 GRANT THE ROLE

Monitoring Metrics Publisher on the rule, for the Abstract app. It is the only role sending needs. Azure can take up to 30 minutes to apply it.

`Data collection rule › Access control (IAM)`

03 SEND ONE TEST EVENT

With the snippet below, as the Abstract app. **HTTP 204** means Azure accepted it.

04 SEE IT LAND

Run the query in the workspace's **Logs**. The first rows in a new table can take up to 15 minutes.

Request	`POST {dataCollectionEndpointUrl}/dataCollectionRules/{dataCollectionRuleImmutableId}/streams/Custom-AbstractEventLogs_CL?api-version=2023-01-01`
Token	Client credentials for the Abstract app, scope `https://monitor.azure.com/.default`
Body	A JSON array of records, at most 1 MB per call
Success	`204`, no body

BASH · AZURE CLOUD SHELL

```
# Send one test event through the Logs Ingestion API, as the Abstract app.
# Fill in the five values: the deployment's outputs and the Abstract app's
registration.
TENANT_ID="<tenant-id>"
CLIENT_ID="<abstract-app-client-id>"
DCE="<dataCollectionEndpointUrl>"
DCR="<dataCollectionRuleImmutableId>"
STREAM="Custom-AbstractEventLogs_CL"
read -rsp "Abstract app secret: " CLIENT_SECRET; echo

TOKEN=$(printf %s "$CLIENT_SECRET" | curl -s -X POST \
  "https://login.microsoftonline.com/$TENANT_ID/oauth2/v2.0/token" \
  -d grant_type=client_credentials -d client_id="$CLIENT_ID" \
  -d scope=https://monitor.azure.com/.default \
  --data-urlencode client_secret@- | jq -r .access_token)

NOW=$(date -u +%Y-%m-%dT%H:%M:%SZ)
curl -s -o /dev/null -w "HTTP %{http_code}\n" -X POST \
  "$DCE/dataCollectionRules/$DCR/streams/$STREAM?api-version=2023-01-01" \
  -H "Authorization: Bearer $TOKEN" -H "Content-Type: application/json" \
  -d "
[{\"timestamp\":\"$NOW\",\"acs_type\":\"event\",\"vendor\":\"abstract\",\"product\"
:\"test\",\"message\":\"Abstract test event $NOW\"}]"
```

POWERSHELL · AZURE CLOUD SHELL

```
# Send one test event through the Logs Ingestion API, as the Abstract app.
# Fill in the five values: the deployment's outputs and the Abstract app's
registration.
$TenantId = "<tenant-id>"
$ClientId = "<abstract-app-client-id>"
$Dce      = "<dataCollectionEndpointUrl>"
$Dcr      = "<dataCollectionRuleImmutableId>"
$Stream   = "Custom-AbstractEventLogs_CL"
$Secret   = Read-Host "Abstract app secret" -AsSecureString

$Token = (Invoke-RestMethod -Method Post -Uri
"https://login.microsoftonline.com/$TenantId/oauth2/v2.0/token" -Body @{
  grant_type = "client_credentials"; client_id = $ClientId; scope =
"https://monitor.azure.com/.default"
  client_secret = [System.Net.NetworkCredential]::new("", $Secret).Password
}).access_token

$Now  = (Get-Date).ToUniversalTime().ToString("yyyy-MM-ddTHH:mm:ssZ")
$Body = ConvertTo-Json -InputObject @(@{ timestamp = $Now; acs_type = "event";
vendor = "abstract"; product = "test"; message = "Abstract test event $Now" })
$Resp = Invoke-WebRequest -Method Post -Uri
"$Dce/dataCollectionRules/$Dcr/streams/$($Stream)?api-version=2023-01-01" `
  -Headers @{ Authorization = "Bearer $Token" } -ContentType "application/json" -
Body $Body
"HTTP $($Resp.StatusCode)"
```

KQL · THE WORKSPACE'S LOGS

```
AbstractEventLogs_CL
| where TimeGenerated > ago(30m) and vendor == "abstract" and product == "test"
| project TimeGenerated, message, acs_type
```

What is proven. Run against Abstract's lab rule on 2026-11-11, the Bash and the PowerShell snippet each returned HTTP 204, and the query returned both events within a minute.

YOU SEE	WHAT IT MEANS
`403`	The app has no Monitoring Metrics Publisher on this rule yet, or the role has not applied. Wait up to 30 minutes.
`413`	The call is over 1 MB. Send fewer records per call.
`429`	Over the rule's limits. Wait for the time in the Retry-After header.
`AADSTS7000215`	The secret is wrong. Often the secret's ID was pasted instead of its value.
`No rows`	The first rows in a new table can take up to 15 minutes.

Codes and limits as Microsoft documents them: Logs Ingestion API troubleshooting. The secret is read at a prompt, so it is not in the shell history.

09

RESOURCES

The Microsoft Learn pages each tab draws on.

RESOURCES

MICROSOFT'S PAGES, IN ONE PLACE.

MICROSOFT LEARN

READ THE SOURCE, TAB BY TAB.

Microsoft's own pages behind each tab of this playbook. Read on 2026-11-08 and 2026-11-11.

START

Microsoft Sentinel in the Defender portal ↗

Microsoft Sentinel data lake overview ↗

What's new in Microsoft Sentinel ↗

DISCOVER

Manage data and connectors ↗

Plan costs and understand billing ↗

Reduce costs ↗

PLAN

Ingest-time normalization (ASIM tables) ↗

Which logs to send to the data lake ↗

Data lake connectors and tiers ↗

Tables that support the Logs Ingestion API ↗

Azure Monitor service limits ↗

BUILD

Data collection rule structure ↗

Transformations in a data collection rule ↗

Data transformation in Microsoft Sentinel ↗

Filter and split transformations ↗

SOURCES

Data collection pipeline overview ↗

Integration guide for partners ↗

CONTENT

ASIM alert schema ↗

UEBA reference ↗

Entity behaviors layer ↗

Summary rules ↗

Analytics rules and custom detections ↗

PROVE

Logs Ingestion API overview ↗

KQL jobs on the data lake ↗

HOW OTHERS DO IT

SIEM migration ↗

Data federation ↗

AUTOMATE

Create a push codeless connector ↗

Package a platform solution ↗

Logs Ingestion API overview ↗