API Documentation

You can get assistance with the API by viewing the **TAMUS AI Framework documentation Swagger page**

How to use the API (Swagger) docs

Obtain an API key

You'll first need to **obtain an API key** and store it in a secure place.

Use your API key with the Swagger docs

1. Open up the **TAMUS AI Framework documentation Swagger page** and choose **your member institution's API URL** from the `Servers` menu in the top left corner.
2. Click the green `Authorize` button in the top right corner.
3. Paste your API key into the `Value` field and click the `Authorize` button

Test out your key

1. Click on the `/openai/models` box under the `openai` endpoint

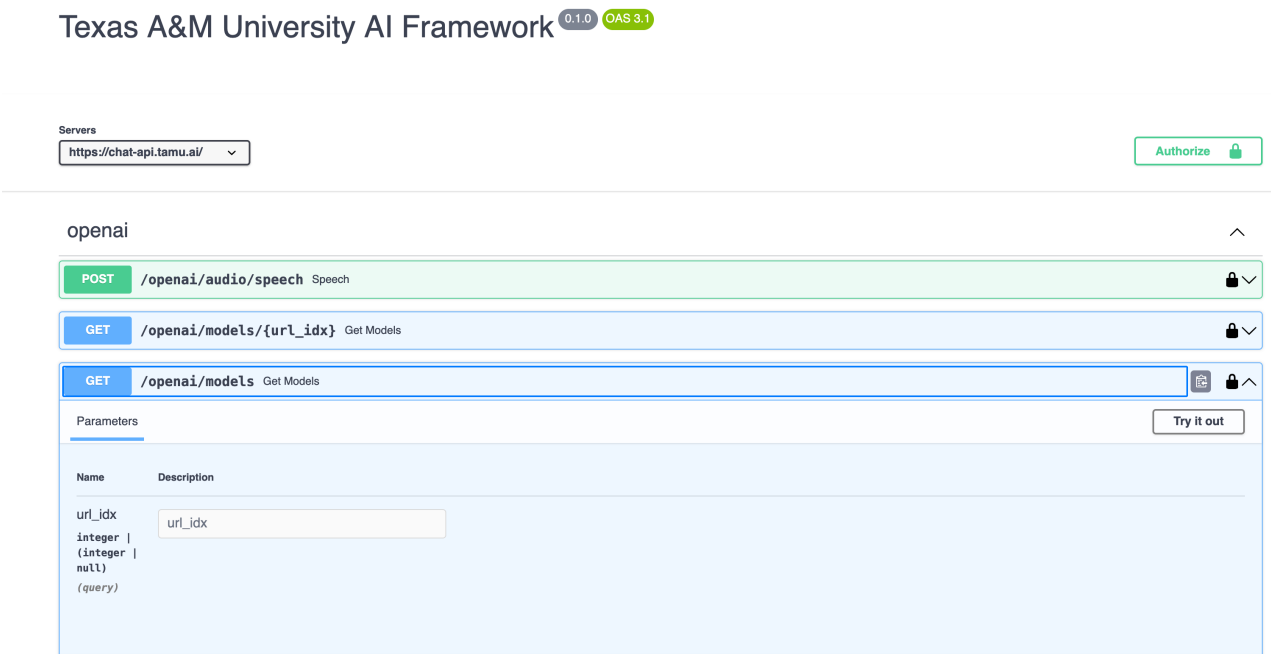

2. Click the `Try it out` button in the top right corner
3. Click the new `Execute` button to fetch a list of the models via `/openai/models`

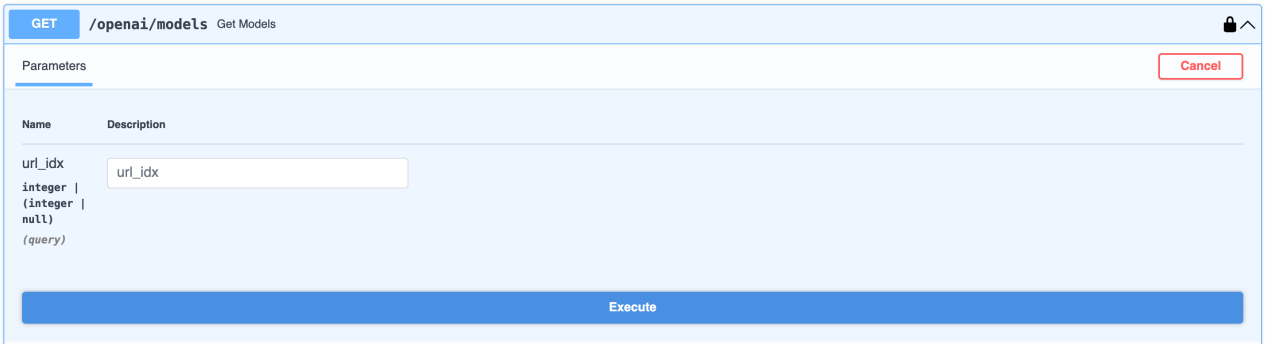

4. Observe the results in the `Response body`, and notice that you could also make the same query via a terminal using the `curl` command.

Responses

Curl

```
curl -X 'GET' \
  'https://chat-api.tamu.ai/openai/models' \
  -H 'accept: application/json' \
  -H 'Authorization: Bearer sk- ——redacted——
```

Request URL

```
https://chat-api.tamu.ai/openai/models
```

Server response

Code	Details
200	Response body


```
{
  "data": [
    {
      "id": "protected.gemini-2.0-flash-lite",
      "name": "gemini-2.0-flash-lite",
      "object": "model",
      "created": 1755461144,
      "owned_by": "openai",
      "pipeline": {
        "type": "manifold",
        "valves": true
      },
      "connection_type": "external",
      "openai": {
        "id": "protected.gemini-2.0-flash-lite",
        "name": "gemini-2.0-flash-lite",
        "object": "model",
        "created": 1755461144,
        "owned_by": "openai",
        "pipeline": {
          "type": "manifold",
          "valves": true
```


Download

Response headers

```
content-type: application/json
```

Test out fetching the same models via Python code

Note that you will need to substitute the API URL **from your member institution** in the `url` variable below. In this example, we are showing the code using the TAMU specific API endpoint.

```python
import requests
import json

def call_models_api():
    url = "https://chat-api.tamu.ai/openai/models"
    headers = {
        "accept": "application/json",
        "Authorization": "Bearer YOUR_API_KEY_HERE"  # Replace with your API key
    }

    response = requests.get(url, headers=headers)
    response.raise_for_status()  # Raises an exception for bad status codes

    return response.json()

# Usage
try:
    result = call_models_api()
    print(json.dumps(result, indent=2))
```

```
except Exception as e:
    print(f"Error calling API: {e}")
```

TIP

1. Replace YOUR_API_KEY_HERE with your actual API key
2. Make sure you have the requests library installed:

   ```
   pip install requests
   ```

3. Ensure that you are using the correct API endpoint **for your institution** in the `url` variable