Práctica 3: “Paso de parámetros usando estructuras JSON”

Como primer paso se instala EXPRESS dentro de nuestra nueva carpeta (/third_app) y se procede a iniciar el servidor

```
PS C:\Users\DELL I5 10TH\Documents\9no semestre telematica\Apps distribuidas\codigos node\third_app> npm install express
up to date, audited 66 packages in 706ms


30 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
PS C:\Users\DELL I5 10TH\Documents\9no semestre telematica\Apps distribuidas\codigos node\third_app>
PS C:\Users\DELL I5 10TH\Documents\9no semestre telematica\Apps distribuidas\codigos node\third_app> npm init
This utility will walk you through creating a package.json file.
It only covers the most common items, and tries to guess sensible defaults.

See `npm help init` for definitive documentation on these fields and exactly what they do.


Use `npm install <pkg>` afterwards to install a package and save it as a dependency in the package.json file.
```

El nuevo método para utilizar es POST, el JSON se debe de mandar llamar desde BODY, debe de ser de tipo RAW y ahí se agrega el valor del JSON

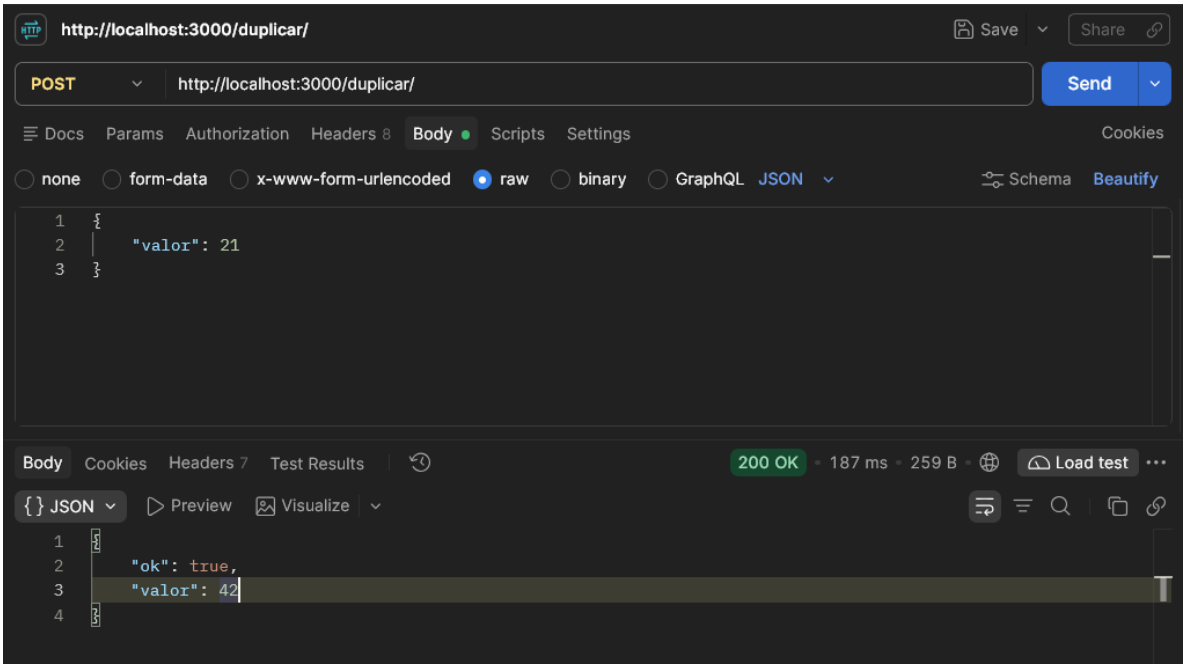


Metodo POST

➔ El código 200 representa que el proceso fue exitoso

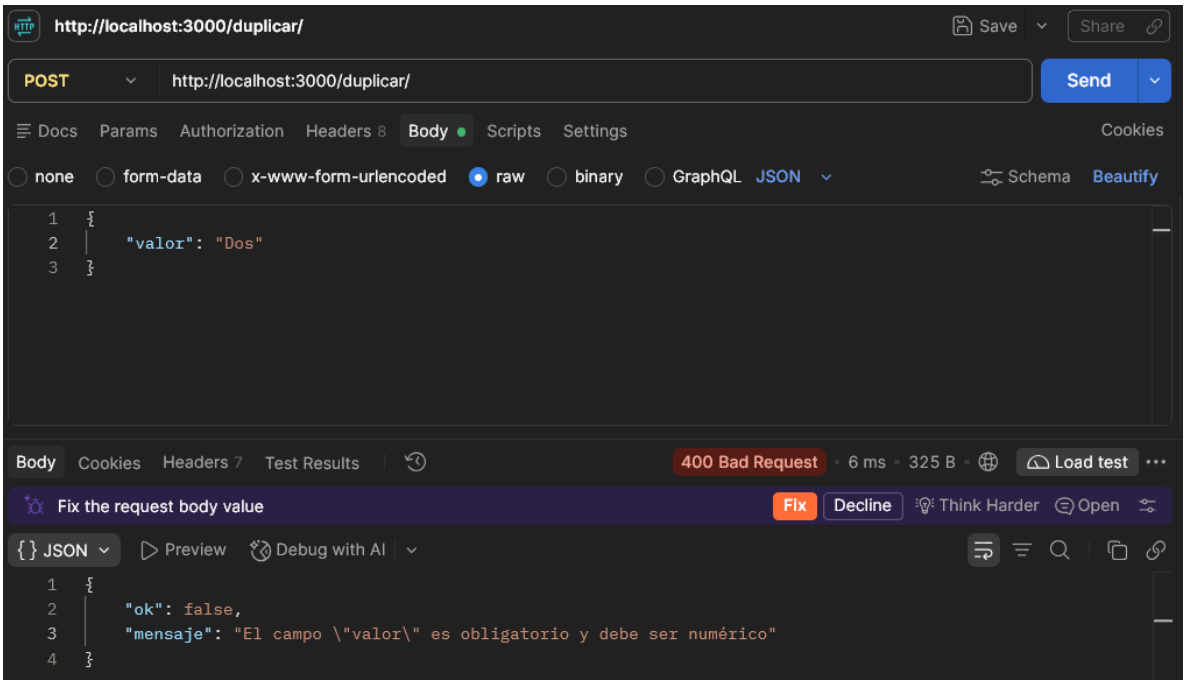

Comprobación de valor numérico, error → cadena de caracteres

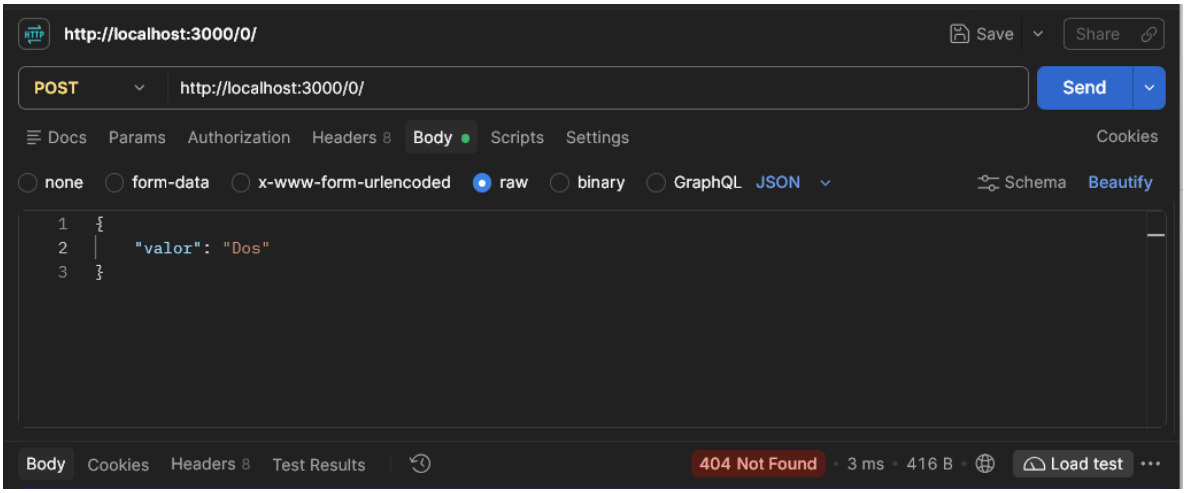


Qué pasa si la ruta no es correcta

→Middleware para rutas no definidas: aplica cuando no se puede resolver una URL o método para el FRONTEND

```
//  Middleware para rutas no definidas
//  Cualquier método y URL
// Debe estar antes del listener

app.use((req, res) => {
  res.status(404).json({ ok: false, mensaje: 'Ruta no encontrada' });
});
```

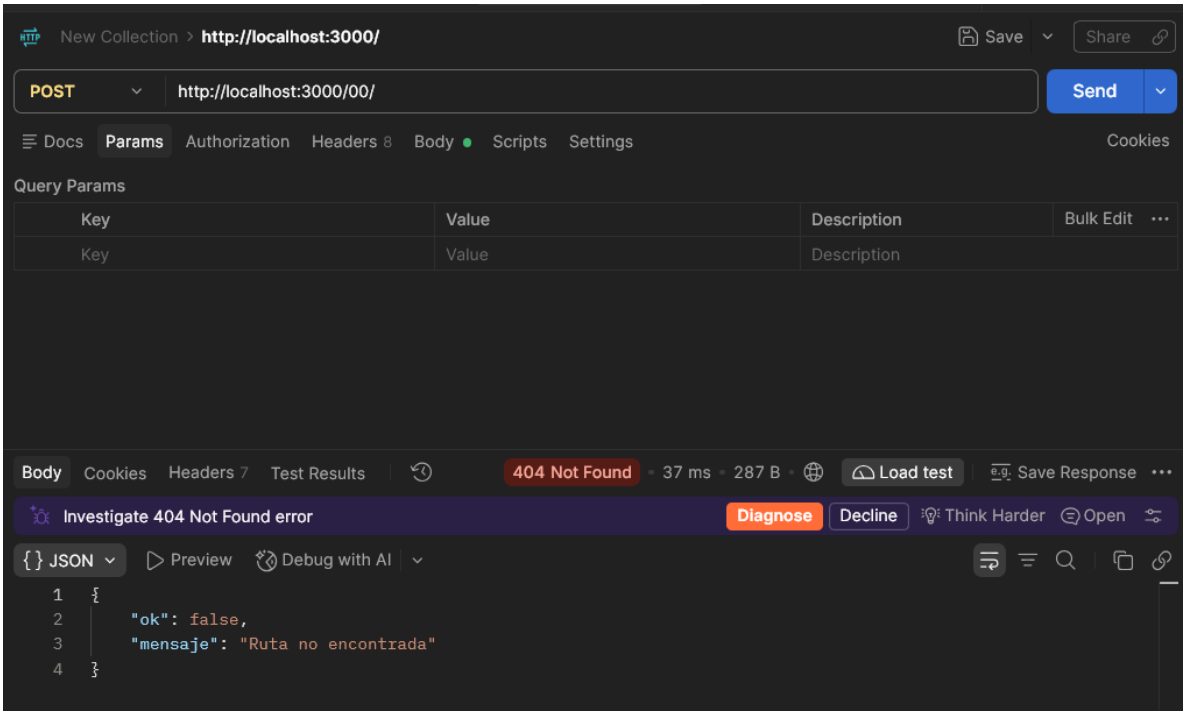

Route not found

Ruta no encontrada por parte de POSTMAN, para ejecutar nuevamente se debe detener el server y levantarlo de nuevo