

# Build a Flow

## Additional Practice

15 – 20 Minutes

### Lab Objective

You will achieve the following objectives:

- Build a flow that responds to the change in priority of an incident.
- Test the flow within Workflow Studio.

### Scenario

When an incident is created or updated with a priority of 1 - Critical, management would like for the incident to be assigned to the Incident Management group.

### Pre-requisite

For your first flow, change these properties to enable the flow engine to debug messages and show system logs within the Flow Execution Details page.

- Navigate to **Process Automation > Flow Administration > Properties**.
- Validate "Specify the log level of system log entries to replicate to the flow log...." is **ERROR**.
- "Level of reporting data generated by the flow engine." should be **All configuration and runtime values (For debugging only)**
- Select **Save**.

**Note:** You could have made these changes in system properties (sys\_properties.list).

Set **com.glide.hub.flow\_engine.listener\_trace.threshold** to **ERROR**.

Set **com.snc.process\_flow.reporting.level** to **FULL**.

## Section 1: Build the Flow

1. To open Workflow Studio in a new tab, navigate to the **Process Automation > Workflow Studio** in the Filter Navigator.

2. On the right side of the screen, select the **New** button.
3. From the drop-down, select the Flow option.
4. In the Flow Properties window, add the following information:
  - Name: Incident Changed to P1
  - Description: Monitor Incidents for P1 Activity
  - Application: **Global**
  - Select Show additional properties
  - Run As: User who initiates session
  - Select Build flow.
5. Create a Trigger by selecting the **+ Symbol** or **Add a trigger** link.
6. From the Trigger menu, select the explicit trigger **Created or Updated**.
7. Select the Table drop-down, type **Incident** in the search field, and select the **Incident [incident]** table.
8. Next to the Condition label, select the **+ Add Filters** and set the drop-down to the following:  
**Priority – is - 1-Critical**
9. Select **Only if not currently running** on the **Run Trigger** drop-down.

**TRIGGER**

Incident Created or Updated where (Priority is 1 - Critical)

Trigger: Created or Updated

\* Table: Incident [incident]

Condition: All of these conditions must be met

Priority is 1 - Critical

or

New Criteria


Run Trigger: Only if not currently running

10. Select **Done**.
11. Under Actions, select the **+ symbol** or **Add an Action, Flow Logic, or Subflow** link.
12. From the Action, Flow Logic, and Subflow, select the **Action** button.
13. With the **ServiceNow Core** category highlighted, select the **Update Record** Action.
14. Specify the record to update by dragging the data pill labeled **Incident Record** from the **Data > Trigger – Record Created or Updated** section on the right side of the screen to the **Record** field.
15. Move down to **Fields** and select the **+ Add Field Value** button.

16. Set the **Select a Field** dropdown fields to the following:

- **Assignment Group – Incident Management**

17. Select **Done** to close the action.

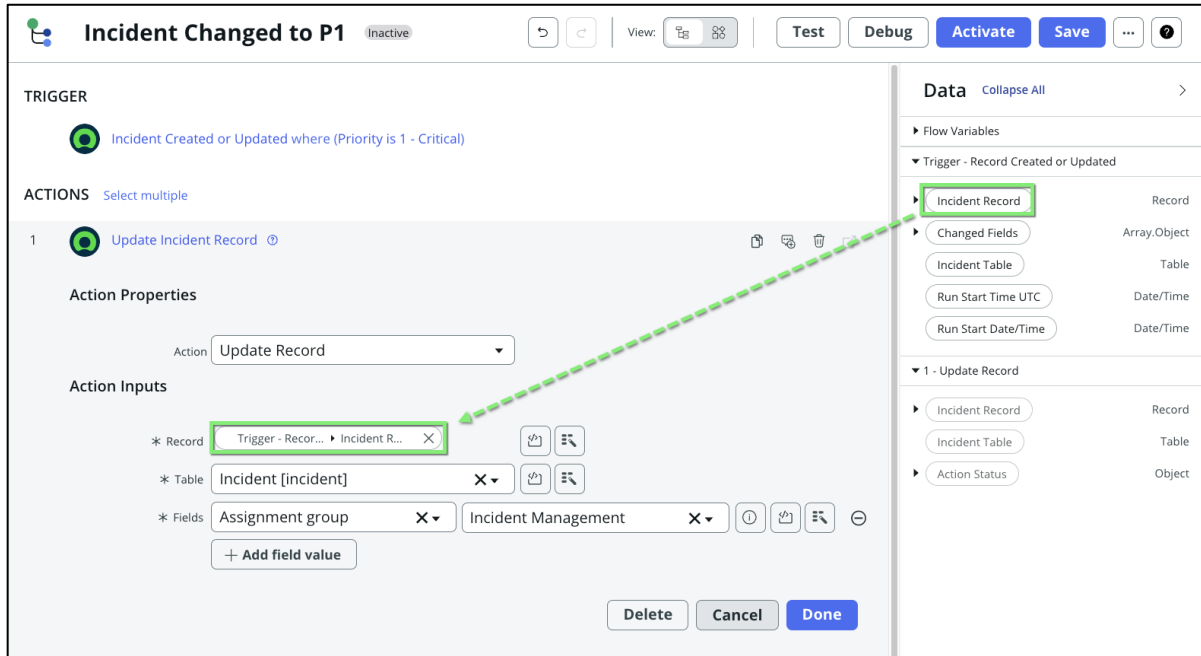

18. Select the **Save** button in the upper right corner.

19. Select the **Activate** button.

20. On the **Are you sure you want to activate the flow?** dialog box, select the **Activate** button.

## Section 2: Test your work

You can test the flow with updates to the record that triggers the flow to execute. However, testing can be done within Workflow Studio.

**Note:** You should only test a flow in a Dev or Test instance, not a Production instance. Record changes caused by the test of a flow or integration call are real.

1. Return to the Now Platform interface and navigate to **Incident > Create New**.
2. Populate the **Caller**, the **Short Description**, and **Save** the incident.
3. Now that we have an incident to test against, return to Workflow Studio and select **Test** on the Incident Changed to P1 flow.
4. In the Test Flow dialog box, select the **Incident Record** field and choose the incident you created (if needed, copy and paste the incident number.)

5. Select the **Run Test** button.
6. After the Flow process completes, select the **Your test has finished running. View the flow execution details.** Link.

Test flow

Run your flow to make sure it has no errors before you activate it. When the test finishes running, check the execution details to see each action's configuration, runtime values, and the log messages for any errors that occurred.

\* Incident Record

INC0010001

X

Q

+

i

Changed Fields

+

Your test has finished running. View the flow execution details.

☐ Run test in background i

Cancel

Run Test

7. The Execution Details tab provides data and links about what occurred during the test. Review the items below to understand what occurred with its execution.
  - **Trigger and Actions** - Select the Trigger or the Actions to expand the sections. Review additional information about what occurred when the trigger or action was processed.
  - **Open Flow Logs** – View the flow logs of what occurred during the test.
  - **Open Current Record** – Open the form of the record to see the changes.
  - **Logs** – The drop-down shows the logs recorded during the flow execution.
8. Review the **Execution Details** screenshot below and select each link, indicated by the arrows, in your instance.

Workflow Studio

Incident Changed to P1

Incident Changed to P1

+

Incident Changed to P1

+

+

EXECUTION DETAILS

Incident Changed to P1

Test Run - Completed

Open flow

Open context record

Hide Action Details

State

Start time

ⓘ

FLOW STATISTICS

Run as: System Administrator

Open flow logs

Completed

2025-05-27 21:01:06

1ms

TRIGGER

Incident Created or Updated

Open current record

ACTIONS

1

Update Record

Core Action

Completed

2025-05-27 21:01:06

1ms

Configuration Details

| VARIABLE NAME | RUNTIME VALUE                                     | CONFIGURATION                                                                                              | TYPE           |
|---------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------|----------------|
| Record        | INC0010001                                        | Trigger - Recor... Incident R...                                                                           | Document ID    |
| Table         | incident                                          | incident                                                                                                   | Table Name     |
| Fields        | assignment_group=12a586cd0bb23200ecfd818393673a30 | assignment_group=({"display":"Incident Managemen t","value":"12a586cd0bb23200ecfd818393673a30","s ys_id... | Template Value |

Output Data

| VARIABLE NAME        | RUNTIME VALUE                                            | CONFIGURATION | TYPE        |
|----------------------|----------------------------------------------------------|---------------|-------------|
| Action Status        | { "Action Status": { "code": 0, "message": "Success" } } |               | Object      |
| Don't Treat as Error | true                                                     | true          | True/False  |
| Record               | INC0010001                                               | record        | Document ID |
| table_name           | incident                                                 | table_name    | Table Name  |

9. Was the Test Run completed the way you expected? Why or why not?
10. Select the **X** on the **Execution Details** Tab to close it.
11. On the flow, select the to close Test Flow dialog box.
12. Select the **Deactivate** button and select **Deactivate** to confirm flow is deactivated.



Good job! You have successfully created a flow and tested the execution of that flow.