

# Usage of MATLAB Report Generator

Eniz Museljc

July 11, 2018

# Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	About this toolset . . . . .	2
1.2	Setup . . . . .	2
1.3	How it works . . . . .	2
<b>2</b>	<b>L<sup>A</sup>T<sub>E</sub>X Generator</b>	<b>4</b>
2.1	New report . . . . .	4
2.2	Deleting files . . . . .	4
2.3	Set and Get . . . . .	5
2.4	Title page and TOC . . . . .	5
2.5	Paragraphs . . . . .	5
2.6	Headings . . . . .	6
2.7	Lists . . . . .	6
2.8	Tabular and table . . . . .	7
2.8.1	Tabular . . . . .	7
2.8.2	Table . . . . .	9
2.9	Images and Figures . . . . .	10
2.10	Pretty output . . . . .	14
2.10.1	Listing and Latex . . . . .	14
2.10.2	Big matrices . . . . .	15
2.10.3	Graphic output for arrays . . . . .	16
2.11	Function descriptions . . . . .	18
2.12	Equations . . . . .	20
2.13	Zip project files . . . . .	21
2.14	Generating and viewing . . . . .	21
<b>3</b>	<b>Template</b>	<b>22</b>

# Chapter 1

## Introduction

### 1.1 About this toolset

This toolset is to be used while programming in MATLAB to create a report or paper of any kind with the data from MATLAB, so it bridges the way and saves you the time to copy values and make pretty tables and plots through an additional LaTeX editor. Please follow the upcoming instructions to get it up and running.

### 1.2 Setup

To set the LaTeX Generator up, you will need the following installed on your pc :

- L<sup>A</sup>T<sub>E</sub>X distribution for your system
- Latexmk package
- Ruby framework (if the right files dont get installed with Latexmk)

After installing these components, copy the reportGenerator main folder to a secure location on your machine and be sure to add it to your MATLABs search path so you can work from a different directory and use all the functions without restriction. We have provided a template working directory which you can use to see how it all fits together. To be sure that everything is set up correctly, we have provided a very simple "hello world" programme that you can run and check if it generates a pdf document with "hello world" on one page, in your current working directory.

### 1.3 How it works

In this section we will talk about all the different files that you can use and manipulate to get the best out of this toolset. The main files that you are gonna be changing are :

**setting.dat** Specifies a variaty of settings for the program which can be adjusted to your specific needs.

`myTextBlocks.tex` A file which contains blocks of Latex code separated by lines with `%% TAG` where `TAG` is a unique identifier.

`myCodeBlocks.m` A file which contains blocks of MATLAB code separated by lines with `%% TAG` where `TAG` is a unique identifier. It can be used to evaluate code specified in a section of this file.

`myMatlabInit.m` This is a init-File for MATLAB which is executed at the beginning. One can specify all necessary settings there.

You can also specify files with different names for organisation purposes, if that's the case you will have to change the file names in the `setting.dat` file. Additionally you will need to edit the provided MATLAB `startup.m` file and set the L<sup>A</sup>T<sub>E</sub>X install path to the path on your computer.

# Chapter 2

## L<sup>A</sup>T<sub>E</sub>X Generator

Now we will go through the functions available and show you what you can do with them, you can use this documentation and the MATLAB file `reportingDocu.m` with which it was created, to help you write your own reports. All of the functions that will be mentioned also have descriptions which can be accessed through MATLAB by using the *help* command for the function in question.

### 2.1 New report

To use the following functions you will need to create a *latexGenerator* object which will be used to access the methods provided and explained in the following sections. This can be easily done with:

```
report = latexGenerator;
```

Note that the constructor function also takes in parameters with which we could like in the following example change the name of the settings file we are using, this can be very useful if we have a settings file with settings that fit our current needs but we might use a different settings file usually.

```
report = latexGenerator('settingFile', 'personalSettings.dat');
```

### 2.2 Deleting files

Before generating a new document it is recommended to clean the working directory of old files to avoid any conflicts. The `cleanDir` functions provides us with that possibility as we will see in the following example. Because the generation process creates a lot of files that are mostly unused, the function can also be used to delete all files except the generated document and/or files specified within the options parameter. There also exists a function for cleaning the media folder `cleanMediaDir`.

- `report.cleanDir`; cleans all files that could cause a conflict, use it just after creating the `latexGenerator` object

- `report.cleanDir('pdf','tex')` this won't delete the generated .pdf and .tex files, could be used at the end to avoid having many not needed files in your working space
- `clearMediaDir` will clean the media directory

## 2.3 Set and Get

Using the *set* and *get* methods from the `reportGenerator` super class, we can access and change the settings provided by the `setting.dat` file from within our MATLAB code. For example, if we wanted to change the name the program gives to the graphics it saves, we could use the following code :

```
report.set('mediaPrefix', 'plot_')
```

With this piece of code we set the name prefix of the plots that are being saved to 'plot\_'. It can be utilized to set and get, with the `get` function, all of the parameters in `setting.dat`. For example, it is possible to set the `dispLatexCode` to 1 and all of the generated latex code after setting it will be shown in the MATLAB command window, by default it is turned off (set to 0).

## 2.4 Title page and TOC

Like in the most cases we would want to add a title page to our document, we will do this in the following lines of code. The title, author and date will be displayed with the corresponding settings from the setting file. We can also add a table of contents.

```
report.addTitlePage
report.addTableOfContents
```

## 2.5 Paragraphs

All of these paragraphs in this documentation were added using the `paragraph` function, you can choose if you want to add the paragraph by writing it whole as a string in MATLAB and passing it to the function or using the `myTextBlocks.tex` file from which we can import any latex code or text and use it in our documents just by passing the `TAG` to the `paragraph` function. An example for adding a short sentence would be :

```
report.addParagraph('This is an example sentence')
```

This is an example sentence

## 2.6 Headings

There are several types of headings which can be added :

- part
- chapter
- section
- subsection
- subsubsection

Using one of these heading types we can structure our document much better and provide a better overview, since without them, the table of contents would be useless. The following code was used to create the heading for this current section in this document :

```
report.addHeading('section', 'Headings')
```

## 2.7 Lists

There are two types of lists you can generate through MATLAB :

- itemize
- enumerate
- description

This list was created with the following code :

```
report.addList('itemize', {'itemize','enumerate','description'});
```

We can see that it is fairly easy and quick to add a MATLAB cell array of strings and make a pretty list in your document. The following examples show that nested lists are also possible, the code that was used to make these can be found in the `reportDocu.m` file under `LISTS`.

- Item 1
  - 1. Enum 1
  - 2. Enum2
  - 3. Enum3
- Item 2
  - Item 2.1

– Item 2.2

- Item 3

**Definition 1 :** Text 1

**Definition 2 :** Text2 Some more text

## 2.8 Tabular and table

### 2.8.1 Tabular

Tables can be created directly from MATLAB arrays, following example shows a simple table containing the values from an array with random values. The following code was executed.

```
arr = randi(10,[2,3]);  
report.addTabular(arr);
```

10.00	4.00	2.00
10.00	6.00	9.00

All of the settings for the tables can be adjusted in the `setting.dat` file or through the `set` function as we will see in this section. Now we will demonstrate how to lable the rows and columns. We will do that by specifying the row and/or column labels as strings with collon separated labels as we can se in the following code.

```
row_labels = 'row1,row2';  
col_labels = 'col1,col2,col3';  
  
report.set('dataFormat','%i');  
report.set('tableRowLabels', row_labels);  
report.set('tableColLabels', col_labels);  
report.set('tableColumnAlignment','lccc');  
  
report.addTabular(arr);
```

	col1	col2	col3
row1	10	4	2
row2	10	6	9

The following example shows that we can also pass data with Not a Number fields, the corresponding parameter in the `setting.dat` file has to be set appropriate, by default it is set to `nan`. We will also demonstrate what `booktabs` and `formating` do for a new table.



```

report.set('dataFormat', '%0.1f,%0.3f,%0.1f,%0.2f');
report.set('tableColLabels', 'col1,col2,col3,col4');
report.set('tableRowLabels', 'row1,row2,row3,row4');
report.set('booktabs', 1);

arr = randn(4,4)*5;
arr(3) = nan;
report.addTabular(arr);

```

	col1	col2	col3	col4
row1	1.4	-4.028	-2.3	-3.96
row2	2.9	3.334	1.2	2.29
row3	-	-2.826	2.6	0.19
row4	3.4	11.065	-1.1	4.86

In the following examples we will see some other possible adjustments we can make to our tables through MATLAB.

```

report.set('tableRowLabels', 'row1, ,row3,row4');
report.set('tableColumnAlignment', 'c|cccc');
report.addTabular(arr);

```

row1	1.437	-4.028	-2.265	-3.962
	2.901	3.334	1.229	2.288
row3	-	-2.826	2.646	0.190
row4	3.372	11.065	-1.095	4.859

As we can see we can also leave specific rows or columns unlabeled. If we want to get rid of the table borders we just need to set the `tableBorders` to 0.

```

report.setDefault('table');
report.set('tableBorders', 0);
report.addTabular(arr);

```

1.44	-4.03	-2.27	-3.96
2.90	3.33	1.23	2.29
-	-2.83	2.65	0.19
3.37	11.07	-1.10	4.86

To reset all the modifications we did to the settings of the table, use the function `setDefault` as shown in the last example.

## 2.8.2 Table

Now we will demonstrate how to use the MATLAB table to create tables. We can use either the `addTabular` or `addTable` function to add the MATLAB table to our document. In the following examples we can see the usage :

```
LastName = {'Smith','Johnson','Williams','Jones','Brown'};
Age = [38;43;38;40;49];
Height = [71;69;64;67;64];
Weight = [176;163;131;133;119];
T = table(Age,Height,Weight,'RowNames',LastName);

report.addTabular(T);
```

	Age	Height	Weight
Smith	38	71.00	176.00
Johnson	43	69.00	163.00
Williams	38	64.00	131.00
Jones	40	67.00	133.00
Brown	49	64.00	119.00

Please note that all of the adjustments to the table properties we have done in the previous section are also applicable here, without any restriction. Next we will see the same MATLAB table added to our document through the `addTable` function which allows us also to add a caption for the table. We can also see the usage of the `transposeTable` setting which can also be applied to the former way of adding tables.

```
report.set('transposeTable',1);
report.addTable(T, 'MyCaption');
```

	Smith	Johnson	Williams	Jones	Brown
Age	38	43	38	40	49
Height	71.00	69.00	64.00	67.00	64.00
Weight	176.00	163.00	131.00	133.00	119.00

Table 2.1: My caption


## 2.9 Images and Figures

To add figures to our document we have two functions at our disposal, `addImage` and `addFigure`. These functions work with figure handles. The following code was used to generate the figures which handles we are going to use to add them into our document.

```
figh = gobjects(1,3);  
t = linspace(-2*pi,2*pi,100);  
  
figh(1) = figure('visible','off');  
plot(t,sin(t));  
xlim([-2*pi,2*pi])  
  
figh(2) = figure('visible','off');  
plot(t,log(t), 'mo');  
xlim([-2*pi,2*pi])  
  
figh(3) = figure('visible','off');  
plot(t,sinc(t), 'r-*');  
xlim([-2*pi,2*pi])
```


You can set the visibility of the figures off so it doesn't show them in MATLAB, like we did in the example above. Using the next line of code we added the first figure to our document.

```
report.addImage(figh(1));
```

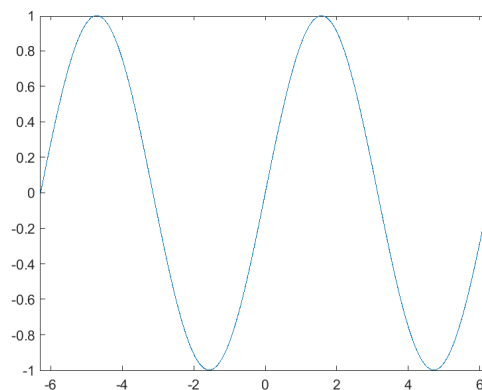

As we have seen in the previous sections, it is also possible to edit settings for the figures and images we are adding with the `set` function. Next we will demonstrate how to add multiple figures in one line, because it is possible to pass an figure array to the `addImage` function.

```
report.set('imagePerLine',2);  
report.addImage(figh(2:3));
```

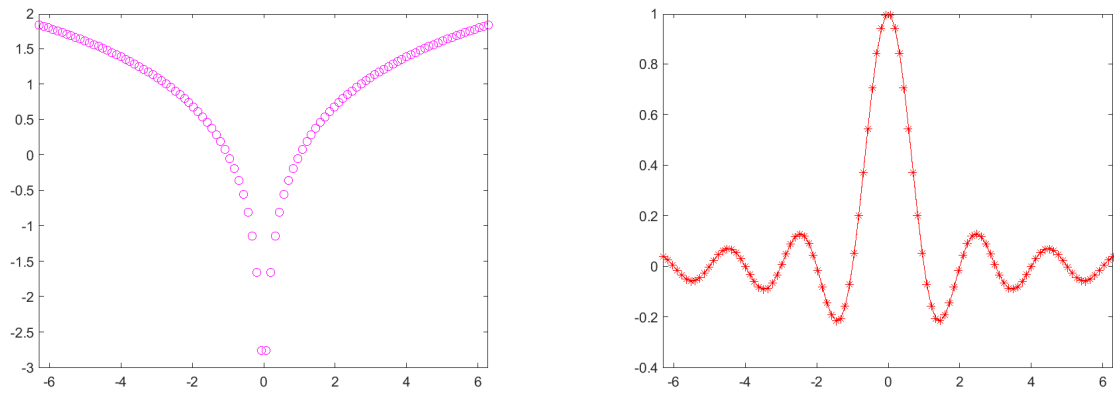

```
report.set('imagePerLine',3);
report.set('imageOption', 'width=0.30\textwidth');
report.addFigure(figh, 'sin(t), \log(t), \sinc(t)');
```

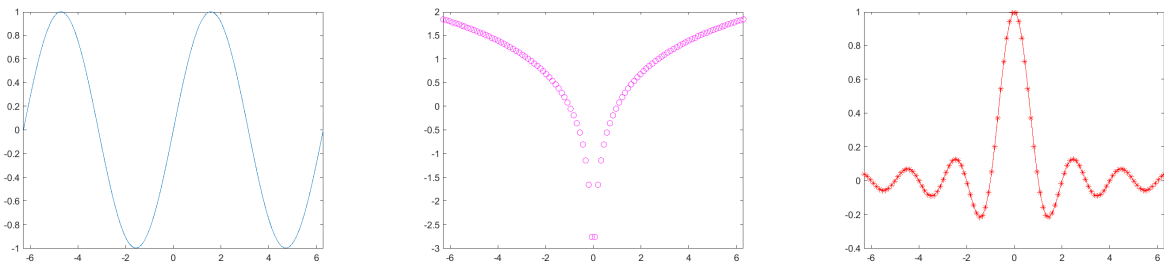


Figure 2.1:  $\sin(t)$ ,  $\log(t)$ ,  $\text{sinc}(t)$

So we can see that by playing with the settings we can place the figures the way we want them. If we want to have bigger figures we can also add them in a vertical positioning.

```
report.set('imagePerLine',1);
report.set('imageOption', 'width=0.8\textwidth');
report.addFigure(figh, {'sin(t)', '\log(t)', '\sinc(t)'});
```

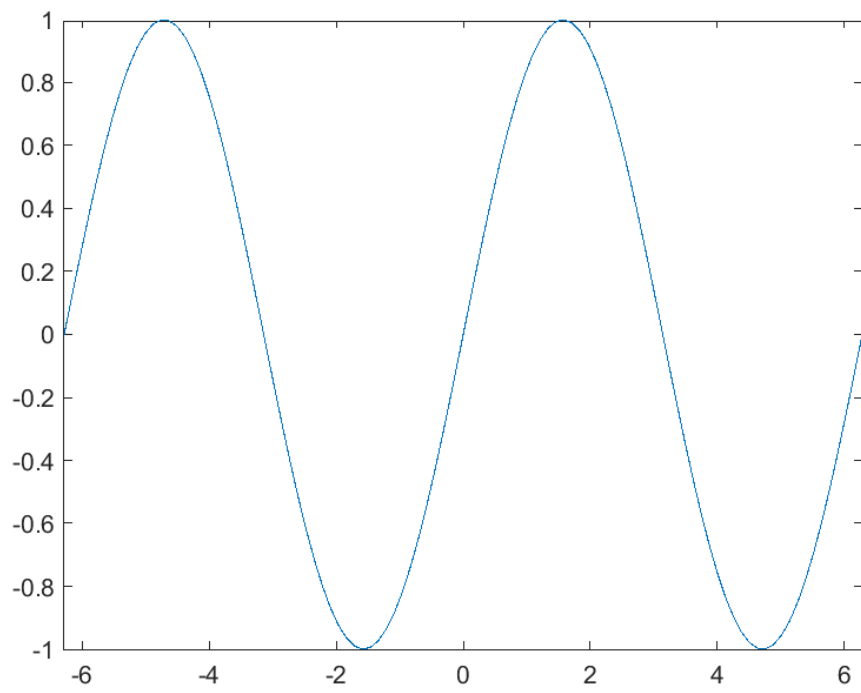


Figure 2.2:  $\sin(t)$

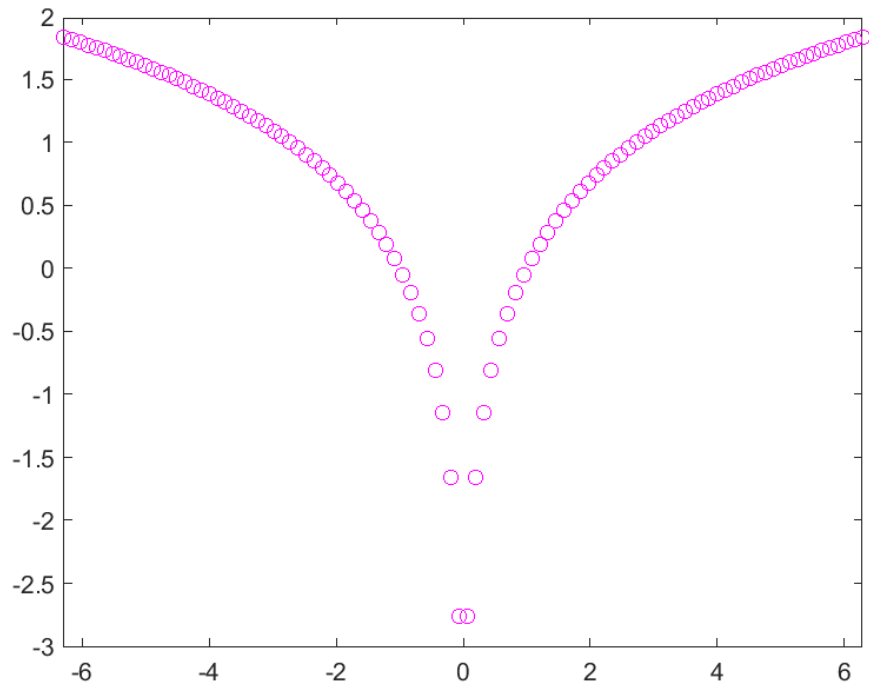


Figure 2.3:

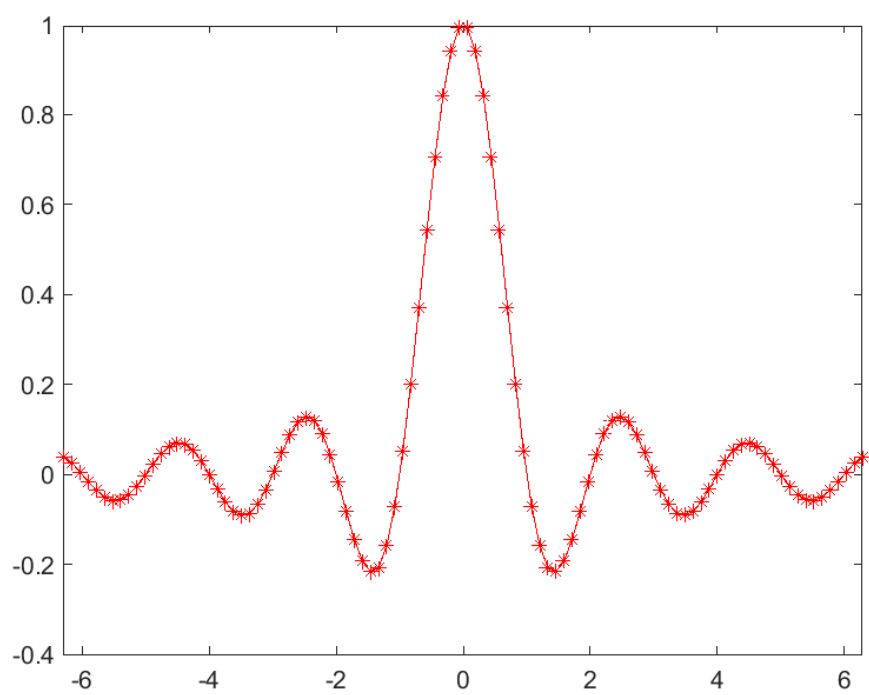


Figure 2.4:  $\text{sinc}(t)$

With the above example we demonstrated how to add multiple figures, one per line, with different captions. You can adjust the size of the figures by accessing the `imageOption` property and setting the size as in the code above. In this case it is important to set the number of images per line to one or else it won't place them in the manner above. If you don't want to add a caption to a specific figure in the array, just pass an empty string in the right place as in the example above.

## 2.10 Pretty output

### 2.10.1 Listing and Latex

We can utilize the `addMatlabOutput` function to display MATLAB console output in our document, it is possible to display it as same as in the console or in latex mode. The color of the latex mode output can be set by accessing the `latexOutputColor` property with the `set` function. The following code was used to generate the matrices used in the following examples.

```
M1 = logical(eye(6));
M2 = flipud(M1);
```

If we use want the MATLAB console output we will use the following function and pass the variable names as a cell array of strings

```
report.addMatlabOutput({'M1','M2'});
```

<p>M1 =</p> <pre> 1 0 0 0 0 0 0 1 0 0 0 0 0 0 1 0 0 0 0 0 0 1 0 0 0 0 0 0 1 0 0 0 0 0 0 1 </pre>	<p>M2 =</p> <pre> 0 0 0 0 0 1 0 0 0 0 1 0 0 0 0 1 0 0 0 0 1 0 0 0 0 1 0 0 0 0 1 0 0 0 0 0 </pre>
--	--

If we want the same variables displayed but in latex mode then we will use the following syntax

```
report.addMatlabOutput({'M1','M2'}, true);
```

$M1 = \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}$	$M2 = \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$
---	---

Now with a different color, standard black is also possible

```
report.set('latexOutputColor','blue');
report.addMatlabOutput({'M1'}, true);
report.set('latexOutputColor','green');
report.addMatlabOutput({'M2'}, true);
```

$$M1 = \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}$$

$$M2 = \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}$$

## 2.10.2 Big matrices

Another example would be wanting to add a matrix whose size is too big to fit into the document in a way that we dont just have a bunch of numbers on the screen, this is easy with the same function as before, lets use the following code

```
bigM = rand(100);
report.set('prettyMaxSize', '[8,6]');
report.addMatlabOutput({'bigM'});
```

bigM =

0.6936	0.2172	0.2795	0.6932	0.1976	>	0.1107
0.3640	0.3378	0.6243	0.3682	0.2128	>	0.7848
0.9956	0.3381	0.7029	0.6085	0.1012	>	0.9595
0.3751	0.0446	0.0639	0.1448	0.7908	>	0.5420
0.7419	0.8013	0.7676	0.5546	0.8249	>	0.9183
0.1029	0.2848	0.0810	0.6815	0.3742	>	0.3956
0.7678	0.0269	0.1581	0.2452	0.5371	>	0.0282
					>	
0.4035	0.1278	0.9656	0.7426	0.3496	>	0.0485



Or if we want it in latex style, this time in black color

```
report.set('latexOutputColor','black');
report.addMatlabOutput({'bigM'}, true);
```

$$\text{bigM} = \begin{bmatrix} 0.6936 & 0.2172 & 0.2795 & 0.6932 & 0.1976 & \cdots & 0.1107 \\ 0.3640 & 0.3378 & 0.6243 & 0.3682 & 0.2128 & \cdots & 0.7848 \\ 0.9956 & 0.3381 & 0.7029 & 0.6085 & 0.1012 & \cdots & 0.9595 \\ 0.3751 & 0.0446 & 0.0639 & 0.1448 & 0.7908 & \cdots & 0.5420 \\ 0.7419 & 0.8013 & 0.7676 & 0.5546 & 0.8249 & \cdots & 0.9183 \\ 0.1029 & 0.2848 & 0.0810 & 0.6815 & 0.3742 & \cdots & 0.3956 \\ 0.7678 & 0.0269 & 0.1581 & 0.2452 & 0.5371 & \cdots & 0.0282 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\ 0.4035 & 0.1278 & 0.9656 & 0.7426 & 0.3496 & \cdots & 0.0485 \end{bmatrix}$$

### 2.10.3 Graphic output for arrays

In this part we will see how to create images from matrices. We will use the previously created M1 and M2.

```
report.set('arrayImageColor',1,'arrayColorbar',1);
imageNames = report.createArrayImage({'M1','M2'});
report.setDefault('array');
report.set('imagePerLine', 2, 'imageOption', 'width=0.4\textwidth');
report.addFigure(imageNames,'Arrays as images');
```

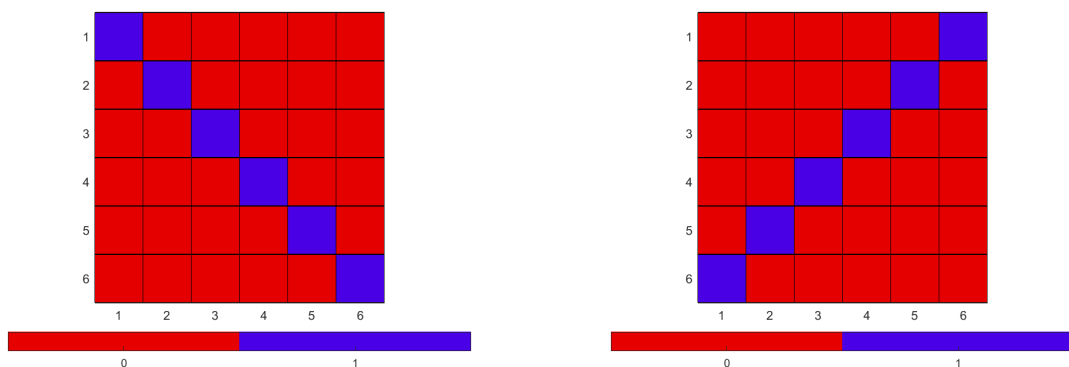


Figure 2.5: Arrays as images

To make one black and white image without the colorbar we will execute the following lines of code. Note how we passed the matrices variable names to the function, we enclosed the cell array with an additional pair of curly brackets to get one figure containing both arrays as images.

```
report.set('arrayImageColor',0,'arrayColorbar',0);
imageNames = report.createArrayImage({'M1','M2'});
report.setDefault('array');
report.addFigure(imageNames,'Arrays as image in bw');
```

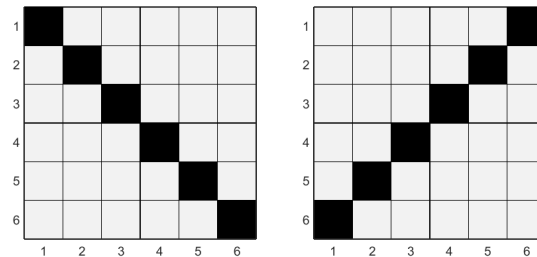


Figure 2.6: Arrays as image in bw

We can also generate images from matrices and arrays of random values, it would look like this for the previously generated matrix **bigM**.

```
report.setDefault('image');
report.set('arrayImageColor', 1, 'arrayColorbar', 1);
imageNames = report.createArrayImage({'bigM'});
report.setDefault('array');
report.addFigure(imageNames, 'Random values as image');
```

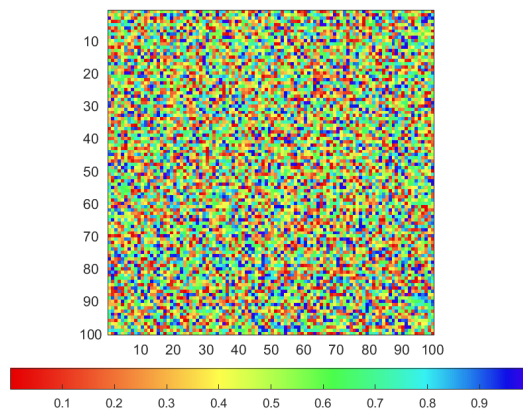


Figure 2.7: Random values as image

Using the previously presented functions some really nice representations can be made. Next you can see an image representation of a magic square, whose sum of every row, column and diagonal is the same.

```
M3 = magic(20);

report.set('arrayImageColor', 1, 'arrayColorbar', 1);
magicM = report.createArrayImage({'M3'});
report.set('imageOption', 'width=0.8\textwidth');

report.addFigure(magicM, 'Magic matrix 20x20');
```

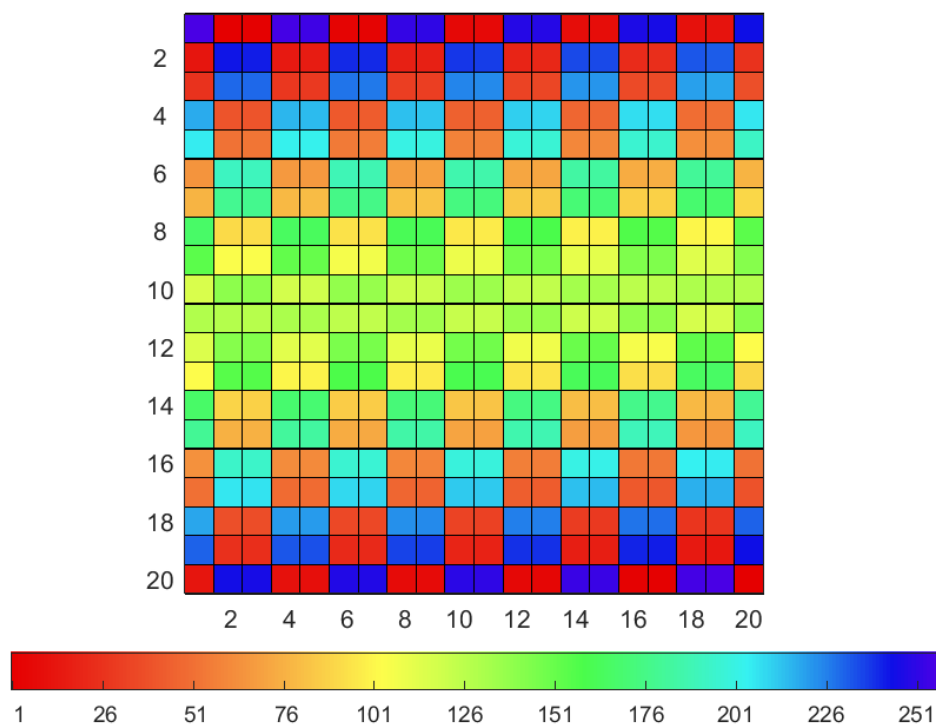


Figure 2.8: Magic matrix 20x20

## 2.11 Function descriptions

To get a good overview of what parameters a function takes in and which it returns back, what types of data each parameter is and a short description can be nicely structured as a table which holds all of that information. You can use the following methods to showcase a function more clearly.

```

myfun = 'exampleFunction.m';
pre = 'This part of the text comes before the table';
typ = {'logical','double','double','string','double'};
desc = {
    '1-D array', ...
    '2-D array', ...
    'scalar', ...
    '1-D array' ...
    'scalar'
};
post = ['this text will be displayed after ' ...
        'the function description'];
report.addFunctionDescription(myfun,typ,desc,pre,post);

```

This part of the text comes before the table

```
function [out1, out2] = exampleFunction(in1, in2, in3)
```

InOut	Name	Type	Description
Input	in1	logical	1-D array
Input	in2	double	2-D array
Input	in3	double	scalar
Output	out1	string	1-D array
Output	out2	double	scalar

this text will be displayed after 'the function description

The type and description can also be extracted from the MATLAB help output for that function

```
function [M1, M2] = matFun(n, V)
```

InOut	Name	Type	Description
Input	n	double	Scalar, determines the size of the output matrices;
Input	V	double	1-D vector of length n
Output	M1	double	Sum of matrices with V on main and anti diagonal
Output	M2	double	Repeated vector V

Just by passing empty strings for `type` and `desc` it will get the data from the help output

That will work only if the description of the function is in a specified format. Next we will see the structure of the description that was typed into the function definition.

```

function [M1, M2] = matFun(n, V)
% [M1, M2] = exampleFunc(n, V)
%
% Input:
% n :: double    :: Scalar, determines the size of
%                  the output matrices;
% V :: double    :: 1-D vector of length n
%
% Output:
% M1 :: double   :: Sum of matrices with V on main
%                  and anti diagonal
% M2 :: double   :: Repeated vector V
%

M1 = diag(V) + fliplr(diag(V));
M2 = repmat(V,[n 1]);

```

## 2.12 Equations

There is also the possibility to add equations in latex syntax, like in the following examples. You can choose between the usual latex equation environments, if you want just one equation pass 'equation' as option, 'align' can display more than one equation and can also align all of them at the & character. If you don't want to enumerate your equations, please add an asterisk to the option (align\*). It is also possible to type the latex code directly into a text file and add it with the paragraph function.

$$\begin{aligned}
\nabla E &= \frac{\rho}{\epsilon_0} \\
\nabla B &= 0 \\
\nabla \times E &= -\frac{\partial B}{\partial t} \\
\nabla \times B &= \mu_0(J + \epsilon_0 \frac{\partial E}{\partial t})
\end{aligned}$$

Or enumerated

$$\cos(x)^2 = \frac{1}{2}(1 + \cos(2x)) \quad (2.1)$$

(2.2)

## 2.13 Zip project files

Executing this function will create a zip file containing all of the relevant project data in your current working directory. You can specify the name of the zip file that is to be made if not, a generic name will be used.

```
report.zipFiles('myZippedFiles');
```

## 2.14 Generating and viewing

At the end we have to first export a latex document, then generate an output file from it. That can be done with the **export** and **generate** functions. If you want the program to automatically open the file, please set the **outputViewer** parameter appropriate so it works with your system.

- **start** [filename] (Windows)
- **open** [filename] (MAC OS)
- **xdg-open** [filename] (Linux)

The default settings are set up for a machine running Windows but it is fairly easy and quick to change the basic parameters to get it running on other systems. All of the files used to generate this documentation are available in the **reportingDocu** folder, the main matlab file is **reportingDocu.m**.

# Chapter 3

## Template

You can find a template project directory provided, `reportTemplate`, the following files can be found in it and can be edited to fit your needs.

`-mainMatlab` : main MATLAB file which holds the code that ties everything together, please note that it is not necessary to do everything inside of this template, the only thing that is important is to have all of the files necessary at the right places, that is why we made this template. The main advantage of such a tool is that you use it in projects where you need a self generating report, it sure helps avoiding manually typing the data every time we maybe change some parameters.

`-setting.dat` : is a file which you need in every project because it holds all of the important parameters and settings for the programs to work, you can adjust it to your liking just as the other files by directly changing it or by using the `set` function.

`-myTextBlocks.tex` : is a `.tex` file which is used to hold blocks of plain text or specific latex syntax, which you can access using the

`-myMatlabBlocks.m` : is a `.m` file which holds MATLAB code that is also separated with the

`-myMatlabInit.m` : MATLAB init file, gets executed at the start, you can specify project dependant settings like the style of MATLAB figures

`-startup.m` : MATLAB startup file, needs to have the path to `latexmk` replaced with the path on your machine, it is needed to add this path to the MATLAB search path it is not necessary to use this file for that