

Training BaryonBridge (Sec. 2.1–2.3)

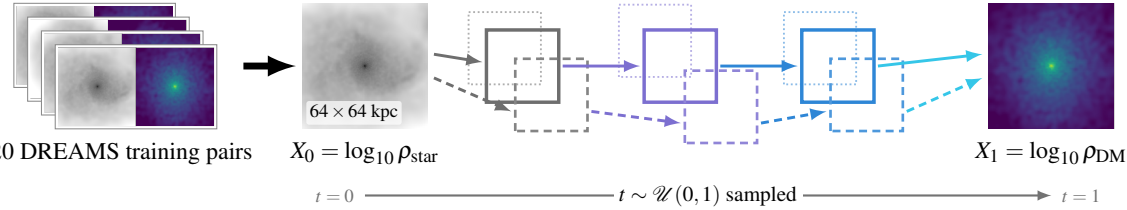

Objective: the U-Net $v_\theta(X_t, X_0, t)$ matches the target velocity $r_t = \dot{X}_t$

$X_t(X_0, X_1, t)$ is formed directly from the endpoint pair at a random t

Testing (Sec. 2.4, 3.2–3.3)

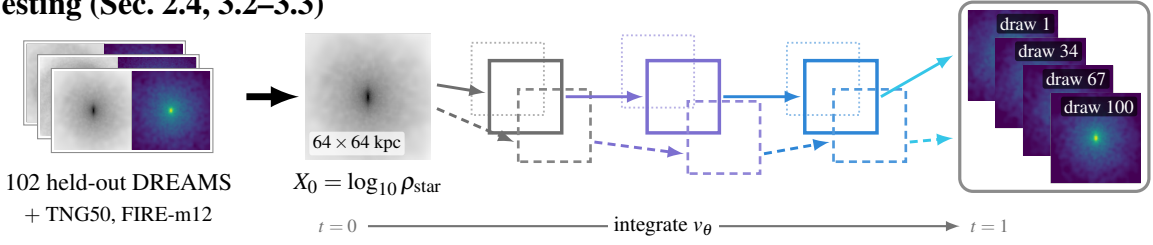

Inference: independent noise each run $\Rightarrow$ 100 draws from $p(X_1 \mid X_0)$