

JavaScript

1

1



src: <https://bootcamp.berkeley.edu/blog/most-in-demand-programming-languages/>

2

2

Content

- Scripts
 - common tasks for client-side scripts
- JavaScript
 - data types & expressions
 - control statements
 - functions & libraries
 - date, document, string, array, user-defined classes

3

3

Client-Side Programming

- HTML is good for developing static pages
 - can specify text/image layout, presentation, links, ...
 - Web page looks the same each time it is accessed
- Client-side programming
 - programs are written in a separate programming (or scripting) language, e.g., JavaScript,
 - programs are embedded in the HTML of a Web page, with (HTML) tags to identify the program component
 - the browser executes the program as it loads the page, integrating the dynamic output of the program with the static content of HTML
 - could also allow the user (client) to input information and process it, might be used to validate input before it's submitted to a remote server

4

4

Common Scripting Tasks

- adding dynamic features to Web pages
 - validation of form data
 - image rollovers
 - time-sensitive or random page elements
 - handling cookies
- defining programs with Web interfaces
 - utilize buttons, text boxes, clickable images, prompts, etc
- limitations of client-side scripting
 - since script code is embedded in the page, it is viewable to the world
 - for security reasons, scripts are limited in what they can do

5

5

JavaScript/ ECMAScript

- **ECMA International**
 - European Computer Manufacturers Association
 - Non-profit organization that develops standards in computer hardware, communications, and programming languages.
- JavaScript: A general purpose scripting language that conforms to the ECMAScript specification
- 1997: ECMA-262 standard
- 2022: ECMAScript 13 was released in June 2022

6

6

JavaScript

- Javascript is a lightweight, interpreted or just-in-time compiled programming language
- Many non-browser environments use it such as Node.js, Apache CouchDB, Adobe Acrobat
- Client-side: JS can run on browsers as a scripting language that allows you to create dynamically updating content, control multimedia, animate images,...
- Server-side: JS can run on server side with the appearance of NodeJS – a Javascript runtime environment.

7

7

JavaScript

```
<html>
<!-- CS443 js01.html 16.08.06 -->

<head>
  <title>JavaScript Page</title>
</head>

<body>
  <script type="text/javascript">
    // silly code to demonstrate output

    document.write("<p>Hello world!</p>");

    document.write(" <p>How are <br/> " +
                  " <i>you</i>?</p> ");
  </script>

  <p>Here is some static text as well.</p>
</body>
</html>
```

[view page](#)

- Use <script> tag to add Javascript code to a page
- document.write displays text in the page
 - text to be displayed can include HTML tags
- JavaScript comments similar to C++/Java

// starts a single line comment
 /*...*/ enclose multi-line comments

8

8

JavaScript Data Types & Variables

```
<html>
<!-- CS443 js02.html 16.08.06 -->

<head>
  <title>Data Types and Variables</title>
</head>
<body>
  <script type="text/javascript">
    var x, y;
    x = 1024;

    y=x; x = "foobar";
    document.write("<p>x = " + y + "</p>");
    document.write("<p>x = " + x + "</p>");
  </script>
</body>
</html>
```

[view page](#)

- JavaScript has 7 primitive data types
 - String* : "foo" 'how do you do?' "I said 'hi'."
 - Number*: 12 3.14159 1.5E6
 - Bigint* (ES2020, số > 2⁵³ -1): 9007199254740991n
 - Boolean* : true false
 - Undefined*: undefined
 - Symbol*: s = Symbol('first name');
 - null*: null

variable names are sequences of letters, digits, an underscores that start with a letter or an underscore, case sensitive

9

9

JavaScript Declaration

- var: function scope or global scope

```
if (true) {
  var noBlockScope = true;
}
console.log(noBlockScope)
=> true
```

```
function foo_a() {
  var functionScope = true;
}
foo_a()
console.log(functionScope)
=> Uncaught ReferenceError: functionScope is not defined
```

- let: block scope

```
if (true) {
  let functionScope = true;
}
console.log(functionScope)
=> Uncaught ReferenceError: functionScope is not defined
```

- const: same as let, except the user cannot update it

10

10

JavaScript Operators & Control Statements

```
<html>
<!-- CS443 js03.html 08.10.10 -->

<head>
  <title>Folding Puzzle</title>
</head>

<body>
  <script type="text/javascript">
    const distanceToSun = 93.3e6*5280*12;
    let thickness = .002;

    let foldCount = 0;
    while (thickness < distanceToSun) {
      thickness *= 2;
      foldCount++;
    }
    document.write("Number of folds = " +
      foldCount);
  </script>
</body>
</html>
```

[view page](#)

standard C++/Java operators & control statements are provided in JavaScript

- +, -, *, /, %, ++, --, ...
- ==, !=, <, >, <=, >=
- &&, ||, !, ===, !==
- if, if-else, switch
- while, for, do-while, ...

PUZZLE: Suppose you took a piece of paper and folded it in half, then in half again, and so on.

How many folds before the thickness of the paper reaches from the earth to the sun?

11

11

Interactive Pages Using Prompt

```
<html>
<!-- CS443 js05.html 08.10.10 -->
<head>
  <title>Interactive page</title>
</head>
<body>
  <script type="text/javascript">
    let userName = prompt("What is your name?",
      "");
    let userAge = prompt("Your age?", "");
    let userAge = parseFloat(userAge);
    document.write("Hello " + userName + ".")
    if (userAge < 18) {
      document.write(" Do your parents know "
        + "you are online?");
    }
    else {
      document.write(" Welcome friend!");
    }
  </script>
  <p>The rest of the page...</p>
</body>
</html>
```

[view page](#)

crude user interaction can take place using prompt

1st argument: the prompt message that appears in the dialog box

2nd argument: a default value that will appear in the box (in case the user enters nothing)

the function returns the value entered by the user in the dialog box (a string)

if value is a number, must use **parseFloat** (or **parseInt**) to convert

12

12

User-Defined Functions

- function definitions are similar to C++/Java, except:
 - no return type for the function (since variables are loosely typed)
 - no variable typing for parameters (since variables are loosely typed)
 - by-value parameter passing only (parameter gets copy of argument)

```
function isPrime(n)
// Assumes: n > 0
// Returns: true if n is prime, else false
{
  if (n < 2) {
    return false;
  }
  else if (n == 2) {
    return true;
  }
  else {
    for (let i = 2; i <= Math.sqrt(n); i++) {
      if (n % i == 0) {
        return false;
      }
    }
    return true;
  }
}
```

13

13

Function Example

```
<html>
<!-- CS443 js06.html 16.08.2006 -->
<head>
  <title>Prime Tester</title>
  <script type="text/javascript">
    function isPrime(n)
      // Assumes: n > 0
      // Returns: true if n is prime
      {
        // CODE AS SHOWN ON PREVIOUS SLIDE
      }
  </script>
</head>
<body>
  <script type="text/javascript">
    testNum = parseFloat(prompt("Enter a positive integer",
    "7"));
    if (isPrime(testNum)) {
      document.write(testNum + " <b>is</b> a prime number.");
    }
    else {
      document.write(testNum + " <b>is not</b> a prime
    number.");
    }
  </script>
</body>
</html>
```

[view page](#)

Function definitions (usually) go in the **<head>** section

<head> section is loaded first, so then the function is defined before code in the **<body>** is executed

14

14

15

- 16

JavaScript Libraries

better still: if you define functions that may be useful to many pages, store in a separate library file and load the library when needed load a library using the **src** attribute in the **script** tag (put nothing between the beginning and ending tags)

```
<script type="text/javascript"
      src="random.js">
</script>
```

17

17

Library Example

```
<html>
<!-- CS443 js08.html 11.10.2011 -->
<head>
  <title> Random Dice Rolls Revisited</title>

  <script type="text/javascript"
    src="random.js">
  </script>
</head>
<body>
  <div style="text-align: center">
    <script type="text/javascript">
      roll1 = randomInt(1, 6);
      roll2 = randomInt(1, 6);
      document.write("<img src='http://www.csc.liv.ac.uk/'+"
        "~martin/teaching/CS443/Images/die" +
        roll1 + ".gif'/">");

      document.write("&nbsp;&nbsp;&nbsp;");
      document.write("<img src='http://www.csc.liv.ac.uk/'+"
        "~martin/teaching/CS443/Images/die" +
        roll2 + ".gif'/">");

    </script>
  </div>
</body>
</html>
```

[view page](#)

18

18


Objects

Objects are used to store keyed collections of various data and more complex entities. An object contains list of properties. A property is a “key:value” pair, where key is a string and value can be anything.

```
1 let user = new Object(); // "object constructor" syntax
2 let user = {}; // "object literal" syntax
```




```
1 let user = { // an object
2   name: "John", // by key "name" store value "John"
3   age: 30 // by key "age" store value 30
4 };
5 console.log(user.name) // John
6 console.log(user.age) // 30
```




19

Objects

```
1 user.isAdmin = true;
```



```
1 delete user.age
```




20

Objects

```

1 let user = {
2   name: "John",
3   age: 30,
4   "likes birds": true // multiword property
                        name must be quoted
5 };
6 console.log(user.like birds) // syntax error
7 console.log(user["like birds"]) //true

```



21

Object references

```

1 let message = "Hello!";
2 let phrase = message;


```



```

1 let user = { name: "John" };
2
3 let admin = user; // copy the reference
4
5 admin.name = "Peter"
6 console.log(user.name) // Peter


```

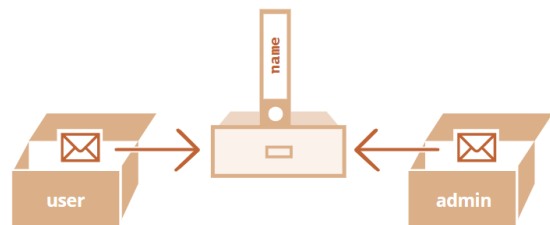


22

Garbage collection

```
1 // user has a reference to the object
2 let user = {
3   name: "John"
4 };
```




```
1 // object has no reference, garbage collector
  will junk the data and free the memory
2 user = null;
```




23

Garbage collection

```
1 let user = {
2   name: "John"
3 };
4
5 let admin = user;
6 user = null; // object is still reachable via
  admin variable, so it must stay in memory
```




```
1 function marry(man, woman) {
2   woman.husband = man
3   man.wife = woman
4
5   return {
6     father: man,
7     mother: woman,
8   }
9 }
10
11 let family = marry(
12   {name: 'John'},
13   {name: 'Ann'}
14 )
15
```

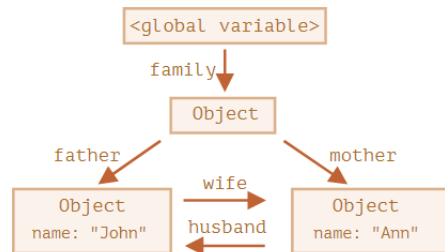


24

Garbage collection

```
1 delete family.father;
2 delete family.mother.husband;
3 // if we remove only one reference, all objects
  would still be reachable. But if we delete both,
  John has no incoming reference and will be junk.
```

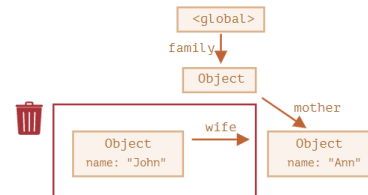

```
1 family = null; // family object has been unlinked
  from root, so the whole island becomes unreachable
  and will be removed
```

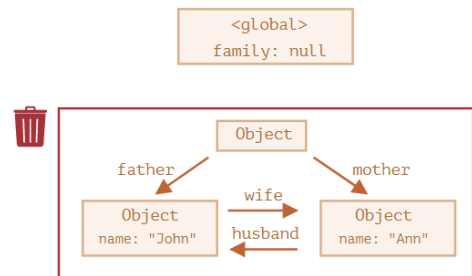

25

String Object

- a String object encapsulates a sequence of characters, enclosed in quotes. Properties include
 - length : stores the number of characters in the string methods include
 - charAt(index): returns the character stored at the given index
 - substring(start, end): returns the part of the string between the start (inclusive) and end (exclusive) indices
 - toUpperCase(): returns copy of string with letters uppercase
 - toLowerCase(): returns copy of string with letters lowercase

to create a string, assign using new or (in this case) just make a direct assignment (new is implicit)

```
• word = new String("foo");   word = "foo";
```

properties/methods are called exactly as in C++/Java

```
• word.length           word.charAt(0)
```

26

26

String example: Palindromes

```
function strip(str)
// Assumes: str is a string
// Returns: str with all but letters removed
{
  let copy = "";
  for (let i = 0; i < str.length; i++) {
    if ((str.charAt(i) >= "A" && str.charAt(i) <= "Z")
    ||
      (str.charAt(i) >= "a" && str.charAt(i) <= "z"))
    {
      copy += str.charAt(i);
    }
  }
  return copy;
}

function isPalindrome(str)
// Assumes: str is a string
// Returns: true if str is a palindrome, else false
{
  str = strip(str.toUpperCase());

  for(let i = 0; i < Math.floor(str.length/2); i++) {
    if (str.charAt(i) != str.charAt(str.length-i-1)) {
      return false;
    }
  }
  return true;
}
```

suppose we want to test whether a word or phrase is a palindrome

noon Radar
Madam, I'm Adam.

must strip non-letters out of the word or phrase

make all chars uppercase in order to be case-insensitive

finally, traverse and compare chars from each end

27

27

```
<html>
<!-- CS443 js09.html 11.10.2011 -->
<head>
<title>Palindrome Checker</title>
<script type="text/javascript">
  function strip(str)
  {
    // CODE AS SHOWN ON PREVIOUS SLIDE
  }
  function isPalindrome(str)
  {
    // CODE AS SHOWN ON PREVIOUS SLIDE
  }
</script>
</head>
<body>
<script type="text/javascript">
  text = prompt("Enter a word or phrase", "Madam, I'm Adam");
  if (isPalindrome(text)) {
    document.write("'" + text + "' <b>is</b> a palindrome.");
  }
  else {
    document.write("'" + text + "' <b>is not</b> a
palindrome.");
  }
</script>
</body>
</html>
```

[view page](#)

28

28

Math Object

```
<html>
<!-- CS443 js04.html 08.10.10 -->
<head>
  <title>Random Dice Rolls</title>
</head>
<body>
  <div style="text-align:center">
    <script type="text/javascript">
      let roll1 = Math.floor(Math.random()*6) + 1;
      let roll2 = Math.floor(Math.random()*6) + 1;
      document.write("<img
src='http://www.csc.liv.ac.uk/'+
      "~martin/teaching/CS443/Images/die" +
      roll1 + ".gif" alt='dice showing ' +
roll1 />");
      document.write("&nbsp;&nbsp;&nbsp;");
      document.write("<img
src='http://www.csc.liv.ac.uk/'+
      "~martin/teaching/CS443/Images/die" +
      roll2 + ".gif" alt='dice showing ' +
roll2 />");
    </script>
  </div>
</body>
</html>
```

[view page](#)

the built-in Math object contains functions and constants

Math.sqrt
 Math.pow
 Math.abs
 Math.max
 Math.min
 Math.floor
 Math.ceil
 Math.round

Math.PI
 Math.E

Math.random function returns a real number in [0..1)

29

29

Math Object

- ceil(4.7)=? 5
- floor(4.7)=? 4
- round(4.7)=? 5

- ceil(4.2)=? 5
- floor(4.2)=? 4
- round(4.2)=? 4

30

30

Arrays

- Arrays store a sequence of items, accessible via an index
 - since JavaScript is loosely typed, elements do not have to be the same type
 - to create an array, allocate space using `new` (or can assign directly)


```
items = new Array(10); // allocates space for 10 items
items = new Array();   // if no size given, will adjust dynamically
items = [0,0,0,0,0,0,0,0,0,0]; // can assign size & values []
```
 - to access an array element, use `[]` (as in C++/Java)


```
for (i = 0; i < 10; i++) {
    items[i] = 0; // stores 0 at each index
}
```
 - the `length` property stores the number of items in the array


```
for (i = 0; i < items.length; i++) {
    document.write(items[i] + "<br>"); // displays elements
}
```

31

31

Array Example

```
<html>
<!-- CS443 js10.html 11.10.2011 -->
<head>
  <title>Dice Statistics</title>
  <script type="text/javascript"
src="http://www.csc.liv.ac.uk/~martin/teaching/CS443/JS/ran
om.js">
  </script>
</head>
<body>
  <script type="text/javascript">
    const numRolls = 60000;
    const diceSides = 6;
    let rolls = new Array(diceSides+1);
    for (i = 1; i < rolls.length; i++) {
        rolls[i] = 0;
    }
    for(i = 1; i <= numRolls; i++) {
        rolls[randomInt(1, diceSides)]++;
    }
    for (i = 1; i < rolls.length; i++) {
        document.write("Number of " + i + "'s = " +
            rolls[i] + "<br />");
    }
  </script>
</body>
</html>
```

[view page](#)

suppose we want to simulate dice rolls and verify even distribution

keep an array of counters:

-initialize each count to 0

-each time you roll X, increment rolls[X]

-display each counter

32

32

Arrays (cont.)

- Arrays have predefined methods that allow them to be used as stacks, queues, or other common programming data structures.

```
var stack = new Array();
stack.push("blue");
stack.push(12);           // stack is now the array ["blue", 12]
stack.push("green");      // stack = ["blue", 12, "green"]
var item = stack.pop();    // item is now equal to "green"

var q = [1,2,3,4,5,6,7,8,9,10];
item = q.shift();          // item is now equal to 1, remaining
                           // elements of q move down one position
                           // in the array, e.g. q[0] equals 2
q.unshift(125);           // q is now the array [125,2,3,4,5,6,7,8,9,10]
q.push(244);              // q = [125,2,3,4,5,6,7,8,9,10,244]
```

33

33

Date Object

- String & Array are the most commonly used objects in JavaScript
 - other, special purpose objects also exist
- the Date object can be used to access the date and time
 - to create a Date object, use new & supply year/month/day/... as desired
- methods include:

```
newYear.getFullYear()    can access individual components of a date
newYear.getMonth()       number (0, 11)
newYear.getDay()         number (1, 31)
newYear.getHours()       number (0, 23)
newYear.getMinutes()     number (0, 59)
newYear.getSeconds()     number (0, 59)
newYear.getMilliseconds() number (0, 999)
```

34

34

Date Example

```
<html>
<!-- CS443  js11.html  16.08.2006 -->
<head>
  <title>Time page</title>
</head>
<body>
  Time when page was loaded:
  <script type="text/javascript">
    now = new Date();
    document.write("<p>" + now + "</p>");
    time = "AM";
    hours = now.getHours();
    if (hours > 12) {
      hours -= 12;
      time = "PM"
    }
    else if (hours == 0) {
      hours = 12;
    }
    document.write("<p>" + hours + ":" +
      now.getMinutes() + ":" +
      now.getSeconds() + " " +
      time + "</p>");
  </script>
</body>
</html>
```

[view page](#)

by default, a date will be displayed in full,
e.g.,

Sun Feb 03 22:55:20 GMT-0600 (Central
Standard Time) 2002

can pull out portions of the date using the
methods and display as desired

here, determine if "AM" or "PM" and
adjust so hour between 1-12

10:55:20 PM

35

35

Another Example

```
<html>
<!-- CS443  js12.html  12.10.2012 -->
<head>
  <title>Time page</title>
</head>
<body>
  <p>Elapsed time in this year:
  <script type="text/javascript">
    now = new Date();
    newYear = new Date(2012,0,1);
    secs = Math.round((now-newYear)/1000);
    days = Math.floor(secs / 86400);
    secs -= days*86400;
    hours = Math.floor(secs / 3600);
    secs -= hours*3600;
    minutes = Math.floor(secs / 60);
    secs -= minutes*60
    document.write(days + " days, " +
      hours + " hours, " +
      minutes + " minutes, and " +
      secs + " seconds.");
  </script>
  </p>
</body>
</html>
```

[view page](#)

you can add and subtract Dates:
the result is a number of milliseconds

here, determine the number of
seconds since New Year's day
(note: January is month 0)

divide into number of days, hours,
minutes and seconds

36

36

Document Object

Internet Explorer, Firefox, Opera, etc. allow you to access information about an HTML document using the **document** object

```
<html>
<!-- CS443 js13.html 2.10.2012 -->
<head>
  <title>Documentation page</title>
</head>
<body>
  <table width="100%">
    <tr>
      <td><i>
        <script type="text/javascript">
          document.write(document.URL);
        </script>
      </i></td>
      <td style="text-align: right;"><i>
        <script type="text/javascript">
          document.write(document.lastModified);
        </script>
      </i></td>
    </tr>
  </table>
</body>
</html>
```

view page

`document.write(...)`

method that displays text in the page

`document.URL`

property that gives the location of the HTML document

`document.lastModified`

property that gives the date & time the HTML document was last changed

37

37

User-Defined Objects

- User can create a class by using keyword "class"

```
class ClassName {
  constructor() { ... }
  method_1() { ... }
  method_2() { ... }
  method_3() { ... }
}
```

```
class Car {
  constructor(name, year) {
    this.name = name;
    this.year = year;
  }
  age() {
    const date = new Date();
    return date.getFullYear() - this.year;
  }
}
```

```
const myCar = new Car("Ford", 2014);
document.getElementById("demo").innerHTML =
  "My car is " + myCar.age() + " years old.";
```

38

38

39

40

HTML Events: *onclick* (cont.)

```
<!DOCTYPE html>
<html>
<body>
<h1>JavaScript HTML Events</h1>
<h2>The onclick Attribute</h2>

<p>Click the button to display the date.</p>
<button onclick="displayDate()">The time is?</button>

<script>
function displayDate() {
    document.getElementById("demo").innerHTML = Date();
}
</script>

<p id="demo"></p>

</body>
</html>
```

Applying javascript function in catching event, for complicate manipulation:

- Defining function
- Call the function by event fired

[view page](#)

41

41

HTML Form input values

```
<!DOCTYPE html>
<html><head>
<script>
function validateForm() {
    let x = document.forms["myForm"]["fname"].value;
    if (x == "") {
        alert("Name must be filled out");
        return false;
    }
}
</script>
</head>
<body>
<h2>JavaScript Validation</h2>

<form name="myForm" action="/action_page.php" onsubmit="return
validateForm()" method="post">
    Name: <input type="text" name="fname">
    <input type="submit" value="Submit">
</form>

</body>
</html>
```

- Catching **onsubmit** event
- Access the form's fields value
- Note: **onclick** event of the button can be used, instead of form event

[view page](#)

42

42