Database Documentation

T's Travel — Client Site | isaaccra_clientsite

Author: Isaac Crft
Course: CSC372
Database: isaaccra_clientsite
Tables: trips, inquiries

Table 1: trips

Overview

Purpose: Stores the four travel packages offered by T's Travel

Data stored: Trip name, type, description, price per person, and max group size

Supports the site: The four rows match the four radio button options on the inquiry form on destinations.php — adventure, relaxation, cultural, and family

Relates to: inquiries — one trip can have many inquiries (one-to-many). The trips.trip_id column is referenced as a foreign key in the inquiries table

Column Structure

Column Name	Data Type	Size	Key	Notes
trip_id	INT	11	PRIMARY KEY	Auto-increments with each new trip
trip_name	VARCHAR	100	—	Full display name of the package
trip_type	VARCHAR	20	—	Matches radio button: adventure / relaxation / cultural / family
description	TEXT	—	—	Long-form description of the package
price_per_person	DECIMAL	10,2	—	Cost per traveler, e.g. 1299.99
max_travelers	INT	11	—	Maximum group size allowed

Sample Data — phpMyAdmin Screenshot

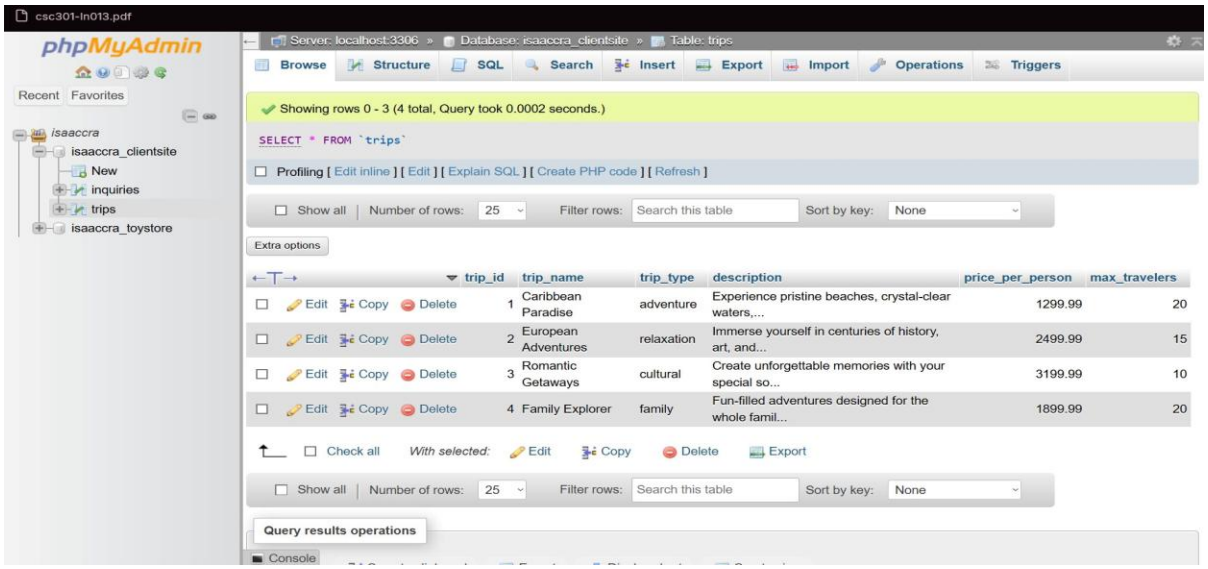

Sample Data — Rows

ID	Trip Name	Type	Description	Price	Max
1	Caribbean Paradise	adventure	Experience pristine beaches...	1299.99	20
2	European Adventures	relaxation	Immerse yourself in centuries...	2499.99	15
3	Romantic Getaways	cultural	Create unforgettable memories...	3199.99	10
4	Family Explorer	family	Fun-filled adventures for families	1899.99	20

Table 2: inquiries

Overview

Purpose: Stores every trip inquiry submitted through the Plan Your Trip form on destinations.php

Data stored: The linked trip (trip_id), the selected trip type, the visitor's full name, number of travelers, and the submission timestamp

Supports the site: When the form validates successfully, a new row is inserted here — allowing T's Travel to review and respond to all customer inquiries

Relates to: trips — the trip_id column is a foreign key referencing trips.trip_id, linking each inquiry to a specific package. This enforces referential integrity at the database level

Column Structure

Column Name	Data Type	Size	Key	Notes
inquiry_id	INT	11	PRIMARY KEY	Auto-increments with each submission
trip_id	INT	11	FOREIGN KEY → trips	Links this inquiry to a specific trip package
trip_type	VARCHAR	20	—	Radio button value submitted on the form
full_name	VARCHAR	50	—	Visitor name — matches is_valid_text(2, 50)
travelers	INT	11	—	Party size — matches is_valid_number(1, 20)
submitted_at	DATETIME	—	—	Auto-recorded timestamp of submission

Sample Data — phpMyAdmin Screenshot

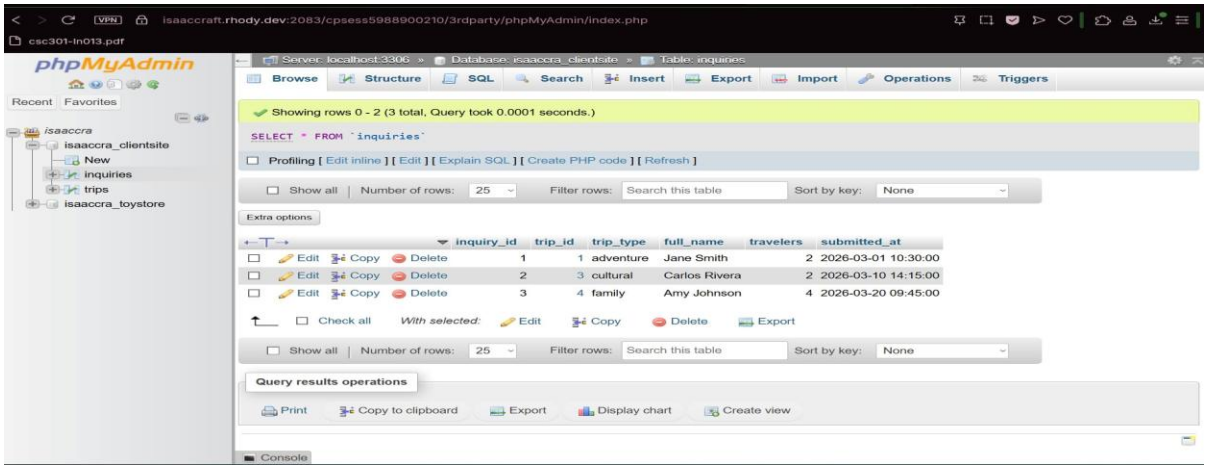

Sample Data — Rows

ID	Trip ID	Trip Type	Full Name	Travelers	Submitted At
1	1	adventure	Jane Smith	2	2026-03-01 10:30:00
2	3	cultural	Carlos Rivera	2	2026-03-10 14:15:00
3	4	family	Amy Johnson	4	2026-03-20 09:45:00

Table Relationship Summary

The two tables share a one-to-many relationship:

- One trip can have many inquiries submitted for it

- inquiries.trip_id is a FOREIGN KEY referencing trips.trip_id
- The foreign key constraint prevents an inquiry from referencing a trip_id that does not exist in the trips table
- trip_type is stored in both tables — in trips as the canonical value, and in inquiries as a snapshot of what the visitor selected so the record is self-contained

```
trips (trip_id PK)  ←—  inquiries (trip_id FK)
```