

DBAT — The Damped Bundle Adjustment Toolbox for Matlab v0.7.0.0

Niclas Börnin¹ and Pierre Grussenmeyer²

¹Department of Computing Science, Umeå University, Sweden,
`niclas.borlin@cs.umu.se`

²ICube Laboratory UMR 7357, Photogrammetry and Geomatics Group,
INSA Strasbourg, France,
`pierre.grussenmeyer@insa-strasbourg.fr`

Nov 24, 2017

With contributions from

- Arnaud Durand, ICube-SERTIT, INSA Strasbourg.
- Jan Hieronymus, TU Berlin.
- Jean-François Hullo, EDF.
- Arnadi Murtiyoso, ICube, INSA Strasbourg.
- Kostas Naskou, University of Nottingham.

Contents

1	Introduction	3
1.1	Purpose	3
1.2	Contents	3
1.2.1	Code	3
1.2.2	Data	4
1.3	Legal	4
2	Installation	5
3	Usage	5
3.1	Demos	5
3.1.1	Plotting	5
3.1.2	Camera calibration	5
3.1.3	Bundle adjustment	12
3.2	Using your own data	13
3.2.1	Photoscan	13
3.2.2	PhotoModeler	13
A	Appendices	16
A.1	Enabling text export from PhotoModeler	16
A.2	Camera model	16
A.3	Result file example	16

1 Introduction

1.1 Purpose

This purpose of the Damped Bundle Adjustment toolbox is to be a high-level toolbox for photogrammetry in general and bundle adjustment in particular. It is the hope of the authors that the high-level nature of the code will inspire algorithm development. The code is written in Matlab and is verified to work with Matlab version 8.6 (release R2015b). The intention is that at least the computation routines will be Octave-compatible. This has however not been tested yet.

1.2 Contents

1.2.1 Code

The toolbox currently includes routines for (Matlab function names within parentheses):

- File handling:
 - Reading PhotoModeler-style text export files (`loadpm`), and 2D/3D point table exports files (`loadpm2dtbl` and `loadpm3dtbl`, respectively).
 - Reading PhotoScan native (.psz) files (`loadpsz`).
 - Writing PhotoModeler-style text result files (`bundle_result_file`).
- Post-processing:
 - Post-processing of PhotoScan projects (`ps_postproc`). Includes object point filtering on low ray count and low intersection angles. For self-calibration post-processing, see the help text for `ps_postproc`.
 - As of version 0.7.0.0, DBAT supports both lens distortion models used by Photomodeler and Photoscan.
- Photogrammetric calculations, including:
 - Spatial resection (`resect`).
 - Forward intersection (`forwintersect`).
 - Absolute orientation (`rigidbody`).
 - Relative orientation based on the Nistér 5-point algorithm (Stewénus et al., 2006) will be added in the future.
- Bundle adjustment
 - Bundle adjustment proper (`bundle`), with or without self-calibration, using either Classical Gauss-Markov, Gauss-Newton-Armijo, Levenberg-Marquardt, or Levenberg-Marquardt-Powell damping schemes (Börnin and Grussenmeyer, 2013a, 2014, 2016).

- Covariance calculations (`bundle_cov`) from the bundle result.
- Various plotting functions, including:
 - Plot image covered by measurements (`plotcoverage`).
 - Plot camera network (`plotnetwork`), either static (as-loaded) or as an illustration of the bundle iterations.
 - Plot .psz project (`loadplotpsz`).
 - Plot of the iteration trace of parameters estimated by bundle (`plotparams`).
 - Plots of quality statistics from the bundle result (`plotimagestats`, `plotopstats`).
- Demo functions using the above functions. The demo functions are detailed in Section 3.1. The available demos are listed by executing the command `help dbatdemos`.

This manual does not contain detailed information about how to use each function. More information may be found by typing `help <function name>` at the Matlab prompt, studying the source code of the demo functions, and reading the source code of each file directly.

1.2.2 Data

The toolbox contains several datasets, including datasets for the Börlin and Grussenmeyer (2016); Murtyyoso et al. (2017) papers.

- PhotoModeler export files or PhotoScan projects.
- Images. To reduce the size of the distribution package, only low resolution images are included in the package¹. The corresponding high resolution images can be downloaded from http://www.cs.umu.se/~niclas/dbat_images. Further instructions are found in `README.txt` files in the respective image directories.

The simplest way to access the data sets is through the demos, described in Section 3.1.

1.3 Legal

The licence detail are described in the `LICENSE.txt` file included in the distribution. In summary:

- You use the code at your own risk.
- You may use the code for any purpose, including commercial, as long as you give due credit. Specifically, if you use the code, or derivatives thereof, for scientific publications, you should refer to on or more of the papers Börlin and Grussenmeyer (2013a,b, 2014, 2016) that the code is based on.
- You may modify and redistribute the code as long as the licensing details are also redistributed.

¹No images are included in the StPierre data set.

2 Installation

```
# == INSTALLATION ==
#
# 1) Download the package file dbat-x.y.z.zip or dbat-x.y.z.tar.gz
#    from https://github.com/niclasborlin/dbat/
#
# 2) Unpack the file into a directory, e.g. c:\dbat or ~/dbat.
#
# 3) Start Matlab. Inside Matlab, do the following initialization:
# 3.1) cd c:\dbat % (change to where you unpacked the files)
# 3.2) dbatSetup % will set the necessary paths, etc.
#
# 4) To test the demos, do 'help dbatdemos' or consult the manual.
#
#
# ===== Download high-resolution images =====
#
# To reduce the size of the repository and hence download times, only
# low-resolution images are included in the repository. High-resolution
# images can be downloaded from http://www.cs.umu.se/~niclas/dbat_images/.
# For further details, consult the README.txt files in the respective
# image directories.
#
#
```

3 Usage

3.1 Demos

Hint: You may wish to use the command `close all` between the demos to close all windows.

3.1.1 Plotting

The `loadplotdemo` function load and plots the content of a PhotoModeler text export file. Two examples are included in the toolbox: ROMA and CAM.

ROMA `loadplotdemo('roma')` loads a modified PhotoModeler text export file of the 60-camera, 26000-point project used in Börlin and Grussenmeyer (2013a). The camera network, as computed by PhotoModeler, is plotted with camera 1 aligned to the cardinal axes. The result should look like Figure 1. The figure is a standard Matlab 3D figure and may e.g. be rotated or zoomed using the camera toolbar.

CAM `loadplotdemo('cam')` demo loads a modified PhotoModeler text export file of a 21-camera, 100-point camera calibration project. The camera network, as computed by PhotoModeler, is plotted and should look like Figure 2. The figure is a standard Matlab 3D figure and may e.g. be rotated or zoomed using the camera toolbar.

3.1.2 Camera calibration

The `camcaldemo` demo loads the camera calibration export file from Section 3.1.1 and runs a camera calibration. The EXIF focal length is used as the initial value. The

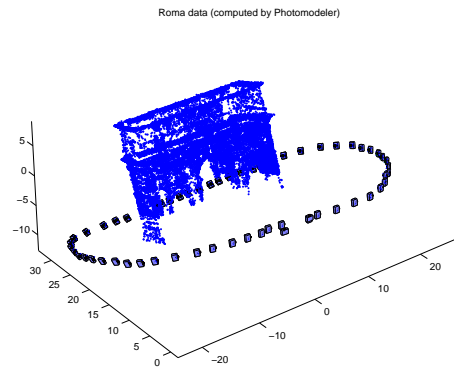


Figure 1: The figure generated by the `loadplotdemo` demo.

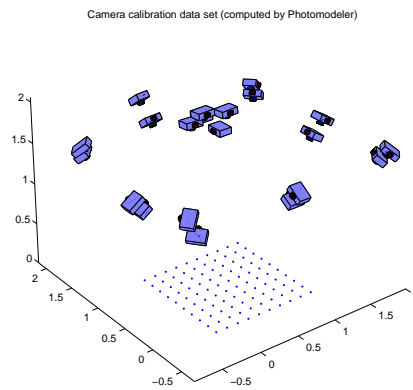


Figure 2: The figure generated by the `loadplotdemo2` demo.

other values are set to “default” values, e.g. the principal point at the center of the sensor and all lens distortion parameters equal to zero. The initial value for the EO parameters are computed by spatial resection (Haralick et al., 1994; McGlone et al., 2004, Chap. 11.1.3.4) using the control points defined for the PhotoModeler calibration sheet. The initial OP coordinates are subsequently computed by forward intersection.

The bundle adjustment is run with Gauss-Newton-Armijo damping (Börlin and Grussenmeyer, 2013a). The result is given in a number of plot windows and a Photo-modeler-style result text file. The result plots are of two kinds: Plots that show the evolution of the iterations and plots that show the quality of the input or output data. The former plots may be useful to understand how the bundle adjustment works but also to “debug” a difficult network that has convergence difficulties. The latter plots give information about the quality of the result and may also provide clues on how to improve a network when the bundle did converge.

Evolution plots The evolution plots are collected in figures 3–7. Figure 3 shows a snapshot of the 3D trace figure at the beginning and end of the iterations. As default, the evolution is presented iteration by iteration with intervening presses of the return key. The figure window is interactive and may be rotated, zoomed, etc. In this example, it is clear in Figure 3b that one camera station had poorer initial values than the rest.


Figures 4–6 contain three plots showing the evolution of the internal orientation (IO), external orientation (EO), and object point (OP), respectively, during the iterations. The IO plot is split into a focal/principal point panel and a radial and tangential distortion panel, where the radial distortion parameters are scaled to provide more information. The EO plot contains a camera center panel and an ω - ϕ - κ Euler angle panel. The EO and OP plots are interactive. Lines in the plots or legends may be selected and all corresponding lines will be highlighted. In the top panel of Figure 5, the motion of one camera stands out. Clicking that line reveals that it belongs to camera station 21, which can be further investigated to decide if it should be excluded from the calibration.

The final evolution plot, shown in Figure 7, illustrates the evolution of the norm of the total residual and the damping behaviour, if any, during the bundle iterations. In this example, the Gauss-Newton-Armijo linesearch damping is active during the first two iterations. For further details on the damping, see Börlin and Grussenmeyer (2013a).

Quality plots The quality plots are gathered in figures 8–10. Per-image quality statistics is shown in Figure 9. The statistics presented for each image are the image coverage (rectangular coverage, convex hull coverage, and radial coverage); the number of measured points; the average (RMS) point residual; and the standard deviations for the EO parameters for the camera stations. In this example, the data does not give any obvious support to exclude the suspected image 21 from the calibration.


The image coverage is detailed in a separate Figure 8. The plotted data is selectable. All observations from a specific image, including their convex hull, will be highlighted when a point or line is selected.

Finally, the per-OP quality statistics in Figure 10 show the number of observations per OP; the maximum ray intersection angle; the average (RMS) point residual; and the OP coordinate standard deviation. The presentation may be zoomed to show only

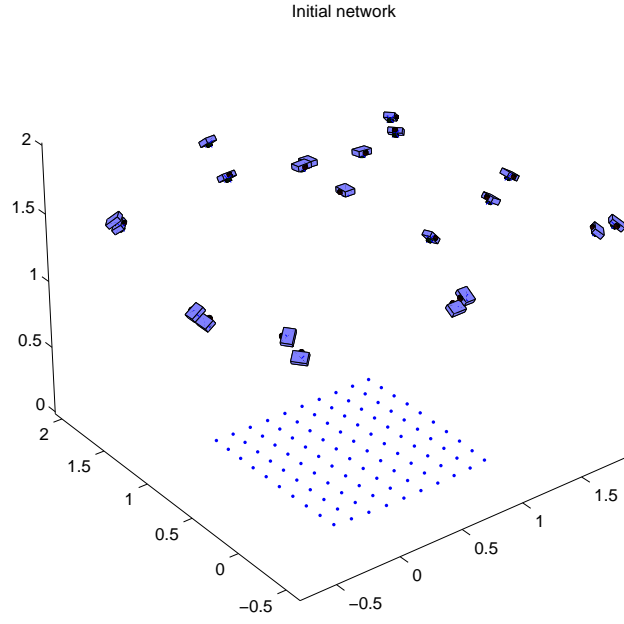

(a) Initial network configuration.

Damping: gna. Iteration 7 of 7

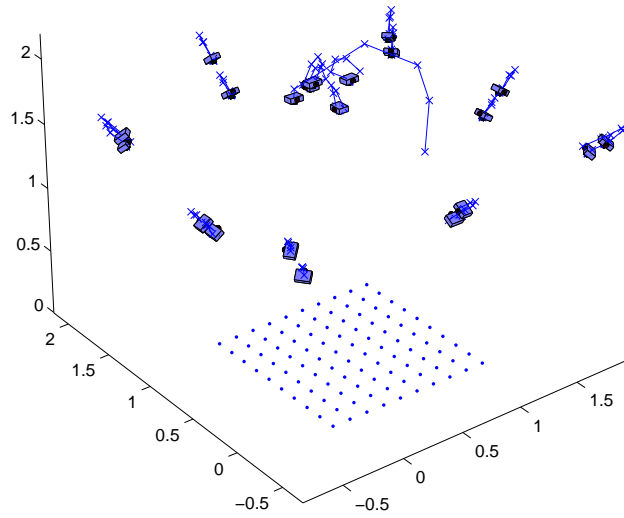

(b) Network configuration after convergence, with camera center trace lines.

Figure 3: 3D network evolution during the iterations. Only the EO and OP parameters are illustrated. In this example, the variation of the OP coordinates is barely visible.

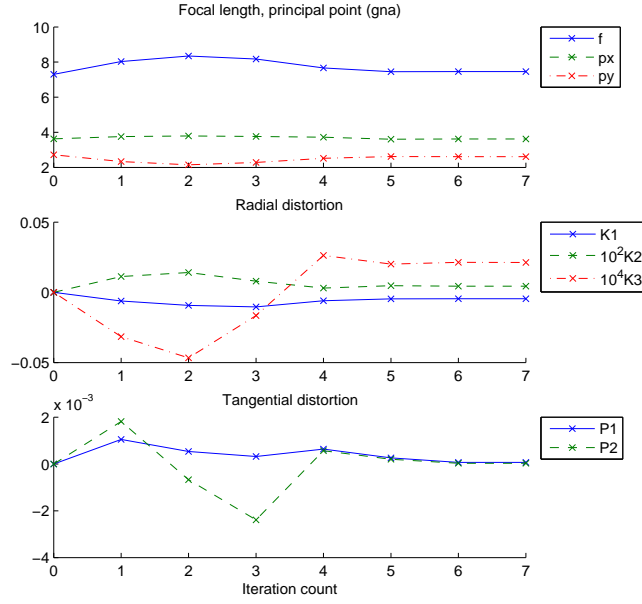


Figure 4: Evolution of IO parameters during the iteration sequence.

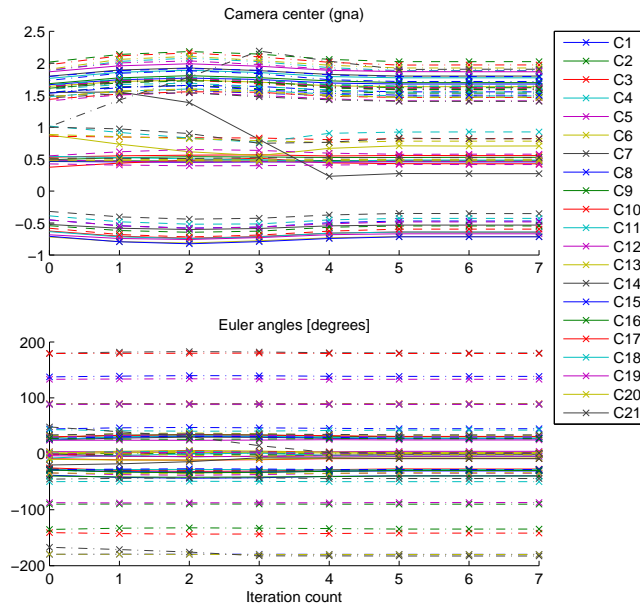


Figure 5: Evolution of EO parameters during the iteration sequence.

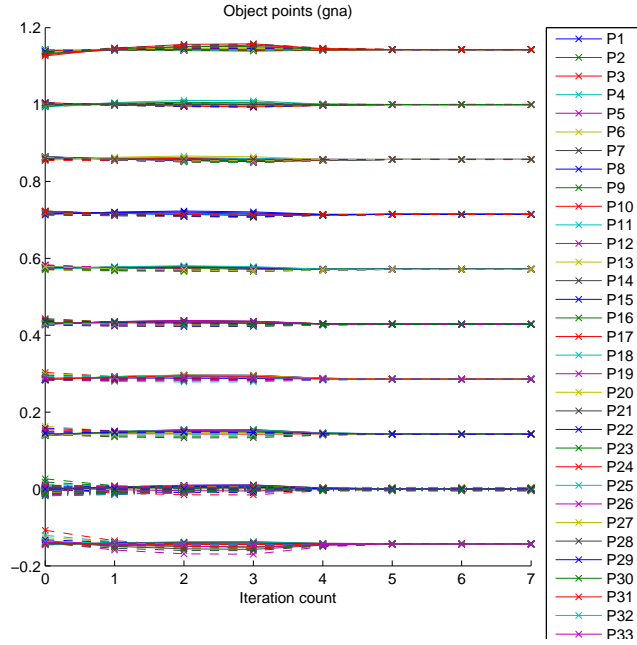


Figure 6: Evolution of OP coordinates during the iteration sequence.

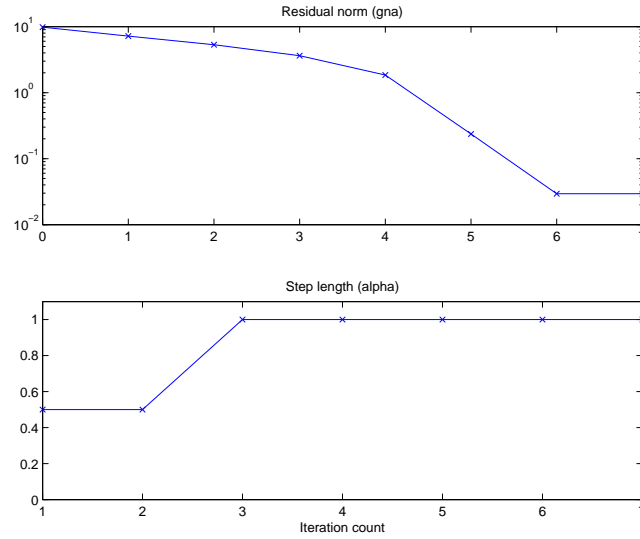


Figure 7: Residual evolution and damping behaviour during the iterations.

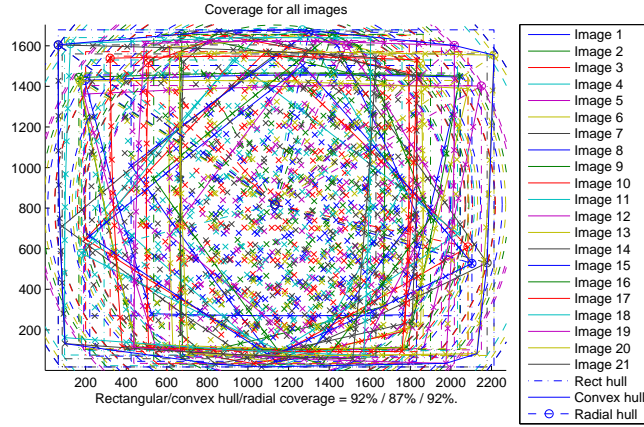


Figure 8: Plots of input/output statistics: Image coverage.

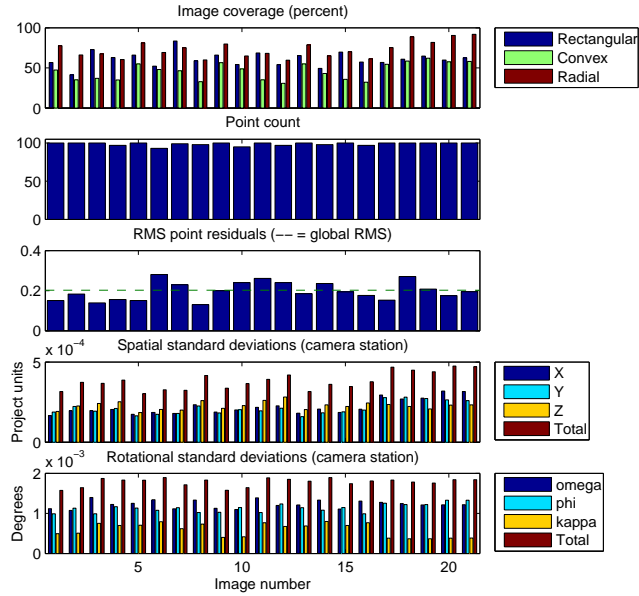


Figure 9: Plots of input/output statistics: Image statistics.

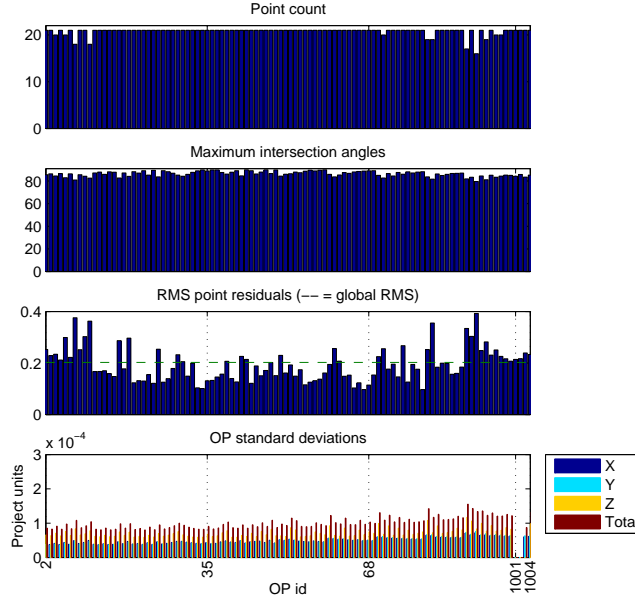


Figure 10: Plots of input/output statistics: Object point statistics.

a subset of the OPs by activating the “zoom” function of the figure window.

Result file The result file is modelled after the PhotoModeler result file. The result file is listed in Appendix A.3.

3.1.3 Bundle adjustment

ROMA The `romabundledemo` function loads the project from Section 3.1.1 and present essentially the same plots and the `camcaldemo`. This demo uses the PhotoModeler file as input to the bundle adjustment that runs a few iterations until convergence. The same result file and result plots as `camcaldemo` are essentially generated. Since the project is larger (60 cams/26 000 points) than the previous example (20 cams/100 points), the computation will take a bit longer. Computation time was around one minute running on a HP compaq dc7800 with an Intel Core2 Quad CPU Q9300 @ 2.50GHz under 64-bit Ubuntu 12.04 (kernel 3.5.0-45).

PRAGUE’16 The `prague2016_pm` function displays six projects that compare the result of the bundle adjustment procedure in DBAT and the results of PhotoModeler (Börlin and Grussenmeyer, 2016). Similarly, the `prague2016_ps` function displays the results of a comparison between DBAT and PhotoScan.

The v0.5.1.6 release includes a fix to a bug the distributed the image observation weights incorrectly. The result is slightly different estimation results than in Börlin and Grussenmeyer (2016). However, the conclusions remain valid.

HAMBURG'17 The `stpierrebundledemo_ps` function runs a self-calibration bundle on a Photoscan project included in the StPierre data set.

3.2 Using your own data

3.2.1 Photoscan

DBAT can read native Photoscan Archive (`.psz`) files. DBAT cannot read Photoscan Project (`.psx`) files. If you have a `.psx` project, use the `Save as...` menu in Photoscan and save the project as a Photoscan Archive (`.psz`).

The `ps_postproc` function can be used to post-process a Photoscan project. `loadplotpsz` may be useful to visualize the project, as computed by Photoscan.

Known limitations DBAT cannot handle all Photoscan coordinate systems. If you get strange results, you may have to convert to Local Coordinates. `loadplotpsz` may be useful for debugging the input.

3.2.2 PhotoModeler

This section describes how to import you own data using PhotoModeler text export files. If you have another type of input file, you may be able to write your own loader. Otherwise, if you have a text file you wish to import, feel free to mail the file to the the toolbox authors and request an import function. Although we cannot guarantee anything, we may adhere to the request, time permitting.

Export from PhotoModeler To import a PhotoModeler project into the toolbox, the following steps are valid in PhotoModeler Scanner 2012:

1. Export the project using the *Export Text File* menu command. If the command is not available, follow the instructions in Appendix A.1.
2. After export, open the *Project/Cameras...* dialog and select the camera that was used in your project.
3. Open the generated text file in a text editor.
 - (a) On the 2nd line (usually reading `0.00005 20`), append the width and height in pixels of your images, e.g. to `0.000500 20 5616 3744`.
 - (b) Inspect the 4th line. For instance, the original data in `roma.txt` was (some trailing zeros removed):
`24.3581 18.1143 12.0 35.96404 24.0 0.00022 -0.0 0.0 0.0 0.0`

The values correspond to the following camera parameters:

`focal pp_x pp_y format_w format_h K1 K2 K3 P1 P2`.

Notice that most of the significant digits of K1–K3 were lost in the text export.

- (c) Update the parameter values on the 4th line with values from the camera dialog *for each parameter with a larger number of significant digits in the dialog*. This usually means all parameters except `format_w`. In the `roma.txt` test case, the 4th line was modified to:
- ```
24.3581 18.1143 12 35.96404 24 2.174e-4 -1.518e-7 0
0 0.
```

### Loading into Matlab

1. In Matlab, run step 2 from Section 2 if not already done.
2. Call `loadplotdemo` with the name of your text export file as first parameter. A figure with your camera network, aligned with the first camera and rotated to have +Z 'up', should now have been generated.

**Using the bundle adjustment of DBAT** Modify either of the demo functions to match what you want to do. If you run into any problems, send us an email. The interesting results may either be in the plots or in the result file.

## References

- N. Börlin and P. Grussenmeyer. Bundle adjustment with and without damping. *Photogrammetric Record*, 28(144):396–415, Dec. 2013a. doi: 10.1111/phor.12037.
- N. Börlin and P. Grussenmeyer. Experiments with metadata-derived initial values and linesearch bundle adjustment in architectural photogrammetry. *ISPRS Annals of the Photogrammetry, Remote Sensing, and Spatial Information Sciences*, II-5/W1:43–48, Sept. 2013b.
- N. Börlin and P. Grussenmeyer. Camera calibration using the damped bundle adjustment toolbox. *ISPRS Annals of the Photogrammetry, Remote Sensing, and Spatial Information Sciences*, II(5):89–96, June 2014.
- N. Börlin and P. Grussenmeyer. External verification of the bundle adjustment in photogrammetric software using the damped bundle adjustment toolbox. *International Archives of Photogrammetry, Remote Sensing, and Spatial Information Sciences*, XLI-B5:7–14, July 2016.
- R. M. Haralick, C.-N. Lee, K. Ottenberg, and M. Nölle. Review and analysis of solutions of the three point perspective pose estimation problem. *Int J Comp Vis*, 13(3): 331–356, 1994.
- C. McGlone, E. Mikhail, and J. Bethel, editors. *Manual of Photogrammetry*. ASPRS, 5th edition, July 2004. ISBN 1-57083-071-1.
- A. Murtiyoso, P. Grussenmeyer, and N. Börlin. Reprocessing close range terrestrial and UAV photogrammetric projects with the DBAT toolbox for independent verification and quality control. *ISPRS - International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, XLII-2/W8: 171–177, 2017. doi: 10.5194/isprs-archives-XLII-2-W8-171-2017. URL <https://www.int-arch-photogramm-remote-sens-spatial-inf-sci.net/XLII-2-W8/171/2017/>.
- H. Stewénius, C. Engels, and D. Nistér. Recent developments on direct relative orientation. *ISPRS J Photogramm*, 60(4):284–294, June 2006.

## A Appendices

### A.1 Enabling text export from PhotoModeler

Some versions of PhotoModeler do not have the text file export option enabled by default. In that case, the following steps worked in PhotoModeler Scanner 2012:

1. Right-click on the main window toolbar, select *Customize toolbar...*
2. In the *Commands* tab, select the *File* category.
3. Drag the *Export Text File...* command to a toolbar of your choice.
4. Now you should be able to export your project as a text file by clicking on the *Export Text File* button.

### A.2 Camera model

Currently, the only supported camera model is the omega-phi-kappa Euler angle camera model (McGlone et al., 2004, Ch. 2.1.2.3).

### A.3 Result file example

```
Damped Bundle Adjustment Toolbox result file
Project Name: Bundle Soln PhotoModeler Calibration Project
Problems and suggestions:
 Project Problems: Not evaluated
 Problems related to the processing: (1)
 One or more of the camera parameter has a high correlation (see below).
Information from last bundle
Last Bundle Run: 24-Nov-2017 01:04:34
DBAT version: 0.7.0.0 (2017-11-24)
MATLAB version: 8.6.0.267246 (R2015b)
Host system: GLNXA64
Host name: slartibartfast
Status: OK (0)
Sigma0: 1.68901
Sigma0 (pixels): 0.168901
Processing options:
 Orientation: on
 Global optimization: on
 Calibration: on
 Constraints: off
 Maximum # of iterations: 20
 Convergence tolerance: 1e-06
 Singular test: off
 Chirality veto: off
 Damping: gna
 Camera unit (cu): mm
 Object space unit (ou): m
 Initial value comment: Camera calibration from EXIF value
Total error:
 Number of stages: 1
 Number of iterations: 9
 First error: 30884.2
 Last error: 103.099
 Execution time (s): 0.59
Lens distortion models:
 Backward (Photogrammetry)
```



```

Cameras:
 Calibration: yes (Xp Yp f K1 K2 K3 P1 P2)
 Cameral
 Lens distortion model:
 Backward (Photogrammetry)
 Focal Length:
 Value: 7.45894 mm
 Deviation: 0.00109 mm
 Xp - principal point x:
 Value: 3.61664 mm
 Deviation: 0.000858 mm
 Yp - principal point y:
 Value: 2.60896 mm
 Deviation: 0.000988 mm
 Fw - format width:
 Value: 7.25319 mm
 Fh - format height:
 Value: 5.43764 mm
 K1 - radial distortion 1:
 Value: 0.00457026 mm(-3)
 Deviation: 2.31e-05 mm(-3)
 Significance: p=1.00
 K2 - radial distortion 2:
 Value: -4.25869e-05 mm(-5)
 Deviation: 2.76e-06 mm(-5)
 Significance: p=1.00
 Correlations over 95%: K3:-97.9%.
 K3 - radial distortion 3:
 Value: -2.15843e-06 mm(-7)
 Deviation: 1.05e-07 mm(-7)
 Significance: p=1.00
 Correlations over 95%: K2:-97.9%.
 P1 - decentering distortion 1:
 Value: -6.5657e-05 mm(-3)
 Deviation: 3.67e-06 mm(-3)
 Significance: p=1.00
 P2 - decentering distortion 2:
 Value: -2.9636e-05 mm(-3)
 Deviation: 4.05e-06 mm(-3)
 Significance: p=1.00
 Iw - image width:
 Value: 2272 px
 Ih - image height:
 Value: 1704 px
 Xr - X resolution:
 Value: 313.306 px/mm
 Yr - Y resolution:
 Value: 313.306 px/mm
 Pw - pixel width:
 Value: 0.00319176 mm
 Ph - pixel height:
 Value: 0.00319176 mm
 Rated angle of view (h,v,d): (52, 40, 63) deg
 Largest distortion: 0.37 mm (116.4 px, 8.2% of half-diagonal)
 Precisions / Standard Deviations:
 Photograph Standard Deviations:
 Photo 1: P8250021.JPG
 Omega:
 Value: -39.425743 deg
 Deviation: 0.00886 deg
 Phi:
 Value: -1.180839 deg
 Deviation: 0.00796 deg
 Kappa:
 Value: -179.839283 deg
 Deviation: 0.00287 deg
 Xc:
 Value: 0.454890 ou

```

```

 Deviation: 0.000162 ou
Yc:
 Value: 1.793760 ou
 Deviation: 0.000187 ou
Zc:
 Value: 1.469288 ou
 Deviation: 0.000205 ou
Photo 2: P8250022.JPG
Omega:
 Value: -39.761249 deg
 Deviation: 0.00841 deg
Phi:
 Value: -1.846758 deg
 Deviation: 0.00908 deg
Kappa:
 Value: -90.121383 deg
 Deviation: 0.00303 deg
Xc:
 Value: 0.470426 ou
 Deviation: 0.000195 ou
Yc:
 Value: 2.027243 ou
 Deviation: 0.000224 ou
Zc:
 Value: 1.638797 ou
 Deviation: 0.000242 ou
Photo 3: P8250023.JPG
Omega:
 Value: -27.239490 deg
 Deviation: 0.011 deg
Phi:
 Value: -28.565343 deg
 Deviation: 0.00788 deg
Kappa:
 Value: -141.846585 deg
 Deviation: 0.00561 deg
Xc:
 Value: -0.644455 ou
 Deviation: 0.000197 ou
Yc:
 Value: 1.466418 ou
 Deviation: 0.000187 ou
Zc:
 Value: 1.581499 ou
 Deviation: 0.000243 ou
Photo 4: P8250024.JPG
Omega:
 Value: -28.558189 deg
 Deviation: 0.00921 deg
Phi:
 Value: -30.331722 deg
 Deviation: 0.00937 deg
Kappa:
 Value: -49.784451 deg
 Deviation: 0.00488 deg
Xc:
 Value: -0.643655 ou
 Deviation: 0.000205 ou
Yc:
 Value: 1.491033 ou
 Deviation: 0.000207 ou
Zc:
 Value: 1.637067 ou
 Deviation: 0.000256 ou
Photo 5: P8250025.JPG
Omega:
 Value: 4.382511 deg
 Deviation: 0.00986 deg

```

Phi:  
   Value:     -34.669427 deg  
   Deviation: 0.00902 deg  
 Kappa:  
   Value:     -87.136940 deg  
   Deviation: 0.00542 deg  
 Xc:  
   Value:     -0.670768 ou  
   Deviation: 0.000165 ou  
 Yc:  
   Value:     0.417346 ou  
   Deviation: 0.000151 ou  
 Zc:  
   Value:     1.410399 ou  
   Deviation: 0.000191 ou  
 Photo 6: P8250026.JPG  
   Omega:  
     Value:     2.097544 deg  
     Deviation: 0.0106 deg  
   Phi:  
     Value:     -34.017520 deg  
     Deviation: 0.00846 deg  
   Kappa:  
     Value:     1.509425 deg  
     Deviation: 0.00601 deg  
   Xc:  
     Value:     -0.713593 ou  
     Deviation: 0.00018 ou  
   Yc:  
     Value:     0.476373 ou  
     Deviation: 0.000162 ou  
   Zc:  
     Value:     1.464831 ou  
     Deviation: 0.000211 ou  
 Photo 7: P8250027.JPG  
   Omega:  
     Value:     27.348261 deg  
     Deviation: 0.00893 deg  
   Phi:  
     Value:     -28.302938 deg  
     Deviation: 0.00914 deg  
   Kappa:  
     Value:     -44.207908 deg  
     Deviation: 0.00466 deg  
   Xc:  
     Value:     -0.534726 ou  
     Deviation: 0.000162 ou  
   Yc:  
     Value:     -0.349536 ou  
     Deviation: 0.000164 ou  
   Zc:  
     Value:     1.403703 ou  
     Deviation: 0.000211 ou  
 Photo 8: P8250028.JPG  
   Omega:  
     Value:     26.923258 deg  
     Deviation: 0.0109 deg  
   Phi:  
     Value:     -28.127953 deg  
     Deviation: 0.00792 deg  
   Kappa:  
     Value:     44.866655 deg  
     Deviation: 0.00561 deg  
   Xc:  
     Value:     -0.718941 ou  
     Deviation: 0.000222 ou  
   Yc:  
     Value:     -0.466477 ou

```

 Deviation: 0.000213 ou
Zc:
 Value: 1.715075 ou
 Deviation: 0.000275 ou
Photo 9: P8250029.JPG
Omega:
 Value: 30.389264 deg
 Deviation: 0.00895 deg
Phi:
 Value: 0.190661 deg
 Deviation: 0.00812 deg
Kappa:
 Value: 0.084680 deg
 Deviation: 0.0026 deg
Xc:
 Value: 0.524910 ou
 Deviation: 0.000169 ou
Yc:
 Value: -0.543280 ou
 Deviation: 0.000173 ou
Zc:
 Value: 1.534216 ou
 Deviation: 0.000207 ou
Photo 10: P8250030.JPG
Omega:
 Value: 31.007630 deg
 Deviation: 0.0087 deg
Phi:
 Value: 1.729844 deg
 Deviation: 0.00907 deg
Kappa:
 Value: 89.539855 deg
 Deviation: 0.00276 deg
Xc:
 Value: 0.554111 ou
 Deviation: 0.000184 ou
Yc:
 Value: -0.593287 ou
 Deviation: 0.000196 ou
Zc:
 Value: 1.617125 ou
 Deviation: 0.000225 ou
Photo 11: P8250031.JPG
Omega:
 Value: 27.634202 deg
 Deviation: 0.0111 deg
Phi:
 Value: 30.750219 deg
 Deviation: 0.0079 deg
Kappa:
 Value: 42.335735 deg
 Deviation: 0.0061 deg
Xc:
 Value: 1.770071 ou
 Deviation: 0.0002 ou
Yc:
 Value: -0.425193 ou
 Deviation: 0.000188 ou
Zc:
 Value: 1.552593 ou
 Deviation: 0.000242 ou
Photo 12: P8250032.JPG
Omega:
 Value: 24.650146 deg
 Deviation: 0.00943 deg
Phi:
 Value: 30.239455 deg
 Deviation: 0.00984 deg

```

Kappa:  
   Value: 133.204238 deg  
   Deviation: 0.00516 deg  
 Xc:  
   Value: 1.864899 ou  
   Deviation: 0.000209 ou  
 Yc:  
   Value: -0.480971 ou  
   Deviation: 0.000207 ou  
 Zc:  
   Value: 1.614058 ou  
   Deviation: 0.000265 ou  
 Photo 13: P8250033.JPG  
   Omega:  
     Value: 0.525524 deg  
     Deviation: 0.00984 deg  
   Phi:  
     Value: 33.149801 deg  
     Deviation: 0.00904 deg  
   Kappa:  
     Value: 88.705121 deg  
     Deviation: 0.00522 deg  
   Xc:  
     Value: 1.630631 ou  
     Deviation: 0.000171 ou  
   Yc:  
     Value: 0.497602 ou  
     Deviation: 0.000158 ou  
   Zc:  
     Value: 1.471594 ou  
     Deviation: 0.000197 ou  
 Photo 14: P8250034.JPG  
   Omega:  
     Value: -1.739655 deg  
     Deviation: 0.0108 deg  
   Phi:  
     Value: 33.635645 deg  
     Deviation: 0.00857 deg  
   Kappa:  
     Value: 180.202091 deg  
     Deviation: 0.006 deg  
   Xc:  
     Value: 1.796837 ou  
     Deviation: 0.000199 ou  
   Yc:  
     Value: 0.525347 ou  
     Deviation: 0.000184 ou  
   Zc:  
     Value: 1.598322 ou  
     Deviation: 0.000227 ou  
 Photo 15: P8250035.JPG  
   Omega:  
     Value: -30.765484 deg  
     Deviation: 0.00909 deg  
   Phi:  
     Value: 28.173051 deg  
     Deviation: 0.00932 deg  
   Kappa:  
     Value: 138.430041 deg  
     Deviation: 0.00483 deg  
   Xc:  
     Value: 1.671657 ou  
     Deviation: 0.000185 ou  
   Yc:  
     Value: 1.554521 ou  
     Deviation: 0.000187 ou  
   Zc:  
     Value: 1.501365 ou

Deviation: 0.000239 ou  
 Photo 16: P8250036.JPG  
 Omega:  
 Value: -29.885916 deg  
 Deviation: 0.0107 deg  
 Phi:  
 Value: 26.975370 deg  
 Deviation: 0.00791 deg  
 Kappa:  
 Value: -134.632252 deg  
 Deviation: 0.0055 deg  
 Xc:  
 Value: 1.694045 ou  
 Deviation: 0.000209 ou  
 Yc:  
 Value: 1.619402 ou  
 Deviation: 0.000198 ou  
 Zc:  
 Value: 1.590016 ou  
 Deviation: 0.000263 ou  
 Photo 17: P8250037.JPG  
 Omega:  
 Value: -8.524924 deg  
 Deviation: 0.0102 deg  
 Phi:  
 Value: -0.516031 deg  
 Deviation: 0.01 deg  
 Kappa:  
 Value: 179.396299 deg  
 Deviation: 0.00207 deg  
 Xc:  
 Value: 0.424528 ou  
 Deviation: 0.0003 ou  
 Yc:  
 Value: 0.823028 ou  
 Deviation: 0.000288 ou  
 Zc:  
 Value: 1.972157 ou  
 Deviation: 0.000252 ou  
 Photo 18: P8250038.JPG  
 Omega:  
 Value: -4.780087 deg  
 Deviation: 0.00998 deg  
 Phi:  
 Value: 0.666315 deg  
 Deviation: 0.00962 deg  
 Kappa:  
 Value: 88.786576 deg  
 Deviation: 0.00198 deg  
 Xc:  
 Value: 0.481967 ou  
 Deviation: 0.000274 ou  
 Yc:  
 Value: 0.926766 ou  
 Deviation: 0.000293 ou  
 Zc:  
 Value: 1.885335 ou  
 Deviation: 0.000239 ou  
 Photo 19: P8250039.JPG  
 Omega:  
 Value: -4.413731 deg  
 Deviation: 0.00965 deg  
 Phi:  
 Value: -0.411919 deg  
 Deviation: 0.00969 deg  
 Kappa:  
 Value: 88.244389 deg  
 Deviation: 0.00195 deg

```

Xc:
 Value: 0.461866 ou
 Deviation: 0.000281 ou
Yc:
 Value: 0.578854 ou
 Deviation: 0.000284 ou
Zc:
 Value: 1.875378 ou
 Deviation: 0.000218 ou
Photo 20: P8250040.JPG
 Omega:
 Value: -7.605652 deg
 Deviation: 0.00976 deg
 Phi:
 Value: -1.556339 deg
 Deviation: 0.0107 deg
 Kappa:
 Value: -180.050876 deg
 Deviation: 0.00208 deg
Xc:
 Value: 0.701782 ou
 Deviation: 0.000334 ou
Yc:
 Value: 0.782358 ou
 Deviation: 0.000276 ou
Zc:
 Value: 1.926167 ou
 Deviation: 0.000247 ou
Photo 21: P8250041.JPG
 Omega:
 Value: -8.697217 deg
 Deviation: 0.00966 deg
 Phi:
 Value: 1.049899 deg
 Deviation: 0.0107 deg
 Kappa:
 Value: -182.614499 deg
 Deviation: 0.00213 deg
Xc:
 Value: 0.268718 ou
 Deviation: 0.000328 ou
Yc:
 Value: 0.821199 ou
 Deviation: 0.000265 ou
Zc:
 Value: 1.905690 ou
 Deviation: 0.00025 ou
Quality
 Photographs
 Total number: 21
 Numbers used: 21
 Cameras
 Total number: 1
 Cameral:
 Calibration: yes
 Number of photos using camera: 21
 Photo point coverage:
 Rectangular: 41%-83% (61% average, 92% union)
 Convex hull: 31%-62% (46% average, 87% union)
 Radial: 60%-92% (73% average, 92% union)
 Photo Coverage
 References points outside calibrated region:
 none
 Point Measurements
 Number of control pts: 4
 Number of check pts: 0
 Number of object pts: 96
 CP ray count: 21-21 (21.0 avg)

```

```

 4 points with 21 rays.
CCP ray count: -
OP ray count: 16-21 (20.7 avg)
 1 points with 16 rays.
 1 points with 17 rays.
 2 points with 18 rays.
 3 points with 19 rays.
 5 points with 20 rays.
 84 points with 21 rays.
Point Marking Residuals
Overall point RMS: 0.226 pixels
Mark point residuals:
 Maximum: 0.952 pixels (OP 1003 on photo 5)
Object point residuals (RMS over all images of a point):
 Minimum: 0.101 pixels (OP 67 over 21 images)
 Maximum: 0.569 pixels (OP 1004 over 21 images)
Photo residuals (RMS over all points in an image):
 Minimum: 0.178 pixels (photo 4 over 97 points)
 Maximum: 0.318 pixels (photo 6 over 93 points)
Point Precision
Total standard deviation (RMS of X/Y/Z std):
 Minimum: 8.6e-05 (OP 49)
 Maximum: 0.00012 (OP 90)
Maximum X standard deviation: 5.2e-05 (OP 90)
Maximum Y standard deviation: 5.5e-05 (OP 90)
Maximum Z standard deviation: 8.9e-05 (OP 90)
Points with high correlations
 Points with correlation above 95%: 0
 Points with correlation above 99%: 0
Point Angles
CP
 Minimum: 83.4 degrees (CP 1003)
 Maximum: 85.8 degrees (CP 1002)
 Average: 84.7 degrees
CCP
 Minimum: -
 Maximum: -
 Average: -
OP
 Minimum: 79.6 degrees (OP 90)
 Maximum: 90.0 degrees (OP 47)
 Average: 86.5 degrees
Smallest angles (ID, angle [deg], vis in cameras)
 90: 79.57 (1 2 3 5 8 9 11 13 14 15 16 17 18 19 20 21)
 8: 80.96 (1 2 3 4 5 7 9 10 11 12 13 14 15 17 18 19 20
 92: 81.12 (1 2 3 4 5 7 8 9 10 11 13 14 15 16 17 18 19
Ctrl measurements
Prior
 id, x, y, z, stdx, stdy, stdz, label
 1001, 0.000, 1.000, 0.000, 0, 0, 0,
 1002, 1.000, 1.000, 0.000, 0, 0, 0,
 1003, 0.000, 0.000, 0.000, 0, 0, 0,
 1004, 1.000, 0.000, 0.000, 0, 0, 0,
Posterior
 id, x, y, z, stdx, stdy, stdz, rays, label
 1001, 0.000, 1.000, 0.000, 0, 0, 0, 21,
 1002, 1.000, 1.000, 0.000, 0, 0, 0, 21,
 1003, 0.000, 0.000, 0.000, 0, 0, 0, 21,
 1004, 1.000, 0.000, 0.000, 0, 0, 0, 21,
Diff (pos=abs diff, std=rel diff)
 id, x, y, z, xy, xyz, stdx, stdy, stdz, rays, label
 1001, 0.000, 0.000, 0.000, 0.000, 0.000, 0.0%, 0.0%, 0.0%, 21,
 1002, 0.000, 0.000, 0.000, 0.000, 0.000, 0.0%, 0.0%, 0.0%, 21,
 1003, 0.000, 0.000, 0.000, 0.000, 0.000, 0.0%, 0.0%, 0.0%, 21,
 1004, 0.000, 0.000, 0.000, 0.000, 0.000, 0.0%, 0.0%, 0.0%, 21,
Ctrl point delta
 Max: 0.000 ou (, pt 1001)
 Max X,Y,Z

```



```
X: 0.000 ou (, pt 1001)
Y: 0.000 ou (, pt 1001)
Z: 0.000 ou (, pt 1001)
RMS: 0.000 ou (from 4 items)
Check measurements
```