
Visoka škola strukovnih studija za informacione i komunikacione tehnologije Predmet: Web programiranje PHP1

# Dokumentacija:

world-of-warplanes.000webhostapp.com

Student: Ignjat Jokanović	
Broj indeksa: 311/16	
Smer: Internet tehnologije – Web programiranje	
Table of Contents	
1. Uvod	4

# 2. Dizajn Baze

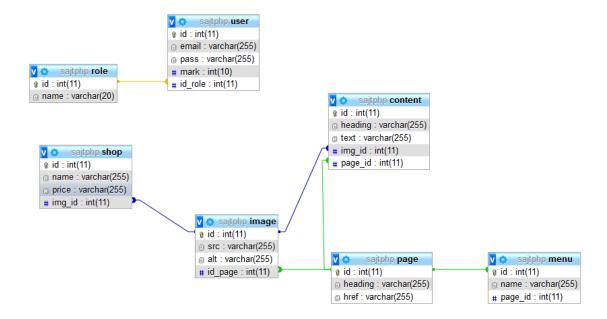


•		5
3	. Kodovi	6
	3.1 index.php	6
	3.2 head.php	6
	3.3 header.php	7
	3.4 slider.php	8
	3.5 warpl.php	10
	3.6 news.php	11
	3.7 menu.php	13
	3.8 galery.php	14
	3.9 shop.php	15
	3.10 author.php	16
	3.11 contact.php	16
	3.12 footer.php	18
	3.13 sendMail.php	. 22

3.14 register.php	23
3.15 logout.php	25
3.16 login.php	25
3.17 connection.php	27
3.18 config.php	27
3.19 ajaxW.php	28
3.20 ajaxRate.php	29
3.21 ajaxBuy.php	30
3.22 admin.php	31
3.23 adminFooter.php	33
3.24 andminHeader.php	33
3.25 galeryCombo.php	36
3.26 galeryInsert.php	40
3.27 newsCombo.php	42
3.28 newsInsert.php	46
3.29 shopCombo.php	49
3.30 shopInsert.php	53
3.31 sliderCombo.php	56
3.32 sliderInser.php	60
3.33 typesCombo.php	62
3.34 typesInsert.php	66
3.35 userStatistics	69
3.36 code is	71

# 1. Uvod

Koriščeni programski jezici: HTML, CSS, JAVASCRIPT, JQUERY, PHP


Opis funkcionalnosti sajta:

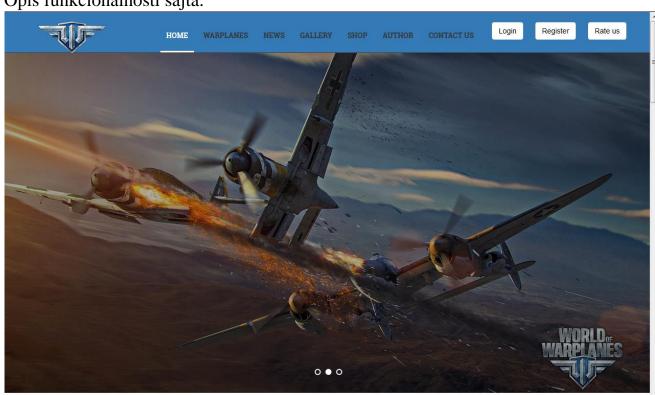

# TYPES OF AIRCRAFTS YOU CAN FIND IN THE GAME

Fighters Multirole Figthers Heavy Fighters Attack Aircraft Bombers

# 2. Dizajn Baze

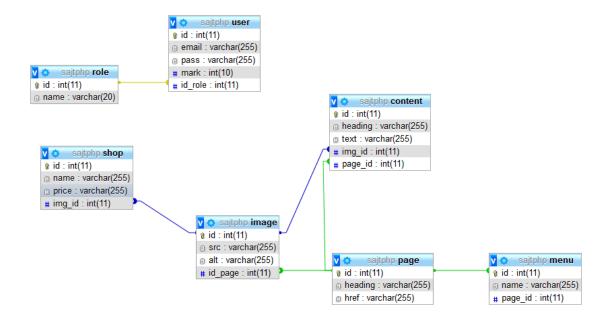

#### 3. Kodovi

#### 3.1 index.php

```
<?php
session_start();
include 'php/connection.php';
include 'views/head.php';
include 'views/header.php';
include 'views/slider.php';
include 'views/warpl.php';
include 'views/news.php';
include 'views/galery.php';
include 'views/shop.php';
include 'views/author.php';
include 'views/contact.php';
include 'views/footer.php';</pre>
```

#### 3.2 head.php

```
link
href='https://fonts.googleapis.com/css?family=Open+Sans:400,300,600,700,800'
rel='stylesheet' type='text/css'>
        <!--Fontawesom-->
        <link rel="stylesheet" href="css/font-awesome.min.css">
        <!--Animated CSS-->
        <link rel="stylesheet" type="text/css" href="css/animate.min.css">
        <link href="css/bootstrap.min.css" rel="stylesheet">
        <!--Bootstrap Carousel-->
        <link type="text/css" rel="stylesheet" href="css/carousel.css" />
        <link rel="stylesheet" href="css/isotope/style.css">
        <!--Main Stylesheet-->
        <link href="css/style.css" rel="stylesheet">
        <!--Responsive Framework-->
        <link href="css/responsive.css" rel="stylesheet">
        <link href="css/lightbox.css" rel="stylesheet">
queries -->
        <!-- WARNING: Respond.js doesn't work if you view the page via file:// -->
        <!--[if lt IE 9]>
          <script
          <script
src="https://oss.maxcdn.com/respond/1.4.2/respond.min.js"></script>
    </head>
```

#### 3.3 header.php

```
<body data-spy="scroll" data-target="#header">
```

```
<!--Start Hedaer Section-->
<section id="header">
    <div class="header-area">
        <!--End of top header-->
        <div class="header_menu text-center bg-primary" data-spy="affix" data-</pre>
offset-top="50" id="nav">
            <div class="container">
                <nav class="navbar navbar-default zero_mp bg-primary">
                    <!-- Brand and toggle get grouped for better mobile display -->
                    <div class="navbar-header">
                        <button type="button" class="navbar-toggle collapsed bg-</pre>
primary" data-toggle="collapse" data-target="#bs-example-navbar-collapse-1" aria-
expanded="false">
                            <span class="sr-only">Toggle navigation</span>
                            <span class="icon-bar"></span>
                             <span class="icon-bar"></span>
                             <span class="icon-bar"></span>
                        </button>
                        <a class="navbar-brand custom_navbar-brand"</pre>
href="index.php"><img src="img/logo.png" alt="wows logo"></a>
                    </div>
                    <!--End of navbar-header-->
                    <!-- Collect the nav links, forms, and other content for
                    <?php include 'menu.php'; ?>
                    <!-- /.navbar-collapse -->
                <!--End of nav-->
            </div>
        </div>
        <!--End of header menu-->
    </div>
    <!--end of header area-->
 /section>
```

#### 3.4 slider.php

```
<?php

$query = "select i.id as id, i.src as src, i.alt as alt from image i join page p on
i.id_page = p.id where p.id = 1";</pre>
```

```
$galery = $con->query($query)->fetchAll();
$slide = 0;
$slide1 = 0;
<section id="slider">
          <div id="carousel-example-generic" class="carousel slide carousel-fade"</pre>
data-ride="carousel" data-interval="3000">
              <!-- Indicators -->
              <?php foreach($galery as $g): ?>
                 $slide++ ?>" class="<?= ($slide == 1)? 'active' : ''?>">
              <?php endforeach; ?>
              <!-- Wrapper for slides -->
              <div class="carousel-inner h-100" role="listbox">
              <?php foreach($galery as $g): ?>
                 <div class="<?= ($slide1 == 0)? 'item active' : 'item' ?>">
                     <div class="slider_overlay">
                        <img class="d-block w-100" src="<?= $g->src ?>"
alt="<?= $g->alt ?>">
                     </div>
                 </div>
                 <?php $slide1++ ?>
              <?php endforeach; ?>
```

#### 3.5 warpl.php

```
<?php
$query1 = 'select p.heading as h1, p.href as href from page p where p.id = 2';
$result1 = $con->query($query1)->fetch();
$query2 = 'select c.id as id, c.heading as h2, c.text as txt, i.src as src, i.alt
as alt from content c join image i on c.img_id = i.id where c.page_id = 2';
$result2 = $con->query($query2)->fetchAll();
$counerW = 0;
<section id="<?= $result1->href ?>" class="text-center mt-3">
           <div class="col-md-12">
               <div class="portfolio title">
                   <h2 class="ha"><?= $result1->h1 ?></h2>
               </div>
           </div>
           <!--End of col-md-2-->
           <div class="colum">
               <div class="container">
                   <div class="row">
                       <form action="/">
                          portfolio custom menu">
                          <?php foreach($result2 as $r2): ?>
                              class="ml">
                                  <a class="click"
href="http://localhost/warplanes/php/ajaxW.php?id=<?= $r2->id ?>"><?= $r2->h2 ?></a>
```

```
<1i>>
                            <button data-filter=".black"</pre>
                       <?php endforeach; ?>
                   </form>
                <!--End of Form-->
           </div>
            <?php foreach($result2 as $r2): ?>
            <?php if($counerW == 0): ?>
            <div id="types" class="margina">
                <div class="col-md-6">
                    <img src="<?= $r2->src ?>" alt="<?= $r2->alt ?>"/>
               </div>
               <div class="col-md-6">
                    <?= $r2->txt ?>
                </div>
           </div>
            <?php $counerW++; ?>
            <?php endif; ?>
            <?php endforeach; ?>
            <!--End of row-->
        </div>
    </div>
    <!--End of colum-->
</section>
```

#### 3.6 news.php

```
<?php
$query1 = 'select p.heading as h1, p.href as href from page p where p.id = 3';
$result1 = $con->query($query1)->fetch();
$query2 = 'select c.heading as h2, c.text as txt, i.src as src, i.alt as alt from content c join image i on c.img_id = i.id where c.page_id = 3';
$result2 = $con->query($query2)->fetchAll();
```

```
<section id="<?= $result1->href ?>">
           <div class="container">
               <div class="row">
                   <div class="col-md-12">
                       <div class="latest_blog text-center">
                           <h2><?= $result1->h1 ?></h2>
                       </div>
                   </div>
               </div>
               <!--End of row-->
               <div class="row">
               <?php foreach($result2 as $r2): ?>
                   <div class="col-md-4">
                       <div class="blog_news">
                           <div class="single_blog_item">
                               <div class="blog_img">
                                  <img src="<?= $r2->src ?>" alt="<?= $r2->alt
                               </div>
                               <div class="blog_content">
                                  <h3><?= $r2->h2 ?></h3>
                                  <?= $r2->txt ?>
                               </div>
                           </div>
                       </div>
                   </div>
               <?php endforeach; ?>
                   <!--End of col-md-4-->
                   <!--End of col-md-4-->
               </div>
           </div>
```

#### 3.7 menu.php

```
<div class="collapse navbar-collapse zero_mp bg-primary" id="bs-example-navbar-</pre>
collapse-1">
                      <?php
                      $counerMenu = 0;
                      $query = 'select m.name as name, p.href as href from menu m
join page p on m.page_id = p.id';
                      $result = $con->query($query)->fetchAll();
                      foreach($result as $r):
                          "><a</pre>
href="<?= ($counerMenu == 0)? '' : '#' ?><?= $r->href?>"><?= $r->name
?><?=($counerMenu == 0)? '<span class="sr-only">(current)</span>' : '' ?></a>
                     <?php $counerMenu++; ?>
                      <?php endforeach; ?>
                          <?php if(isset($_SESSION['user']) && $_SESSION['user']-</pre>
>name == 'admin'): ?>
                          <a href="views/admin.php">admin</a>
                          <?php endif; ?>
                          <?php if(!isset($_SESSION['user'])): ?>
                          <button class="mybtn btn-secondary" data-toggle="modal"</pre>
data-target="#loginModal">Login</button>
                          <button class="mybtn btn-secondary" data-toggle="modal"</pre>
data-target="#registerModal">Register</button>
                          <?php endif; ?>
                          <?php if(isset($_SESSION['user'])): ?>
                              <a href="php/logout.php" type="submit"</pre>
class="mybtn">Logout</a>
                          <?php endif; ?>
```

#### 3.8 galery.php

```
<?php
$query1 = 'select p.heading as h1, p.href as href from page p where p.id = 4';
$result1 = $con->query($query1)->fetch();
$query2 = 'select i.src as src, i.alt as alt from image i where i.id_page = 4';
$result2 = $con->query($query2)->fetchAll();
<div id="<?= $result1->href ?>" class="container mtx">
<h1 class="text-center ha"><?= $result1->h1 ?></h1>
<div class="row text-center text-lg-left margina">
<?php foreach($result2 as $r2): ?>
 <div class="col-lg-3 col-md-4 col-xs-6">
    <a href="<?= $r2->src ?>" class="d-block mb-4 h-100" data-lightbox="roadtrip">
      <img class="img-fluid img-thumbnail" src="<?= $r2->src ?>" alt="<?= $r2->alt
    </a>
 </div>
<?php endforeach; ?>
</div>
</div>
```

#### 3.9 shop.php

```
<?php
$query1 = 'select p.heading as h1, p.href as href from page p where p.id = 5';
$result1 = $con->query($query1)->fetch();
$query2 = 'select s.id as id, s.name as name, s.price as price, i.src as src, i.alt
as alt from shop s join image i on s.img_id = i.id';
$result2 = $con->query($query2)->fetchAll();
$counertItem = 0;
?>
<div id="<?= $result1->href ?>" class="container">
    <h1 class="text-center ha"><?= $result1->h1 ?></h1>
            <div id="carousel-example-generic" class="carousel slide carousel-fade"</pre>
data-ride="carousel" data-interval="3000">
                    <!-- Indicators -->
                    <!-- Wrapper for slides -->
                    <div class="carousel-inner h-100" role="listbox">
                    <?php foreach($result2 as $r2): ?>
                        <div class="<?= ($counertItem == 0)? 'item active' : 'item'</pre>
                            <div class="slider_overlay">
                                <img class="d-block w-100" src="<?= $r2->src ?>"
alt="<?= $r2->alt ?>">
                                <h1 class="text-center"><?= $r2->name ?></h1>
                                <h1 class="text-center">PRICE: <?= $r2->price
?></h1>
                                <h5 class="text-center">*Notice if you buy already
owned warplane you will just get gold</h5>
```

#### 3.10 author.php

#### 3.11 contact.php

```
<div class="contact_area text-center">
                           <h3>get in touch</h3>
                       </div>
                   </div>
               </div>
               <!--End of row-->
               <div class="row">
                   <div class="col-md-6">
                       <div class="msg">
                           <div class="msg_title">
                               <h5>Drop A Message</h5>
                           </div>
                           <div class="form_area">
                               <!-- CONTACT FORM -->
                               <div class="contact-form wow fadeIn animated" data-</pre>
wow-offset="10" data-wow-duration="1.5s">
                                   <div id="message"></div>
                                   <form class="form-horizontal contact-1"</pre>
role="form" name="contactform" id="contactform">
                                       <div class="form-group">
                                           <div class="col-sm-12">
                                               <input type="subject" class="form-</pre>
control" id="subject" placeholder="Subject *">
                                               name="errC">
                                               <div class="text area">
                                                   <textarea name="contact-message"
id="msg" class="form-control" cols="30" rows="8" placeholder="Message"></textarea>
                                                   name="errC">
                                                   <div id="res"></div>
                                               </div>
                                               <button type="submit" class="btn</pre>
custom-btn" data-loading-text="Loading..." id="send">Send</button>
                                           </div>
                                       </div>
                                   </form>
                               </div>
                           </div>
                       </div>
                   </div>
                   <!--End of col-md-6-->
               </div>
               <!--End of row-->
```

```
</div>
<!--End of container-->
</section>
```

#### 3.12 footer.php

```
<div class="modal fade" id="loginModal" tabindex="-1" role="dialog" aria-</pre>
labelledby="exampleModalLabel" aria-hidden="true">
           <div class="modal-dialog" role="document">
             <div class="modal-content">
               <div class="modal-header">
                 <button type="button" class="close" data-dismiss="modal" aria-</pre>
label="Close">
                   <span aria-hidden="true">&times;</span>
                 </button>
               </div>
               <div class="modal-body">
                 <form>
                   <div class="form-group">
                     <label for="recipient-name" class="col-form-label</pre>
myClass">Email:</label>
                     <input type="text" class="form-control" id="loginMail">
                     <div class="form-group">
                          <label for="recipient-name" class="col-form-label</pre>
myClass">Password:</label>
                          <input type="text" class="form-control" id="loginPass">
                          </div>
                   <div class="form-group">
                     <div id="responseLogin">
                     </div>
                           <button type="submit" class="btn btn-primary"</pre>
id="login">Login</button>
                   </div>
                 </form>
               </div>
             </div>
           </div>
         </div>
```

```
<div class="modal fade" id="rateusModal" tabindex="-1" role="dialog" aria-</pre>
labelledby="exampleModalLabel" aria-hidden="true">
            <div class="modal-dialog" role="document">
              <div class="modal-content">
                <div class="modal-header">
                  <button type="button" class="close" data-dismiss="modal" aria-</pre>
label="Close">
                    <span aria-hidden="true">&times;</span>
                  </button>
                </div>
                <div class="modal-body">
                  <form>
                    <div class="form-group">
                      <label for="recipient-name" class="col-form-label">Rate
us:</label>
                      <select id="ddl">
                           <option value="0">Choose</option>
                           <option value="1">1</option>
                           <option value="2">2</option>
                           <option value="3">3</option>
                           <option value="4">4</option>
                           <option value="5">5</option>
                       </select>
                    </div>
                    <div id="responseRate">
                       </div>
                    <div class="form-group">
                             <button type="submit" class="btn btn-primary"</pre>
id="rate">Rate us</button>
                    </div>
                  </form>
                </div>
              </div>
            </div>
          </div>
          <div class="modal fade" id="registerModal" tabindex="-1" role="dialog"</pre>
aria-labelledby="exampleModalLabel" aria-hidden="true">
            <div class="modal-dialog" role="document">
              <div class="modal-content">
                <div class="modal-header">
                  <button type="button" class="close" data-dismiss="modal" aria-</pre>
label="Close">
                    <span aria-hidden="true">&times;</span>
                  </button>
                </div>
                <div class="modal-body">
                  <form>
```

```
<div class="form-group">
                    <label for="recipient-name" class="col-form-</pre>
label">Email:</label>
                    <input type="text" class="form-control" id="registerMail">
                    </div>
                  <div class="form-group">
                    <label for="message-text" class="col-form-</pre>
label">Password:</label>
                    <input type="text" class="form-control" id="registerPass"/>
                    </div>
                  <div class="form-group">
                  <div id="responsereg">
                    </div>
                          <button type="submit" class="btn btn-primary"</pre>
id="register">Register</button>
                 </form>
               </div>
             </div>
           </div>
         </div>
       <!--End of contact-->
       <!--Start of footer-->
       <section id="footer">
           <div class="container">
               <div class="row text-center">
                  <div class="col-md-6">
                      <div class="copyright">
                          © Ignjat Jokanovic 311/16 
                      </div>
                  </div>
                  <div class="col-md-6">
                      <div class="designer">
                      <?php if(isset($_SESSION['user']) && $_SESSION['user']->name
== 'admin'): ?>
                       <a href="views/admin.php">DOCUMENTATION</a>
                        <?php endif; ?>
                      </div>
                  </div>
              </div>
```

```
</div>
        </section>
        <!--End of footer-->
        <!--Scroll to top-->
        <a href="#" id="back-to-top" title="Back to top">&uarr;</a>
        <!--End of Scroll to top-->
        <!-- jQuery (necessary for Bootstrap's JavaScript plugins) -->
        <!-- <script
src='http://cdnjs.cloudflare.com/ajax/libs/jquery/2.2.2/jquery.min.js'></script>-->
        <script src="js/jquery-1.12.3.min.js"></script>
        <script src="js/code.js"></script>
        <!--Counter UP Waypoint-->
        <script src="js/waypoints.min.js"></script>
        <!--Counter UP-->
        <script src="js/jquery.counterup.min.js"></script>
        <script>
           $('.counter').counterUp({
                delay: 10,
               time: 1000
            });
        </script>
        <script src="js/gmaps.min.js"></script>
        <script
src="https://maps.googleapis.com/maps/api/js?key=AIzaSyBjxvF9oTfcziZWw--
3phPVx1ztAsyhXL4"></script>
        <!--Isotope-->
        <script src="js/isotope/min/scripts-min.js"></script>
        <script src="js/isotope/cells-by-row.js"></script>
        <script src="js/isotope/isotope.pkgd.min.js"></script>
        <script src="js/isotope/packery-mode.pkgd.min.js"></script>
        <script src="js/isotope/scripts.js"></script>
```

```
<script src="js/backtotop.js"></script>
       <!--JQuery Click to Scroll down with Menu-->
       <script src="js/jquery.localScroll.min.js"></script>
       <script src="js/jquery.scrollTo.min.js"></script>
       <!--WOW With Animation-->
       <script src="js/wow.min.js"></script>
       <!--WOW Activated-->
       <script>
           new WOW().init();
       </script>
       <script src="js/bootstrap.min.js"></script>
       <!-- Custom JavaScript-->
       <script src="js/main.js"></script>
       <script src="js/lightbox.js"></script>
   </body>
</html>
```

#### 3.13 sendMail.php

```
if(isset($_POST['sub']) && isset($_POST['msg'])){
    $code = 500;
    $err = [];
    $response = '';
    $sub = $_POST['sub'];
    $msg = $_POST['msg'];
    $re = '/^[A-Za-z0-9\s]+$/';
    if($sub == ''){
        $code = 500;
        $err[] = 'Field subject is requiered';
}
if($msg == ''){
        $code = 500;
```

```
$err[] = 'Field message is requiered';
   if(!preg_match($re, $sub)){
      $code = 500;
      $err[] = 'Field subject must contain aplha numerical
values only';
   if(!preg_match($re, $msg)){
      $code = 500;
      $err[] = 'Field message must contain aplha numerical
values only';
   if(count($err) == 0){
      $code = 200;
      mail('jokanovic.ignjat@gmail.com', $sub, $msg);
      $response = 'Thank you for your message';
   }
   else{
      $code = 500;
      foreach($err as $e){
          $response .= $e;
   }
http_response_code($code);
echo $response;
```

#### 3.14 register.php

```
<?php
include 'connection.php';

if(isset($_POST['registerMail']) && isset($_POST['registerPass'])){
    $code = 500;
    $response = '';

$mail = $_POST['registerMail'];</pre>
```

```
$pass = $_POST['registerPass'];
   reMail = "/^[A-Za-z0-9]+\@[a-z]{3,5}\.[a-z]{3,}$/";
   rePass = "/^[a-zA-Z0-9]+$/";
   $err = [];
   if(!preg match($reMail, $mail)){
      $err = 'Invalid email format';
   if($mail == ''){
      $err = 'Email field is requiered';
   if($pass == ''){
      $err = 'Password field is requiered';
   if(!preg_match($rePass, $pass)){
      $err = 'Password field requiers letters and numbers
only';
   if(count($err) == 0){
      $query1 = 'select * from user where email = :mail';
      $smt1 = $con->prepare($query1);
      $smt1->bindParam(":mail", $mail);
      $smt1->execute();
      $result1 = $smt1->fetch();
      if(!$result1){
          $passwd = md5($pass);
          $query = "insert into user values('', :email, :pass, 0, 2)";
          $stm = $con->prepare($query);
          $stm->bindParam(":email", $mail);
          $stm->bindParam(":pass", $passwd);
          $result = $stm->execute();
          if($result){
          code = 200;
          $response = 'Thank you for registering, you can
now login';
          }
      else{
          code = 500;
          $response = 'Email already taken, try something
else';
```

```
}

}
else{
    $code = 500;

    foreach($err as $e){
        $response .= $e;
    }
}

http_response_code($code);
echo $response;
```

# 3.15 logout.php

```
<?php

session_start();
unset($_SESSION['user']);
header('Location: ../index.php');</pre>
```

# 3.16 login.php

```
<?php
session_start();
include 'connection.php';</pre>
```

```
if(isset($ POST['mail']) && isset($ POST['pass'])){
    $code = 500;
    $response = '';
    $mail = $ POST['mail'];
   $pass = $_POST['pass'];
    reMail = "/^[A-Za-z0-9]+\@[a-z]{3,5}\.[a-z]{3,}$/";
    rePass = "/^[a-zA-Z0-9]+$/";
   $err = [];
    if(!preg_match($reMail, $mail)){
        $err = 'Invalid email format';
    if($mail == ''){
        $err = 'Email field is requiered';
    if($pass == ''){
        $err = 'Password field is requiered';
    if(!preg_match($rePass, $pass)){
        $err = 'Password field requiers letters and numbers only';
    if(count($err) == 0){
        $passwd = md5($pass);
        $upit = 'select u.mark as mark, u.email as email, u.pass as pass, r.name as
name from user u join role r on u.id_role=r.id where u.email = :email and u.pass=
:pass';
        $stm = $con->prepare($upit);
       $stm->bindParam(":email", $mail);
        $stm->bindParam(":pass", $passwd);
        $stm->execute();
        $result = $stm->fetch();
        if($result){
            $_SESSION['user'] = $result;
          #var_dump($result);
          $code = 200;
        else{
            code = 500;
```

```
}
else{
    $code = 500;

foreach($err as $e){
    $response += ''.$e.'';
}

http_response_code($code);
echo $response;
```

#### 3.17 connection.php

```
<?php

include 'config.php';

try{
    $con = new PDO("mysql:host=".host.";dbname=".db.";", user, pass);

    $con->setAttribute(PDO::ATTR_ERRMODE, PDO::ERRMODE_EXCEPTION);

    $con->setAttribute(PDO::ATTR_DEFAULT_FETCH_MODE, PDO::FETCH_OBJ);
}

catch(PDOException $ex){
    echo $ex->getMessage();
}
```

#### 3.18 config.php

```
<?php

define('user', 'root');
define('pass', '');</pre>
```

```
define('host', 'localhost');
define('db', 'newdb1');
```

#### 3.19 ajaxW.php

```
<?php
include 'connection.php';
if(isset($_GET['id'])){
    code = 404;
    $msg = '';
   $id = $_GET['id'];
    $query = 'select c.text as txt, i.src as src, i.alt as alt from content c join
image i on c.img_id = i.id where c.page_id = 2 and c.id = :id';
    $smt = $con->prepare($query);
    $smt->bindParam(":id", $id);
    $smt->execute();
    $result = $smt->fetch();
   if($result){
       $code = 200;
       $msg = '<div class="col-md-6">
            <img src="'.$result->src.'" alt="'.$result->alt.'"/>
       </div>
       <div class="col-md-6">
           '.$result->txt.'
       </div>';
    }
    else{
       $code = 500;
       $msg = 'Trouble loading content';
http_response_code($code);
echo $msg;
```

#### 3.20 ajaxRate.php

```
<?php
session_start();
include 'connection.php';
if(isset($_POST['mark'])){
    $code = 500;
    $msg = '';
    $mark = $_POST['mark'];
    $err = [];
    if($mark == 0){
        $err[] = 'You mush choose a value';
    if(!isset($_SESSION['user'])){
        $err[] = 'You must be logged in to wote';
   if($_SESSION['user']->mark != 0){
        $err[] = 'You already voted';
    }
    if(count($err) == 0){
        $mail = $_SESSION['user']->email;
            $query = 'update user set mark = :mark where email = :email';
            $smt = $con->prepare($query);
            $smt->bindParam(":email", $mail);
            $smt->bindParam(":mark", $mark);
            $result = $smt->execute();
            if($result){
```

#### 3.21 ajaxBuy.php

```
??php
session_start();

if(isset($_SESSION['user'])){
    $code = 200;
    $mail = $_SESSION['user']->email;
    $key = rand(0000, 1000).'-'.rand(0000, 1000).'-'.rand(0000, 1000);
    mail($mail, 'Activation key', $key);
    $msg = 'Thank you for buying this game';

}
else{
    $code = 500;
    $msg = 'You must be logged in to buy this
warpnale';
```

```
http_response_code($code);
echo $msg;
```

#### 3.22 admin.php

```
<?php
session_start();
if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'){
include 'adminHeader.php';
if(isset($_GET['page'])){
  $page = $_GET['page'];
  switch($page){
    case "userS":
     include "../admin/userStatistics.php";
     break;
    case "galUD":
      include "../admin/galeryCombo.php";
     break;
    case "galI":
     include "../admin/galeryInsert.php";
     break;
    case "typeUD":
      include "../admin/typesCombo.php";
    case "typeI":
      include "../admin/typesInsert.php";
      break;
    case "newUD":
      include "../admin/newsCombo.php";
```

```
break;
    case "newI":
      include "../admin/newsInsert.php";
     break;
    case "shopUD":
      include "../admin/shopCombo.php";
     break;
    case "shopI":
      include "../admin/shopInsert.php";
     break;
    case "sliderUD":
      include "../admin/sliderCombo.php";
     break;
    case "sliderI":
      include "../admin/sliderInser.php";
     break;
    default:
      include "../admin/userStatistics.php";
      break;
 }
include 'adminFooter.php';
else{
  header("Location: ../index.php");
```

#### 3.23 adminFooter.php

#### 3.24 andminHeader.php

```
<!-- Bootstrap Core CSS -->
    <link href="../vendor/bootstrap/css/bootstrap.min.css" rel="stylesheet">
    <!-- MetisMenu CSS -->
    <link href="../vendor/metisMenu/metisMenu.min.css" rel="stylesheet">
    <!-- Custom CSS -->
    <link href="../vendor/sb-admin-2.css" rel="stylesheet">
    <!-- Morris Charts CSS -->
    <link href="../vendor/morrisjs/morris.css" rel="stylesheet">
    <!-- Custom Fonts -->
    <link href="../vendor/font-awesome/css/font-awesome.min.css" rel="stylesheet"</pre>
type="text/css">
    <!-- HTML5 Shim and Respond.js IE8 support of HTML5 elements and media queries -
    <!-- WARNING: Respond.js doesn't work if you view the page via file:// -->
        <script
src="https://oss.maxcdn.com/libs/html5shiv/3.7.0/html5shiv.js"></script>
src="https://oss.maxcdn.com/libs/respond.js/1.4.2/respond.min.js"></script>
    <![endif]-->
</head>
<body>
    <div id="wrapper">
        <!-- Navigation -->
        <nav class="navbar navbar-default navbar-static-top" role="navigation"</pre>
style="margin-bottom: 0">
            <div class="navbar-header">
                <button type="button" class="navbar-toggle" data-toggle="collapse"</pre>
data-target=".navbar-collapse">
                    <span class="sr-only">Toggle navigation</span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                </button>
                <a class="navbar-brand" href="../index.php">BACK TO WEBSITE</a>
            <!-- /.navbar-header -->
```

```
<div class="navbar-default sidebar" role="navigation">
            <div class="sidebar-nav navbar-collapse">
               <1i>>
                     <a href="admin.php?page=userS">User Statistics</a>
                  <1i>>
                     <a href="#">Gallery<span class="fa arrow"></span></a>
                     <1i>>
                            <a href="admin.php?page=galUD">Update /
Delete</a>
                         <1i>>
                            <a href="admin.php?page=gall">Insert</a>
                         <1i>>
                     <a href="#">Types<span class="fa arrow"></span></a>
                     <1i>>
                            <a href="admin.php?page=typeUD">Update /
Delete</a>
                         <1i>>
                            <a href="admin.php?page=typeI">Insert</a>
                         <
                     <a href="#">News<span class="fa arrow"></span></a>
                     <1i>>
                            <a href="admin.php?page=newUD">Update /
Delete</a>
```

```
<1i>>
                           <a href="admin.php?page=newI">Insert</a>
                        <1i>>
                     <a href="#">Shop Item<span class="fa arrow"></span></a>
                     <1i>>
                           <a href="admin.php?page=shopUD">Update /
Delete</a>
                        <1i>>
                           <a href="admin.php?page=shopI">Insert</a>
                        <1i>>
                     <a href="#">Slider<span class="fa arrow"></span></a>
                     <1i>>
                           <a href="admin.php?page=sliderUD">Update /
Delete</a>
                        <1i>>
                           <a href="admin.php?page=sliderI">Insert</a>
                        </div>
```

### 3.25 galeryCombo.php

```
<?php
include '../php/connection.php';</pre>
```

```
?>
<?php if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'): ?>
<div id="page-wrapper">
<?php
if(isset($_POST['delG'])){
    $id = $_POST['id'];
   $query = 'delete from image where id = :id';
    $stm = $con->prepare($query);
   $stm->bindParam(":id", $id);
   $result = $stm->execute();
   if($result){
       echo '<h1>Image deleted</h1>';
   }
   else{
       echo 'The force is strong cant delete';
    }
if(isset($_POST['galUSub'])){
   $id= $_POST['idU'];
   $file = $_FILES['src'];
   $erors = [];
   $size = $file['size'];
   $name = $file['name'];
   $type = $file['type'];
   $tmp = $file['tmp_name'];
   $formats = array("image/jpg", "image/jpeg", "image/png");
   if($size == 0){
       $erors[] = 'You must put some file';
```

```
if(!in array($type, $formats)){
       $erors[] = 'File must be an image format';
   if(count($erors) == 0){
       $newName = time().$name;
       $newPath = "C:/xampp/htdocs/warplanes/img/".$newName;
       if(move_uploaded_file($tmp, $newPath)){
           $newPath1 = "img/".$newName;
           $query= "update image set src = :src where id = :id";
           $stm = $con->prepare($query);
           $stm->bindParam(":src", $newPath1);
           $stm->bindParam(":id", $id);
           $result = $stm->execute();
           if($result){
               echo 'Picture inserted successfully';
       }
   else{
       foreach($erors as $e){
           echo $e;
<?php
$query = 'select id, src, alt from image where id_page = 4';
$result = $con->query($query)->fetchAll();
<div class="row">
               <div class="col-lg-12">
                  <div class="panel panel-default">
```

```
<div class="panel-body">
                        <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                           <thead>
                               Image
                                  >Delete/Update
                           </thead>
                           <?php foreach($result as $r2): ?>
   <?= $r2->src ?>
   <form action=".../views/admin.php?page=galUD" method="POST">
   <input name="id" type="hidden" value="<?= $r2->id ?>"/>
   <button class="btn btn-primary" type="submit" name="delG">Delete</button>
   </form>
<form action="../views/admin.php?page=galUD" method="POST" enctype="multipart/form-</pre>
data">
   <input type="file" name="src">
   <input name="idU" type="hidden" value="<?= $r2->id ?>"/>
   name="galUSub">Update</button>
</form>
<?php endforeach; ?>
</div>
</div>
</div>
</div>
<?php else: ?>
```

```
<?php
header('Location: ../index.php');
endif;
?>
```

#### 3.26 galeryInsert.php

```
<?php if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'): ?>
<div id="page-wrapper">
<div class="row">
              <div class="col-lg-12">
                  <div class="panel panel-default">
                      <div class="panel-body">
                      <form action="../views/admin.php?page=galI" method="POST"</pre>
enctype="multipart/form-data">
                          <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                             Image:
   <input type="file" name="galF">
<to>class="btn btn-primary" name="galSub">
```

```
</button>
</form>
</div>
</div>
<?php
if(isset($_POST['galSub'])){
   include '../php/connection.php';
   $file = $_FILES['galF'];
   $erors = [];
   $size = $file['size'];
   $name = $file['name'];
   $type = $file['type'];
   $tmp = $file['tmp_name'];
   $formats = array("image/jpg", "image/jpeg", "image/png");
   if($size == 0){
       $erors[] = 'You must put some file';
   if(!in_array($type, $formats)){
       $erors[] = 'File must be an image format';
   if(count($erors) == 0){
       $newName = time().$name;
       $newPath = "C:/xampp/htdocs/warplanes/img/".$newName;
       if(move_uploaded_file($tmp, $newPath)){
          $newPath1 = "img/".$newName;
          $query= "insert into image values('', :src, 'world of warplanes', 4)";
          $stm = $con->prepare($query);
          $stm->bindParam(":src", $newPath1);
          $result = $stm->execute();
          if($result){
              echo 'Picture inserted successfully';
       }
```

```
else{
        foreach($erors as $e){
            echo $e;
</div>
</div>
<?php else: ?>
<?php
header('Location: ../index.php');
endif;
?>
```

## 3.27 newsCombo.php

```
<!php
include '../php/connection.php';

?>

<!php if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'): ?>
```

```
<div id="page-wrapper">
<?php
if(isset($_POST['delN'])){
    $id = $_POST['nid'];
   $imageId = $_POST['gid'];
    $query = 'delete from image where id = :id';
   $stm = $con->prepare($query);
   $stm->bindParam(":id", $imageId);
    $result = $stm->execute();
   $query1 = 'delete from content where id= :gid';
    $stm1 = $con->prepare($query1);
   $stm1->bindParam(":gid", $imageId);
   $result1 = $stm1->execute();
    if($result && $result1){
       echo '<h1> 1 News deleted</h1>';
    }
   else{
       echo 'The force is strong cant delete';
if(isset($_POST['upN'])){
    $id= $_POST['idUN'];
   $imageId = $_POST['idUI'];
    $heading = $_POST['upNH'];
   $txt = $_POST['upNT'];
   $file = $_FILES['upNI'];
   $erors = [];
   $size = $file['size'];
   $name = $file['name'];
    $type = $file['type'];
   $tmp = $file['tmp_name'];
    $formats = array("image/jpg", "image/jpeg", "image/png");
    if($size == 0){
        $erors[] = 'You must put some file';
```

```
if(!in_array($type, $formats)){
       $erors[] = 'File must be an image format';
   if($heading == ''){
       $erors[] = 'Heading must not be empty';
   if($txt == ''){
       $erors[] = 'Text must not be empty';
   if(count($erors) == 0){
       $newName = time().$name;
       $newPath = "C:/xampp/htdocs/warplanes/img/".$newName;
       if(move_uploaded_file($tmp, $newPath)){
          $newPath1 = "img/".$newName;
          $query= "update image set src = :src where id = :id";
          $stm = $con->prepare($query);
          $stm->bindParam(":src", $newPath1);
          $stm->bindParam(":id", $imageId);
          $result = $stm->execute();
          $query1 = 'update content set heading = :h1, text = :txt where id =
:id';
          $stm1 = $con->prepare($query1);
          $stm1->bindParam(":h1", $heading);
          $stm1->bindParam(":txt", $txt);
          $stm1->bindParam(":id", $id);
          $result1 = $stm1->execute();
          if($result && $result1){
              echo ' 1 News updated succesfully';
          }
   else{
       foreach($erors as $e){
          echo $e;
   }
```

```
<?php
$query = 'select c.id as id, i.id as gid, c.heading as h1, c.text as txt, i.src as
src from content c join image i on c.img_id = i.id where c.page_id = 3';
$result = $con->query($query)->fetchAll();
<div class="row">
              <div class="col-lg-12">
                  <div class="panel panel-default">
                      <div class="panel-body">
                          <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                             <thead>
                                 Heading
                                     Text
                                     Image
                                     >Delete/Update
                             </thead>
                             <?php foreach($result as $r2): ?>
<?= $r2->h1 ?>
   <?= $r2->txt ?>
   <?= $r2->src ?>
   <form action=".../views/admin.php?page=newUD" method="POST">
   <input name="nid" type="hidden" value="<?= $r2->id ?>"/>
   <input name="gid" type="hidden" value="<?= $r2->gid ?>"/>
   <button class="btn btn-primary" type="submit" name="delN">Delete</button>
   </form>
   <form action="../views/admin.php?page=newUD" method="POST" enctype="multipart/form-</pre>
data">
   <input type="text" name="upNH">
```

```
<input type="text" name="upNT">
   <input type="file" name="upNI">
   <input name="idUN" type="hidden" value="<?= $r2->id ?>"/>
   <input name="idUI" type="hidden" value="<?= $r2->gid ?>"/>
   <button class="btn btn-primary" type="submit"
name="upN">Update</button>
</form>
<?php endforeach; ?>
</div>
</div>
</div>
</div>
<?php else: ?>
<?php
header('Location: ../index.php');
endif;
```

#### 3.28 newsInsert.php

```
<?php if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'): ?>
```

```
<div id="page-wrapper">
<div class="row">
             <div class="col-lg-12">
                 <div class="panel panel-default">
                    <div class="panel-body">
                    <form action="../views/admin.php?page=newI" method="POST"</pre>
enctype="multipart/form-data">
                        <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                           Heading:
   <input type="text" name="newIH">
   Text:
   <input type="text" name="newIT">
   Image:
   <input type="file" name="newII">
td><button type="submit" class="btn btn-primary" name="newIS">
Upload
</button>
</form>
</div>
</div>
<?php
if(isset($_POST['newIS'])){
```

```
include '../php/connection.php';
$file = $ FILES['newII'];
$heading = $_POST['newIT'];
$txt = $_POST['newIH'];
$erors = [];
$size = $file['size'];
$name = $file['name'];
$type = $file['type'];
$tmp = $file['tmp_name'];
$formats = array("image/jpg", "image/jpeg", "image/png");
if(size == 0)
   $erors[] = 'You must put some file';
if($heading == ''){
   $erors[] = 'Heading must not be empty';
if($txt == ''){
   $erors[] = 'Text must not be empty';
if(!in_array($type, $formats)){
   $erors[] = 'File must be an image format';
if(count($erors) == 0){
   $newName = time().$name;
   $newPath = "C:/xampp/htdocs/warplanes/img/".$newName;
   if(move_uploaded_file($tmp, $newPath)){
       $newPath1 = "img/".$newName;
       $query= "insert into image values('', :src, 'wows news', null)";
       $stm = $con->prepare($query);
       $stm->bindParam(":src", $newPath1);
       $stm->execute();
       $id = $con->lastInsertId();
       $query1 = "insert into content values('', :h1, :txt, :iId, 3)";
       $stm1 = $con->prepare($query1);
       $stm1->bindParam(":h1", $heading);
       $stm1->bindParam(":txt", $txt);
       $stm1->bindParam(":iId", $id);
       $result = $stm1->execute();
       if($result){
          echo 'News inserted successfully';
      }
```

```
else{
        foreach($erors as $e){
            echo $e;
        }
</div>
</div>
<?php else: ?>
<?php
header('Location: ../index.php');
endif;
```

# 3.29 shopCombo.php

```
<?php
include '../php/connection.php';

?>

<?php if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'): ?>
```

```
<div id="page-wrapper">
<?php
if(isset($_POST['sD'])){
    $id = $_POST['shopIDD'];
   $imageId = $_POST['shopIID'];
    $query = 'delete from image where id = :id';
   $stm = $con->prepare($query);
   $stm->bindParam(":id", $imageId);
   $result = $stm->execute();
   $query1 = 'delete from shop where id= :gid';
    $stm1 = $con->prepare($query1);
   $stm1->bindParam(":gid", $imageId);
   $result1 = $stm1->execute();
    if($result && $result1){
       echo '<h1>Item deleted</h1>';
    }
   else{
       echo 'The force is strong cant delete';
if(isset($_POST['sU'])){
    $id = $_POST['idS'];
   $imageId = $_POST['idSI'];
    $nameItem = $_POST['upSN'];
   $price = $_POST['upSP'];
   $file = $_FILES['upSI'];
   $erors = [];
   $size = $file['size'];
   $name = $file['name'];
    $type = $file['type'];
   $tmp = $file['tmp_name'];
    $formats = array("image/jpg", "image/jpeg", "image/png");
    if($size == 0){
        $erors[] = 'You must put some file';
```

```
if(!in_array($type, $formats)){
   $erors[] = 'File must be an image format';
if($name == ''){
   $erors[] = 'Name must not be empty';
if($price == ''){
   $erors[] = 'Price must not be empty';
var_dump($name);
if(count($erors) == 0){
   $newName = time().$name;
   $newPath = "C:/xampp/htdocs/warplanes/img/".$newName;
   if(move_uploaded_file($tmp, $newPath)){
       $newPath1 = "img/".$newName;
       $query= "update image set src = :src where id = :id";
       $stm = $con->prepare($query);
       $stm->bindParam(":src", $newPath1);
       $stm->bindParam(":id", $imageId);
       $result = $stm->execute();
       $query1 = 'update shop set name = :name, price = :price where id = :id';
       $stm1 = $con->prepare($query1);
       $stm1->bindParam(":name", $nameItem);
       $stm1->bindParam(":price", $price);
       $stm1->bindParam(":id", $id);
       $result1 = $stm1->execute();
       if($result && $result1){
           echo 'Item updated succesfully';
       }
}
else{
   foreach($erors as $e){
       echo $e;
}
```

```
<?php
$query = 'select s.id as id, i.id as gid, s.name as name, s.price as price, i.src as
src from shop s join image i on s.img_id = i.id';
$result = $con->query($query)->fetchAll();
<div class="row">
              <div class="col-lg-12">
                  <div class="panel panel-default">
                      <!-- /.panel-heading -->
                      <div class="panel-body">
                         <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                             <thead>
                                 >
                                    Name
                                    Price
                                    Imae
                                    >Delete/Update
                                 </thead>
                             <?php foreach($result as $r2): ?>
<?= $r2->name ?>
   <?= $r2->price ?>
   <?= $r2->src ?>
   <form action=".../views/admin.php?page=shopUD" method="POST">
   <input name="shopIDD" type="hidden" value="<?= $r2->id ?>"/>
   <input name="shopIID" type="hidden" value="<?= $r2->gid ?>"/>
   <button class="btn btn-primary" type="submit" name="sD">Delete</button>
   </form>
```

```
<form action="../views/admin.php?page=shopUD" method="POST" enctype="multipart/form-</pre>
data">
   <input type="text" name="upSN">
   <input type="text" name="upSP">
   <input type="file" name="upSI">
   <input name="idS" type="hidden" value="<?= $r2->id ?>"/>
   <input name="idSI" type="hidden" value="<?= $r2->gid ?>"/>
   <button class="btn btn-primary" type="submit" name="sU">Update</button>
</form>
<?php endforeach; ?>
</div>
</div>
</div>
</div>
<?php else: ?>
<?php
header('Location: ../index.php');
endif;
```

#### 3.30 shopInsert.php

```
<?php if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'): ?>
```

```
<div id="page-wrapper">
<div class="row">
            <div class="col-lg-12">
                <div class="panel panel-default">
                   <div class="panel-body">
                   <form action="../views/admin.php?page=shopI" method="POST"</pre>
enctype="multipart/form-data">
                      <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                         Name:
   <input type="text" name="shopIN">
   Price:
   <input type="text" name="shopIP">
   Image:
   <input type="file" name="shopII">
rimary name="shop!">
Upload
</button>
</form>
</div>
</div>
```

```
<?php
if(isset($ POST['shopI'])){
   include '../php/connection.php';
   $file = $ FILES['shopII'];
   $nameItem = $_POST['shopIN'];
   $price = $_POST['shopIP'];
   $erors = [];
   $size = $file['size'];
   $name = $file['name'];
   $type = $file['type'];
   $tmp = $file['tmp_name'];
   $formats = array("image/jpg", "image/jpeg", "image/png");
   if(\$size == 0){
       $erors[] = 'You must put some file';
   if($nameItem == ''){
       $erors[] = 'Name must not be empty';
   if($price == ''){
       $erors[] = 'Price must not be empty';
   if(!in_array($type, $formats)){
       $erors[] = 'File must be an image format';
   if(count($erors) == 0){
       $newName = time().$name;
       $newPath = "C:/xampp/htdocs/warplanes/img/".$newName;
       if(move_uploaded_file($tmp, $newPath)){
           $newPath1 = "img/".$newName;
           $query= "insert into image values('', :src, 'wows news', null)";
           $stm = $con->prepare($query);
           $stm->bindParam(":src", $newPath1);
           $stm->execute();
           $id = $con->lastInsertId();
           $query1 = "insert into shop values('', :name, :price, :iId)";
           $stm1 = $con->prepare($query1);
           $stm1->bindParam(":name", $nameItem);
           $stm1->bindParam(":price", $price);
           $stm1->bindParam(":iId", $id);
           $result = $stm1->execute();
           if($result){
              echo 'Item inserted successfully';
```

```
else{
        foreach($erors as $e){
            echo $e;
        }
    }
</div>
<?php else: ?>
<?php
header('Location: ../index.php');
endif;
?>
```

### 3.31 sliderCombo.php

```
<?php
include '../php/connection.php';

?>

<?php if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'): ?>
```

```
<div id="page-wrapper">
<?php
if(isset($_POST['sliderD'])){
   $id = $_POST['sliderID'];
   $query = 'delete from image where id = :id';
   $stm = $con->prepare($query);
   $stm->bindParam(":id", $id);
   $result = $stm->execute();
   if($result){
       echo '<h1>Image deleted</h1>';
   else{
       echo 'The force is strong cant delete';
if(isset($_POST['sliderU'])){
   $id= $_POST['sliderIDU'];
   $file = $_FILES['sliderUF'];
   $erors = [];
   $size = $file['size'];
   $name = $file['name'];
   $type = $file['type'];
   $tmp = $file['tmp_name'];
   $formats = array("image/jpg", "image/jpeg", "image/png");
   if(size == 0)
       $erors[] = 'You must put some file';
   if(!in_array($type, $formats)){
       $erors[] = 'File must be an image format';
   if(count($erors) == 0){
       $newName = time().$name;
       $newPath = "C:/xampp/htdocs/warplanes/img/".$newName;
```

```
if(move_uploaded_file($tmp, $newPath)){
           $newPath1 = "img/".$newName;
           $query= "update image set src = :src where id = :id";
           $stm = $con->prepare($query);
           $stm->bindParam(":src", $newPath1);
           $stm->bindParam(":id", $id);
           $result = $stm->execute();
           if($result){
               echo 'Type updated succesfully';
   else{
       foreach($erors as $e){
           echo $e;
       }
    }
<?php
$query = 'select id, src from image where id_page = 1';
$result = $con->query($query)->fetchAll();
 <div class="row">
               <div class="col-lg-12">
                   <div class="panel panel-default">
                       <!-- /.panel-heading -->
                       <div class="panel-body">
                           <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                              <thead>
                                  >
                                      Iamge
```

```
>Delete/Update
                                </thead>
                             <?php foreach($result as $r2): ?>
<?= $r2->src ?>
   <form action=".../views/admin.php?page=sliderUD" method="POST">
   <input name="sliderID" type="hidden" value="<?= $r2->id ?>"/>
   <button class="btn btn-primary" type="submit" name="sliderD">Delete</button>
   </form>
   <form action="../views/admin.php?page=sliderUD" method="POST"</pre>
enctype="multipart/form-data">
   <input type="file" name="sliderUF">
   <input name="sliderIDU" type="hidden" value="<?= $r2->id ?>"/>
   <to>ton class="btn btn-primary" type="submit"
name="sliderU">Update</button>
<?php endforeach; ?>
</div>
</div>
</div>
</div>
<?php else: ?>
<?php
header('Location: ../index.php');
endif;
```

```
?>
```

#### 3.32 sliderInser.php

```
<?php if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'): ?>
<div id="page-wrapper">
<div class="row">
               <div class="col-lg-12">
                  <div class="panel panel-default">
                      <div class="panel-body">
                      <form action=".../views/admin.php?page=sliderI" method="POST"</pre>
enctype="multipart/form-data">
                          <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                              Image:
   <input type="file" name="sliderIimg">
td><button type="submit" class="btn btn-primary" name="sliderIsub">
Upload
</button>
```

```
</form>
</div>
</div>
<?php
if(isset($_POST['sliderIsub'])){
   include '../php/connection.php';
   $file = $_FILES['sliderIimg'];
   $erors = [];
   $size = $file['size'];
   $name = $file['name'];
   $type = $file['type'];
   $tmp = $file['tmp_name'];
   $formats = array("image/jpg", "image/jpeg", "image/png");
   if($size == 0){
       $erors[] = 'You must put some file';
   if(!in_array($type, $formats)){
       $erors[] = 'File must be an image format';
   if(count($erors) == 0){
       $newName = time().$name;
       $newPath = "C:/xampp/htdocs/warplanes/img/".$newName;
       if(move_uploaded_file($tmp, $newPath)){
           $newPath1 = "img/".$newName;
           $query= "insert into image values('', :src, 'World of Warplanes', 1)";
           $stm = $con->prepare($query);
           $stm->bindParam(":src", $newPath1);
           $result = $stm->execute();
           if($result){
              echo 'Image inserted successfully';
           }
   else{
       foreach($erors as $e){
           echo $e;
```

## 3.33 typesCombo.php

```
<?php
include '../php/connection.php';

?>

<?php if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'): ?>

<div id="page-wrapper">
<?php
if(isset($_POST['tyD'])){</pre>
```

```
$id = $ POST['tyID'];
   $imageId = $_POST['tuIID'];
   $query = 'delete from image where id = :id';
   $stm = $con->prepare($query);
   $stm->bindParam(":id", $imageId);
   $result = $stm->execute();
   $query1 = 'delete from content where id= :gid';
   $stm1 = $con->prepare($query1);
   $stm1->bindParam(":gid", $imageId);
   $result1 = $stm1->execute();
   if($result && $result1){
       echo '<h1>Type deleted</h1>';
   else{
       echo 'The force is strong cant delete';
if(isset($_POST['tyU'])){
   $id= $_POST['idT'];
   $imageId = $_POST['idTI'];
   $heading = $_POST['upTH'];
   $txt = $_POST['upTT'];
   $file = $_FILES['upTI'];
   $erors = [];
   $size = $file['size'];
   $name = $file['name'];
   $type = $file['type'];
   $tmp = $file['tmp_name'];
   $formats = array("image/jpg", "image/jpeg", "image/png");
   if($size == 0){
       $erors[] = 'You must put some file';
   if(!in_array($type, $formats)){
       $erors[] = 'File must be an image format';
   if($heading == ''){
       $erors[] = 'Heading must not be empty';
```

```
if($txt == ''){
       $erors[] = 'Text must not be empty';
   if(count($erors) == 0){
       $newName = time().$name;
       $newPath = "C:/xampp/htdocs/warplanes/img/".$newName;
       if(move_uploaded_file($tmp, $newPath)){
           $newPath1 = "img/".$newName;
           $query= "update image set src = :src where id = :id";
           $stm = $con->prepare($query);
           $stm->bindParam(":src", $newPath1);
           $stm->bindParam(":id", $imageId);
           $result = $stm->execute();
           $query1 = 'update content set heading = :h1, text = :txt where id =
:id';
           $stm1 = $con->prepare($query1);
           $stm1->bindParam(":h1", $heading);
           $stm1->bindParam(":txt", $heading);
           $stm1->bindParam(":id", $id);
           $result1 = $stm1->execute();
           if($result && $result1){
               echo 'Type updated succesfully';
   }
   else{
       foreach($erors as $e){
           echo $e;
       }
   }
<?php
$query = 'select c.id as id, i.id as gid, c.heading as h1, c.text as txt, i.src as
src from content c join image i on c.img_id = i.id where c.page_id = 2';
$result = $con->query($query)->fetchAll();
```

```
<div class="row">
              <div class="col-lg-12">
                  <div class="panel panel-default">
                     <div class="panel-body">
                         <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                             <thead>
                                Heading
                                    Text
                                    Image
                                    >Delete/Update
                                </thead>
                             <?php foreach($result as $r2): ?>
   <?= $r2->h1 ?>
   <?= $r2->txt ?>
   <?= $r2->src ?>
   <form action=".../views/admin.php?page=typeUD" method="POST">
   <input name="tyID" type="hidden" value="<?= $r2->id ?>"/>
   <input name="tuIID" type="hidden" value="<?= $r2->gid ?>"/>
   <button class="btn btn-primary" type="submit" name="tyD">Delete</button>
   </form>
   <form action="../views/admin.php?page=typeUD" method="POST" enctype="multipart/form-</pre>
data">
   <input type="text" name="upTH">
   <input type="text" name="upTT">
   <input type="file" name="upTI">
   <input name="idT" type="hidden" value="<?= $r2->id ?>"/>
   <input name="idTI" type="hidden" value="<?= $r2->gid ?>"/>
   <button class="btn btn-primary" type="submit"
name="tyU">Update</button>
```

```
<?php endforeach; ?>
</div>
</div>
</div>
</div>
<?php else: ?>
<?php
header('Location: ../index.php');
endif;
```

## 3.34 typesInsert.php

```
<form action=".../views/admin.php?page=typeI" method="POST"</pre>
enctype="multipart/form-data">
                         <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                             Heading:
   <input type="text" name="typeIH">
   Text:
   <input type="text" name="typeIT">
   Image:
   <input type="file" name="typeII">
td><button type="submit" class="btn btn-primary" name="typeI">
Upload
</button>
</form>
</div>
</div>
<?php
if(isset($_POST['typeI'])){
   include '../php/connection.php';
   $file = $_FILES['typeII'];
   $heading = $_POST['typeIH'];
   $txt = $_POST['typeIT'];
   $erors = [];
   $size = $file['size'];
   $name = $file['name'];
   $type = $file['type'];
```

```
$tmp = $file['tmp_name'];
$formats = array("image/jpg", "image/jpeg", "image/png");
if($size == 0){
   $erors[] = 'You must put some file';
if($heading == ''){
   $erors[] = 'Heading must not be empty';
if($txt == ''){
   $erors[] = 'Text must not be empty';
if(!in_array($type, $formats)){
   $erors[] = 'File must be an image format';
if(count($erors) == 0){
   $newName = time().$name;
   $newPath = "C:/xampp/htdocs/warplanes/img/".$newName;
   if(move_uploaded_file($tmp, $newPath)){
       $newPath1 = "img/".$newName;
       $query= "insert into image values('', :src, ':alt', null)";
       $stm = $con->prepare($query);
       $stm->bindParam(":src", $newPath1);
       $stm->bindParam(":alt", $heading);
       $stm->execute();
       $id = $con->lastInsertId();
       $query1 = "insert into content values('', :h1, :txt, :iId, 3)";
       $stm1 = $con->prepare($query1);
       $stm1->bindParam(":h1", $heading);
       $stm1->bindParam(":txt", $txt);
       $stm1->bindParam(":iId", $id);
       $result = $stm1->execute();
       if($result){
          echo 'Type inserted successfully';
else{
   foreach($erors as $e){
       echo $e;
}
```

```
?>
</div>
</div>
</php else: ?>
</php
header('Location: ../index.php');
endif;
?>
```

#### 3.35 userStatistics

```
<?php if(isset($_SESSION['user']) && $_SESSION['user']->name == 'admin'): ?>

<div id="page-wrapper">
<?php
include '../php/connection.php';

$query = 'select u.email as mail, u.mark as mark, r.name as role from user u join role r on u.id_role = r.id';
$result = $con->query($query)->fetchAll();
$number = 0;
$marks = 0;
foreach($result as $r){
    $number ++;
    $marks += $r->mark;
```

```
$final = $marks/$number;
<div class="row">
             <div class="col-lg-12">
                 <div class="panel panel-default">
                    <div class="panel-body">
                       <table width="100%" class="table table-striped table-
bordered table-hover" id="dataTables-example">
                           <thead>
                              Email
                                  Mark
                                 Role
                              </thead>
                           <?php foreach($result as $r2): ?>
   <?= $r2->mail ?>
   <?= $r2->mark ?>
   <?= $r2->role ?>
<?php endforeach; ?>
</div>
</div>
</div>
<h1 class="text-center">Average Mark of website: <?= $final ?></h1>
</div>
```

```
<?php else: ?>
<?php
header('Location: ../index.php');
endif;
?>
```

#### 3.36 code.js

```
$(document).ready( function() {
   $('#login').on('click', function(e){
       e.preventDefault();
       if(checkLogin() == true){
           var mail = $('#loginMail').val();
           var pass = $('#loginPass').val();
           $.ajax({
               method: 'POST',
               url: 'http://localhost/warplanes/php/login.php',
               data: {mail: mail, pass: pass},
               complete: function(xhr, textStatus, errorThrown){
                  if(xhr.status == 200){
                      location.reload();
                },
                error: function(){
                   var txt = 'Invalid username or
password';
                   $('#responseLogin').html(txt);
```

```
}
        });
    else{
        checkLogin();
});
$('.click').on('click', function(e){
    e.preventDefault();
    var href = (this).href;
    $.ajax({
        url: href,
        complete: function(data){
           var show = data.responseText;
            $('#types').html(show);
        },
        error: function(data, xhr, xhrs){
```

```
});
});
$('#rate').on('click', function(e){
   e.preventDefault();
   var mark = $('#ddl').val();
   if(mark != 0){
       $.ajax({
           method: 'POST',
           url: 'http://localhost/warplanes/php/ajaxRate.php',
           data: {mark : mark},
           complete: function(data){
              var show = data.responseText;
               $('#responseRate').html(show);
           },
           error: function(data, xhr, xhrs){
               var show = data.responseText;
               $('#responseRate').html(show);
       });
    }
   else{
       var txt = 'You mush choose a value';
       $('#responseRate').html(txt);
```

```
}
});
$('#register').on('click', function(e){
    e.preventDefault();
    if(checkReg() == true){
        var mail = $('#registerMail').val();
        var pass = $('#registerPass').val();
        $.ajax({
            method: 'POST',
            url: 'http://localhost/warplanes/php/register.php',
            data: {registerMail: mail, registerPass: pass},
            complete: function(data){
                var show = data.responseText;
                $('#responsereg').html(show);
             },
             error: function(data){
                var show = data.responseText;
                $('#responsereg').html(show);
             }
        });
    else{
```

```
checkReg();
    }
});
$('#send').on('click', function(e){
   e.preventDefault();
   var sub = $('#subject').val();
   var msg = $('#msg').val();
   var adress = 'http://localhost/warplanes/php/sendMail.php';
   if(checkContact() == true){
        $.ajax({
            method: 'POST',
            url: adress,
            data: {sub : sub, msg : msg},
            complete: function(data){
               var show = data.responseText;
                $('#res').html(show);
            },
            error: function(data, xhr, xhrs){
                var show = data.responseText;
                $('#res').html(show);
```

```
});
   else{
        checkContact();
});
$('.buy_me').on('click', function(){
    $.ajax({
        url: 'http://localhost/warplanes/php/ajaxBuy.php',
        complete: function(data){
           var show = data.responseText;
            $('.feedback').html(show);
        error: function(data, xhr, xhrs){
            var show = data.responseText;
            $('#feedback').html(show);
    });
});
```

```
});
function checkContact(){
    var sub = document.getElementById('subject').value;
    var msg = document.getElementById('msg').value;
    var err = document.getElementsByName('errC');
    var re = /^[A-Za-z0-9\s]+$/;
    var errMsg = ['This fied is requiered', 'This field must contain leters or
numbers only'];
    if(sub == '' && msg == ''){
        for(var i = 0; i < errMsg.length; i++){</pre>
            err[i].innerHTML = errMsg[0];
        return false;
    if(sub == ''){
        err[0].innerHTML = errMsg[0];
        return false;
    if(msg = ''){
        err[1].innerHTML = errMsg[0];
        return false;
    if(!sub.match(re) && !msg.match(re)){
        for(var i = 0; i < errMsg.length; i++){</pre>
            err[i].innerHTML = errMsg[1];
        return false;
    if(!sub.match(re)){
        err[0].innerHTML = errMsg[1];
        return false;
```

```
return true;
function checkLogin(){
    var mail = document.getElementById('loginMail').value;
    var pass = document.getElementById('loginPass').value;
    var reMail = /^[A-Za-z0-9]+\@[a-z]{3,5}\.[a-z]{3,}$/;
    var rePass = /^[a-zA-Z0-9]+$/;
    var msg = ['This field is required', 'This field must contain leters or numbers
only', 'This field must be valied email adress'];
    var err = document.getElementsByName('err');
    if(mail == " " && pass == " "){
        for(var i = 0; i < err.lenght; i++){</pre>
            err[i].innerHTML = msg[0];
        return false;
    if(!mail.match(reMail) && !pass.match(rePass)){
        err[0].innerHTML = msg[2];
        err[1].innerHTML = msg[1];
        return false;
    if(mail == ''){
        err[0].innerHTML = msg[0];
        return false;
    if(pass == ''){
        err[1].innerHTML = msg[0];
        return false;
    if(!mail.match(reMail)){
        err[0].innerHTML = msg[2];
        return false;
```

```
if(!pass.match(rePass)){
        err[1].innerHTML = msg[1];
        return false;
    return true;
function checkReg(){
    var mail = document.getElementById('registerMail').value;
    var pass = document.getElementById('registerPass').value;
    var reMail = /^[A-Za-z0-9]+\\@[a-z]{3,5}\\.[a-z]{3,}$/;
    var rePass = /^[a-zA-Z0-9]+$/;
    var msg = ['This field is required', 'This field must contain leters or numbers
only', 'This field must be valied email adress'];
    var err = document.getElementsByName('errReg');
    if(mail == " " && pass == " "){
        for(var i = 0; i < err.lenght; i++){</pre>
            err[i].innerHTML = msg[0];
        }
        return false;
    if(!mail.match(reMail) && !pass.match(rePass)){
        err[0].innerHTML = msg[2];
        err[1].innerHTML = msg[1];
        return false;
    if(mail == ''){
        err[0].innerHTML = msg[0];
        return false;
    if(pass == ''){
        err[1].innerHTML = msg[0];
        return false;
```

```
}
if(!mail.match(reMail)){

    err[0].innerHTML = msg[2];
    return false;

}
if(!pass.match(rePass)){

    err[1].innerHTML = msg[1];
    return false;

}
return true;

}
```