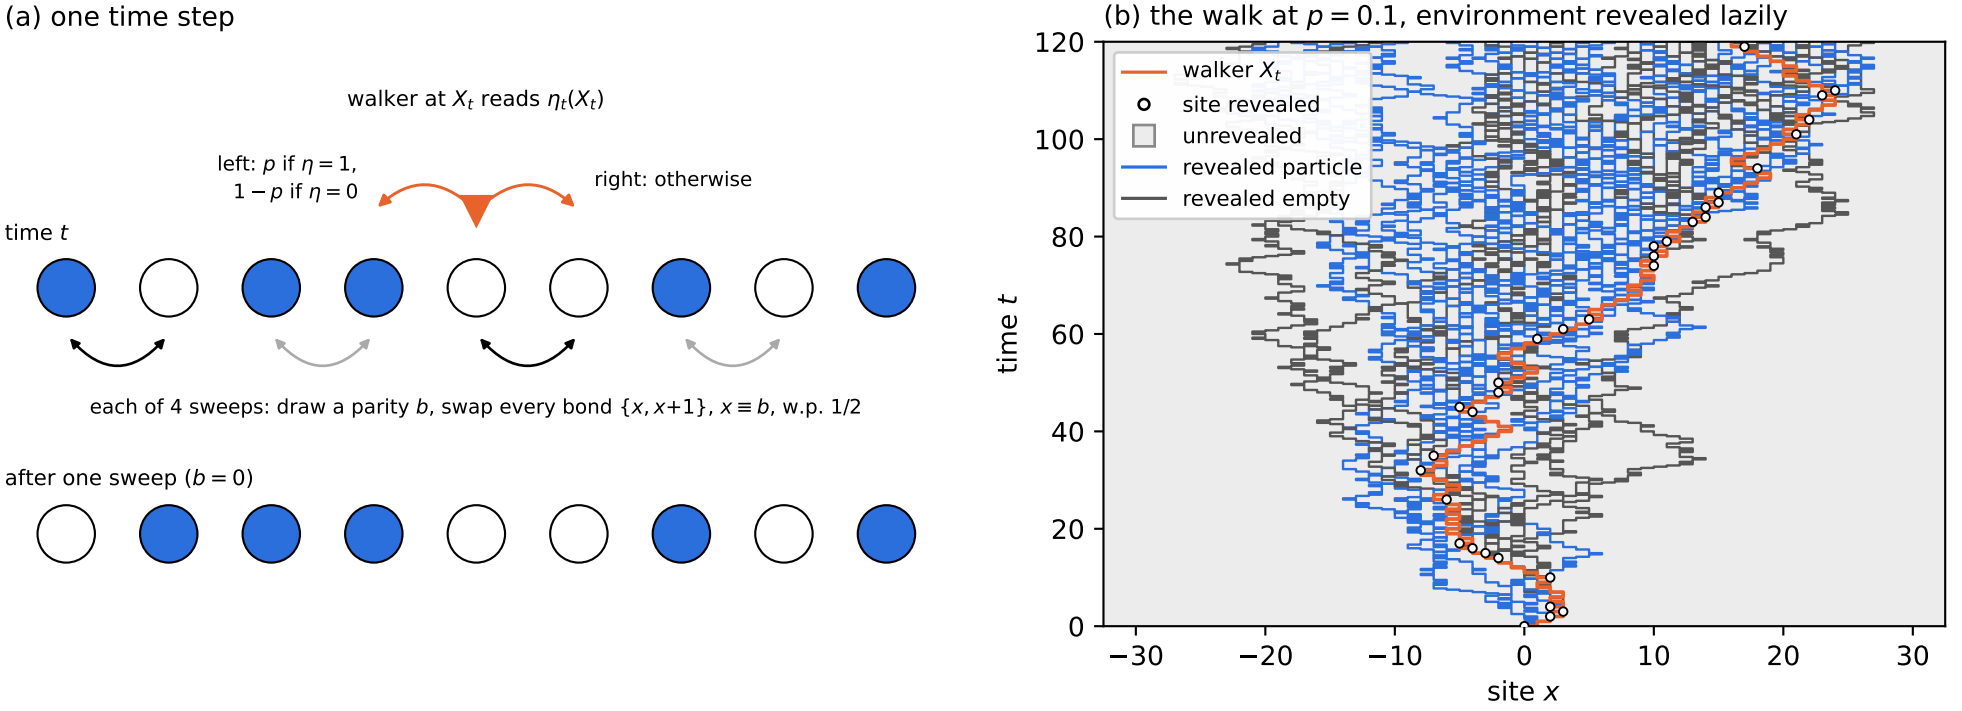
(a) one time step
walker at X_t reads $\eta_t(X_t)$
left: p if $\eta = 1$,
$1-p$ if $\eta = 0$
right: otherwise
time t
each of 4 sweeps: draw a parity b, swap every bond $\{x, x+1\}$, $x \equiv b$, w.p. 1/2
after one sweep ($b = 0$)
(b) the walk at $p = 0.1$, environment revealed lazily
walker X_t
site revealed
unrevealed
revealed particle
revealed empty
time t
site x
0
20
40
60
80
100
120
−30
−20
−10
0
10
20
30