



Application aware error correction: error against physical qubit cost


10 subjects (EPCTL01 to 07, 09, 11 and 12, three seeds each, averaged within subject), depolarizing noise p = 0.02, 50 shots, 20 held out windows per run

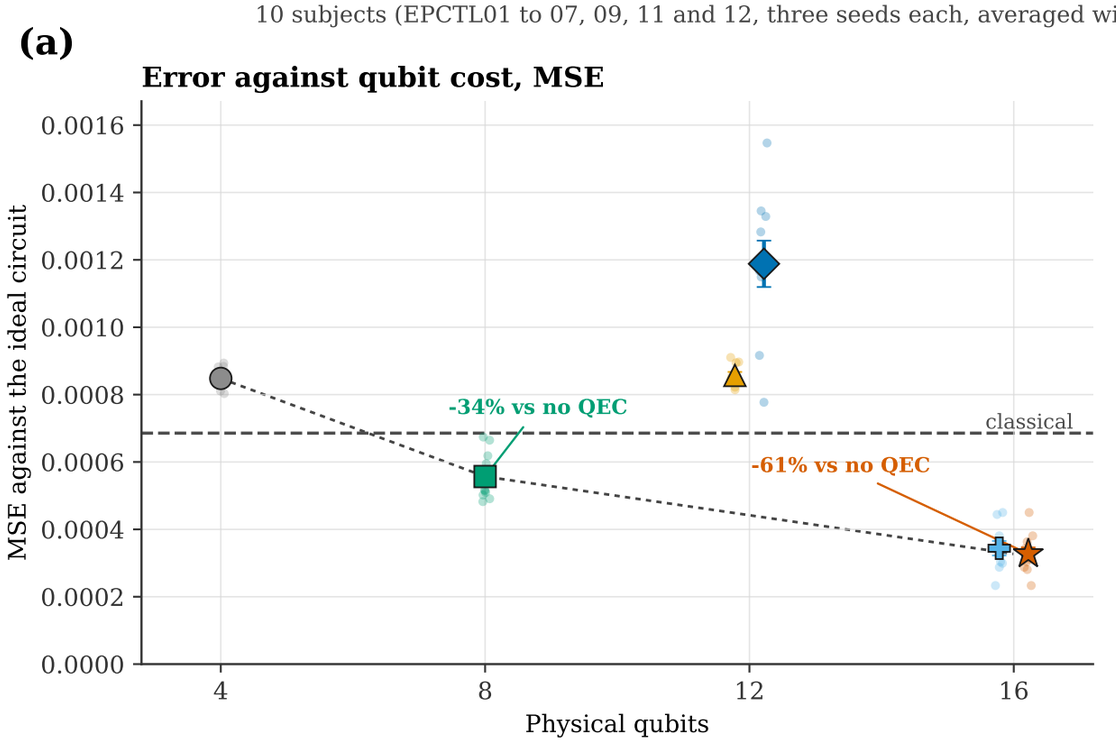


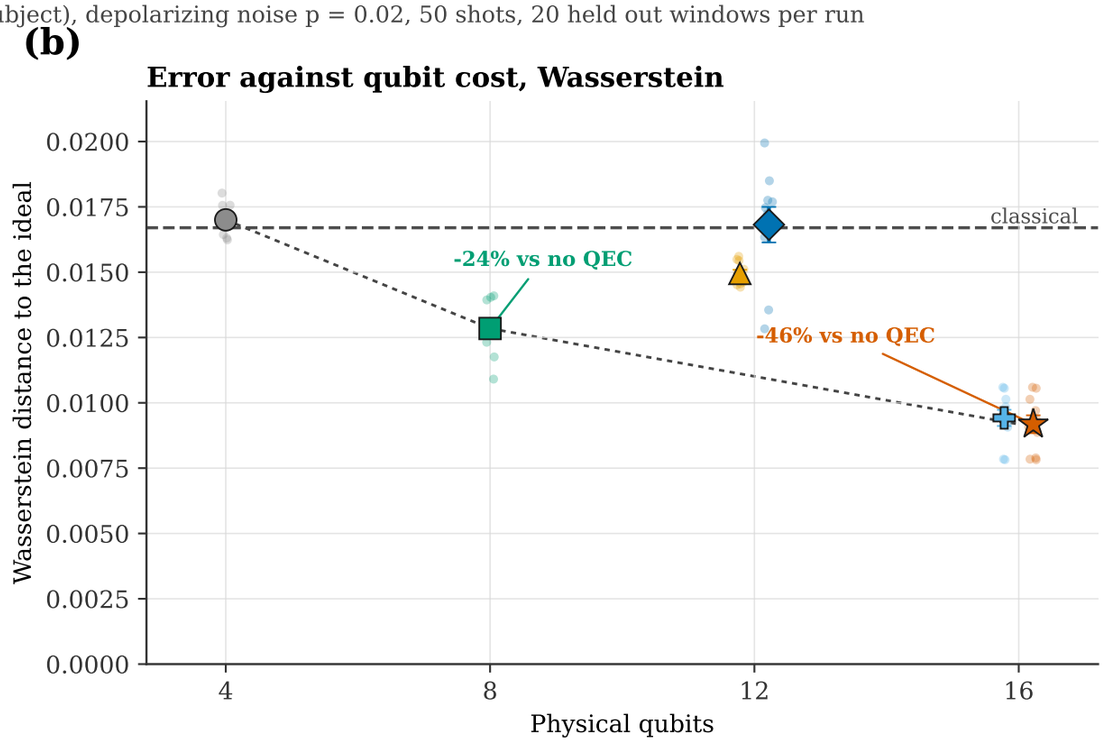

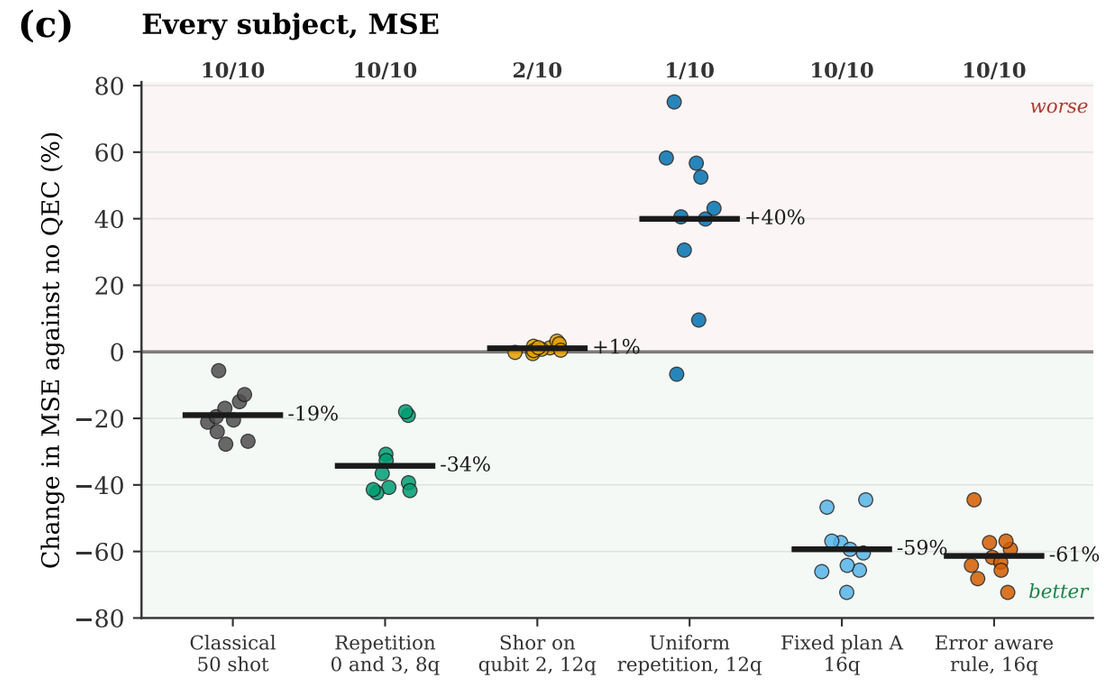

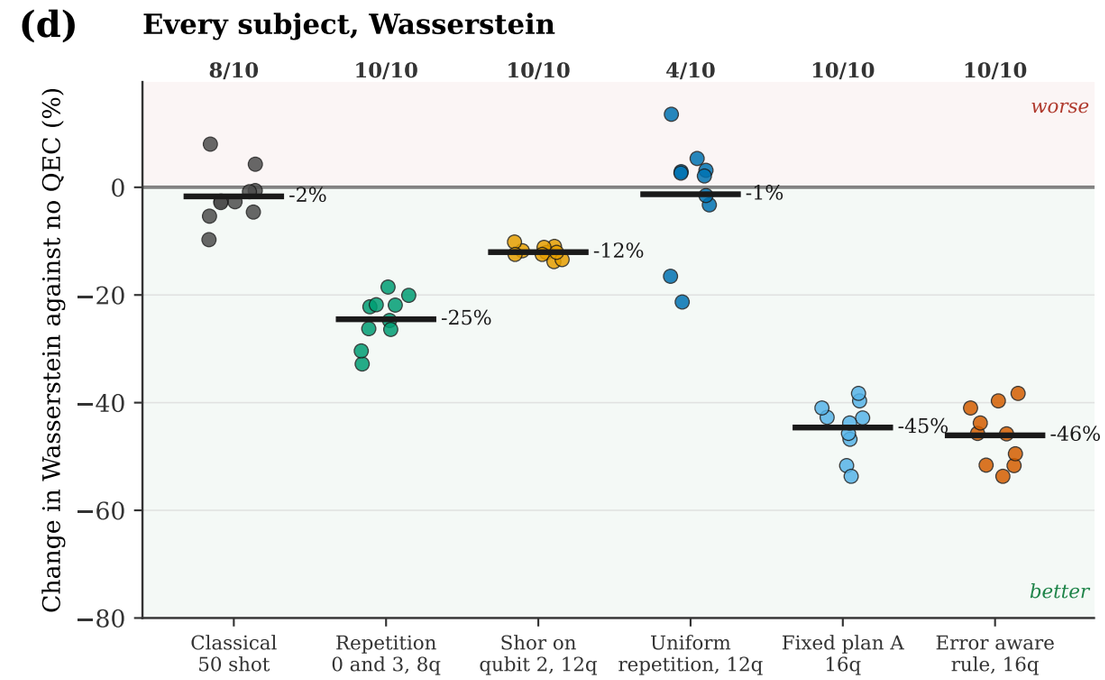

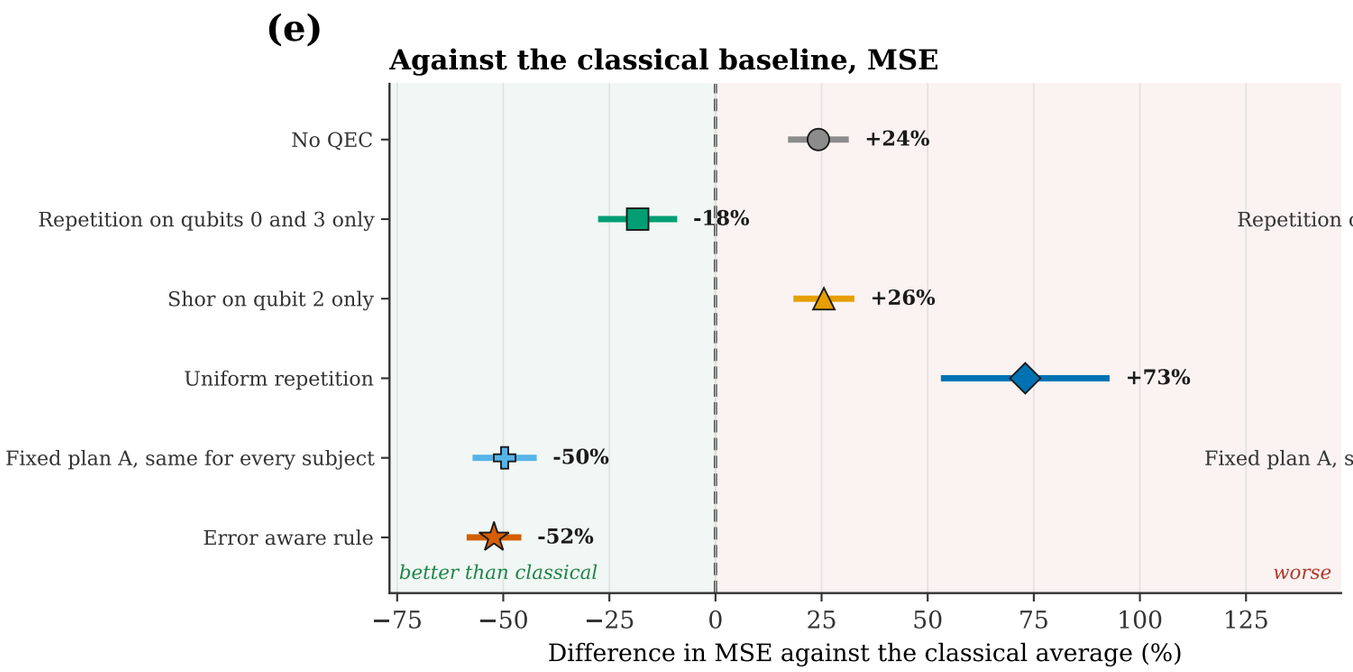

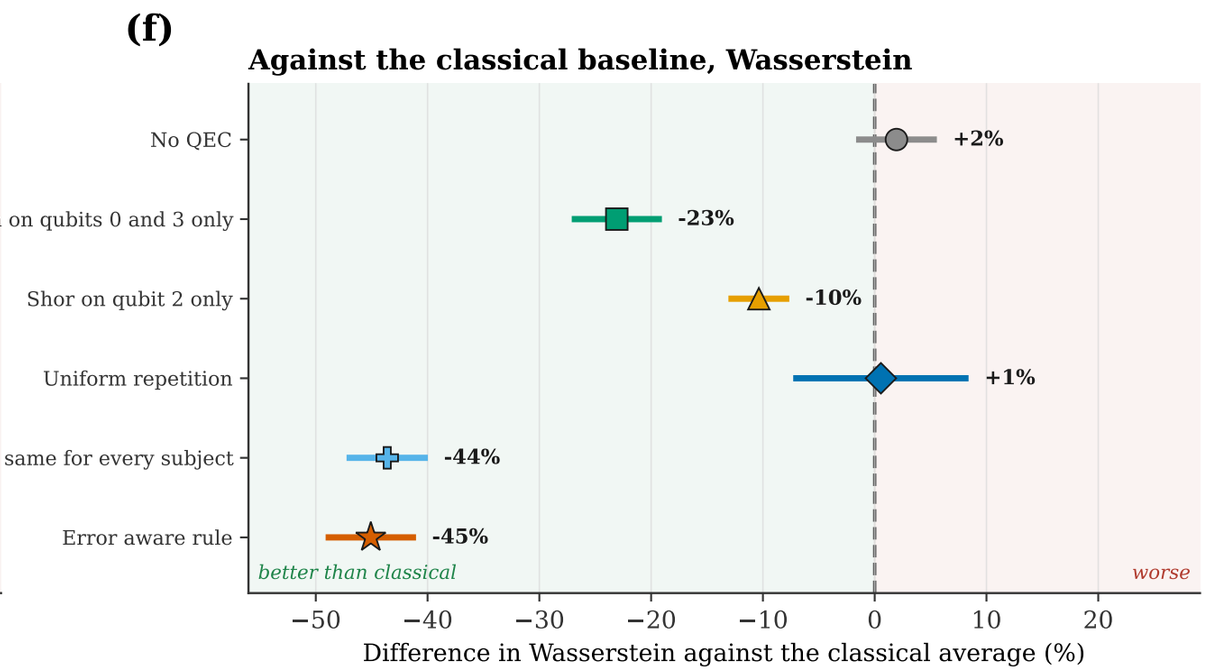

(a, b) mean and standard error over subjects, faint dots are single subjects. (c, d) one dot per subject, black bar is the mean, fractions count subjects better than no QEC.
(e, f) mean and 95% confidence interval of the subject level difference against the classical average.

No QEC
Repetition on qubits 0 and 3 only
Shor on qubit 2 only
Uniform repetition
Fixed plan A, same for every subject
Error aware rule
Classical 50 shot average
Efficient frontier