


Beavir.Businesslogic.Utilities.
PlayerLogger.OnDisable

Beavir.Businesslogic.Utilities.
PlayerLogger.OnEnable

Beavir.Businesslogic.Utilities.
PlayerLogger.OnGoBackHome

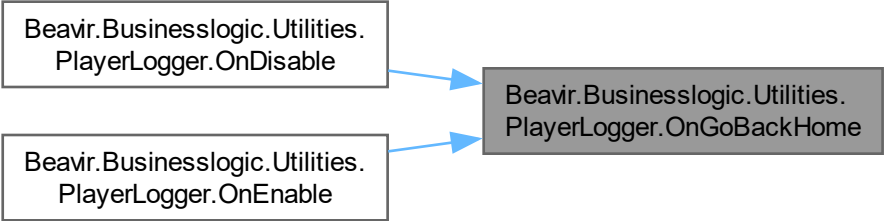

```
graph LR; A[Beavir.Businesslogic.Utilities.  
PlayerLogger.OnDisable] --> C[Beavir.Businesslogic.Utilities.  
PlayerLogger.OnGoBackHome]; B[Beavir.Businesslogic.Utilities.  
PlayerLogger.OnEnable] --> C;
```

The diagram illustrates a mapping or transformation. On the left, there are two white rectangular boxes with black borders. The top box contains the text 'Beavir.Businesslogic.Utilities. PlayerLogger.OnDisable'. The bottom box contains the text 'Beavir.Businesslogic.Utilities. PlayerLogger.OnEnable'. On the right, there is a single gray rectangular box with a black border containing the text 'Beavir.Businesslogic.Utilities. PlayerLogger.OnGoBackHome'. Two blue arrows point from the right side of each white box to the left side of the gray box, indicating that both 'OnDisable' and 'OnEnable' events are mapped to the 'OnGoBackHome' event.