

Monday 11:08 AM

Continue my Lenny Growth Assistant take-home assignment from another conversation. I'm building an Agentic AI Engineer Intern project called "The Lenny Growth Assistant." I need to follow a structured software-building process starting with a PRD, then architecture/design, then implementation using OpenCode. The assignment requires FastAPI, Claude SDK or Pi Coding Agent, Ollama for local LLM demo, PostgreSQL/Supabase or Railway, RAG over Lenny's Podcast transcripts, Ship30for30 content skill, artifact generation/viewer, public GitHub repo, agent

Show more ▾

Worked for 7s >

Yes. We were at the point where we separated **the coding agent from the model**:

- **OpenCode** → the coding/agent environment that will actually build the project.
- **Gemini / Qwen / DeepSeek / Claude** → models you can use to help generate the PRD, reason about architecture, or write code.

▬ • Your agreed workflow is:  [Free offer](#)   

PRD → Architecture → Design → Implementation → Testing → Deployment

And the first artifact should be:

docs/PRD.md



What I recommend for your assignment

Since the assignment explicitly asks for a **structured software-building process**, don't just ask Gemini:

"Write me a PRD for Lenny Growth Assistant."

Instead, use Gemini/ChatGPT to **help formulate the PRD**, then give the finalized PRD to **OpenCode** and have OpenCode build from it.

So the workflow should look like:



```
YOU
↓
Create/refine PRD
↓
docs/PRD.md
↓
OpenCode
↓
Architecture/design
↓
docs/design.md
↓
Implementation
↓
Tests + fixes
↓
GitHub
↓
2-3 min demo
```

Step 1 — PRD

Your PRD should define **what we're building**, not how we're coding it.

For your project, it should cover:

1. Problem

- User wants growth/product advice based on Lenny's Podcast knowledge and Ship30for30 content.

2. Target user

- Someone asking product/growth questions.

3. Core experience

- User asks a growth/product question.
- Agent retrieves relevant knowledge from Lenny transcripts.
- Agent can use the Ship30for30 content skill.
- Agent reasons over the retrieved information.
- Agent produces an answer and/or generated artifact.

4. Agentic behavior

- Decide when retrieval is needed.
- Decide which knowledge source/tool to use.
- Generate artifacts when appropriate.
- Show the agent's activity/transcript.

5. RAG

- Lenny's Podcast transcripts.
- Chunking/embeddings/retrieval.

- PostgreSQL/Supabase/Railway storage.

6. LLM

- Claude SDK or Pi Coding Agent for the main agent.
- Ollama for the local-LLM demonstration.

7. Backend

- FastAPI.

8. Artifact generation

- Agent can create something useful such as a framework, plan, checklist, strategy document, etc.
- Viewer in the application.

9. Observability

- Agent transcripts/logs.
- Preserve failures and corrections too, because this is part of the assignment workflow.

10. Deployment/repository

- Public GitHub repository.
- README.
- docs/PRD.md
- docs/design.md

11. Demo

- 2–3 minute demonstration showing the complete flow.

Step 2 — Don't let OpenCode code yet

This is important.

Give OpenCode the PRD and tell it something like:

Do not implement anything yet. First analyze the PRD, identify missing requirements, propose the system architecture and technical design, and create docs/design.md . Wait for approval before implementation.

That keeps the process genuinely structured rather than immediately generating a huge codebase.

Step 3 — Then implementation

Once PRD.md and design.md are solid, OpenCode becomes the main builder.

The repository could eventually look roughly like:

lenny-growth-assistant/



```
|
├─ app/
│   ├── api/
│   ├── agents/
│   ├── rag/
│   ├── skills/
│   ├── artifacts/
│   ├── db/
│   └─ main.py
├─ data/
│   └─ ...
├─ docs/
│   ├── PRD.md
│   └─ design.md
├─ tests/
├─ README.md
├─ .env.example
├─ requirements.txt
└─ ...
```

We shouldn't lock this folder structure yet. The architecture phase should decide it.

So, for your immediate question: Gemini or OpenCode for PRD?

Use Gemini/ChatGPT to help create and refine the PRD. Use OpenCode as the implementation agent.

You don't need OpenCode to be the author of every planning document. The important thing is that **OpenCode receives the finalized PRD as its source of truth before coding.**


If you want, we can do the next step **right now**: I'll ↪ help you create the actual docs/PRD.md for *The Lenny Growth Assistant*, based specifically on the assignment requirements, in a form you can directly give to OpenCode.

    ...  Sources





Pasted markdown(6).md
File

Monday 12:11 PM

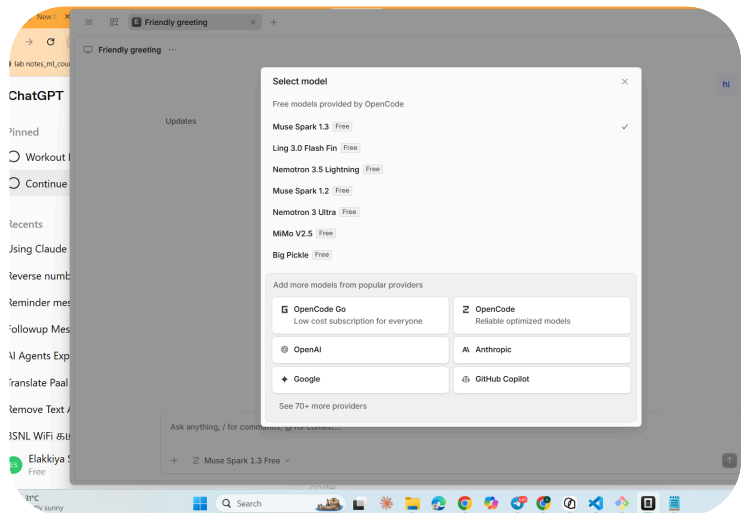


Open code has this models ... whearen Qoder had
Deepseek flash
..or am i wrong ? so i though to go with Qoder

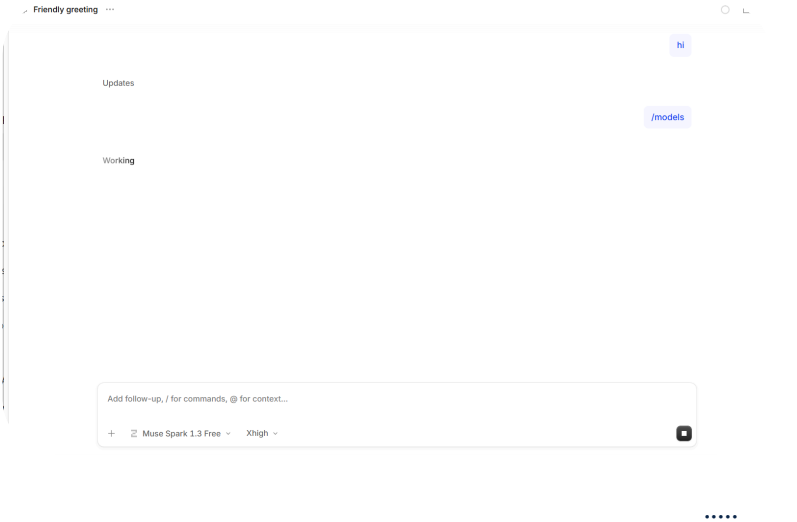


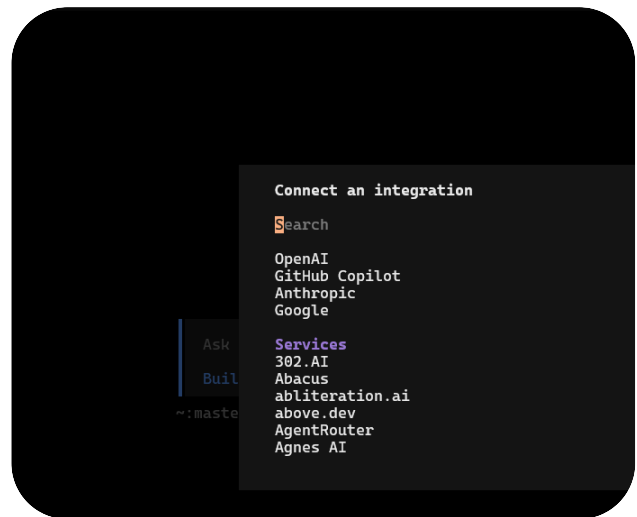


..

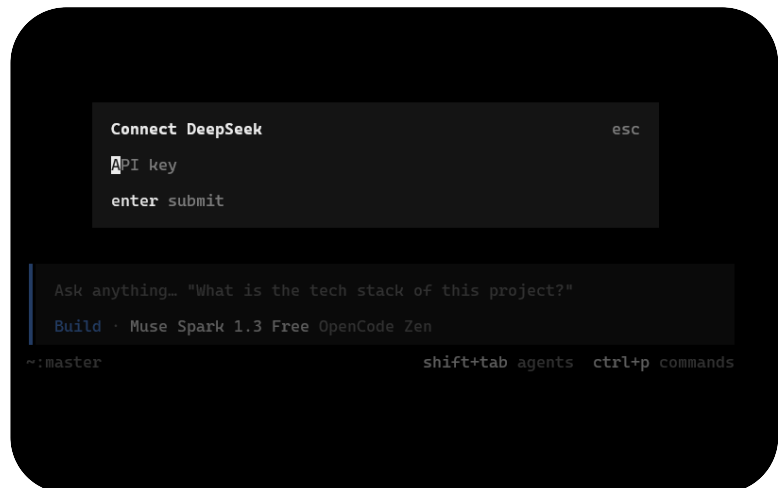

I still have some of the model from Quoder

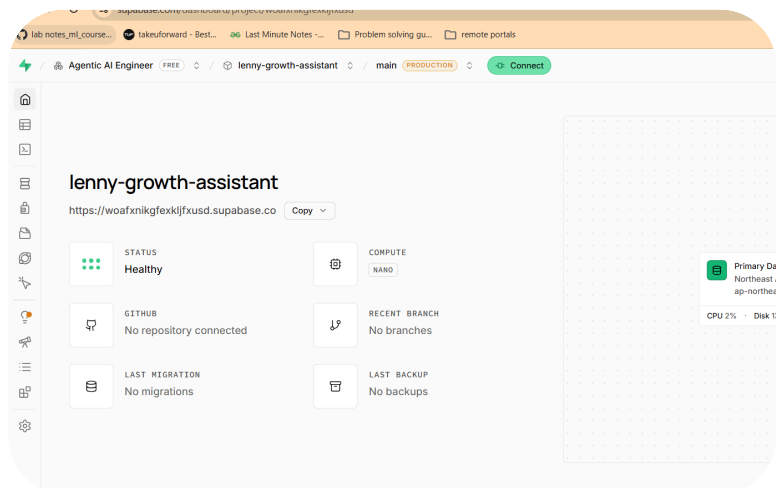

i have already just created an project in supa base do that need to be included here ?

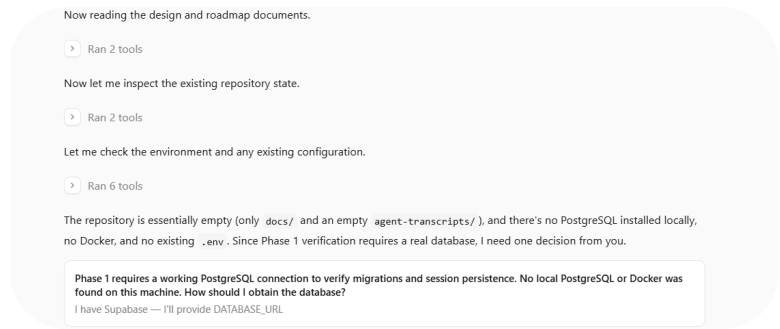


which is the connectoin url ?

is this ?

anion :

eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpc3MiOiJzdXBhYmFzZSIsInJlZi6IIndvYWZ4bmlrZ2ZleGtsamZ4dXNkliwicm9sZSI6ImFub24iLCJpYXQiOiJlE3ODk5NTk4NzMsImV4cCI6ImJE

Show more ▾

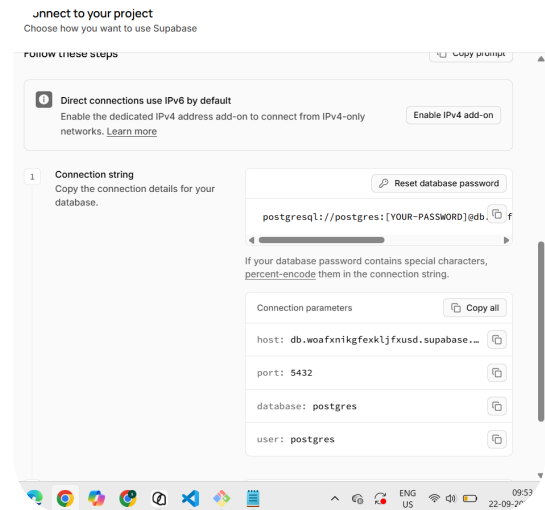

is this ? but this was under direct connection string bar
after connect

postgresql://postgres:[YOUR-
PASSWORD]@db.woafxnikgfexkljfxusd.supabase.co:5432/p
ostgres

Ran 1 tool

The direct Supabase host resolves to IPv6 only, which this machine can't reach. Let me confirm before asking you to switch endpoints.

Ran 3 tools

Confirmed the blocker: this machine has IPv6 but cannot reach Supabase's IPv6-only direct endpoint (100% packet loss), so `db.<ref>.supabase.co:5432` is unreachable from this network. Supabase's **Session pooler** endpoint is IPv4-capable.

1 files changed +1 -1

How should I get an IPv4-reachable database endpoint? (Supabase Dashboard -- Connect -- Connection string -- 'Session pooler' shows a URI like `postgres://postgres.<ref>:[PASSWORD]@aws-0-<region>.pooler.supabase.com:5432/postgres`)

1

I'll paste the Session pooler URI (Recommended)

Recommended

You paste the Session pooler connection st...

2

Auto-detect my region's pooler

I probe the known Supabase pooler regions (aws-0-<region>.pooler.supabas...

3

Skip live database verification

Keep the IPv6 URI in `.env`, skip applying migrations and live DB checks, and repo...


Enter another answer

No preference

...



lenny-growth-assistant.zip
Zip Archive

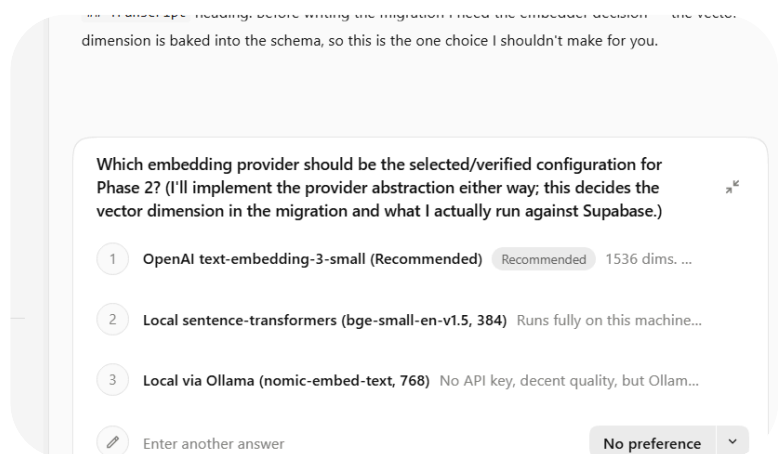

can i go with recomended ? or choose model from hugging face ?

The failure path logs no traceback. Let me make `--verbose` surface one, and add a pipeline test for the "one bad file must not abort the run" requirement.

Ran 7 tools

Memory is tight (0.7 GB free of 7.7 GB) which is slowing the run to ~60s/episode — roughly 4 hours for the remaining 236. Per-episode commits mean a crash costs at most one episode, so I'll let it run and check in periodically.

Running · 196s

Terminal command running · sleep 590; tail -1 /tmp/ingest-rest.log

Command description

Wait and check progress


\$ sleep 590; tail -1 /tmp/ingest-rest.log

⋮ Looking at options...

Step 8 / 10 · 25 files changed +2,878 -42

Press and hold the mouse to dictate text

how to make the availbale space from my side ?

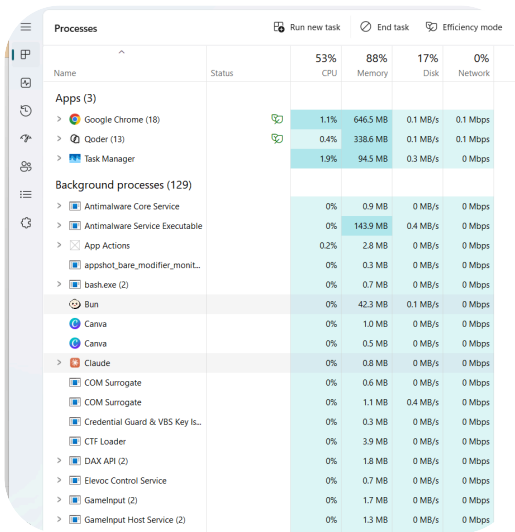

The screenshot shows the Windows Task Manager 'Processes' tab. At the top, there are buttons for 'Run new task', 'End task', and 'Efficiency mode'. Below these, a table lists running processes with columns for Name, Status, CPU, Memory, Disk, and Network. The table is divided into 'Apps (3)' and 'Background processes (129)'. In the 'Apps' section, Google Chrome (18) is using 1.1% CPU and 646.5 MB memory, Qoder (13) is using 0.4% CPU and 338.6 MB memory, and Task Manager is using 1.9% CPU and 94.5 MB memory. In the 'Background processes' section, several system services are listed, including Antimalware Core Service, Antimalware Service Executable, App Actions, appshot_bare_modifier_monit..., bash.exe (2), Bun, Canva, Claude, COM Surrogate, Credential Guard & VBS Key Is..., CTF Loader, DAX API (2), Elevoc Control Service, GamelInput (2), and GamelInput Host Service (2). The 'Bun' process is highlighted in blue, indicating it is the selected process.

Name	Status	53% CPU	88% Memory	17% Disk	0% Network
Apps (3)					
> Google Chrome (18)		1.1%	646.5 MB	0.1 MB/s	0.1 Mbps
> Qoder (13)		0.4%	338.6 MB	0.1 MB/s	0.1 Mbps
> Task Manager		1.9%	94.5 MB	0.3 MB/s	0 Mbps
Background processes (129)					
> Antimalware Core Service		0%	0.9 MB	0 MB/s	0 Mbps
> Antimalware Service Executable		0%	143.9 MB	0.4 MB/s	0 Mbps
> App Actions		0.2%	2.8 MB	0 MB/s	0 Mbps
appshot_bare_modifier_monit...		0%	0.3 MB	0 MB/s	0 Mbps
bash.exe (2)		0%	0.7 MB	0 MB/s	0 Mbps
Bun		0%	42.3 MB	0.1 MB/s	0 Mbps
Canva		0%	1.0 MB	0 MB/s	0 Mbps
Canva		0%	0.5 MB	0 MB/s	0 Mbps
> Claude		0%	0.8 MB	0 MB/s	0 Mbps
COM Surrogate		0%	0.6 MB	0 MB/s	0 Mbps
COM Surrogate		0%	1.1 MB	0.4 MB/s	0 Mbps
Credential Guard & VBS Key Is...		0%	0.3 MB	0 MB/s	0 Mbps
CTF Loader		0%	3.9 MB	0 MB/s	0 Mbps
> DAX API (2)		0%	1.8 MB	0 MB/s	0 Mbps
Elevoc Control Service		0%	0.7 MB	0 MB/s	0 Mbps
GamelInput (2)		0%	1.7 MB	0 MB/s	0 Mbps
GamelInput Host Service (2)		0%	1.3 MB	0 MB/s	0 Mbps

what is that bun ? process ?

Processes					
Name	Status	17% CPU	78% Memory	2% Disk	0% Network
> Google Chrome (18)		0%	703.1 MB	0.1 MB/s	0 Mbps
> Qoder (13)		0%	562.7 MB	0.1 MB/s	0.1 Mbps
> Python (2)		0.2%	342.6 MB	0.7 MB/s	0.1 Mbps
> Visual Studio Code (11)		0.8%	103.0 MB	0.1 MB/s	0 Mbps
> Antimalware Service Executable		0%	76.3 MB	0.4 MB/s	0 Mbps
> Task Manager		1.5%	65.1 MB	0.1 MB/s	0 Mbps
> Search (7)		0%	61.4 MB	0 MB/s	0 Mbps
> Desktop Window Manager		0%	59.3 MB	0 MB/s	0 Mbps
> Bun		0%	41.7 MB	0.1 MB/s	0 Mbps
> Secure System		0%	40.2 MB	0 MB/s	0 Mbps
> Windows Explorer		0%	31.5 MB	0 MB/s	0 Mbps
> mysgid.exe (2)		0%	21.7 MB	0.1 MB/s	0 Mbps
> Microsoft Windows Search Ind...		0.2%	18.3 MB	0.1 MB/s	0 Mbps
> Microsoft Core Worker Process		0%	14.9 MB	0 MB/s	0 Mbps
> McAfee Framework Host Servi...		0%	13.7 MB	0.1 MB/s	0 Mbps
> MongoDB Database Server		0.2%	13.7 MB	0.1 MB/s	0 Mbps
> Lenovo Notebook ITS Service		0.2%	11.7 MB	0 MB/s	0 Mbps
> Microsoft Edge (5)		0%	10.6 MB	0.1 MB/s	0 Mbps
> Sink to receive asynchronous c...		0%	10.1 MB	0 MB/s	0 Mbps
> Microsoft OneDrive Sync Servi...		0%	9.4 MB	0.1 MB/s	0 Mbps
> Service Host: Diagnostic Polity...		0%	9.3 MB	0 MB/s	0 Mbps
> Telegram Desktop		0%	7.0 MB	0 MB/s	0 Mbps
> Service Host: Remote Procedu...		0%	7.0 MB	0 MB/s	0 Mbps
> Mobile devices (2)		0.2%	5.8 MB	0 MB/s	0 Mbps

..

name / UUID

Memory is tight (0.7 GB free of 7.7 GB) which is slowing the run to ~60s/episode — roughly 4 hours for the remaining 236. Per-episode commits mean a crash costs at most one episode, so I'll let it run and check in periodically.

Running · 1697s

Terminal command ran · sleep 590; tail -1 /tmp/ingest-rest.log

Command description

Wait and check progress

```
$ sleep 590; tail -1 /tmp/ingest-rest.log
```

```
12:48:05 INFO    lenny.ingestion: [30/246] elena-verna-20: 66 chunks (inserted 2286, updated 0) | total chunks-2286 | 28m24s elapsed
```

Thought · Progress: 30/246 at 20m24s → 216 episodes left → 2.5 hours more at this pace (2 episodes/min... wait: 30 epis...

Terminal command ran · cd /d/lenny-growth-assistant && ls -d .git 2>/dev/null && cat .gitignore | head -25 && echo "...

Thought · .git exists (Phase 1 did git init), .env and .env. are ignored (with !env.example exception) — good. The dataset i...

Terminal command ran · sleep 595; tail -1 /tmp/ingest-rest.log

Thought · Pace has improved: 60/246 in 31m49s = 1.89 ep/min → 186 remaining → 98 min ≈ 1.6 hours. Let me keep wait...

Terminal command running · sleep 595; tail -1 /tmp/ingest-rest.log

⌵ Pulling out the signal...

↶ Step 8 / 10 · 25 files changed +2,878 -42

Press and hold the mouse to dictate text

i can leave this and close all ... Like I am affriad if it cant finish in 2 hours ..

<https://chatgpt.com/c/6ab0c2ca-d28c-83ee-8b39-6aa779374ceb>

420/669


Yesterday 2:44 PM



Pasted text(1).txt
Document



Pasted markdown (2).md
File

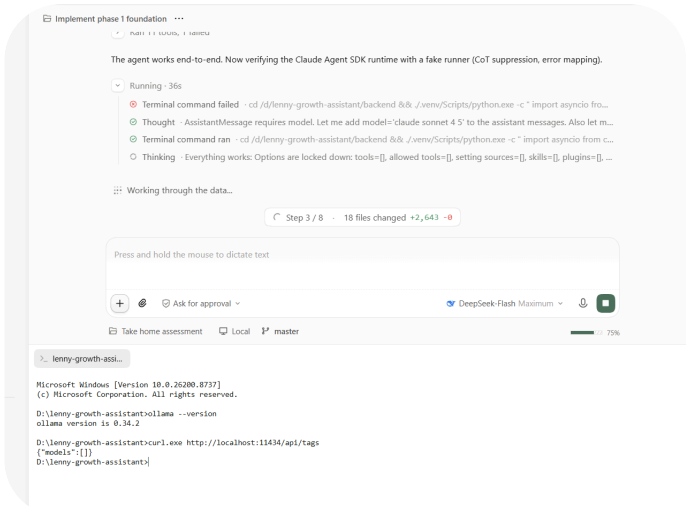

...

Yesterday 4:32 PM



Pasted text(2).txt
Document




Pasted markdown (2)(1)....
File



Pasted markdown(7).md

File

...?

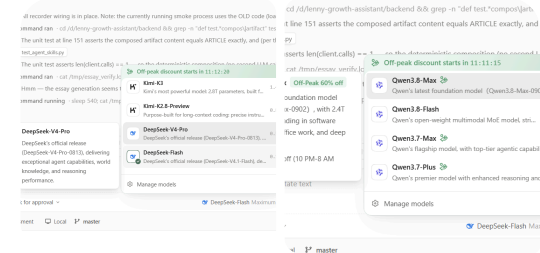

i think its for reasoning ... like better perfomance ..

Database tables

Automatically enable Row Level Security (RLS) on new tables
Protect future tables by automatically enabling RLS whenever a table is created.

Set up trigger

schema public

Search for a table

Entity Type

New table

NAME	COLUMNS	ROWS (ESTIMATED)	SIZE (ESTIMATED)	REALTIME	
alembic_version	1	1	24 kB	× Disabled	View columns
messages	6	3	80 kB	× Disabled	View columns
sessions	5	9	96 kB	× Disabled	View columns
transcript_chunks	11	22,327	129 MB	× Disabled	View columns
users	3	1	32 kB	× Disabled	View columns

5 tables

our supabase setup

Today 11:30 AM

...at test
ounded answers, essays and artifacts

first question


hi


I don't have transcript evidence to answer your question.

Ask about Lenny's transcripts, request an essay, or generate an artifact...


Placeholder text: Enter the search - "Hello"Enter text is now free


so , it wont work as an chatbot .. it's performing crct right ?

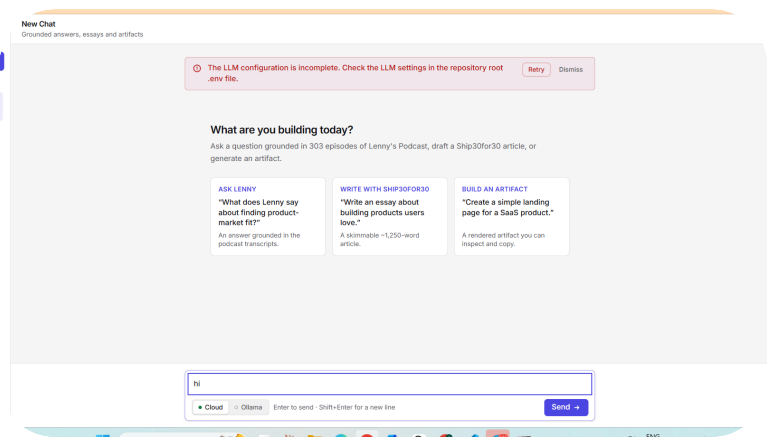

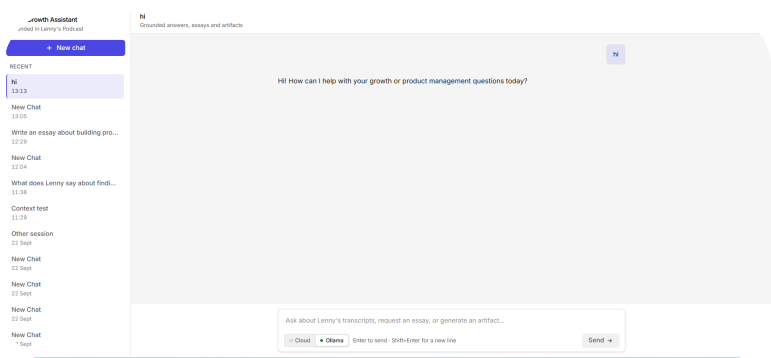


now it's working
but it wasn't before - but i have a concern it's taking 2
mins for this answer
of simple hi

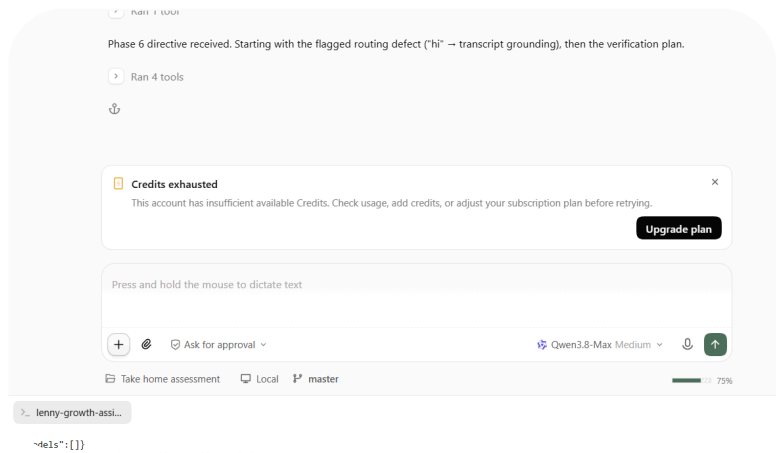

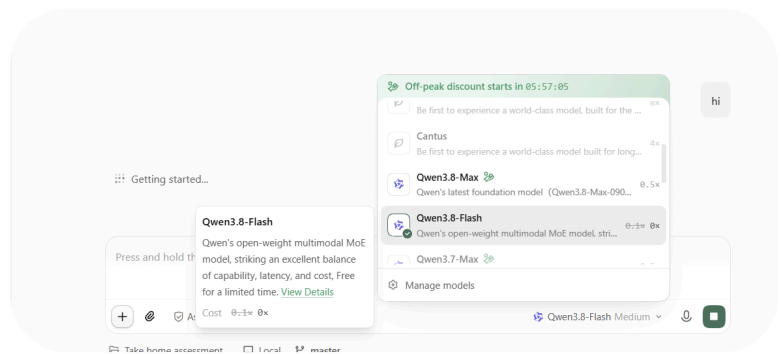

can i continue ? or stop and mnually do ?

Today 2:59 PM

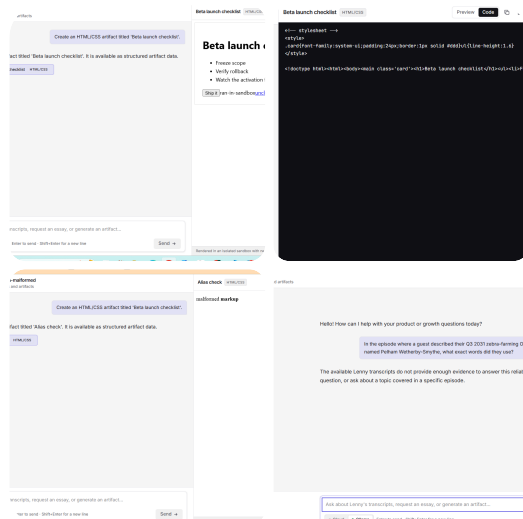


I hit a real environment blocker on the browser side, so let me first kick off the scripted end-to-end probes and address the browser panel in parallel.

Phase 6 progress while the live probes run — one environment blocker needs your hand


Need: Qoder's in-app Browser panel must be opened/visible for me to click in it. Right now it reports `visibilityState=hidden` , viewport 638x310, so clicks silently don't dispatch (the sidebar is also off-canvas)

Show more ▾





Pasted markdown(8).md
File

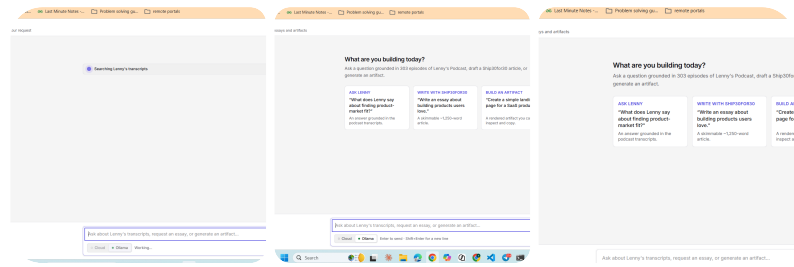

I found an issue ..

When an chat is given like " talk about pricing" in an new chat and while it is processing when i go back to another chat and came an see it does not show my prompt and its processing result also

Yes — that is a real UX/state bug worth fixing in Phase 6, and your screenshots make the behavior clear.

What is happening

In the first screenshot:

New Chat
Talk about pricing
Searching Lenny's transcripts
40s



So the request is **in progress**.

Then you switch to another conversation.

When you come back to the original New Chat , the screen shows the empty state again instead of:

You: Talk about pricing
Assistant: [processing / completed response]



Why this can happen

Your Phase 5 design intentionally delays persistence until a successful turn finishes.

So during processing, the user's message may exist only in the **frontend's temporary state**.

Then when you switch sessions:

```

Session A
└─ temporary "Talk about pricing"
    ↓
    switch to B
    ↓
Session A is reloaded from backend
    ↓
temporary message isn't in database yet
    ↓
message disappears from UI
  
```

There is a second issue to investigate: Phase 5 also had session-switch cancellation/race-safety logic. That may be interacting with the in-flight request.

So we should **not assume which one is the root cause**. Qoder needs to inspect and reproduce it.

Give Qoder this focused Phase 6 fix prompt

We found a real Phase 6 integration/UX bug.

REPRODUCTION:

1. Open a new chat/session.
2. Send:
"Talk about pricing"
3. While the request is still processing and the UI shows the activity state,
switch to another existing chat/session.
4. Return to the original chat/session.

CURRENT BAD BEHAVIOR:

The original chat no longer shows the in-flight user message, and after the request completes the processing result is also not reliably shown when returning to that session.

The expected behavior is:

Session A:

User: "Talk about pricing"

Status: processing...

Switch to Session B.

Session B:

its own messages only.

Return to Session A:

The user message must still be visible.

If generation is still in progress, show the processing state.

When the backend turn completes, the assistant response must appear in Session A.

The response must NOT appear in Session B.

IMPORTANT:

Do NOT assume the root cause.

Inspect the existing Phase 5 implementation, especially:

- useWorkspace.ts
- selection/session switching logic
- selectionRef / selection token
- AbortController / request cancellation
- streamChat / chat request handling
- optimistic message handling
- session message reload
- backend persistence timing
- run_chat_turn()
- POST /api/chat
- POST /api/chat/stream

Determine exactly which condition causes the message/result to disappear.

Possible causes to investigate:

1. optimistic user message exists only in local state and is discarded on session reload;
2. session switching aborts the client request and therefore the completion is never reflected in the UI;
3. backend continues processing after client aborts, persists successfully, but the original session is not refreshed when the user returns;
4. late-result/session-token logic drops the result incorrectly;
5. message reload races with persistence and loads stale history.

Do NOT fix this by simply disabling session switching or by forcing all sessions to share one global message list.

Desired behavior:

- each session remains isolated;
- in-flight requests are associated with their original session;
- switching sessions must not leak messages into another session;
- returning to the original session must recover the in-flight/completed turn;
- if the client intentionally cancels a request, make that behavior explicit and preserve a correct state;
- successful backend persistence must be reflected when the original session is revisited;
- no duplicate user/assistant messages;
- failed requests must still follow the existing non-persistence rule.

Prefer a small, maintainable fix.

Add regression tests covering at least:

- A. Send in Session A → switch to B while processing → return to A while still processing.
- B. A completes while B is selected → result appears only in A.
- C. Return to A after completion → persisted user + assistant messages are loaded exactly once.
- D. Session B remains unchanged.
- E. Failed request does not create persisted duplicate rows.

Run the focused tests first, then the relevant Phase 6 regression suite.

Do not reopen Phase 1-5 architecture.

Do not redesign the agent/provider/RAG system.

Do not implement Phase 7.


After the fix, reproduce the exact browser scenario once and report:

- root cause
- files changed
- regression tests
- browser result
- persistence behavior
- confirmation that Session A and B remain isolated.

One important clarification

The fact that the message disappears **while the original request is still running** is the biggest clue. Your intended UX should not make the user lose a prompt simply because they navigated to another conversation.

The clean mental model should be:

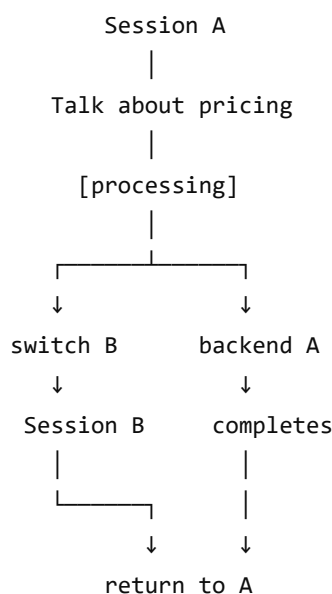



prompt + result visible

And **B** should never receive **A**'s result.

This is exactly the kind of integration bug Phase 6 is supposed to catch and fix, so you're right to stop and address it before Phase 7.





Pasted markdown(9).md
File

this is the report are we good ? and back then can I now
give the prompt

Yes — this bug fix looks correct and, importantly, it was verified in the exact scenario you originally reported.

The strongest evidence is the live **CASE 1**:

Session A request still running → switch to B → return to A **before completion** → A shows the original user message, "Searching Lenny's transcripts" , **1m 37s**, Stop button, and Sending state.

That is exactly the behavior you wanted.

The implementation also fixes the underlying problem properly: the request is now owned by its **originating session**, rather than by whichever session is currently selected. The report also confirms B stayed isolated and that the background request was not duplicated.

I would consider the bug fixed

The test coverage is also much better now:

128 frontend + 390 backend = 518 automated tests

and:

- TypeScript 
- Lint 
- Build 
- Backend tests 
- Live browser CASE 1 
- Live browser CASE 2 

So do not start another development phase or redesign anything.

But do these final cleanup steps before submission

There is one important documentation mismatch:

Your Phase 7 documentation was finalized when the frontend had **120 tests**, but this bug fix added 8 tests, bringing it to **128**. So the final README/report/transcript should not still claim the old 120/510 total.

Also, because this fix happened **after Phase 7**, I would record it as a small **post-Phase-7 bug-fix/hotfix entry** in `agent-transcripts/` rather than calling it a new phase.

And most importantly, **rotate the Supabase database password before making the GitHub repository public**, because the earlier Phase 7 process exposed that credential in the tool/session output.

You can give Qoder this final tiny cleanup prompt:

FINAL SUBMISSION CLEANUP ONLY



The session-switching bug fix is complete and verified.

Do NOT modify application behavior.

Make only these documentation updates:

1. Update frontend automated test count from 120 to 128 wherever the old number is doc
2. Update total automated tests from 510 to 518 where applicable.
3. Add one agent-transcript entry documenting this post-Phase-7 session-switching bug
 - root cause
 - implementation
 - verification
 - live CASE 1 and CASE 2 results
4. Clearly mark it as a post-Phase-7 focused bug fix/hotfix, not a new development pha
5. Do not change architecture, roadmap scope, RAG, prompts, database schema, or UI des

Then run only the lightweight final verification:

- frontend tests
- backend tests
- lint
- typecheck
- build

Report the final counts and files changed.

After that, the technical side is essentially **ready for GitHub/demo**, with the credential rotation being the important owner action before making the repo public.



How to export this entire conversation , so that i can attach it in transcript

Yes. Since you want to **attach this entire ChatGPT conversation as an agent transcript**, there are two practical options.

Best option: Export your ChatGPT data

On ChatGPT web:

Profile → Settings → Data Controls → Export Data → Confirm export

OpenAI will email you a download link. The exported ZIP contains your chat history, including the conversation data. The export can take up to **7 days**, and the download link expires after **24 hours**.  OpenAI Help Ce...

Inside the ZIP, look for the conversation data (`conversations.json` , or numbered conversation files for larger exports).  OpenAI Help Ce...

For your project, though, I recommend a simpler approach

Since you specifically want **this one conversation** as a transcript, use the conversation's **Share** option:

Open this chat → Share → Create link / Copy link

A shared conversation can include the conversation history, and the resulting link can be given to your reviewer.  OpenAI Help Ce...

However, a **Share link is not a downloadable transcript file**. For your `agent-transcripts/` folder, a `.md` or `.txt` file is cleaner.

You can also use your browser:

Ctrl + P → Save as PDF

That gives you a readable snapshot of this conversation that you can attach to your project documentation.

For your take-home, I'd use PDF for the human-readable transcript and keep the official Qoder `agent-transcripts/*.md` files as the development-agent evidence.



What is left on the task now ? Other than pushing in git ?

You are **very close to submission**. Based on the Phase 7 report + the session-switch bug fix you just completed, here's the remaining checklist.

● Must do before submission

1. Rotate the Supabase database password

- This is important because the old credential appeared during the earlier repository-wide security check.
- Update your local `.env` with the new password.

- Make sure `.env` remains ignored.
- Verify no credentials are present in tracked/project files.

2. Update documentation for the latest bug fix

- Frontend tests: 120 → 128
- Total automated tests: 510 → 518
- Add the session-switch bug fix to `agent-transcripts/`.
- Mention the live CASE 1 / CASE 2 verification.
- Don't create a new development phase; document it as a focused post-Phase-7 fix.

3. Do one final local verification

- Backend: 390 passed
- Frontend: 128 passed
- TypeScript: clean
- Lint: clean
- Build: successful
- `/api/health` : healthy
- Frontend loads correctly.

● Submission materials

4. Review README once

Make sure it reflects the final state, especially:

- 518 total tests
- actual limitations
- Ollama setup
- Claude/cloud setup
- artifact viewer
- architecture
- agent transcripts
- known HTML/Ollama limitation
- session-switch fix if relevant.

5. Prepare the 2–3 minute demo

Your `docs/demo-script.md` already exists. The demo should show the important assignment requirements rather than trying to demonstrate every feature.

A good flow:

① New Chat → ② Lenny transcript Q&A → ③ sources → ④ Ship30for30 → ⑤ artifact viewer → ⑥ Ollama toggle → ⑦ session switching

Because Ollama is slow, your Phase 7 preparation already accounts for pre-generating named sessions.

6. Record the YouTube demo

- Camera enabled as required by the assignment.
- Keep it around 2–3 minutes.
- Free-form rather than reading the script word-for-word.

● Then

7. Create the Git commit

8. Push to public GitHub

9. Verify the public repository

- `.env` absent
- no secrets
- README renders
- required docs present
- `agent-transcripts/` present
- tests/docs visible.

10. Submit the GitHub repo + YouTube link + whatever submission form/details they requested.

One thing I would NOT do now

Don't start another big implementation cycle.

Your latest bug fix has already addressed the actual issue you discovered, and it was verified with the exact "switch away while still processing → return before completion" scenario.

So the remaining work is essentially:

🔑 Rotate credential → 📄 update docs/transcript → 🧪 final verification → 🎥 demo → 🚀 GitHub → submit.

That's it.



 Full server control, zero corporate complexity

 Bluehost

Ad ...

Check VPS Plans & Pricing

Full root access, 99.9% uptime & 24/7 support. Join 5M+ on Bluehost.

ChatGPT can make mistakes. Check important info.