






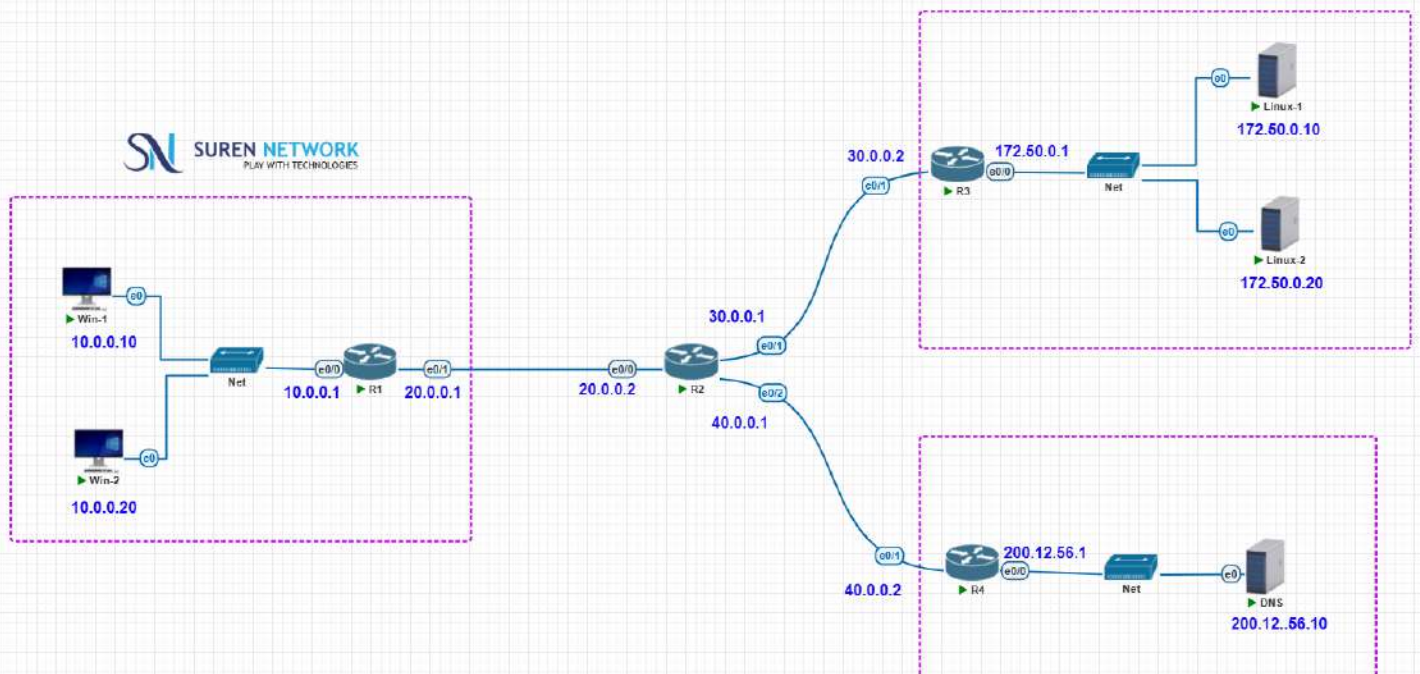

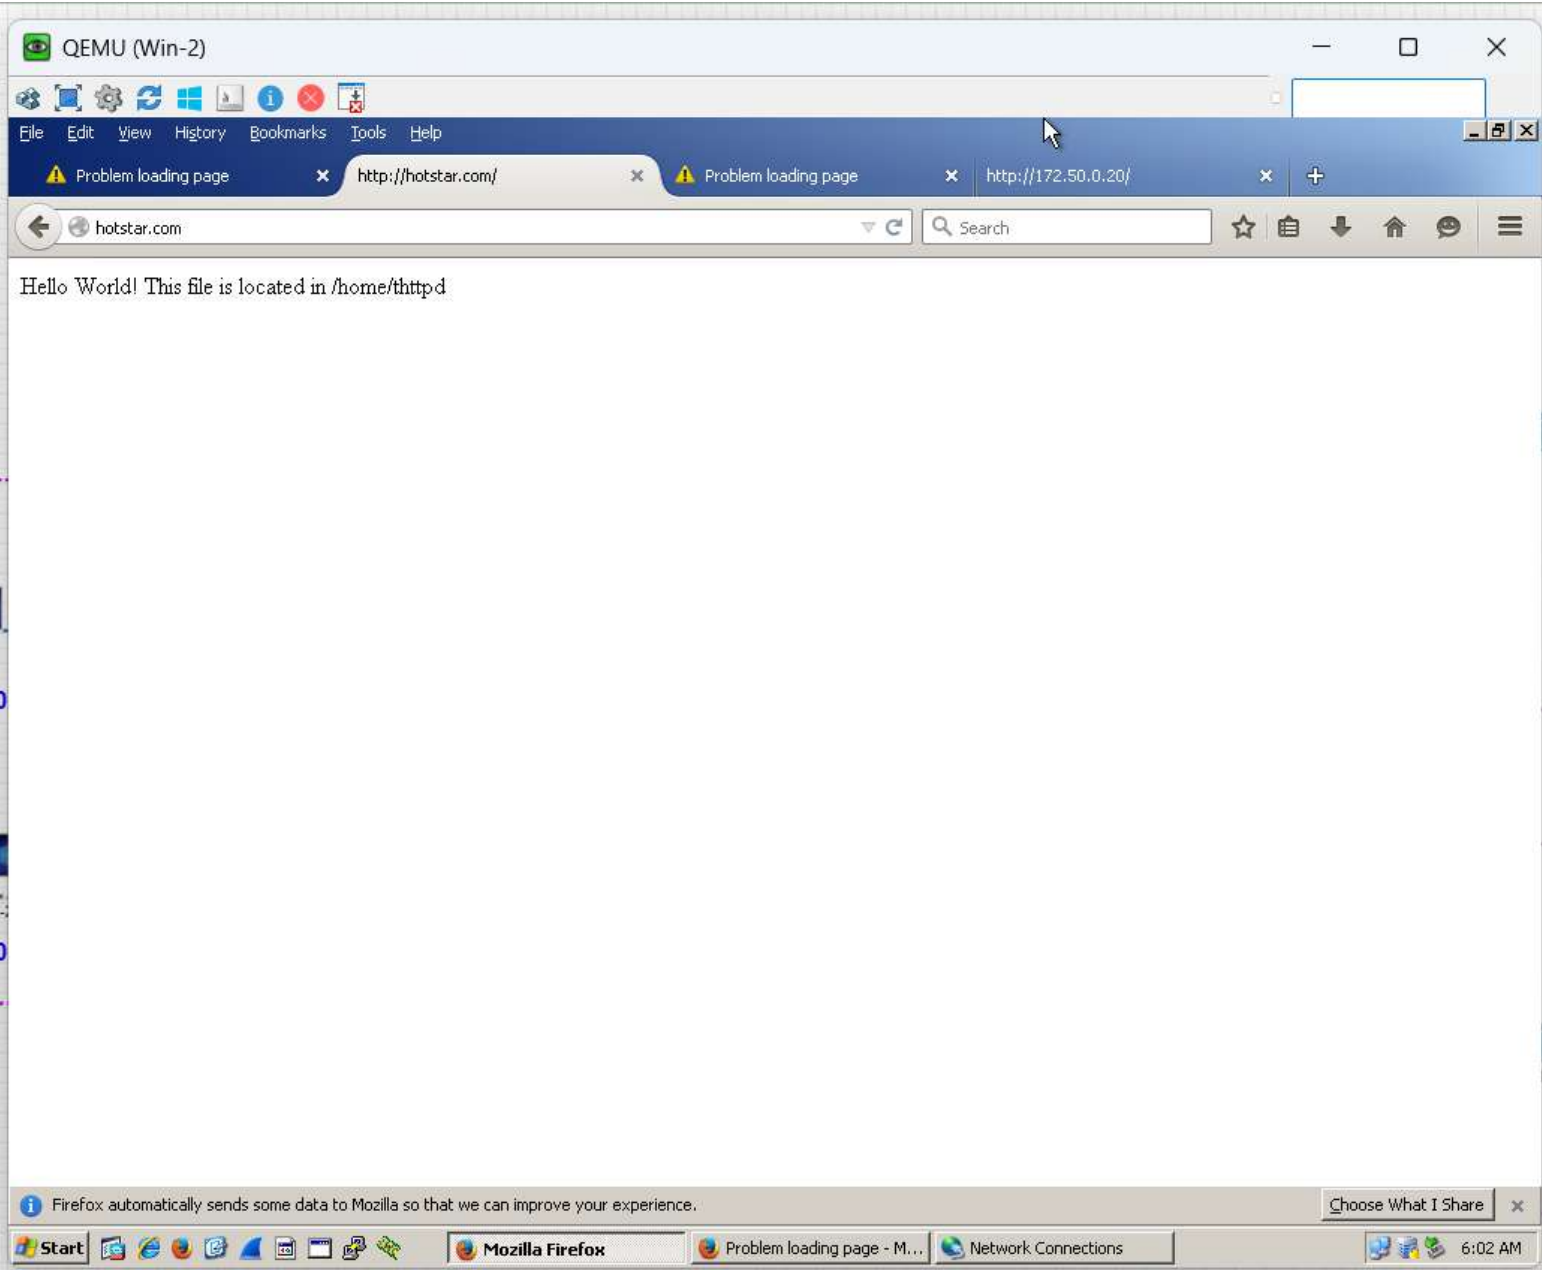

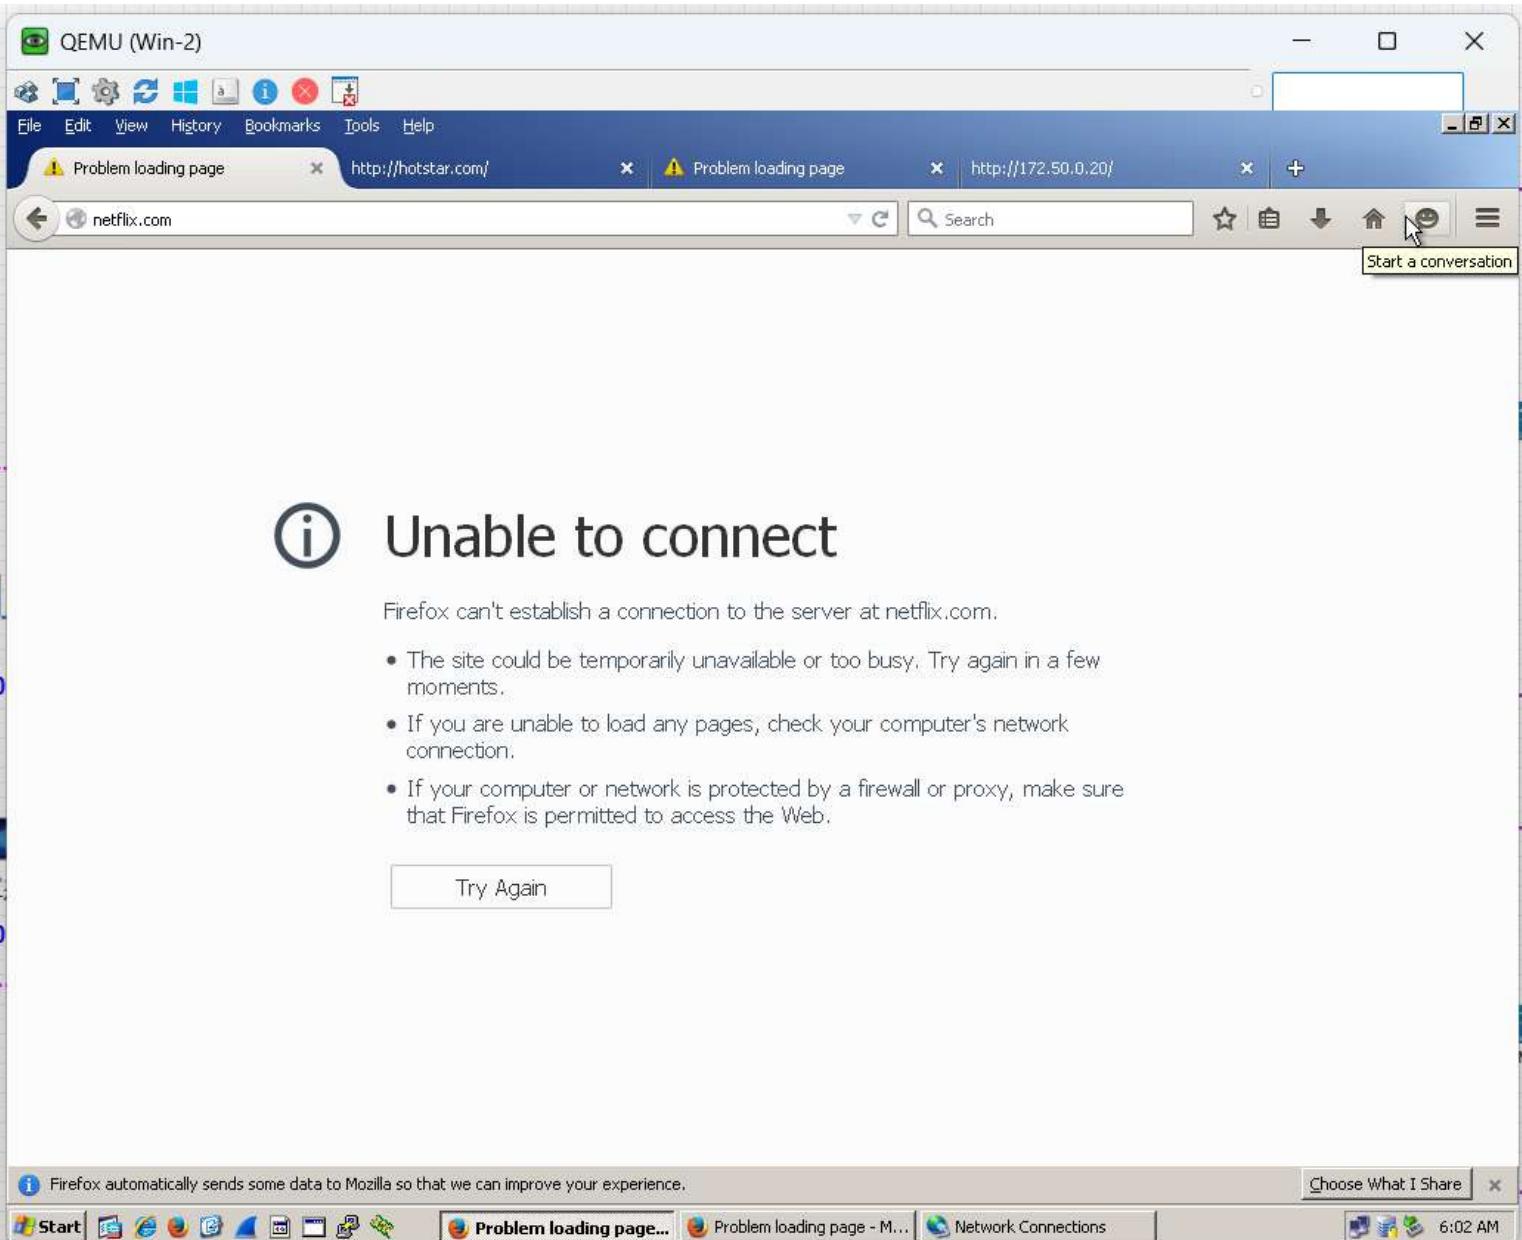

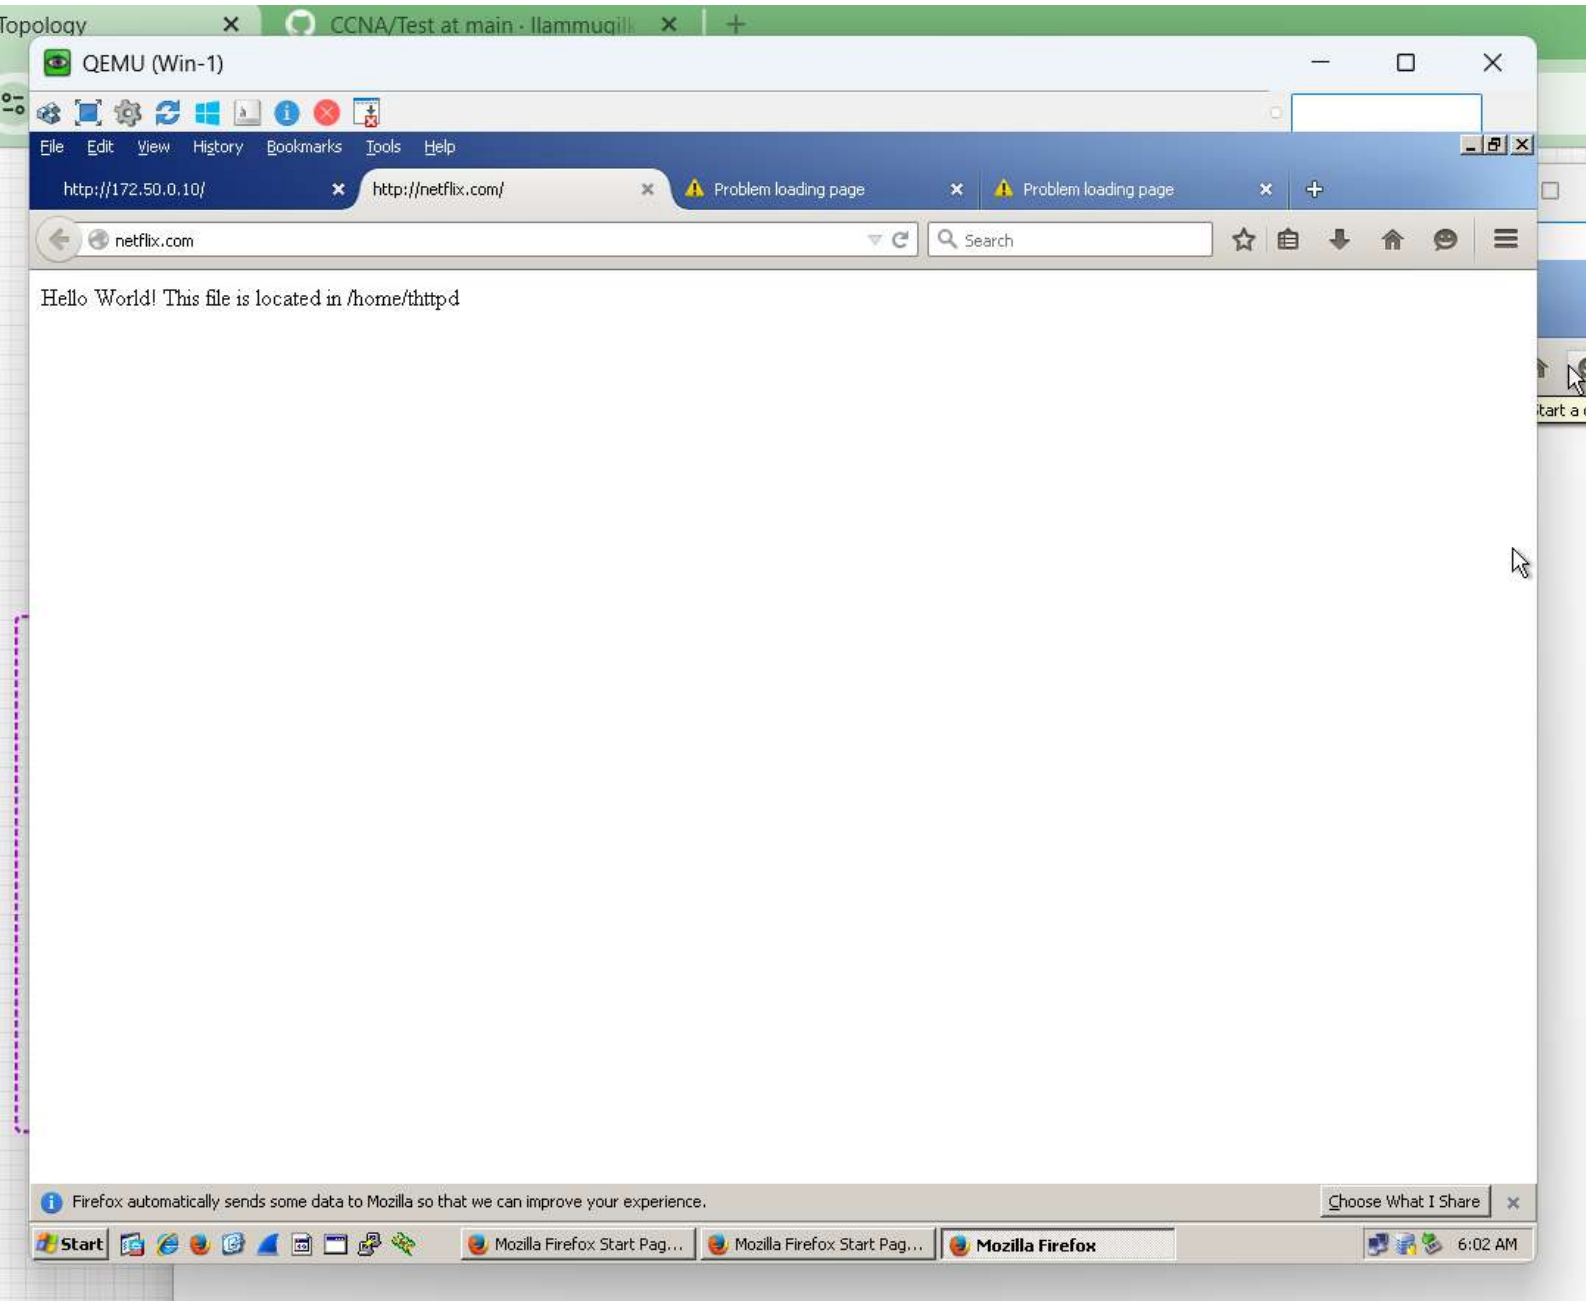

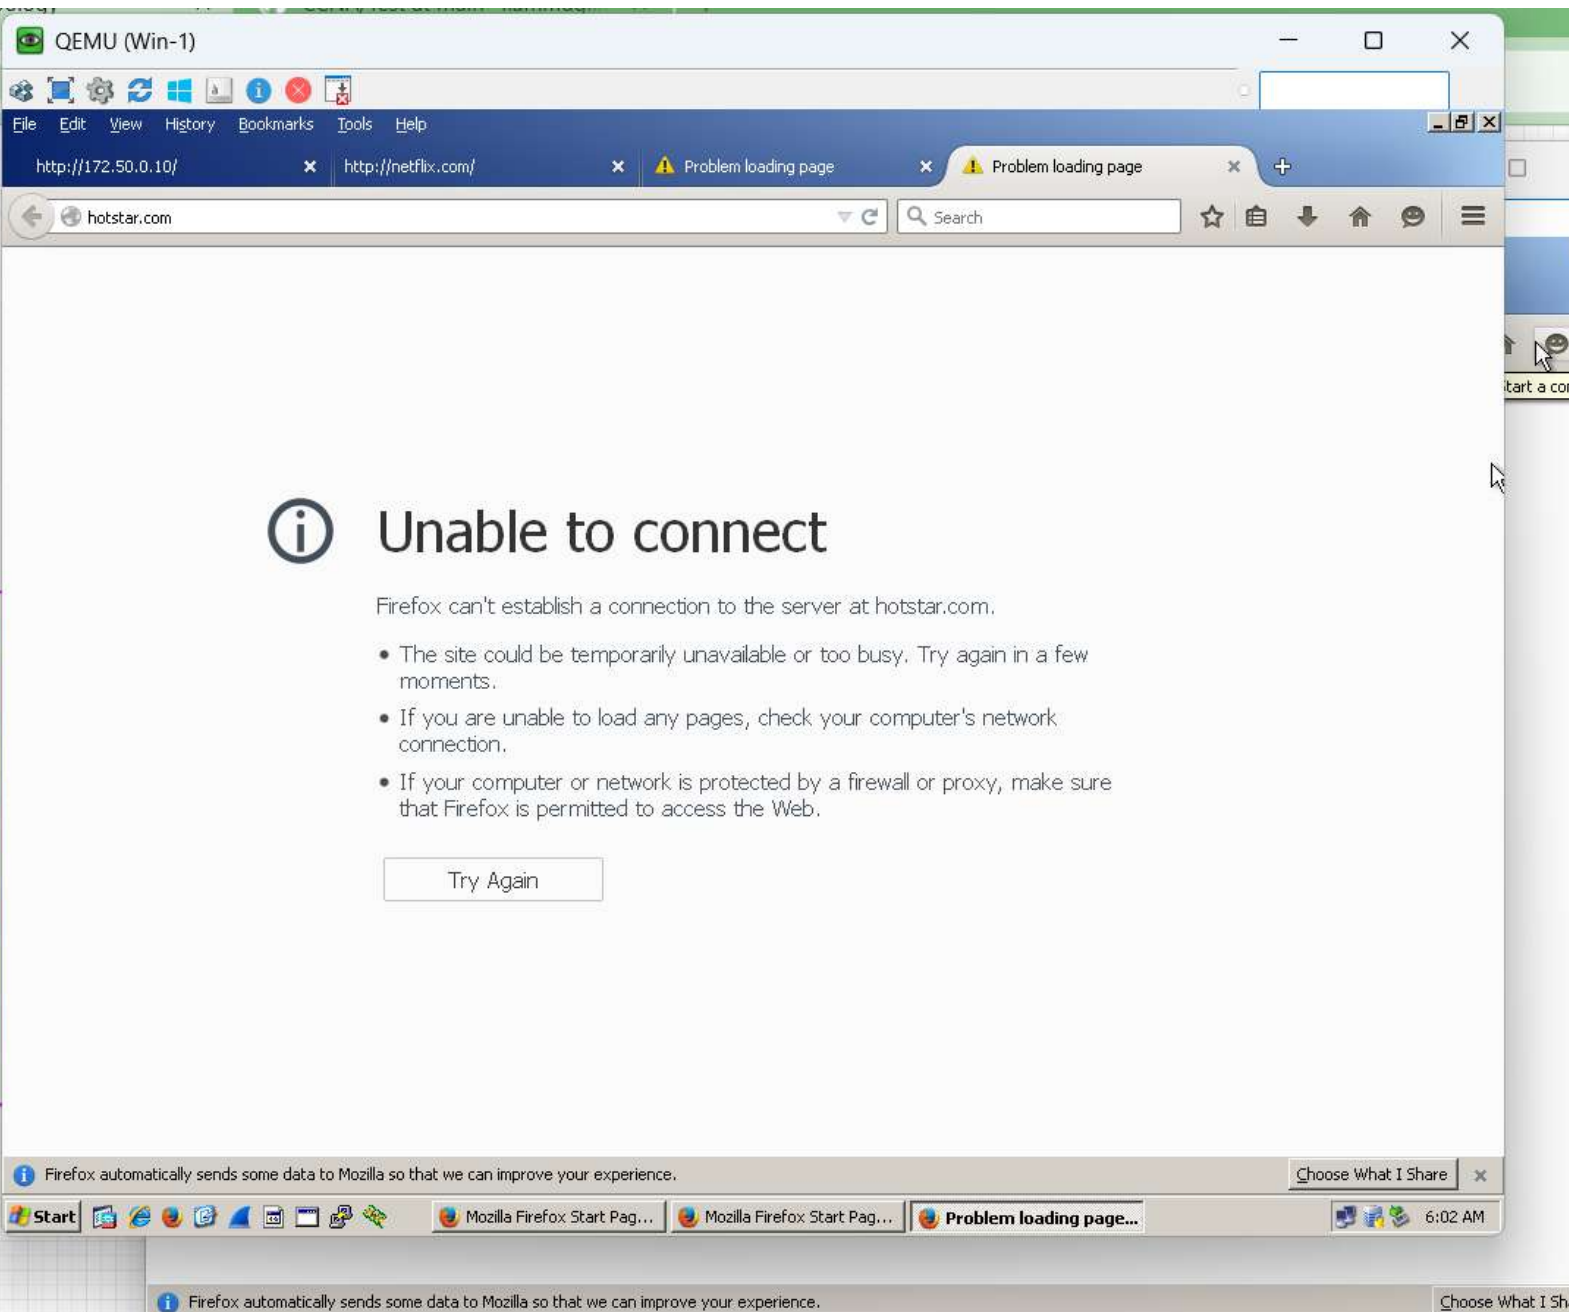

```
R1
R1(config-if)#exit
R1(config)#
R1(config)#
R1(config)#access-list 100 permit icmp any any
R1(config)#exit
R1#pi
*Aug  7 04:42:38.019: %SYS-5-CONFIG_I: Configured from console by console
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#int e0/0
R1(config-if)#ip access-group 100 in
R1(config-if)#exit
R1(config)#
R1(config)#
R1(config)#
R1(config)#exit
R1#
R1#
R1#ping
*Aug  7 04:43:04.908: %SYS-5-CONFIG_I: Configured from console by console
R1#sh access-lists
Extended IP access list 100
 10 permit tcp host 10.0.0.10 host 172.50.0.10 eq www (20 matches)
 20 permit tcp host 10.0.0.20 host 172.50.0.20 eq www (20 matches)
 30 permit udp 10.0.0.0 0.255.255.255 host 200.12.56.10 eq domain
 40 permit icmp any any (7 matches)
R1#
```

