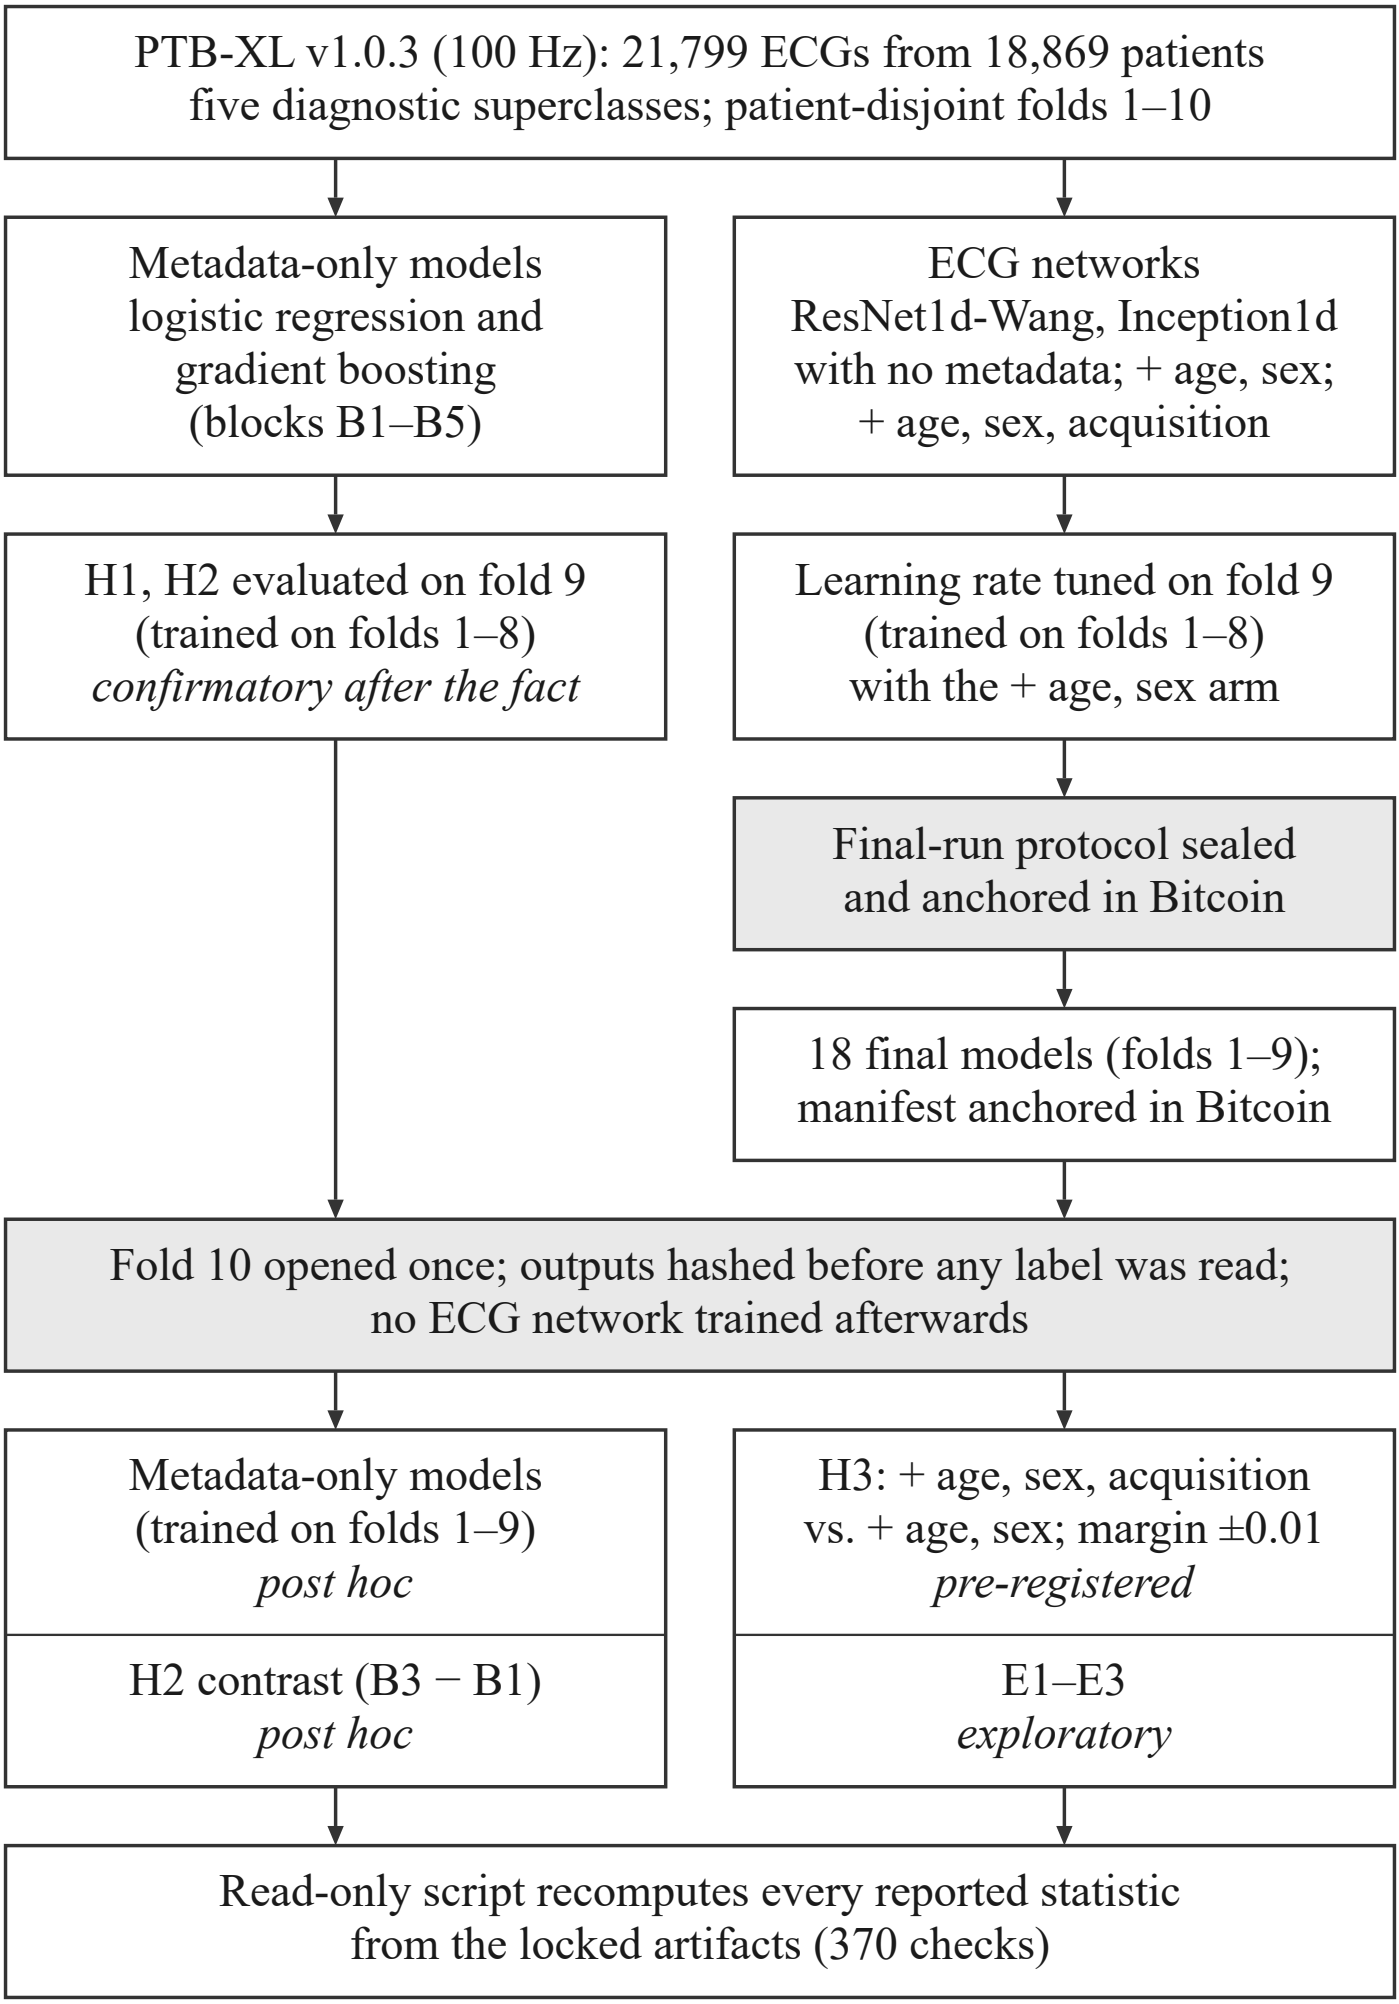

PTB-XL v1.0.3 (100 Hz): 21,799 ECGs from 18,869 patients
five diagnostic superclasses; patient-disjoint folds 1–10
Metadata-only models
logistic regression and
gradient boosting
(blocks B1–B5)
ECG networks
ResNet1d-Wang, Inception1d
with no metadata; + age, sex;
+ age, sex, acquisition
H1, H2 evaluated on fold 9
(trained on folds 1–8)
confirmatory after the fact
Learning rate tuned on fold 9
(trained on folds 1–8)
with the + age, sex arm
Final-run protocol sealed
and anchored in Bitcoin
18 final models (folds 1–9);
manifest anchored in Bitcoin
Fold 10 opened once; outputs hashed before any label was read;
no ECG network trained afterwards
Metadata-only models
(trained on folds 1–9)
post hoc
H3: + age, sex, acquisition
vs. + age, sex; margin ±0.01
pre-registered
H2 contrast (B3 − B1)
post hoc
E1–E3
exploratory
Read-only script recomputes every reported statistic
from the locked artifacts (370 checks)