Bounded Brent in h versus spectral selection

100 paired Gaussian samples, $n = 200$ | $h \in [0.01, 2]$ | geometric spectral grids, $\lambda_N = N^{1.9}$

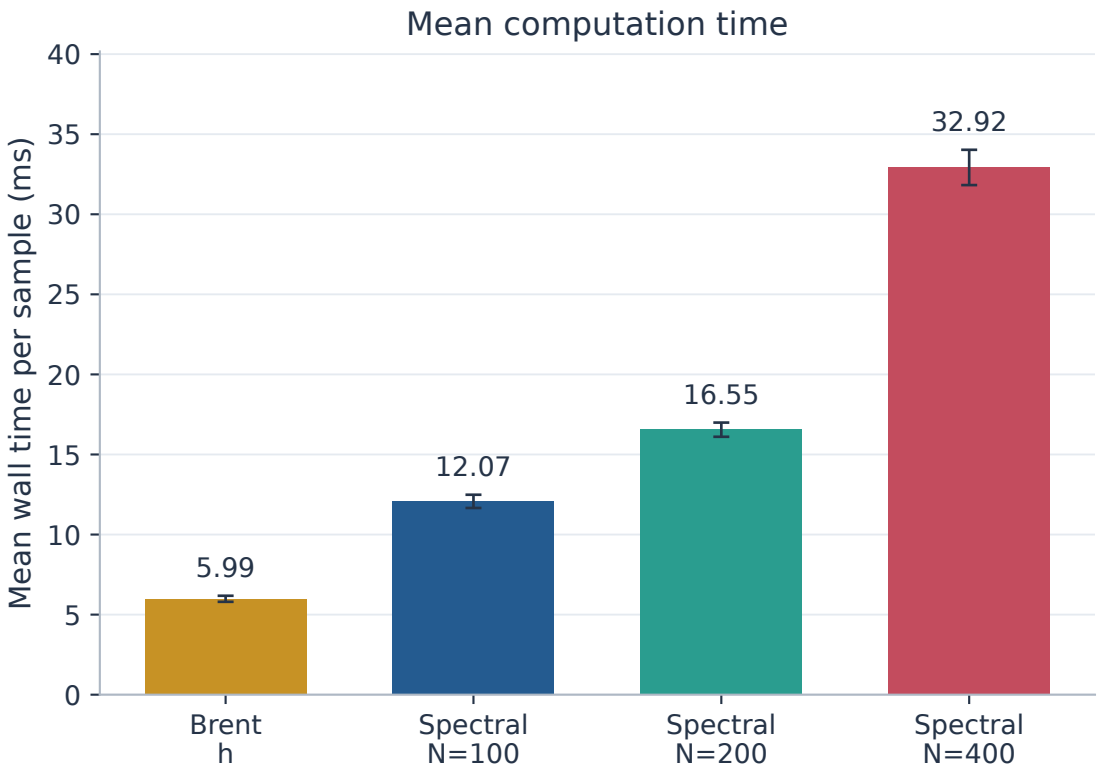

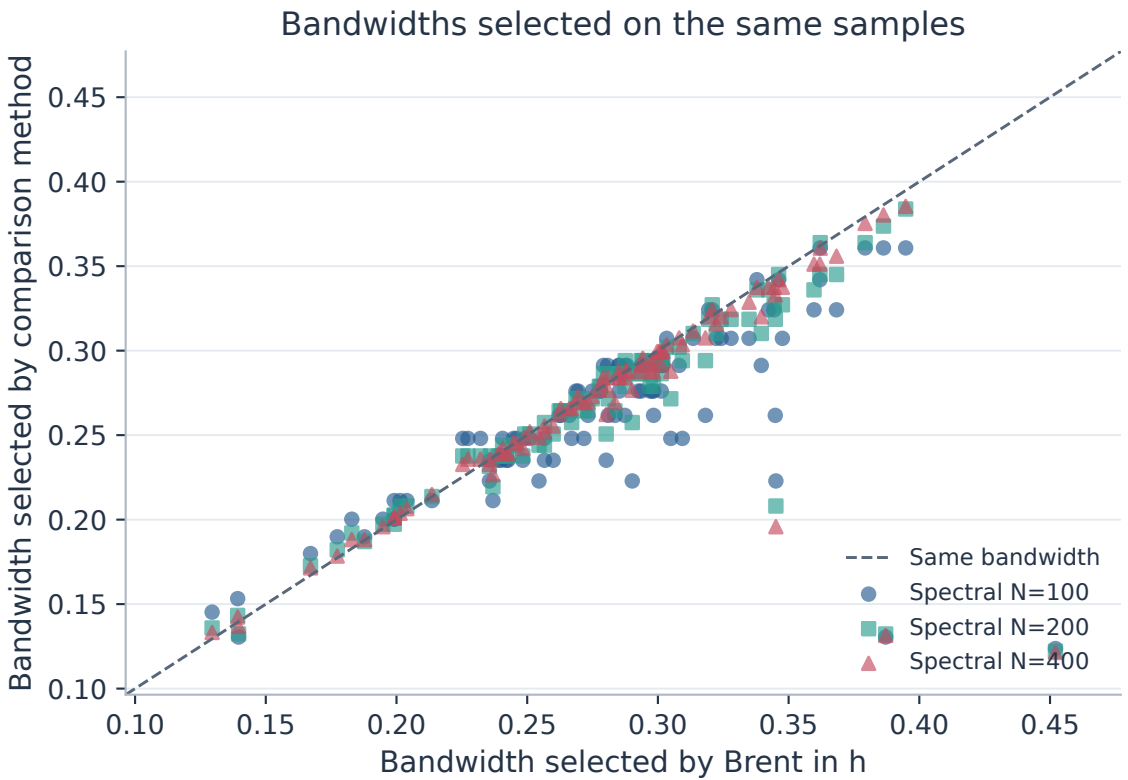

Arithmetic means over 100 timed calls per method. Error bars: one standard error of the mean time. One numerical thread.

Each call starts from raw observations; spectral times include fresh matrix construction and the eigensolve.

Imports, sample generation, reference searches, validation, plotting and saving are outside the timed calls.