Local energy minimizers and ISE-optimal bandwidths

Gaussian samples; M = 1000 per n; bandwidth interval [0.01, 2]

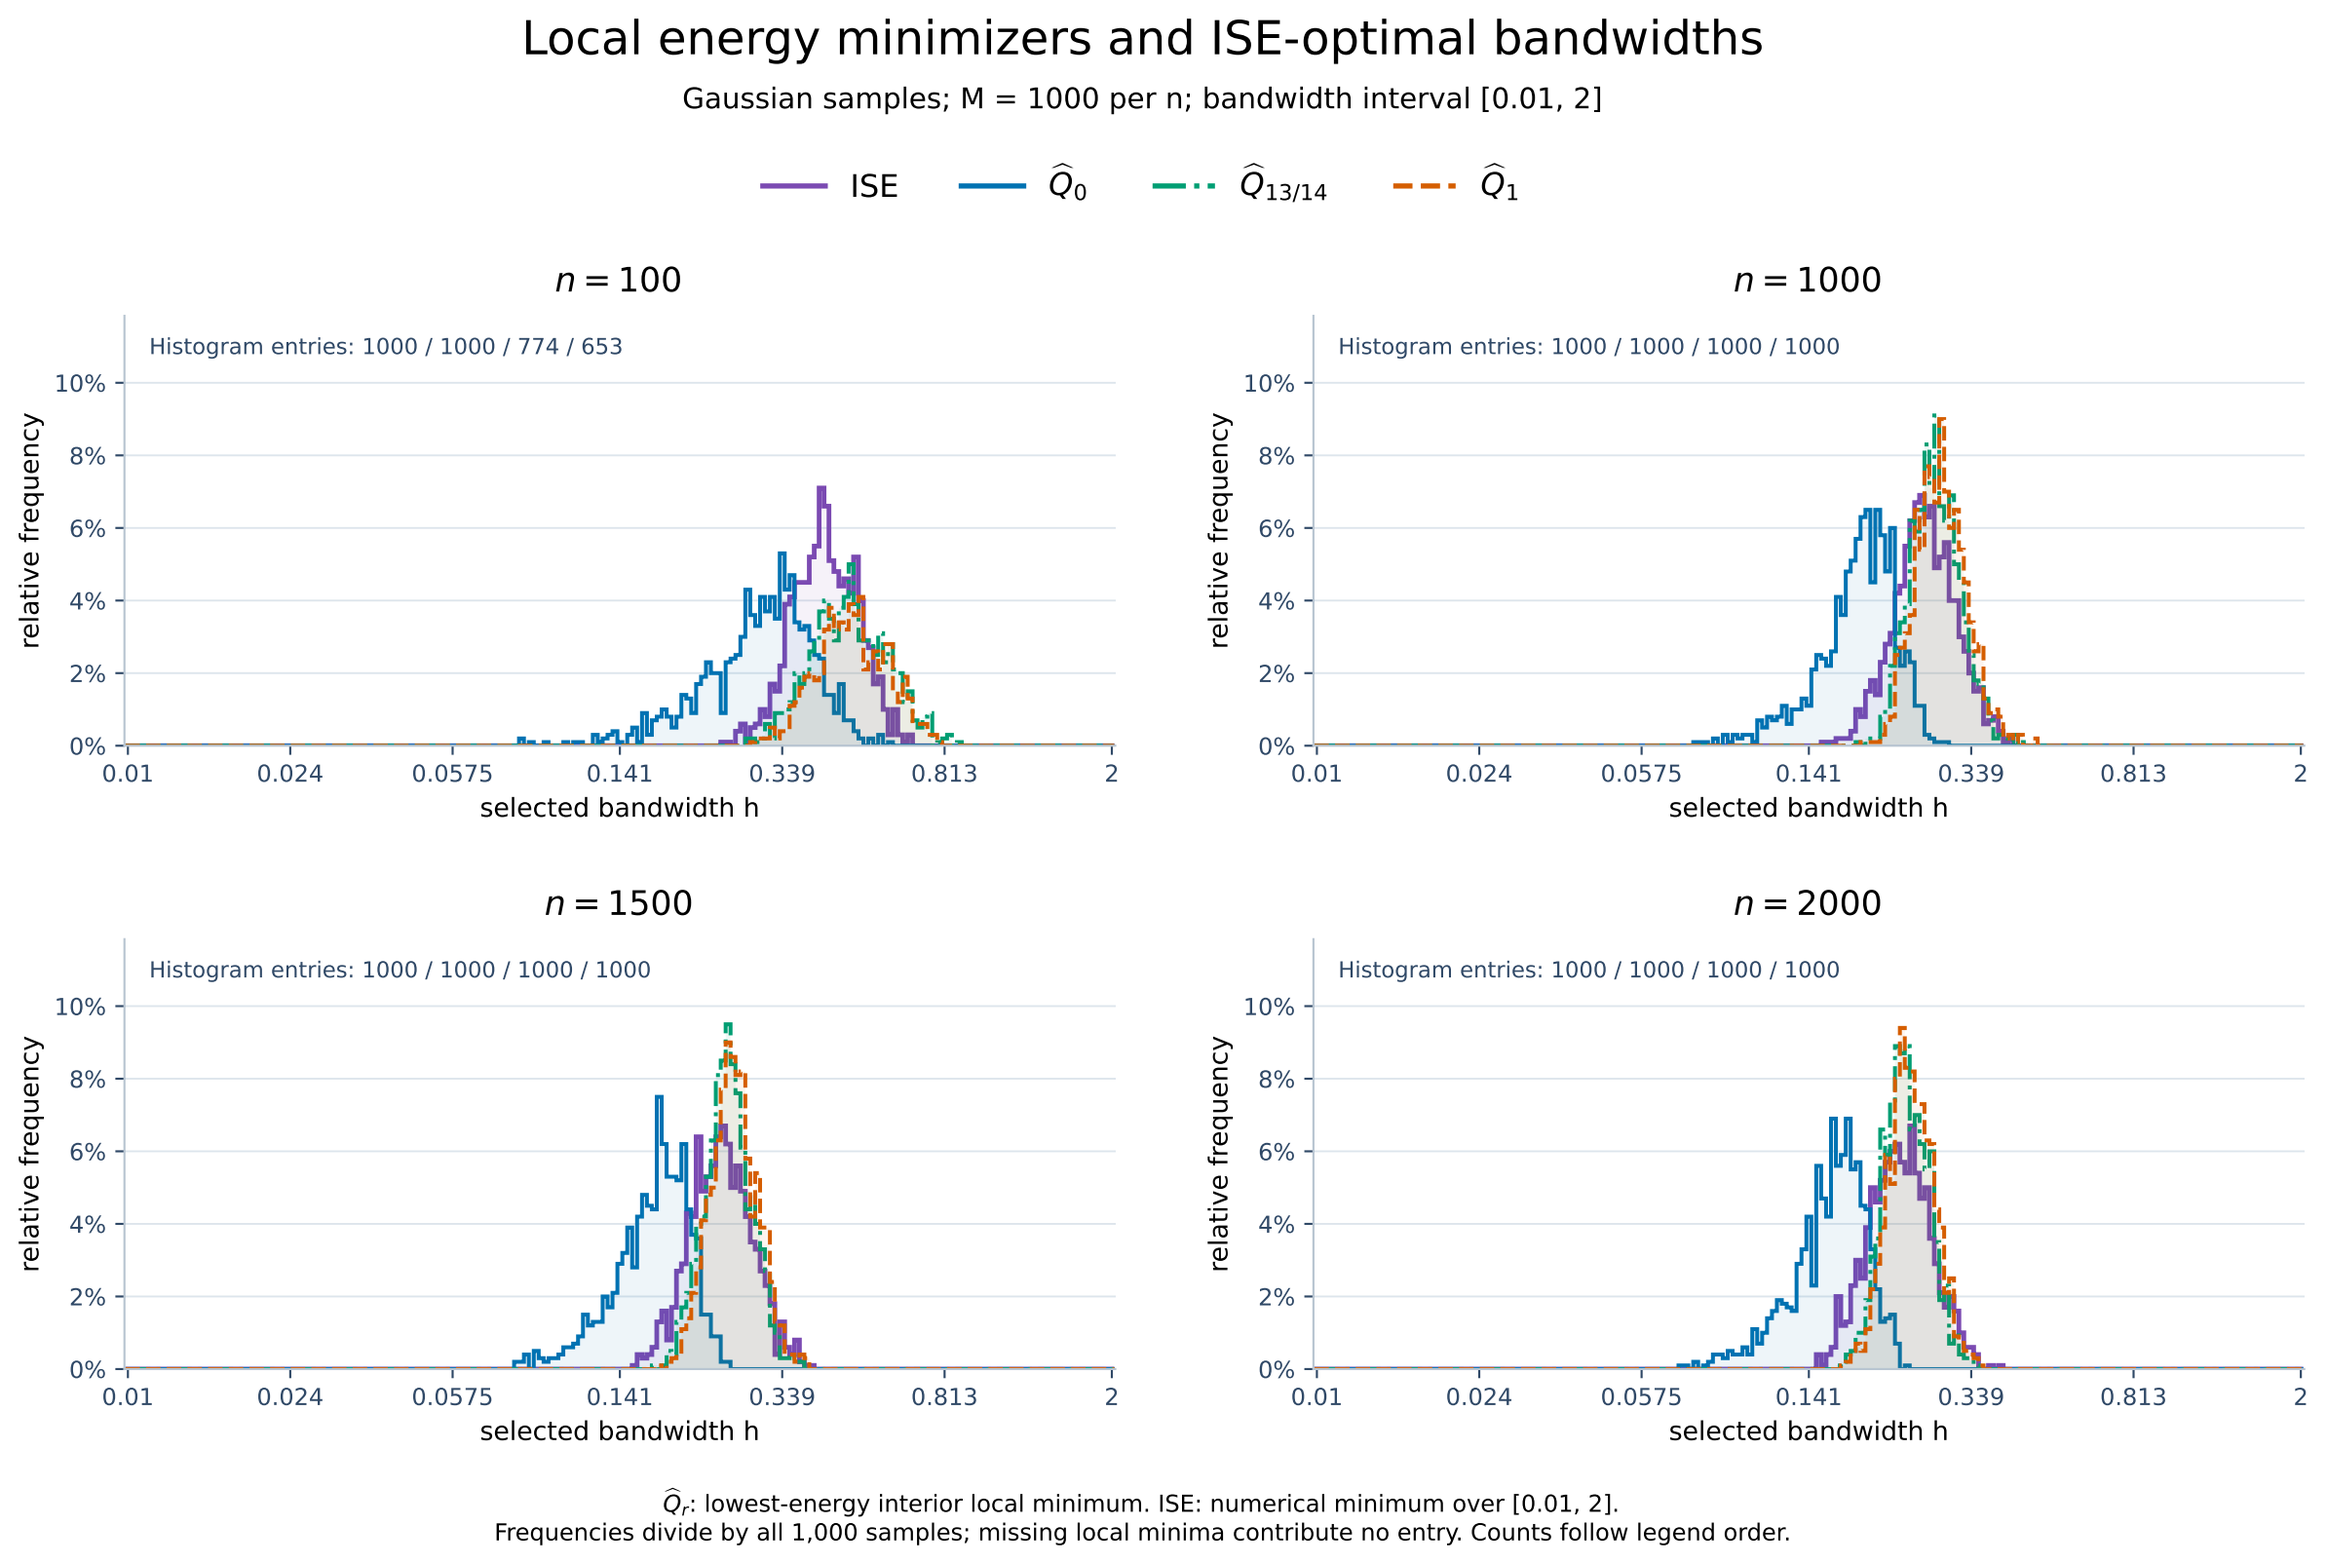

$\widehat{Q}_r$: lowest-energy interior local minimum. ISE: numerical minimum over [0.01, 2].
Frequencies divide by all 1,000 samples; missing local minima contribute no entry. Counts follow legend order.