

iOS SDK PastMatch / History API release notes

Roy Lovejoy

roy@ringoai.com

Draft: Jan 31, 2026

Introduction:

Since the early prototypes of the FindMyShade SDK, there had been an available function to ‘access’ the past history of matches. It had been in the format of key/value pairs and very JSON-y. We’ve updated that function with a couple of additional features.

It was available on the public `RingoAI` object as a function called `history()`

As the SDK has matured, and a couple of real-world applications have been using the color matching for many months now, a need for a new feature grew –

Goals of new feature:

- (1) generate a new shade match (for a user-requested product) based on measurement data from a prior session. Using this function the user can request a new shade recommendation without having to actually go through the measurement process. With the input of `FamilyId` (which specifies the product) the function `RingoAI.pastMatch` will return a new shade recommendation for that product, based on that user’s previous (most recent face-scan) measurement.
- (2) return the shade finder history, so a user can see their prior shade recommendations (what product(s), and shades were recommended in prior sessions). Using the `history()` function the user can request the history of their shade finder use, which is returned as a list with time-stamp(s), requested product(s) and recommended shade(s). We have also provided an (optional) `RingoAI.deleteHistory()` function so that users can delete their shade match history if desired.

Implementation

With the update to the `FaceCaptureDelegate` method that returns the actual shade matching results to be a cleaner, leaner `RingoResult` object *fig 1*, so to now does the `history()` function return the same structure- this allows for the same UX code that takes the current result and display the product matches, to display the individual `history()` records.

RingoResult

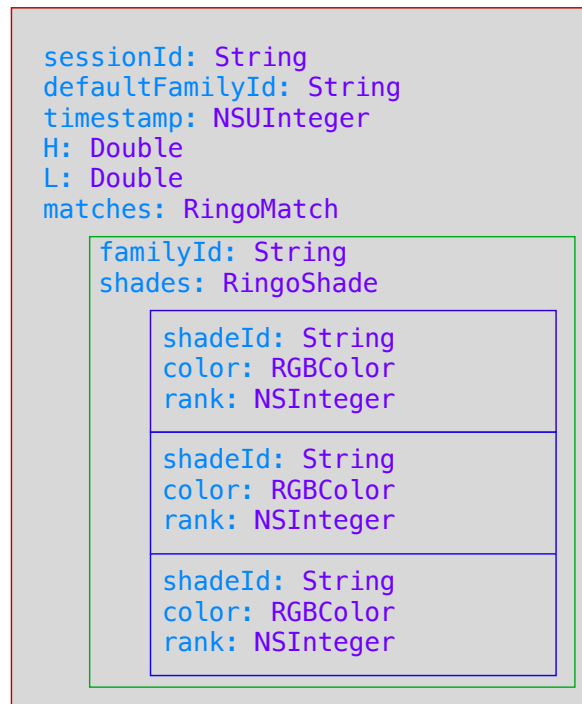


fig 1 - RingoResult

In order to achieve the goal of “what about a new product match?” – another new function has been added- **RingoAI.pastMatch(familyID: String)**. This function takes one parameter - the product’s **FamilyId**, sometimes called the SKU.

The function will also return a **RingoResult** object, that contains the same information as the ‘live’ result from the photo capture process.

In the Technical Weeds

This is the relevant snippet of the SDK header file.

```

+ (BOOL)hasHistory;
+ (NSArray<RingoResult*>* _Nullable)history;
+ (void)deleteHistory;

+ (RingoResult* _Nullable)pastMatch:(NSString* _Nonnull)familyID;

```

Calling the **RingoAI.history()** function, we may see an array of **RingoResult** structures that look like this

RingoResult

```
sessionId: ooqlc7V3F7ZF8k2dGhecWA
defaultFamilyId: {Product 1}
timestamp: {2026.01.24 18:31:11}
H: 49.682
L: 0.0552
matches: RingoMatch
```

```
familyId: {Product 1}
shades: RingoShade
```

```
shadeId: {Shade 121}
color: RGBColor
rank: 0
```

```
shadeId: {Shade 124}
color: RGBColor
rank: 1
```

```
shadeId: {Shade 122}
color: RGBColor
rank: -1
```

RingoResult

```
sessionId: w9asdfb70dqww00zQas
defaultFamilyId: {Product 2}
timestamp: {2026.01.24 16:22:51}
H: 49.679
L: 0.0572
matches: RingoMatch
```

```
familyId: {Product 2}
shades: RingoShade
```

```
shadeId: {Shade 212}
color: RGBColor
rank: 0
```

```
shadeId: {Shade 211}
color: RGBColor
rank: 1
```

```
shadeId: {Shade 210}
color: RGBColor
rank: -1
```

RingoResult

```
sessionId: Oif3du9q1Pmq4we34
defaultFamilyId: {Product 3}
timestamp: {2026.01.23 05:41:22}
H: 50.341
L: 0.0643
matches: RingoMatch
```

```
familyId: {Product 3}
shades: RingoShade
```

```
shadeId: {Shade 345}
color: RGBColor
rank: 0
```

```
shadeId: {Shade 344}
color: RGBColor
rank: 1
```

The list will be sorted, from most recent to 'longer ago'.


If there is no scan history, an empty **RingoResult** will be returned, with an empty **matches** field, and an **error** & **errorMessage** field filled in.

RingoResult

```
sessionId: ""
defaultFamilyId: ""
timestamp: {right now}
H: 0
L: 0
matches: RingoMatch[] {empty}
error: 700
errorMessage: "No History"
```

Results without the scanning: requesting a different product

Calling `RingoAI.pastMatch(familyID: {Product 2})` will grab, in our case the session `ooqlc7V3F7ZF8k2dGhecWA`, since it chronologically was the *most recent*, and will extract out the {Product 2} values, and yield a result that looks like this:

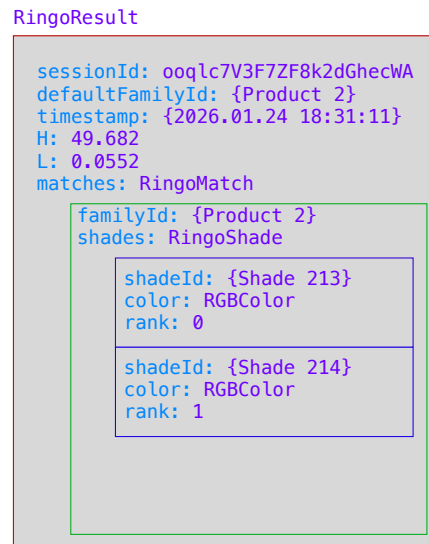

Note: the `sessionId` is the same, because it *was* the same capture session, but the shades are updated with the Product 2 values.

Deleting History

To erase the history data, the `RingoAI.deleteHistory()` function may be called. This will delete all captured sessions stored on the device.